


POGO TEST PLATE — top view, board coordinates (green: panel / card; red: probe bosses)    Z stack / build notes

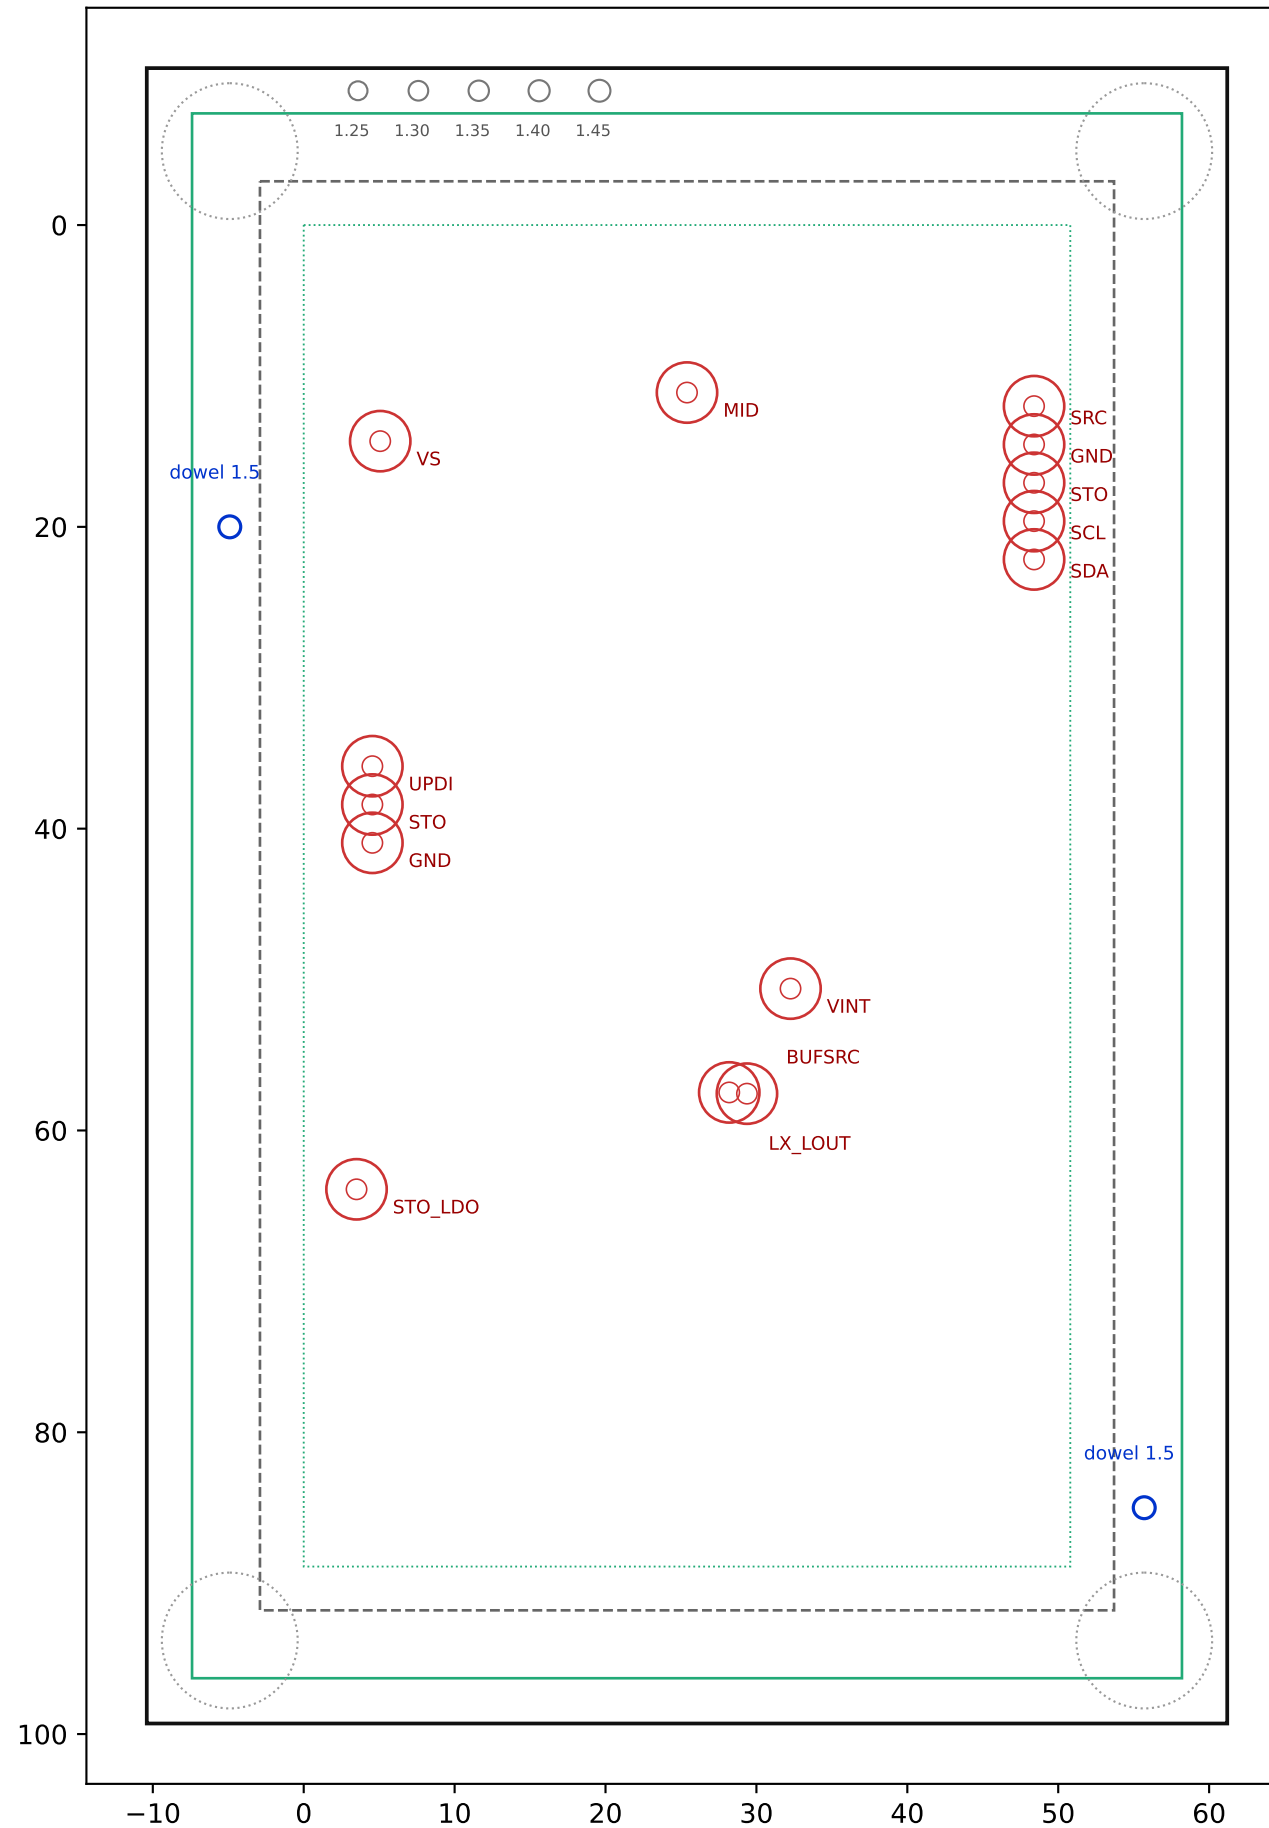

|                        |        |
|------------------------|--------|
| plate top (panel rest) | 10.00  |
| boss top (collar seat) | 5.70   |
| cavity floor           | 4.00   |
| plate bottom           | 0.00   |
| bench (legs)           | -17.80 |

|                   |            |                                        |
|-------------------|------------|----------------------------------------|
| probe compression | 1.20       |                                        |
| EXPOSED_FREE      | 5.50       | << MEASURE on a real P75+R75 pair      |
| receptacle bore   | 1.35       | << set from the fit coupon (1.25-1.45) |
| dowels            | 2x dia 1.5 | through TH1/TH2 (-4.9,20) / (55.7,85)  |
| boss-top to parts | 2.45       | clear (supercaps drop 1.85)            |

hardware: P75-E2 probes (stroke 2.50 full),  
R75-3W wire-wrap receptacles (OD 1.32,  
collar 5.0, ~26.5 long). Set SW2 before  
seating the panel.

```
hookup (tails, below the plate):
  UPDI prog      SNAP/PICKit: UPDI+GND at the
                  J1 column, VTG ref -> VS
  I2C tap        SCL / SDA / GND (JP1 column;
                  4.7k pull-ups to VS on-board)
  power in       ST0 (J1 or JP1), return GND
                  (TC1 from the top stays the alternative)
```