
Liebert 400 A Sub-Feed Lug Kit Installation onto a Liebert NQ Panelboard

Instruction Bulletin

80043-792-01
03/2012

Retain for Future Use.

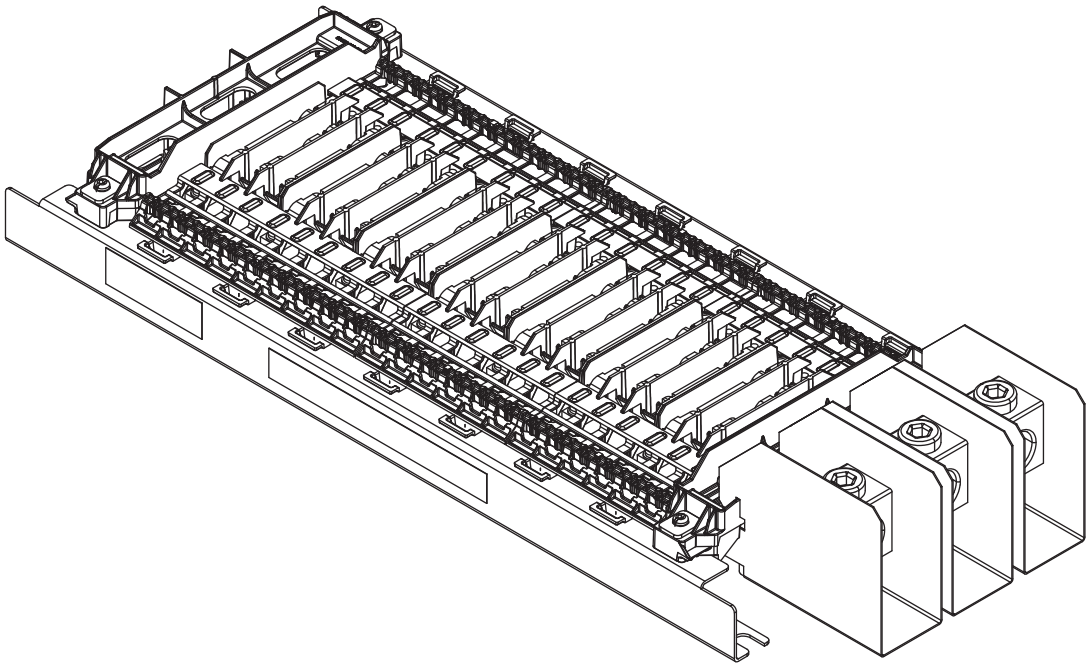

SQUARE D™

by Schneider Electric

80043-792-01
03/2012
Peru, IN, USA

Instruction Bulletin

Liebert 400 A Sub-Feed Lug Kit Installation onto a Liebert NQ Panelboard

Class Number 1640

Introduction

This bulletin contains instructions for installing a Square D™ brand Liebert, 400 A sub-feed lug kit onto a Square D brand, Liebert NQ panelboard manufactured by Schneider Electric.

Safety Precautions

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Turn off all power supplying this equipment before working on or inside equipment.
- Always use a properly rated voltage sensing device to confirm power is off.
- Replace all devices, doors and covers before turning on power to this equipment.


Failure to follow these instructions will result in death or serious injury.


Kit Contents


NQSFL4L

A. Line lugs (3)
B. 1/4-20 x 7/8-inch tapping screws (6)
C. Lug barrier (3)

NOTE: Screws enlarged to show detail.







Tools Needed



- Torque wrench with 3/8-inch Allen driver
- Torque wrench with 5/32-inch Allen driver


© 2012 Schneider Electric All Rights Reserved

SQUARE D™
by Schneider Electric


Installing the Sub-Feed Lug Kit

Turn off all power supplying this equipment before working inside the panelboard; follow all lockout/tagout procedures.


1 Assemble the lug barriers included in the kit into the end support.

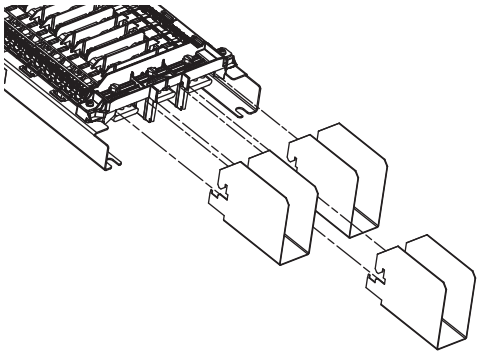

Barrier Rotates into Place

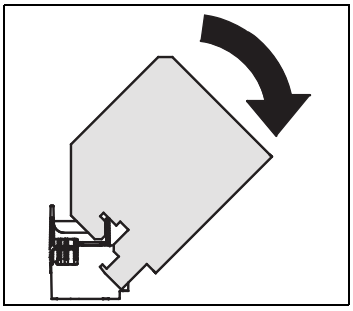


Barrier Installed

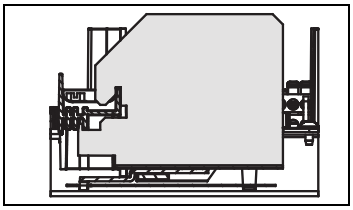


NOTE: For step 2 do not overtighten the screws.

2 Install the line lugs included in the kit on the panel bus using the 1/4-20 x 7/8-inch tapping screws. The initial torque to tighten may be 100–110 lb-in (11.3–12.4 N•m) until the thread forming screws have formed the threads in the busbar. The final torque should be 60–65 lb-in (6.8–7.3 N•m).

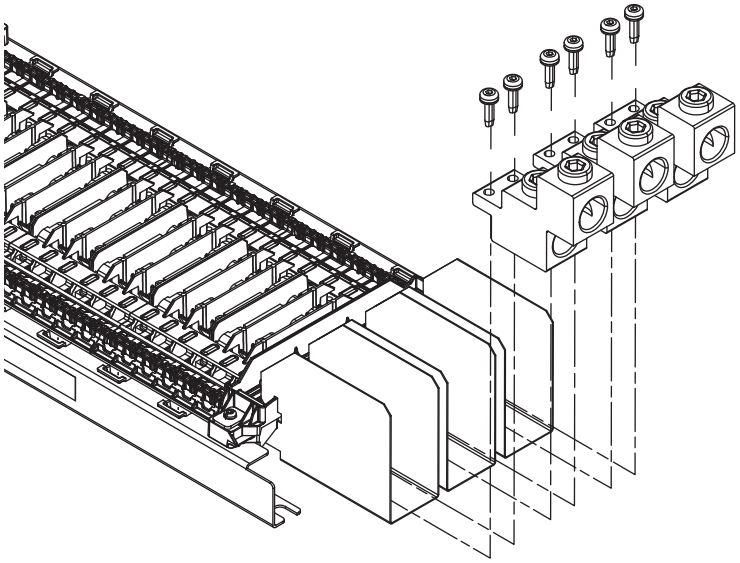

Lugs Installed

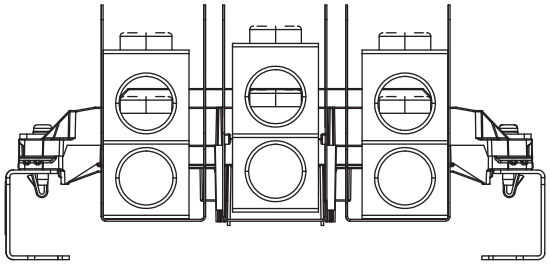

For technical support on the installation of this kit,
contact the Schneider Electric Customer Information Center at 1-888-778-2733.

Schneider Electric USA, Inc.
252 North Tippecanoe
Peru, IN 46970 USA
1-888-778-2733
www.schneider-electric.us

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

Square D™ and Schneider Electric™ are trademarks or registered trademarks of Schneider Electric. Other trademarks used herein are the property of their respective owners.

© 2012 Schneider Electric All Rights Reserved



80043-842-01
08/2018

California Proposition 65 Warning—Nickel Compounds and Bisphenol A (BPA)

Advertencia de la Proposición 65 de California—compuestos de níquel y Bisfenol A (BPA)

Avertissement concernant la Proposition 65 de Californie—composés de nickel et Bisphénol A (BPA)

⚠ **WARNING:** This product can expose you to chemicals including Nickel compounds, which are known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

⚠ **ADVERTENCIA:** Este producto puede exponerle a químicos incluyendo compuestos de níquel, que son conocidos por el Estado de California como causantes de cáncer, y Bisfenol A (BPA), que es conocido por el Estado de California como causante de defectos de nacimiento u otros daños reproductivos. Para mayor información, visite www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT**: Ce produit peut vous exposer à des agents chimiques, y compris composés de nickel, identifiés par l'État de Californie comme pouvant causer le cancer, et Bisphénol A (BPA) reconnus par l'État de Californie comme pouvant causer des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca

© 2018 Schneider Electric All Rights Reserved / Reservados todos los derechos / Tous droits réservés