BeneVision N22N19


Patient Monitor

Parts

1 Parts

1.1 Main Unit

1.1.1 Exploded View

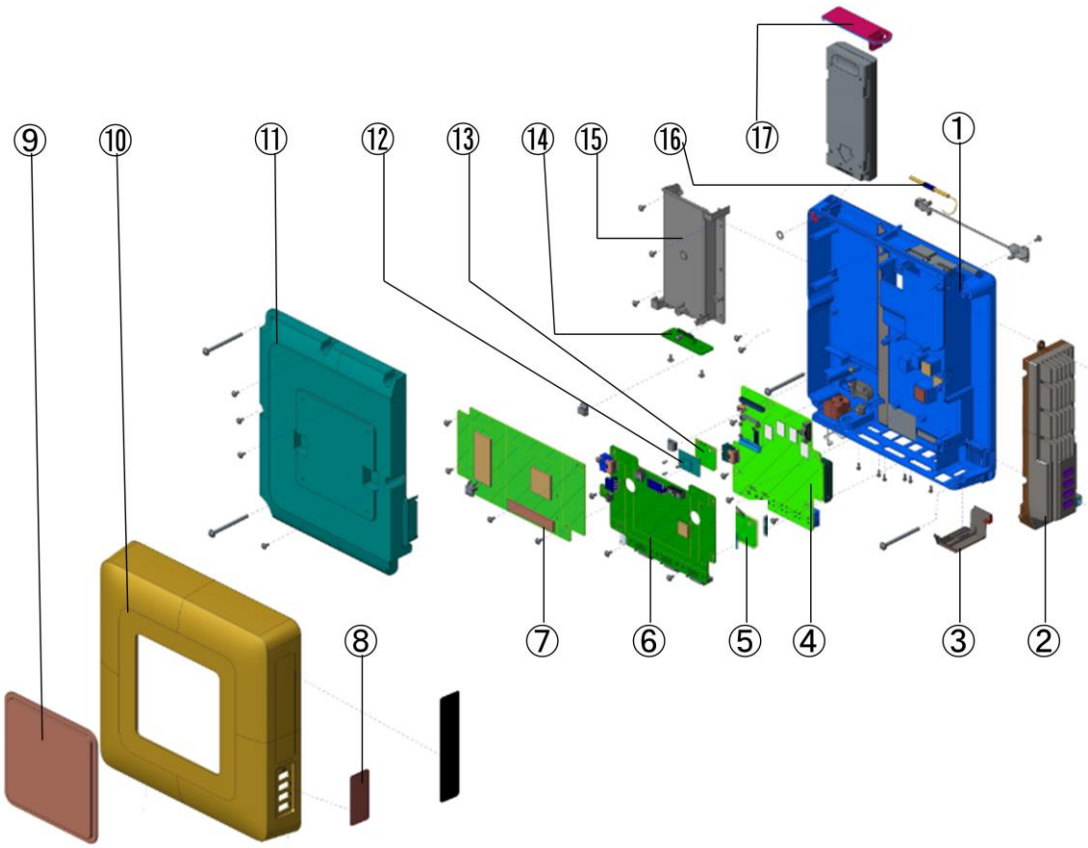


1.1.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	115-037485-00	Main unit base assembly	1	/
2	115-037269-00	iView module	1	/
3	043-005815-01	DP port decoration cover(ESM)	1	replace 043-005815-00
4	115-037490-00	Main control board PCBA Bay-Trail E3827 2GDDR	1	/
5	023-001072-00	SSD 2GB SLC mSATA	1	/
	023-001074-00	SSD 8GB SLC mSATA		/
6	115-037491-00	Main unit interface and DC-DC board PCBA	1	/
7	022-000249-00	Power supply 90-264VAC 16V/10A	1	/
8	043-009126-00	USB port decoration cover(ESM)	1	replace

No.	Order Number	Part Description	Qty	Remark
				043-005816-00
9	043-006885-01	Host ornamental cover silk screen	1	replace 043-006885-00
10	115-037486-00	Main Unit outside housing Assembly	1	/
11	044-000660-00	Upper cover of main unit	1	/
12	024-000707-00	Raido module support IEEE 802.11a/b/g/n	1	WiFi module
13	051-001926-00	Carrier Board of Wireless Module(PCBA)	1	/
14	051-001932-00	6600 battery interface board PCBA	1	/
15	043-005814-00	Battery cavity assembly	1	/
16	024-000717-00	WiFi antenna 2.4GHz and 5GHz dual frequencies	1	/
17	043-006168-00	Main unit battery door (overmold)	1	/

1.2 D22/D19 Display Assembly (Capacitive Screen)

1.2.1 Exploded View

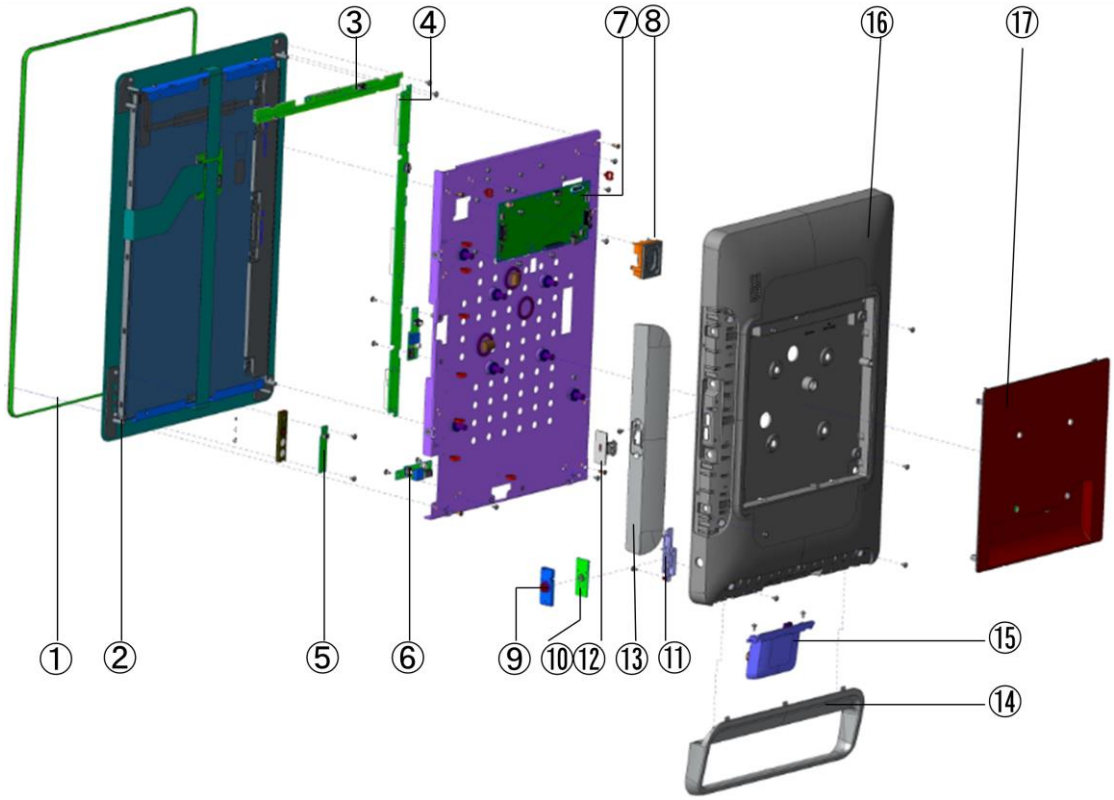


1.2.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	115-045002-01	D22 ornamental belt(FRU)	1	Used for N22
	115-045003-01	D19 ornamental belt(FRU)		Used for N19
2	115-045000-01	D22 capacitance screen assembly(FRU)	1	1,Included 115-045002-01 2,Together with 043-005871-02 D22 rear housing to replace 115-045000-00
	115-045001-01	D19 capacitance screen assembly(FRU)		1, Included 115-045003-01 2, Together with 043-005820-02 to replace 115-045001-00
3	051-001923-00	22 inch vertical LED board PCBA	1	/

No.	Order Number	Part Description	Qty	Remark
	051-001925-01	19 inch vertical LED board PCBA		Compatible with 051-001925-00
4	051-001922-00	22 inch horizontal LED board PCBA	1	Used for N22
	051-001924-00	19 inch horizontal LED board PCBA		Used for N19
5	051-001918-00	Indicator and light intensity sensor board PCBA	1	/
6	051-001933-01	USB interface board PCBA	2	Compatible with 051-001933-00
7	115-044999-00	Display interface board PCBA (FRU)	1	Capacitive touchscreen, compatible with 115-037494-00
8	115-037489-00	Speaker Assembly	1	/
9	049-001426-00	Switch key assembly(ESM)	1	replace 049-001031-00
10	051-001920-00	Switch keypad board PCBA	1	/
11	043-006119-00	Key seat	1	/
12	043-006004-01	USB cover display(ESM)	2	/
13	115-035456-00	22 inch handle cover Assembly	1	Include 043-006004-01
	115-035457-00	19 inch handle cover Assembly		Include 043-006004-01
14	115-034030-00	Handle assembly (without an encoder)	1	/
15	115-034031-00	Encoder assembly	1	/
16	043-005871-02	D22 rear housing(ESM)	1	together with 115-045002-01 to replace 043-005871-01
	043-005820-02	D19 rear housing(ESM)		together with 043-005820-02 to replace 115-045003-00
17	043-006465-01	Interface cover silk of display back	1	replace 043-006465-00

1.3 D22/ D19 Display Assembly (Resistive Screen)

1.3.1 Exploded View

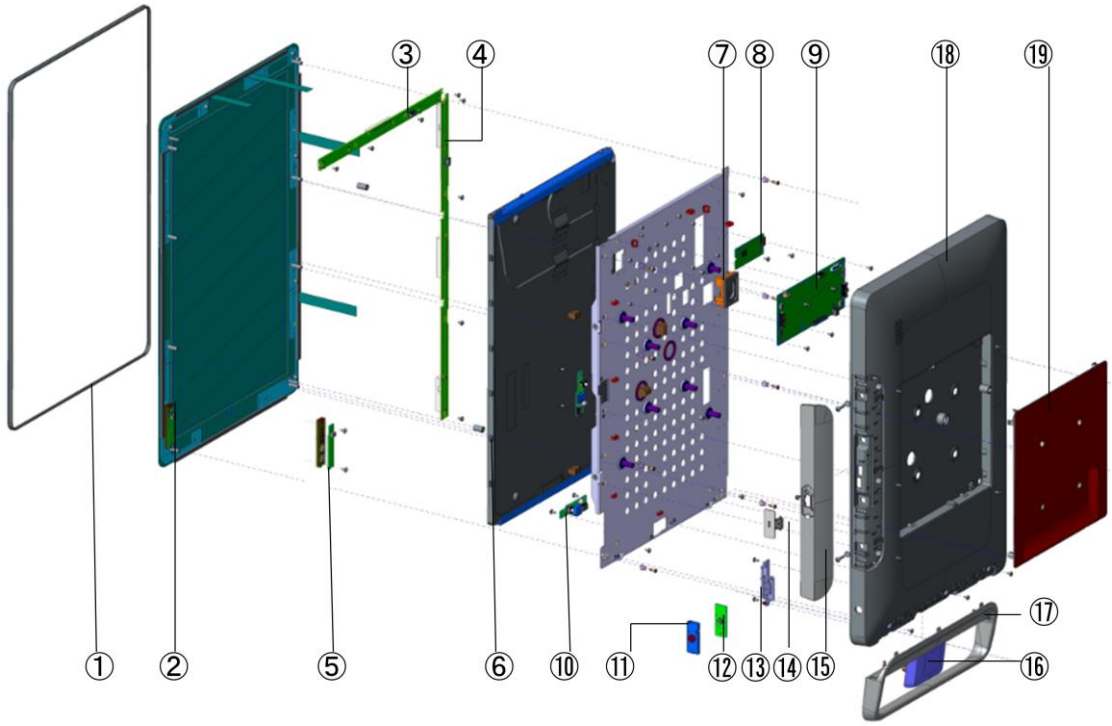


1.3.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	115-037496-00	D22 Decoration Bar assembly	1	only suitable for resistive touchscreen (N22)
	115-037497-00	D19 Decoration Bar assembly		only suitable for resistive touchscreen(N19)
2	115-037498-00	D22 touchscreen assembly(FRU)	1	include 115-037496-00; used for N22
	115-037499-00	D19 touchscreen assembly(FRU)		When Out of stock, use 115-040801-00 to replace, used for N19
3	051-001923-00	22 inch vertical LED board PCBA	1	Used for N22
	051-001925-01	19inch vertical LED board PCBA		Used for N19 compatible with 051-001925-00
4	051-001922-00	22 inch horizontal LED board PCBA	1	Used for N22
	051-001924-00	19 inch horizontal LED board PCBA		Used for N19

No.	Order Number	Part Description	Qty	Remark
5	051-001918-00	Indicator and light intensity sensor board PCBA	1	/
6	115-037487-00	22-inch display assembly	1	Include 009-005111-00 and 009-005112-00
	115-037488-00	19-inch display Assembly		Include 009-005110-00 and 009-005113-00
7	115-037489-00	Speaker assembly	1	/
8	051-001917-00	Touchscreen control board PCBA	1	/
9	115-037494-00	Display interface board PCBA (FRU)	1	Used for resistive touchscreen
10	051-001933-01	USB interface board PCBA	2	compatible with 051-001933-00
11	049-001426-00	Switch key assembly(ESM)	1	replace 049-001031-00
12	051-001920-00	Switch keypad board PCBA	1	/
13	043-006119-00	Key seat	1	/
14	043-006004-01	USB cover display(ESM)	2	replace 043-006004-00
15	115-035456-00	22-inch Handle cover assembly	1	Used for N22
	115-035457-00	19-inch handle cover Assembly		Used for N19
16	115-034031-00	Encoder assembly	1	/
17	115-034030-00	Handle（no Encoder/packaging）	1	/
18	043-005871-02	D22 rear housing(ESM)	1	together with 115-045002-01 to replace 043-005871-01
	043-005820-02	D19 rear housing(ESM)		together with 115-045003-01 to replace 043-005820-00
19	043-006465-01	Interface cover silk of display back	1	replace 043-006465-00

1.4 Display Cover Assembly

1.4.1 Exploded View

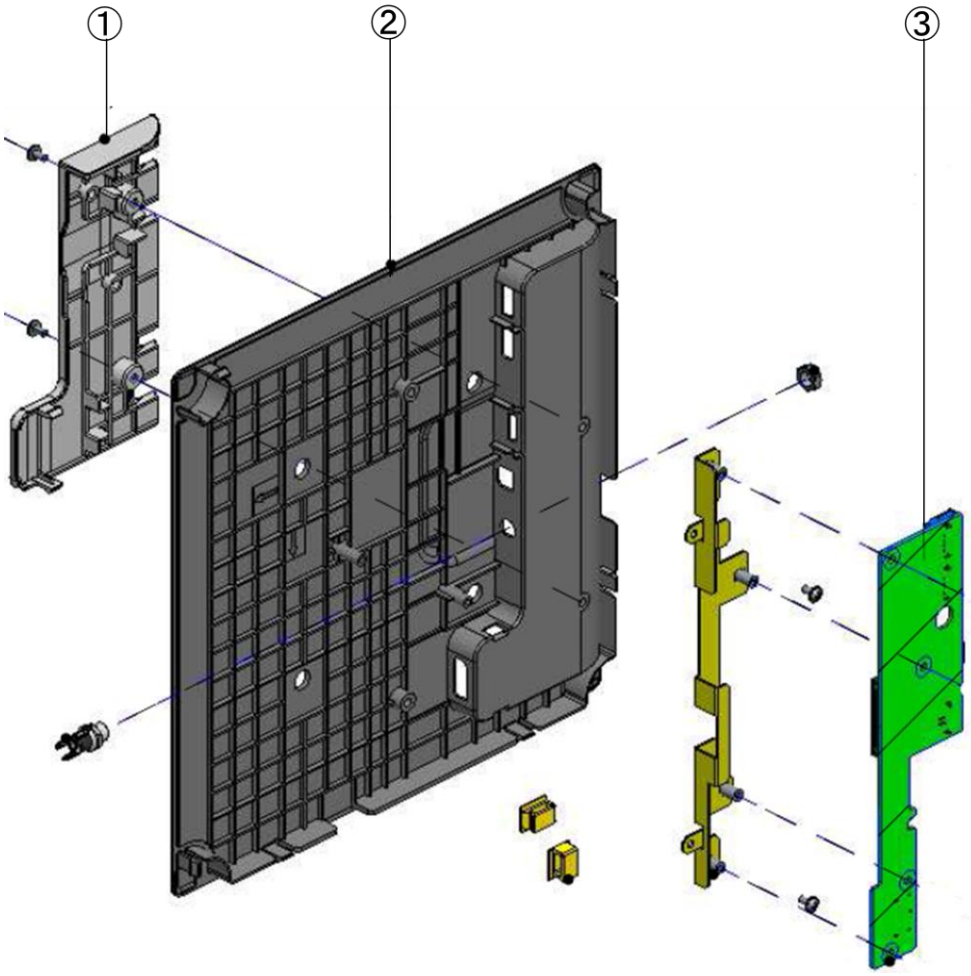


1.4.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	043-008962-00	Cable Management Cover (SilkScreen)	1	/
2	043-006465-01	Interface cover silk of display back	1	replace 043-006465-00
3	051-001916-00	Display Interface Convert Board PCBA	1	/

1.5 Module Rack

1.5.1 Exploded View

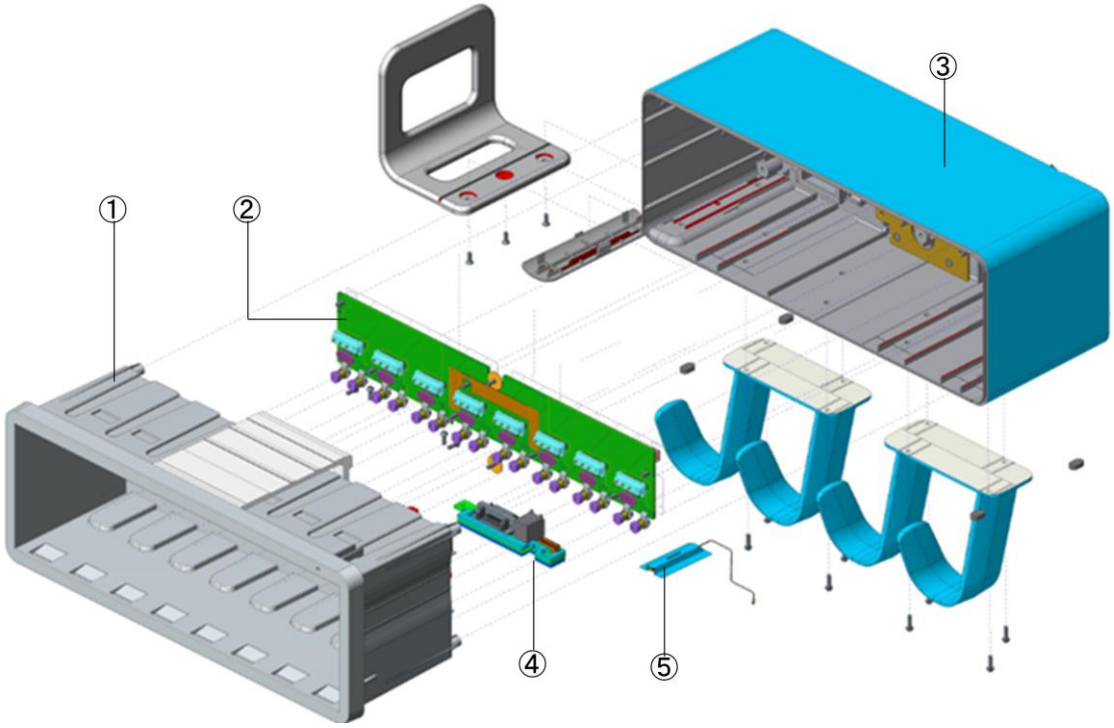


1.5.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	043-008617-00	Front housing silkscreen of module rack(ESM)	1	Replace 043-006301-00
2	115-054923-00	8-slot PCBA of external module rack	1	Replace 115-037493-00
3	043-008616-00	Rear housing silkscreen of module rack(ESM)	1	Replace 043-006300-00
	043-008485-00	The near housing of the SMR（N22N19 neutral）		N22N19 neutral
4	051-001908-00	Interface board PCBA of external module rack	1	/
5	024-000718-00	2.4GHz Antenna of Bluetooth	1	/

1.6 iVIEW Module(Win7/win10 system)

1.6.1 Exploded View

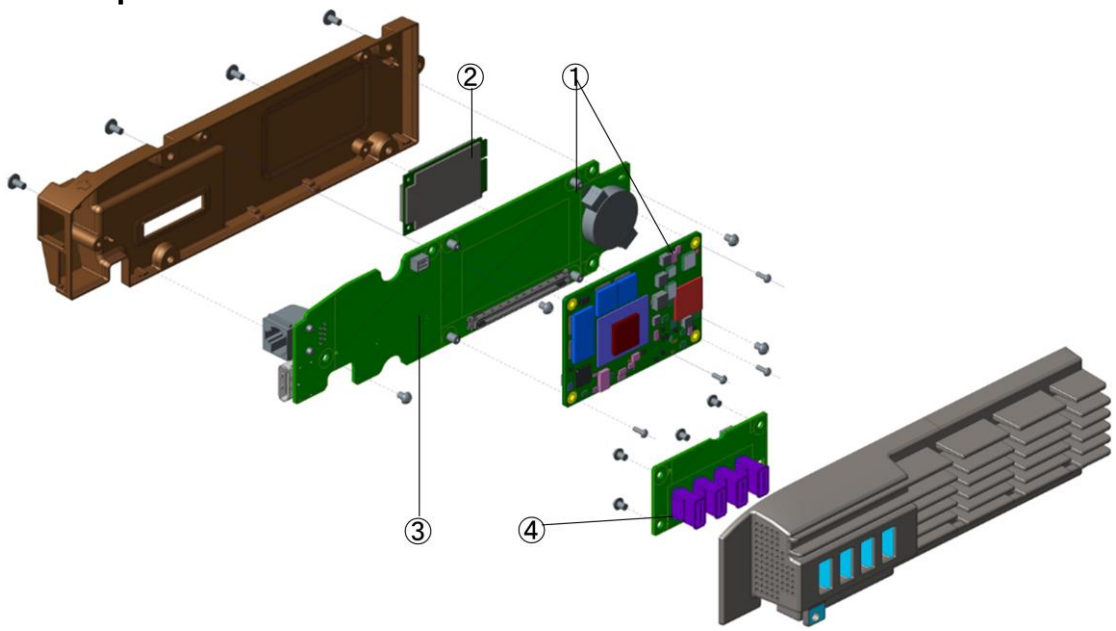


1.6.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	115-056277-00	iView module PCBA FRU	1	used for win7 system, include 051-003028-00 iView support board PCBA (No3)
	115-056280-00	iView module PCBA FRU		used for win10 system, include 051-003028-00 iView support board PCBA (No3)
2	023-000993-00	SSD 120GB mSATA 6Gb/s MLC	1	used for win7 system
	023-001329-00	SSD 128GB MLC mSata		used for win10 system
3	051-001946-00	iView support board PCBA	1	used for win7 system
	051-003028-00	iView support board PCBA		used for win10 system
4	051-001948-00	iView USB interface board PCBA	1	/

1.7 Main Unit Separated Installation Auxiliary Accessories

1.7.1 Exploded View

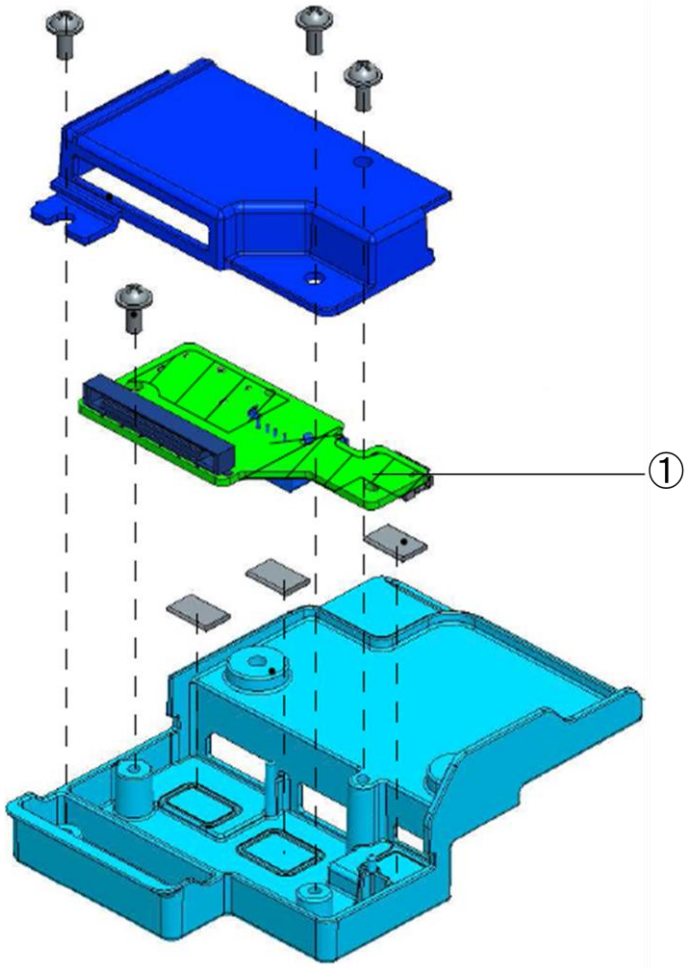


1.7.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	051-001915-00	Main unit interface adapter board PCBA	1	To be used in separate installation way

1.8 MPM module (M51A)

1.8.1 Exploded View

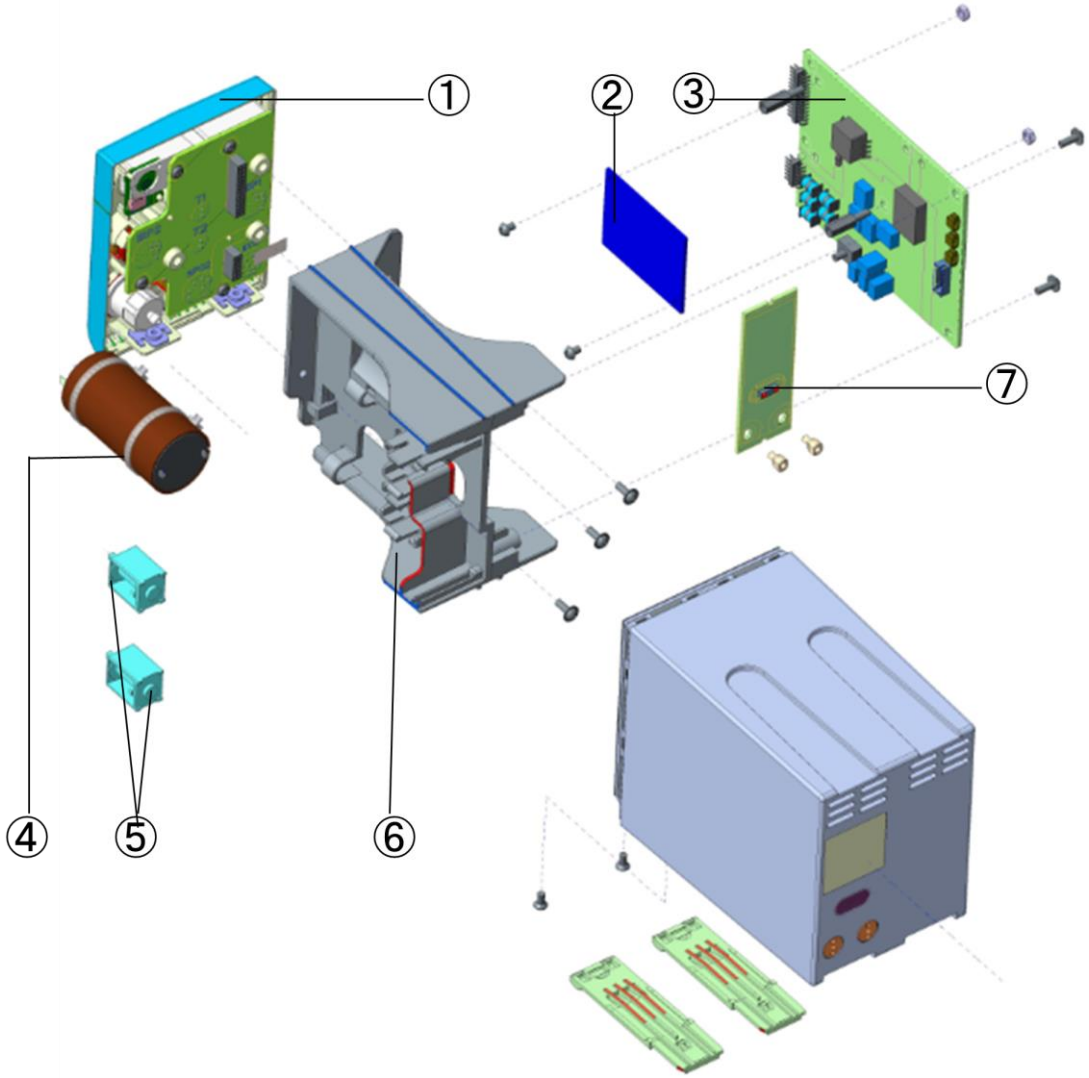


1.8.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	115-033839-00	New MPM front panel assembly (Mindray SPO_2/ analog output)	1	/
	115-033840-00	New MPM front panel assembly (Nellcor SPO_2/analog output)		/
2	051-000943-00	9008 V2.0 blood oxygen board PCBA	1	/
	100-000106-00	Nellcor blood oxygen board RoHS		/
	040-001149-01	Masimo MS-2013SB blood oxygen board (dedicated to Shenzhen product) RoHS		/
3	051-002039-00	MPM multi-parameter module (12 leads, 3rd standard CE) PCBA	1	/

No.	Order Number	Part Description	Qty	Remark
	051-002232-00	M51A multi-parameter module (12 leads, analog output) PCBA	1	/
	051-002066-00	M51A Multi-Para module PCBA(5 std)(3rd std CE)	1	/
4	082-000862-00	Pump. 12VDC with 120 wire and connector	1	/
5	082-000864-00	Air valve. Dual air valve (custom) 12VDC normally-open line, 125 mm long	1	One material with two valves
6	043-001964-02	Bracket (T8)	1	/
7	115-034329-00	M51A Infrared communication board	1	/

1.9 M51C Module(Platinum)

1.9.1 Exploded View

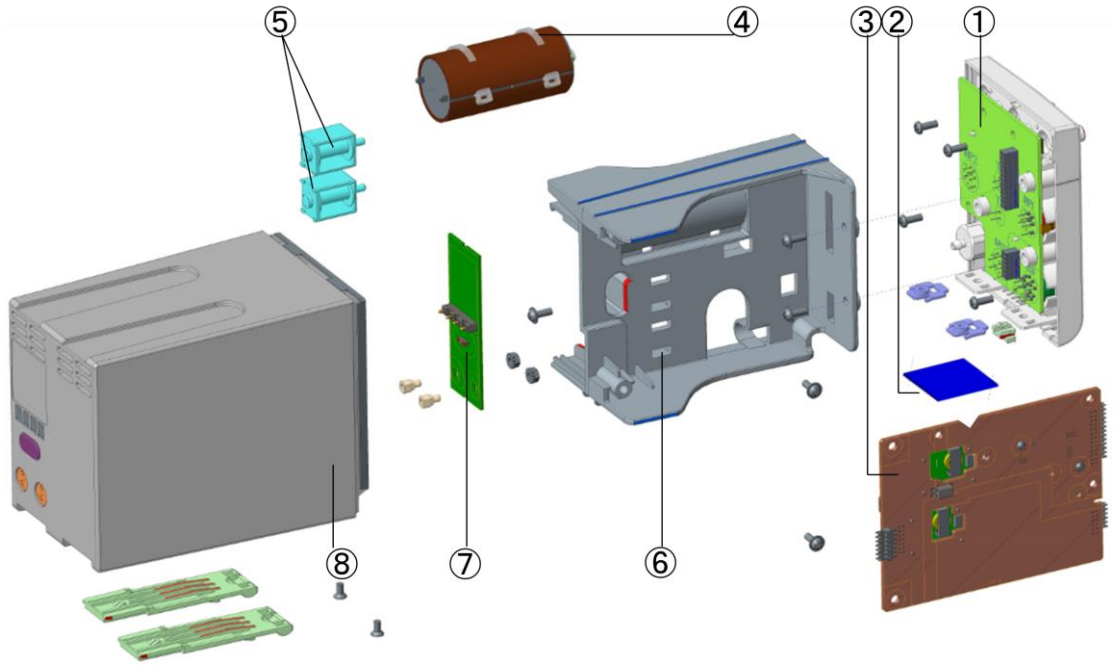

1.9.2 Parts List

No.	Order Number	Part Description	Qty	Remark
1	115-044670-01	M51C front panel maintenance package (Mindray SpO2/IBP FRU)	1	/
	115-044671-01	M51C front panel maintenance package (Nellcor SpO2/IBP FRU)		/
	115-044672-01	M51C front panel maintenance package (Mindray /IBP analog FRU)		/
	115-044673-01	M51C front panel maintenance package (Nellcor /IBP analog FRU)		/
	115-044668-01	M51C Front assembly(Mindray SpO2/No IBP)		/
	115-044669-01	M51C Front assembly(Nellcor SpO2/No IBP)		/
2	051-002353-00	M51C-9008V3.0 SPO2 PCBA	1	/
	101-000469-00	Nellcor SpO2 PCBA		/
3	051-002481-01	M51C Parameter board(5 lead/MR SpO2/no	1	Replace

No.	Order Number	Part Description	Qty	Remark
		IBP/with MPM connector)		051-002481-00
	051-002482-01	M51C-ME, 5L5P, MR/NC-SPO2, IBP, MPM I/F		Replace 051-002482-00
	051-002483-00-00	M51C Full configuration parameter board(extend ARR 12lead ST and Glasgow/FRU)		/
	051-002483-00-01	M51C Full configuration parameter board(Mindray:Hr +Glasgow_12/FRU)		/
4	082-000862-00	Pump. 12VDC with 120 wire and connector	1	/
5	082-000864-00	Air valve. Dual air valve (custom) 12VDC normally-open line, 125 mm long	1	One material with two valves
6	043-001964-02	Bracket (T8)	1	/
7	051-002383-00-00	M51C module back plane (with IBP/FRU)	1	/
	051-002383-00-01	M51C module communication backplane（no IBP）		/
8	115-044674-00	M51C rear housing assembly(FRU)	1	/

1.10 Others

No.	Order Number	Part Description	Qty	Remark
1	009-004998-00	Host to LED Internal power wire	1	cable
2	009-005131-00	display to display interface convert board interconnection line	1	cable
3	009-006879-00	Interconnection line from the display interface board to touchscreen control board	1	cable
4	009-005102-00	main unit to interface convert board interconnection line	1	cable
5	009-005103-00	main unit to display signal cable	1	cable
6	043-005819-00	Protective cable	1	cable
7	115-044675-00	M51C tube accessory(FRU)	1	others
8	044-000785-00	Safety Hook	1	others
9	022-000250-00	Adapter 100-250VAC 12V/5A	1	others
10	100-000173-00	Preamplifier with cable of rSO2 module	1	others
11	009-001770-00	Network cable between benelink module with ID box	1	others
12	115-045621-00	SMR integrated mount accessory Kit	1	others
13	115-033755-00	wifi assembly	/	others
14	115-047640-00	iView package(English/OEM)	/	others
15	115-033904-00	iView system maintenance U disk(WIN7)	/	others
16	115-050029-00	iView system maintenance U disk(WIN10)	/	others
17	115-049986-00	iView upgrade package(EN/WIN10)	/	Upgrade package
18	115-035451-00	separate installation way change to integrated installation way	/	Upgrade package
19	115-051379-00	Together installation chage to separate Package(whirl/ESM)	/	Upgrade package
20	115-049900-00	ID adapter upgrade package (with network cable and F serial cable)	/	Upgrade package
21	115-049179-00	MPM-IBP Upgrade Kit(NC SPO2 3/5 lead)	/	Upgrade package
22	115-049180-00	MPM-IBP Upgrade Kit(MR SPO2 3/5 lead)	/	Upgrade package
23	045-003140-00	BD trolley plate assembly	1	Rolling stand
24	045-003258-00	BD rolling stand maintenance package	1	Rolling stand
25	034-000090-00	caster with a lock	1	Rolling stand
26	043-000383-00	Base cover	1	Rolling stand
27	051-002035-00	Encoder Interface and Key Board PCBA	1	/