



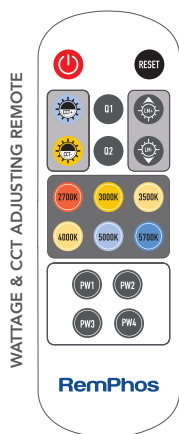

PART #

JOB NAME

TYPE

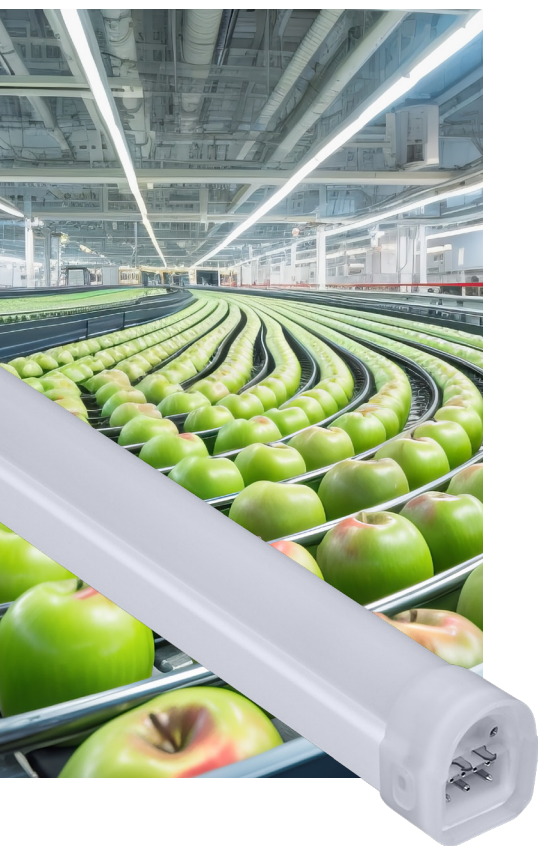

The LBI 65 is an IP65-rated linkable fixture or retrofit kit. Great for parking garages, coolers, outdoor canopies, tunnels, walkways, and more. Liquid-tight end caps allow for accessories to be used while still maintaining the IP65 rating.

- Suitable for wet locations
- 24 skus in 1 w/ **SUPERFLEX** technology
- Link multiple fixtures together w/ seamless connectors, or linking cables, to allow for multiple units to run on a single power source
- Polycarbonate housing w/ inner metal structure and heat sink
- Liquid-tight fitting conduit adapter available
- In-line mounting
- Quick connection in-line occupancy sensor option available
- Built-in white-tuning control channel
- **SIMPLE & NETWORK LIGHTING CONTROL**


SUPERFLEX
SWITCH BETWEEN
4 WATTAGES & 6 CCTS




PART #	UPC	DESCRIPTION	LUMENS	WATTAGE	CCT
RP-LBI65-2F-6W-40K-WC	197810004509	2 FT IP65-RATED LINKABLE BAR - INTERNAL DRIVER	640-1920	FLEXWATT 4W/ 6W /9W/12W	FLEXCOLOR 2700K/3000K/3500K 4000K /5000K/5700K
RP-LBI65-3F-10W-40K-WC	197810004516	3 FT IP65-RATED LINKABLE BAR - INTERNAL DRIVER	960-2400	FLEXWATT 6W/ 10W /15W/20W	
RP-LBI65-4F-25W-40K-WC	197810004523	4 FT IP65-RATED LINKABLE BAR - INTERNAL DRIVER	1920-4000	FLEXWATT 10W/15W/20W/ 25W	

DEFAULT WATTAGE AND CCT ARE SHOWN IN BOLD.






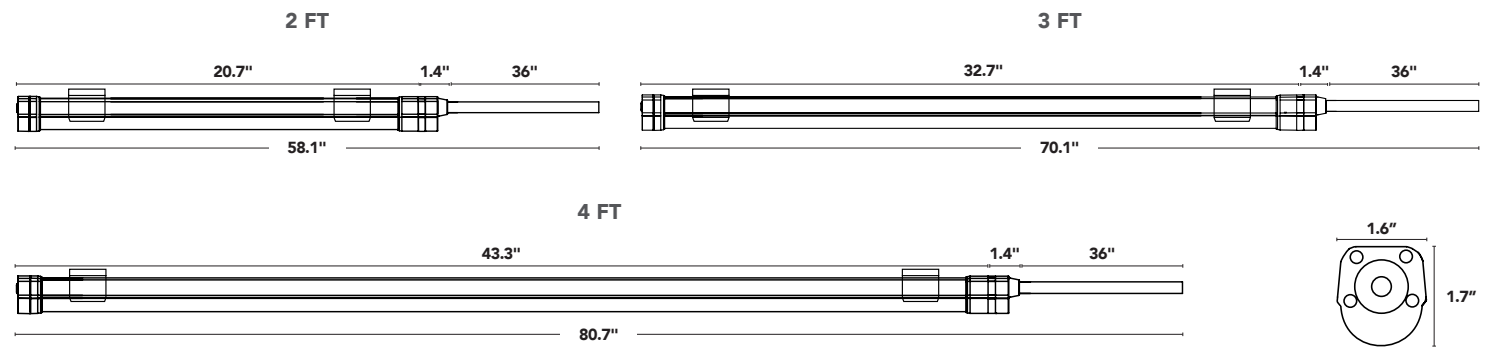


INCLUDED HARDWARE

REMOTE CONTROLLER 	2 STAINLESS STEEL, SELF-TAPPING SCREWS 	2 MOUNTING BRACKETS (45° AND 90° MOUNTING) 	SHIPS W/ A WATERPROOF END CAP INSTALLED 1-WAY MOISTURE VALVE 
--	---	--	---

CONTROL OPTIONS

SIMPLE LIGHTING CONTROL 		NETWORK LIGHTING CONTROLS 	
RP-LBI65-PIR-A IP65 IN-LINE PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HARVESTING SENSOR IR23 REMOTE*  		RP-LBI65-BLE-PIR-A IP65 IN-LINE SILVAIR™ BLUETOOTH PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR 	
TO CUSTOMIZE DEFAULT SETTINGS, IR23 REMOTE MUST BE ORDERED SEPARATELY		RP-LBI65-BLE-A IP65 IN-LINE SILVAIR™ BLUETOOTH CONTROL NODE 	

SIMPLE AND NETWORK LIGHTING CONTROL INCLUDED HARDWARE

2 SEAMLESS CONNECTORS 	2 STAINLESS STEEL, SELF-TAPPING SCREWS 	1 MOUNTING BRACKET (45° AND 90° MOUNTING) 	SHIPS W/ A WATERPROOF END CAP INSTALLED 1-WAY MOISTURE VALVE 
--	---	---	---



LINEAR AMBIENT (DIRECT LINEAR AMBIENT LUMINAIRES)

	PART #	DLC CODE	DLC	# OF BARS	WATTAGE / BAR	MOUNTING CONFIGURATION	TOTAL WATTAGE	TOTAL LUMENS
2FT	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-GPV6WB	●	1	4	SINGLE	4	620
	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-SH3Z04	●	2	4	LINEAR	8	1219
	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-744RW1	●	2	4	PARALLEL	8	1213
	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-JWV8DB	●	3	4	LINEAR	12	1829
	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-HMX309	●	3	4	PARALLEL	12	1810
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-VDPTQY	●	1	6	SINGLE	6	914
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-LGGMSQ	●	2	6	LINEAR	12	1829
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-0X20Q5	●	2	6	PARALLEL	12	1819
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-NG8267	●	3	6	LINEAR	18	2743
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-YDS9BC	●	3	6	PARALLEL	18	2714
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-WT9XKW	●	1	9	SINGLE	9	1372
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-S8643F	●	2	9	LINEAR	18	2743
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-2F4Q83	●	2	9	PARALLEL	18	2729
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-V782T7	●	3	9	LINEAR	27	4115
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-3QS044	●	3	9	PARALLEL	27	4072
	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-155JSB	●	1	12	SINGLE	12	1872
	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-GZR72D	●	2	12	LINEAR	24	3743
	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-KHWK8S	●	2	12	PARALLEL	24	3721
	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-QN3151	●	3	12	LINEAR	36	5615
	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-T5PDLL	●	3	12	PARALLEL	36	5531
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-WB99XV	●	1	6	SINGLE	6	915
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-MXNTRLR	●	2	6	LINEAR	12	1830
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-VD1KYC	●	2	6	PARALLEL	12	1820
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-WSDXGY	●	3	6	LINEAR	18	2745
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-3VCXD3	●	3	6	PARALLEL	18	2722
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-8487YN	●	1	10	SINGLE	10	1525
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-3MWP1B	●	2	10	LINEAR	20	3050
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-B0MQCD	●	2	10	PARALLEL	20	3034
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-26GBD8	●	3	10	LINEAR	30	4575
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-VOW3RN	●	3	10	PARALLEL	30	4536
3FT	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-RKXJDW	●	1	15	SINGLE	15	2288
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-03DJ9T	●	2	15	LINEAR	30	4575
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-1C28XF	●	2	15	PARALLEL	30	4551
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-D66JF6	●	3	15	LINEAR	45	6863
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-JVYYJP	●	3	15	PARALLEL	45	6804
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-WVWH6V	●	1	20	SINGLE	20	2874
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-5154RY	●	2	20	LINEAR	40	5749
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-5715RQ	●	2	20	PARALLEL	40	5716
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-65DY7X	●	3	20	LINEAR	60	8623
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-WXZHQL	●	3	20	PARALLEL	60	8536

● STANDARD ● PREMIUM FAMILY CODE: MMMTNV

TESTED AT 2700K



LINEAR AMBIENT (DIRECT LINEAR AMBIENT LUMINAIRES)

PART #	DLC CODE	DLC	# OF BARS	WATTAGE / BAR	MOUNTING CONFIGURATION	TOTAL WATTAGE	TOTAL LUMENS
RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-RXTRCH	●	1	10	SINGLE	10	1505
RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-0ZLS7Z	●	2	10	LINEAR	20	3010
RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-ZPP4K8	●	2	10	PARALLEL	20	2990
RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-QXLY7T	●	3	10	PARALLEL	30	4461
RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-N32WYB	●	1	15	SINGLE	15	2258
RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-GSNMFH	●	2	15	LINEAR	30	4515
RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-SH2TVJ	●	2	15	PARALLEL	30	4485
RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-SMFZB6	●	3	15	PARALLEL	45	6692
RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-ZC55PZ	●	1	20	SINGLE	20	3010
RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-7192HT	●	2	20	LINEAR	4	6020
RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-5RY6B2	●	2	20	PARALLEL	40	5980
RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-9Y0WS3	●	3	20	PARALLEL	60	8922
RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-H3PQMB	●	1	25	SINGLE	25	3824
RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-8ZM6JW	●	2	25	LINEAR	50	7649
RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-82XD8K	●	2	25	PARALLEL	50	7606
RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-9TDQW2	●	3	25	PARALLEL	75	11324

LOW OUTPUT (STAIRWELL AND PASSAGEWAY LUMINAIRES)

PART #	DLC CODE	DLC	# OF BARS	WATTAGE / BAR	MOUNTING CONFIGURATION	TOTAL WATTAGE	TOTAL LUMENS
RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-11CH62	●	1	4	SINGLE	4	610
RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-6WTMX4	●	2	4	LINEAR	8	1219
RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-VM57VY	●	2	4	PARALLEL	8	1213
RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-3WGKGJ	●	1	6	SINGLE	6	914
RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-WDP580	●	2	6	LINEAR	12	1829
RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-XFTP9Q	●	2	6	PARALLEL	12	1819
RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-2GGSBG	●	1	9	SINGLE	9	1872
RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-THGFB8	●	2	9	LINEAR	18	2743
RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-FKBMZ4	●	2	9	PARALLEL	18	2729
RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-HCYTMW	●	1	12	SINGLE	12	1872
RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-59WXD1	●	2	12	LINEAR	24	3743
RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-RL5N1R	●	2	12	PARALLEL	24	3721
RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-8J5M0Q	●	1	6	SINGLE	6	915
RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-LFWK48	●	1	10	SINGLE	10	1525
RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-XH5Y2R	●	1	15	SINGLE	15	2288
RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-RKBK37	●	1	20	SINGLE	20	2874
RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-61RZ44	●	1	10	SINGLE	10	1505
RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-ZT7M4L	●	1	15	SINGLE	15	2258
RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-YZ5CX4	●	1	20	SINGLE	20	3010
RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]	S-V49614	●	1	25	SINGLE	25	3824

● STANDARD ● PREMIUM FAMILY CODE: MMMTNV

TESTED AT 2700K



MID OUTPUT (STAIRWELL AND PASSAGEWAY LUMINAIRES)

	PART #	DLC CODE	DLC	# OF BARS	WATTAGE / BAR	MOUNTING CONFIGURATION	TOTAL WATTAGE	TOTAL LUMENS
2 FT	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-9LPWT9	●	3	4	LINEAR	12	1829
	RP-LBI65-2F-4W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-FTCJZZ	●	3	4	PARALLEL	12	1810
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-8F9XX9	●	3	6	LINEAR	18	2743
	RP-LBI65-2F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-H2JPW7	●	3	6	PARALLEL	18	2714
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-HXKVDV	●	3	9	LINEAR	27	4115
	RP-LBI65-2F-9W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-4ZYXZ7	●	3	9	PARALLEL	27	4072
3 FT	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-5QVBBP	●	3	12	LINEAR	36	5616
	RP-LBI65-2F-12W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-M9XP4B	●	3	12	PARALLEL	36	5531
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-55Q3S0	●	2	6	LINEAR	12	1830
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-GG8910	●	2	6	PARALLEL	12	1820
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-C4N3WH	●	3	6	LINEAR	18	2745
	RP-LBI65-3F-6W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-1LCDST	●	3	6	PARALLEL	18	2722
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-RTT28D	●	2	10	LINEAR	20	3050
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-W2Q8ZM	●	2	10	PARALLEL	20	3034
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-KJQFF1	●	3	10	LINEAR	30	4575
	RP-LBI65-3F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-PYPQQC	●	3	10	PARALLEL	30	4536
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-7CS1WF	●	2	15	LINEAR	30	4575
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-754MFJ	●	2	15	PARALLEL	30	4551
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-GH93VH	●	3	15	LINEAR	45	6863
	RP-LBI65-3F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-T6X8G3	●	3	15	PARALLEL	45	6804
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-Y8CDQ5	●	2	20	LINEAR	40	5749
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-CBP0X3	●	2	20	PARALLEL	40	5716
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3L	S-P0L549	●	3	20	LINEAR	60	8623
	RP-LBI65-3F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-02BPTT	●	3	20	PARALLEL	60	8536
	RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-CTG99H	●	2	10	LINEAR	20	3010
	RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-N0ZMZH	●	2	10	PARALLEL	20	2990
	RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-F3NZLM	●	2	15	LINEAR	30	4515
	RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-ZQ0FCF	●	2	15	PARALLEL	30	4485
	RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-Y8LMBP	●	2	20	LINEAR	40	6020
	RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-FXJHP9	●	2	20	PARALLEL	40	5980
	RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2L	S-8M07FR	●	2	25	LINEAR	50	7649
	RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-2X	S-158JD4	●	2	25	PARALLEL	50	7606

HIGH OUTPUT (STAIRWELL AND PASSAGEWAY LUMINAIRES)

	PART #	DLC CODE	DLC	# OF BARS	WATTAGE / BAR	MOUNTING CONFIGURATION	TOTAL WATTAGE	TOTAL LUMENS
4 FT	RP-LBI65-4F-10W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-4HGKGJ	●	3	10	PARALLEL	30	4461
	RP-LBI65-4F-15W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-F9K7VC	●	3	15	PARALLEL	45	6692
	RP-LBI65-4F-20W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-JQ7J8T	●	3	20	PARALLEL	60	8922
	RP-LBI65-4F-25W-YYK-[WC;C]-[OCC;OCBT;OCCBT;BT;BTX;blank]-[HV;blank]-3X	S-DBY3BF	●	3	25	PARALLEL	75	11324

● STANDARD ● PREMIUM FAMILY CODE: MMTNV

TESTED AT 2700K



CABLES + CONNECTORS

PART #				DESCRIPTION	
6 IN	12 IN	24 IN	48 IN	LINKING CABLES	
RP-LBI65-LC-6IN-DIM	RP-LBI65-LC-12IN-DIM	RP-LBI65-LC-24IN-DIM	RP-LBI65-LC-48IN-DIM		

PART #	DESCRIPTION	
RP-LBI65-IP-3FT RP-LBI65-IP-10FT	3 FT / 10 FT INCOMING POWER CABLE WIRE WHIP 	
RP-LBI-SSC-DIM-10P RP-LBI-SSC-NODIM-10P	SEAMLESS CONNECTOR AVAILABLE FOR DIMMING (INCLUDES CCT) AND NON-DIMMING (DOES NOT INCLUDE CCT) APPLICATIONS 	
RP-LBI65-IPC-12NPT-3FT RP-LBI65-IPC-12NPT-10FT	INCOMING POWER CONDUIT ADAPTER USED W/ CONDUIT TO HARDWIRE THE INCOMING POWER CABLE INTO FIXTURE OR JUNCTION BOX (3 FT / 10 FT OF WIRE INPUT INCLUDED) 	
RP-LBI65-SPND-SS-10FT (1 PACK) RP-LBI65-SPND-SS-10FT-2P (2 PACK)	STAINLESS STEEL, WATERPROOF AIRCRAFT SUSPENSION CABLE 	
RP-LBI65-EMG-40W	RP-LBI65-EMG-40W THE STREAMER STB27FC(A)-40WL LED EMERGENCY DRIVER IS UL LISTED FOR WET LOCATIONS. IT ALLOWS THE SAME LED LUMINAIRE TO BE USED FOR NORMAL AND EMERGENCY OPERATION, AND WORKS IN CONJUNCTION WITH AN AC LED DRIVER THAT CONVERTS NEW OR EXISTING LED FIXTURES INTO EMERGENCY LIGHTING. IT INCLUDES A WATERPROOF AND INDEPENDENT BATTERY PACK THAT CAN BE EASILY REPLACED BY HAND, AND FEATURES A STATUS SCREEN TO SHOW CHARGING, DISCHARGING, AND FAILURE. 	

LINKING QUANTITY


	120V	208V	240V	277V
4 FT	30 BARS	40 BARS	40 BARS	40 BARS
3 FT	40 BARS	40 BARS	40 BARS	40 BARS
2 FT	40 BARS	40 BARS	40 BARS	40 BARS

LINKING POSSIBILITIES

- Linking cables will lower connectable quantities.
- The linking numbers are based on using the LBI 65 conduit adapter and connected end to end.
- If linking cables are used when powered on 120VAC, linking number is reduced to 24pcs.
- Linking does not include 0-10V linked control. This will depend on the controlling device.



24 SKUs in 1 WITH FLEXWATT™ & FLEXCOLOR™ TECHNOLOGY (CONTROLLABLE FROM REMOTE)

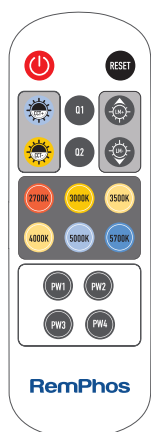

2 FT			
	2700K		3000K
	3500K		4000K
	5000K		5700K
	4W		6W
	9W		12W

3 FT			
	2700K		3000K
	3500K		4000K
	5000K		5700K
	6W		10W
	15W		20W

4 FT			
	2700K		3000K
	3500K		4000K
	5000K		5700K
	10W		15W
	20W		25W

- Product ships at a default color temp (K) and wattage setting (install as is, or tailor the settings to fit your needs).
- Save on labor costs by having us factory pre-set the wattage and color temperature (possible upcharge - contact us for more details).

FLEXCONTROL™ TECHNOLOGY

- Order control-ready, simple lighting controls (integrated high/low and daylight sensor), or network lighting controls.
- Optional sensors are directly linkable to the light bars.
- Our basic motion/daylight control (RP-LBI65-PIR-A ordering code) is adjustable via remote control for sensitivity duration of time at high light level before dimming to low duration of time at low light level before turning off. Ramping up and down light levels based on daylight and the dimmed light level %.

SUITABLE FOR WET LOCATIONS

PASS-THROUGH 0-10V DIMMING, AUXILIARY 12V OUTPUT, & COLOR CONTROL CHANNEL

- Allows all light bars to be dimmed & white-tuned together as a group.

ADAPTABLE MOUNTING

- Included mounting clips (x2) made from stainless steel, painted white to match fixture. Suspension mounting holes in bracket for 3/8" diameter threaded rod. Included stainless steel, self-drilling screws for surface mounting.

RP-LBI65-EMG-40W

PRODUCT DESCRIPTION

The Streamer STB27FC(A)-40WL LED emergency driver is UL Listed for wet locations. It allows the same LED luminaire to be used for normal and emergency operation, and works in conjunction with an AC LED driver that converts new or existing LED fixtures into emergency lighting. It includes a waterproof and independent battery pack that can be easily replaced by hand, and features a status screen to show charging, discharging, and failure.

OPERATION

When AC power fails, the STREAMER emergency LED driver immediately switches to the emergency mode, operating the LEDs at full lumen output for a minimum of 90 minute (max 40W dimmed load). When AC power is restored, the emergency driver automatically returns to the charging mode.

FEATURES

- UL Listed for wet locations, IP65 Waterproof
- Manual test and remote control test (remote included)
- Over-discharging protection
- Rest mode
- 90 minutes emergency time
- Initial functional self-test
- Includes 6 1/2 NPT threaded openings

CONNECTION QUANTITY

SIZE	UNCONTROLLED	STANDARD/NLC SENSOR
2 FT	16 PIECES	14 PIECES
3 FT	11 PIECES	10 PIECES
4 FT	8 PIECES	7 PIECES


STREAMER STB27FC(A)-40WL
UL LISTED LED EMERGENCY DRIVER

0-10V Dimming



DIMENSIONS

MRF MODEL #	L	W	H
STB27FC-40WL-LFPB4S2P-AC	14.37 IN	5.79 IN	2.83 IN

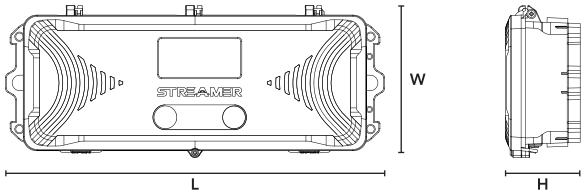


RP-LBI65-EMG-40W
(STB27FC-40WL-LFPB4S2P-AC)

- OUTPUT POWER**
40 Watts (Max Load)
- OUTPUT VOLTAGE**
120V AC
- INPUT CURRENT**
150 mA (Max)
- INPUT POWER**
8.5 Watts (Max)
- INPUT VOLTAGE**
120-277VAC, 50-60Hz


- EMERGENCY OPERATION**
>90 Minutes
- OPERATING TEMP**
0° to 60°C
- BATTERY**
Lithium
- RECHARGE**
36 HRS
- DIMENSIONS (L X W X H)**
14.37 IN X 5.79 IN X 2.83 IN

TYPICAL WIRING DIAGRAM

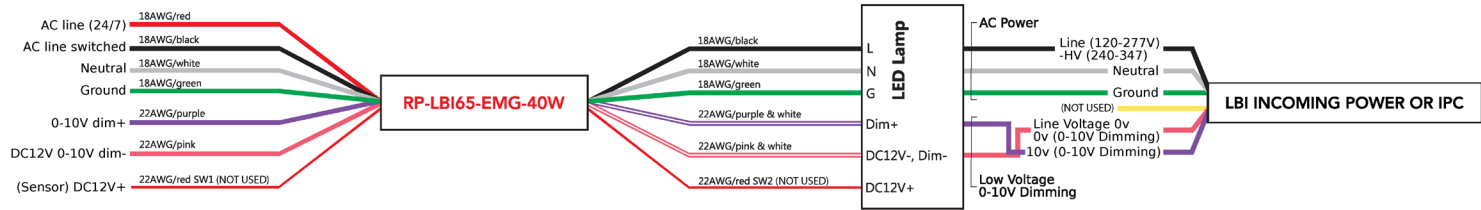

IP65 IN-LINE PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HARVESTING SENSOR

ORDERING **RP-LBI65-PIR-A**, IN ADDITION TO THE LBI 65 PART NUMBER, UPGRADES THE FIXTURE W/ A **SIMPLE CONTROL** IN-LINE PASSIVE INFRARED OCCUPANCY SENSOR.

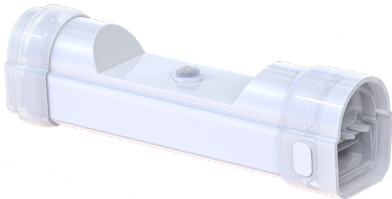


ATTRIBUTES

DETECTION TECHNOLOGY	PASSIVE INFRARED (PIR)
DETECTION TYPE	OCCUPANCY
SENSOR POWER	12VDC
GROUPABLE	NO
NETWORK LIGHTING CONTROL	NO
COMISSIONING METHOD	IR REMOTE
REMOTE	IR23*
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	NO
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	NONE
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES
CONTROL CAPACITY	15 BARS

* SENSOR ALSO COMPATIBLE W/ IR11 REMOTE

IR23 REMOTE

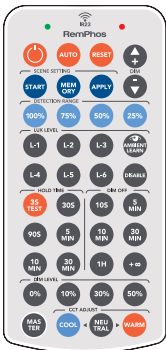


-  **PERMANENT ON/OFF FUNCTION**
-  **SENSOR MODE**
-  **RESET FUNCTION**
-  **AMBIENT LEARN**
-  **TEST MODE**
-  **DIM +/-**

FOR MORE INFORMATION ON THE IR23 REMOTE SCAN BELOW




DETECTION PATTERN / RP-LBI65-PIR-A

TOP VIEW

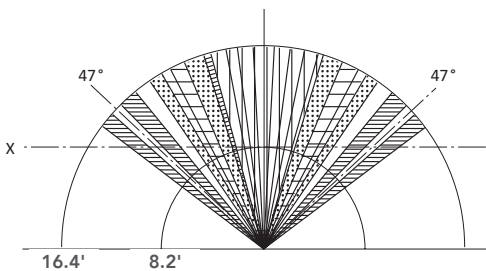


SIDE

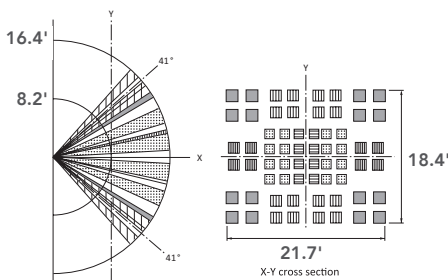

DAYLIGHT HARVESTING / RP-LBI65-PIR-A

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even w/o movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light is bright enough).


NOTE LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPERATE WITHOUT MOTION WHEN STANDBY IS SET TO + ∞.

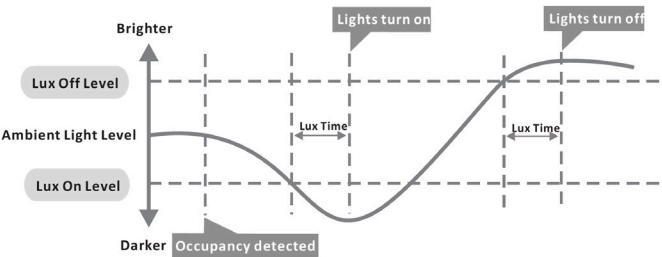



IP65 IN-LINE SILVAIR™ BLUETOOTH PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR


ORDERING **RP-LBI65-BLE-PIR-A**, IN ADDITION TO THE LBI 65 PART NUMBER, UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **NETWORK LIGHTING CONTROL**. ONCE CONNECTED THROUGH THE SILVAIR APP, THE BLUETOOTH MICROWAVE MOTION SENSOR AND DAYLIGHT HARVESTING TECHNOLOGY CAN MAXIMIZE ENERGY SAVINGS.

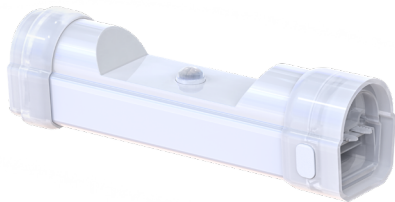


ATTRIBUTES

DETECTION TECHNOLOGY	PASSIVE INFRARED (PIR)
DETECTION TYPE	OCCUPANCY / VACANCY
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMISSIONING METHOD	SILVAIR APP + IR REMOTE FOR RANGE SETTING
REMOTE	N/A
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	BLUETOOTH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC
CONTROL CAPACITY	15 BARS


SILVAIR APP



SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.




FOR MORE INFORMATION ON THE SILVAIR APP SCAN BELOW




DETECTION PATTERN / RP-LBI-BLE-PIR-A

TOP VIEW

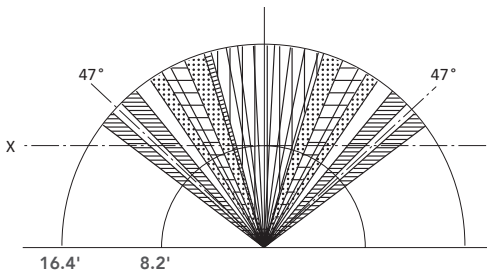


SIDE

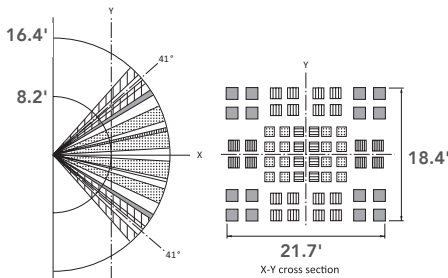

IP65 IN-LINE SILVAIR™ BLUETOOTH CONTROL NODE


ORDERING **RP-LBI65-BLE-A**, IN ADDITION TO THE LBI 65 PART NUMBER, UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **NETWORK LIGHTING CONTROL**. ONCE CONNECTED THROUGH THE SILVAIR APP, THE BLUETOOTH MICROWAVE MOTION SENSOR AND DAYLIGHT HARVESTING TECHNOLOGY CAN MAXIMIZE ENERGY SAVINGS.

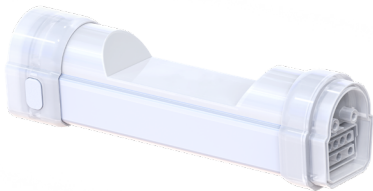



ATTRIBUTES

DETECTION TECHNOLOGY	MICROWAVE
DETECTION TYPE	OCCUPANCY / VACANCY
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMISSIONING METHOD	SILVAIR APP
REMOTE	N/A
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	BLUETOOTH MESH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC
CONTROL CAPACITY	15 BARS


SILVAIR APP




SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.



FOR MORE INFORMATION ON THE SILVAIR APP SCAN BELOW



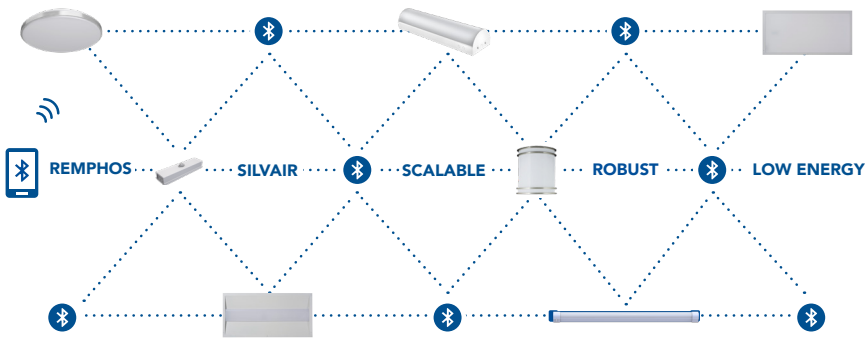

WHAT IS SILVAIR?

Silvoir is a software and commissioning app that connects and controls lighting fixtures using Bluetooth mesh technology.

HOW DOES IT CONNECT?

Silvoir can be set up in advance through the cloud and the Silvoir portal. It can also be commissioned in the field with the IOS app.

DOWNLOAD SILVAIR APPS



MOBILE APP Apple App Store
or
WEB APP platform.silvoir.com

