AERO 422 Homework #2

Instructor: Vedang Deshpande

Due: September 22, 2021 at 12:40p.m.

Fall 2021

(**25 Points**)

1. Consider the function $f(t) = te^{2t}\sin 3t$

   (a) (**2 points**) Find the Laplace transform using the table. Mention which entries from the table are being used.
   Refer to the following properties from the Laplace table

$$\mathcal{L}\left\{t^n f(t)\right\} = (-1)^n \frac{d^n F(s)}{ds^n} \quad (7), \qquad \mathcal{L}\left\{e^{at}\sin kt\right\} = \frac{k}{(s-a)^2+k^2} \quad (22)$$

   Let $f(t) = e^{2t}\sin 3t$. Apply (7) to get

$$\begin{aligned}\mathcal{L}\left\{te^{2t}\sin 3t\right\} &= \mathcal{L}\left\{tf(t)\right\}\\ &= (-1)\frac{dF(s)}{ds}\\ &= (-1)\frac{d\left[\mathcal{L}\left\{e^{2t}\sin 3t\right\}\right]}{ds}\end{aligned}$$

   Apply (22) and simplify using the quotiet rule.

$$\begin{aligned}\mathcal{L}\left\{te^{2t}\sin 3t\right\} &= (-1)\frac{d}{ds}\left\{\frac{3}{(s-2)^2+3^2}\right\}\\ &= (-1)\frac{-3\cdot 2(s-2)}{((s-2)^2+9)^2}\\ &= \frac{6s-12}{((s-2)^2+9)^2}\end{aligned}$$

   (b) (**1 point**) Can we use the F.V.T. to determine $f(\infty)$? Why or why not?
   For the Final Value Theroem to apply, $f(t)$ must approach a finite value in the limit as t approaches ∞. Upon inspection, we see that $f(t) = te^{2t}\sin 3t$ diverges as $t \to \infty$, and thus does not approach a finite value.

   Another way to arrive at this conclusion is to look at the poles of the function. If a pole exists in the right-half plane, then the function will diverge. If the poles are puely imaginary, then the function will oscillate and will not approach a finite value in the limit as $t \to \infty$. Therefore, if there are no poles in the right-half plane, then at least one pole must lie in the left-half plane in order for the function to converge to a steady-state finite value.

   The poles of the transfer function

$$F(s) = \frac{6s-12}{((s-2)^2+9)^2}$$

   are $s = 2+j3,\ 2-j3,\ 2+j3,\ 2-j3$, which are all in the right-half plane, implying that this function is unstable.

   Therefore, the Final Value Theorem cannot be applied to determine $f(\infty)$.

2. Find the inverse Laplace transform using the table and partial fraction expansion. Show your work.

   (a) (**2 points**)

$$F(s) = \frac{s+10}{s^2+2s+10}$$

   Refer to the following properties from the Laplace table

$$\mathcal{L}\left\{e^{at}\sin kt\right\} = \frac{k}{(s-a)^2+k^2} \quad (22), \qquad \mathcal{L}\left\{e^{at}\cos kt\right\} = \frac{s-a}{(s-a)^2+k^2} \quad (23)$$

   By completing the square, $F(s)$ can be re-written as follows:

$$\begin{aligned} F(s) &= \frac{s+10}{s^2+2s+10} \\ &= \frac{s+10}{(s+1)^2+9} \\ &= \frac{s+1}{(s+1)^2+3^2} + \frac{9}{(s+1)^2+3^2} \\ &= \frac{s+1}{(s+1)^2+3^2} + \frac{3^2}{(s+1)^2+3^2} \end{aligned}$$

   Take the inverse Laplace transform of $F(s)$ by using (22) and (23).

$$\begin{aligned} f(t) &= \mathcal{L}^{-1}\left\{F(s)\right\} \\ &= \mathcal{L}^{-1}\left\{\frac{s+1}{(s+1)^2+3^2}\right\} + 3\cdot\left\{\frac{3}{(s+1)^2+3^2}\right\} \\ &= e^{-t}\cos 3t + 3e^{-t}\sin 3t \\ &= e^{-t}\left(\cos 3t + 3\sin 3t\right) \end{aligned}$$

   (b) (**3 points**)

$$F(s) = \frac{s^2+1}{s(s-1)^3}$$

3. A given system is found to have a transfer function that is

$$\frac{Y(s)}{R(s)} = \frac{10(s+2)}{s^2+8s+15}$$

   (a) (**3 points**) Using partial fractions, determine $y(t)$ when $r(t)$ is a unit step input. Show your work.

   (b) (**1 point**) Can we use F.V.T. to find $y(\infty)$? If the answer is yes, apply F.V.T. If not, explain why.

4. (a) (**3 points**) Using the convolution integral, find the step response of the system whose impulse response is given below

$$h(t) = \begin{cases} te^{-t} & t \geq 0 \\ 0 & t < 0 \end{cases}$$

   (b) (**2 points**) Now use the Laplace transform table and partial fraction expansion to find $y(t)$.

   (c) (**2 points**) Apply I.V.T. and F.V.T. (if applicable) to find $y(0)$ and $y(\infty)$.

5. For each of the following block diagrams, reduce the block diagram to find $T(s)$, where $T(s)$ is defined by $Y(s) = T(s)R(s)$.

(a) (**1.5 points**)

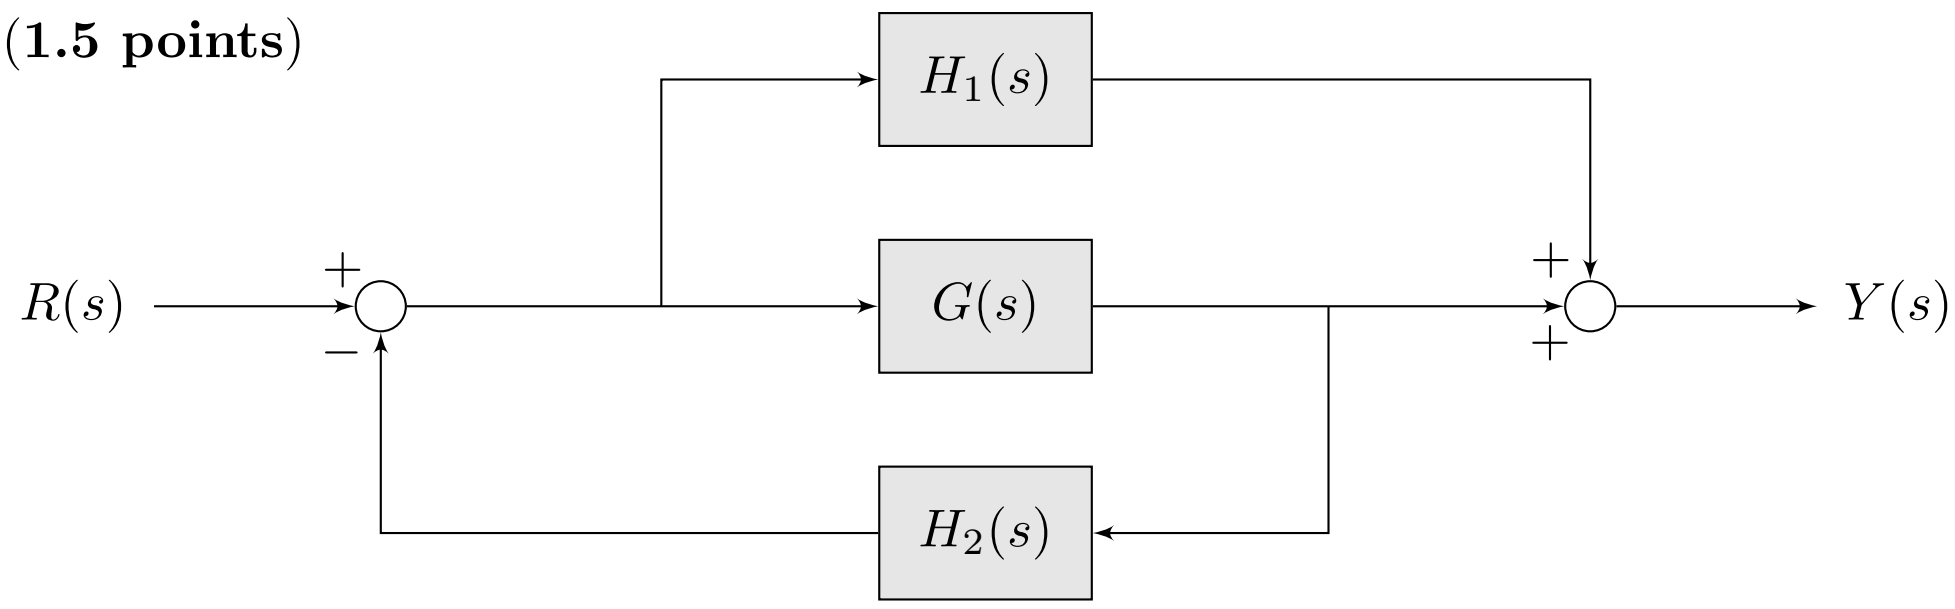

(b) (**3 points**)

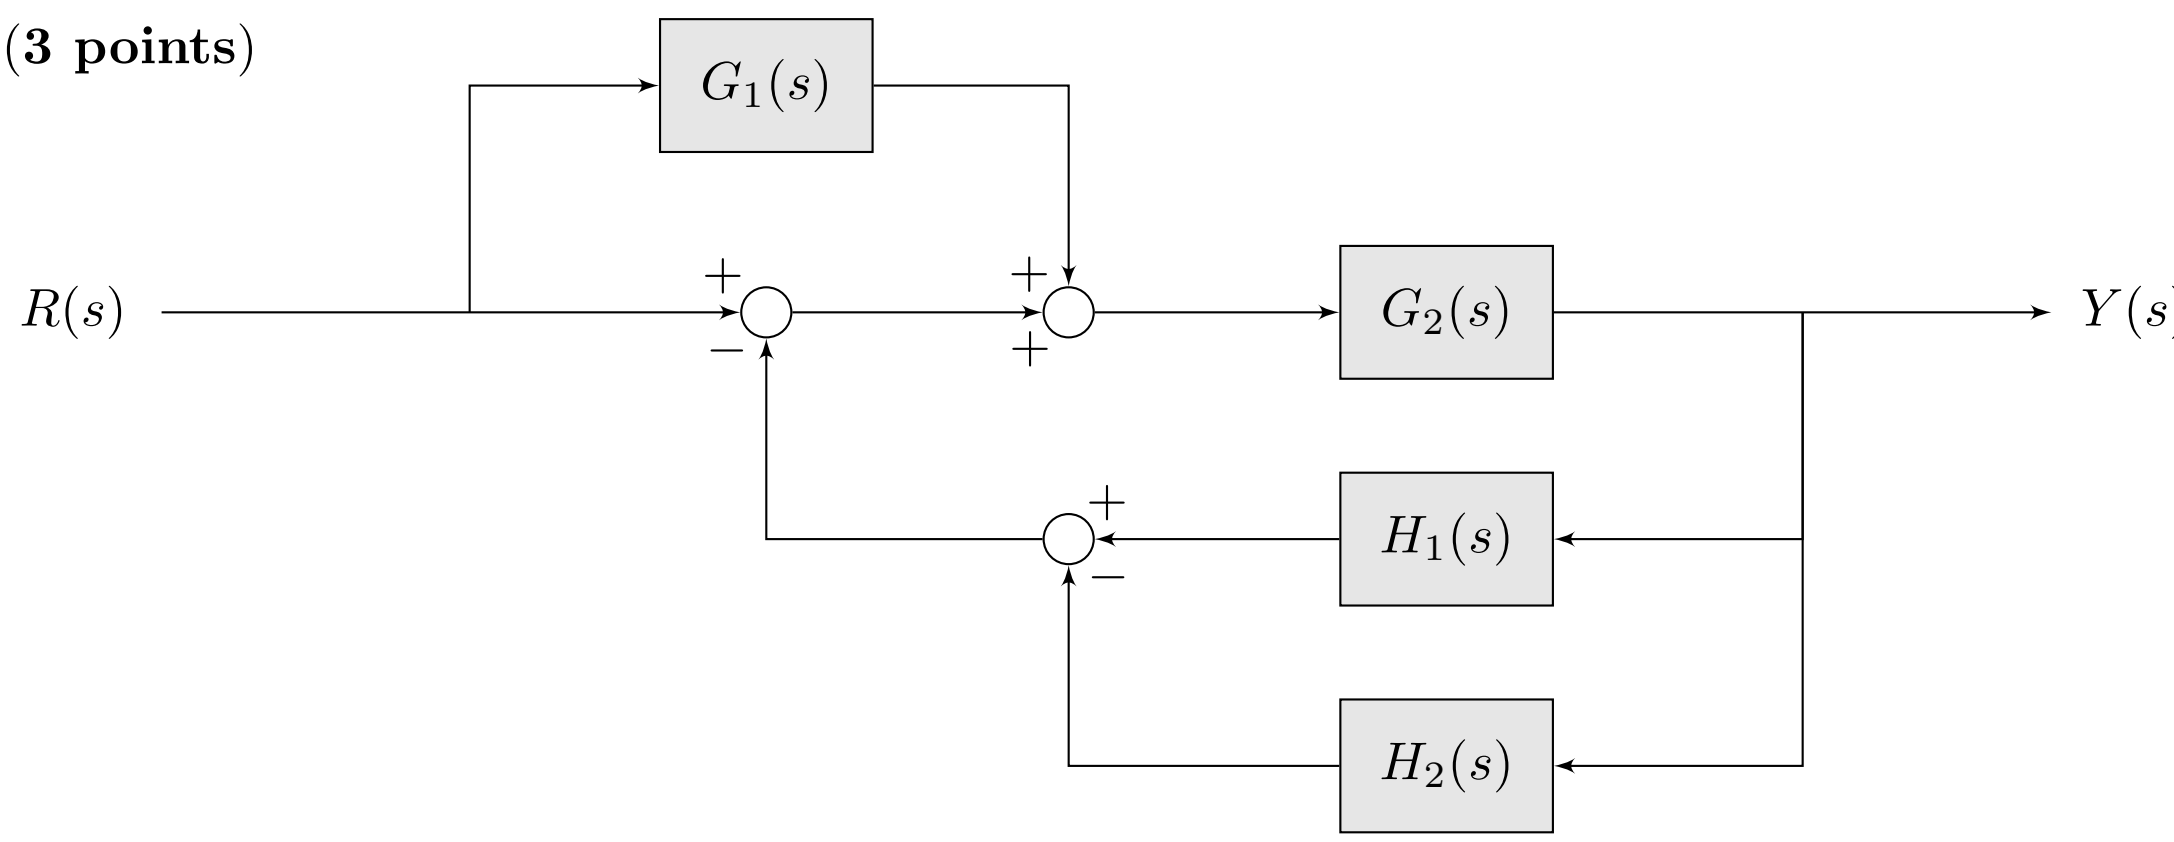

(c) (**1.5 points**)

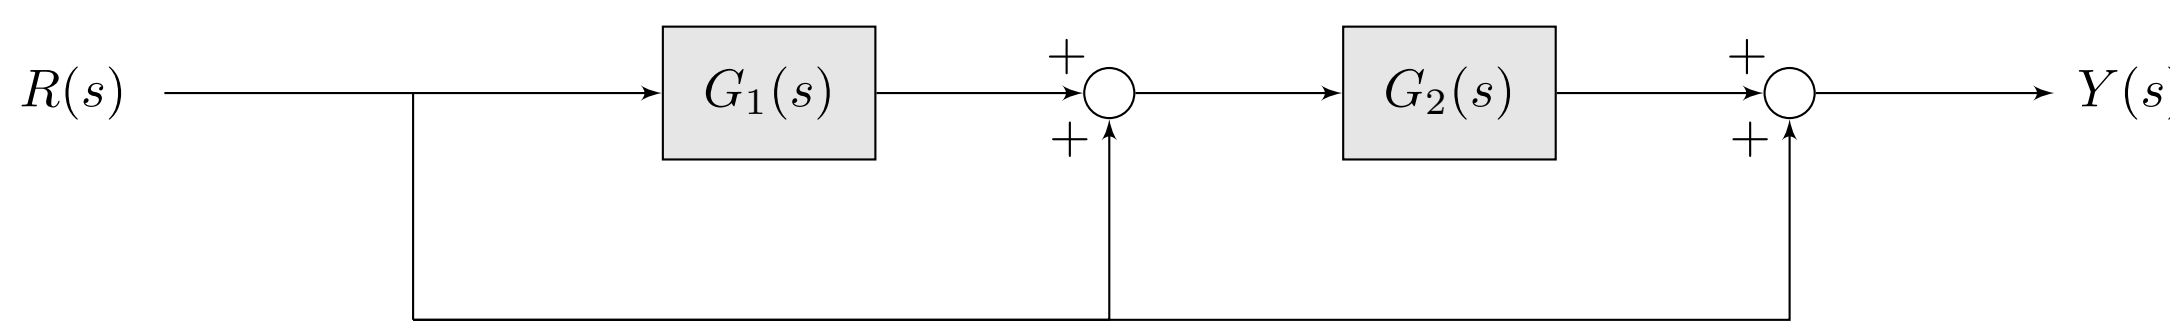

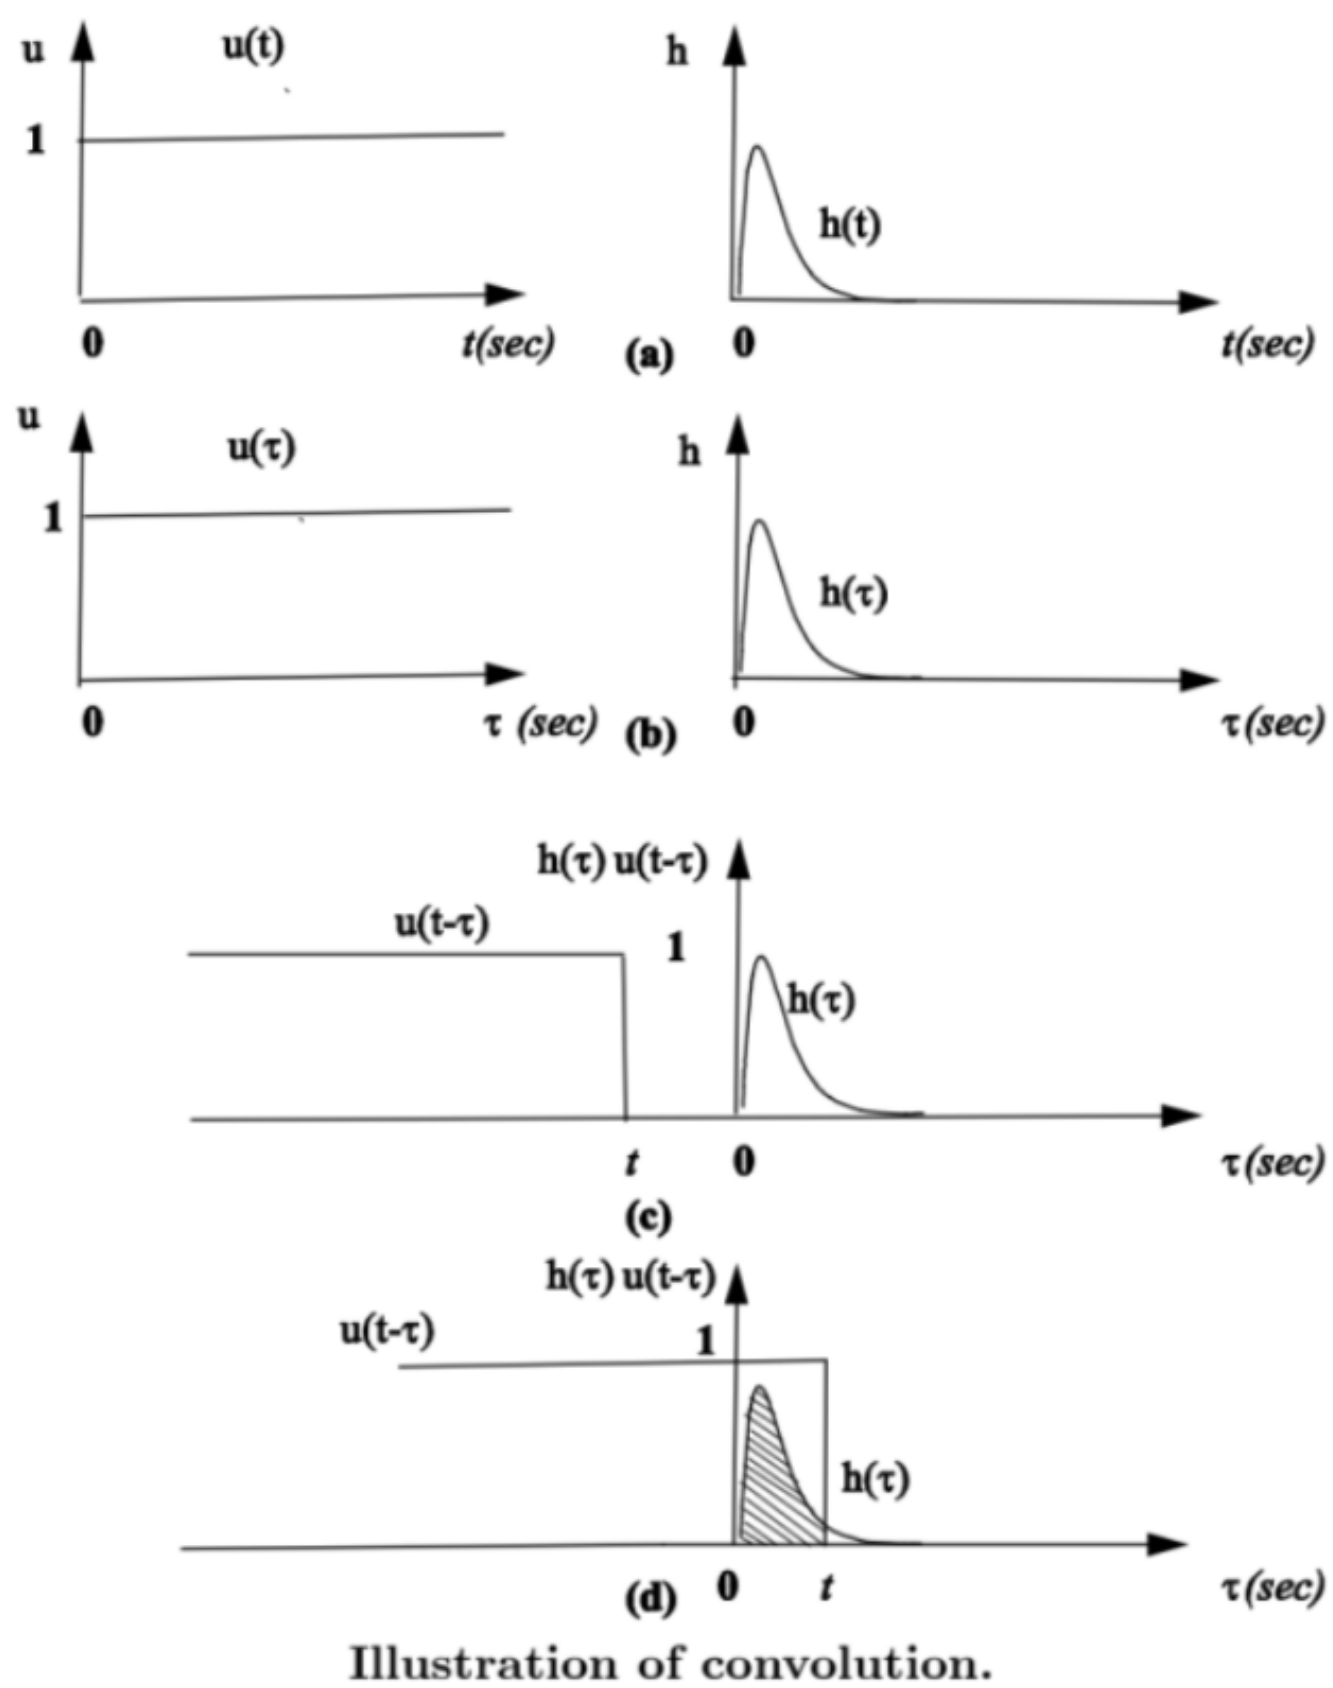

Figure 1: Convolution integral (reference for problem 4)