


KEEP-OUT ZONE

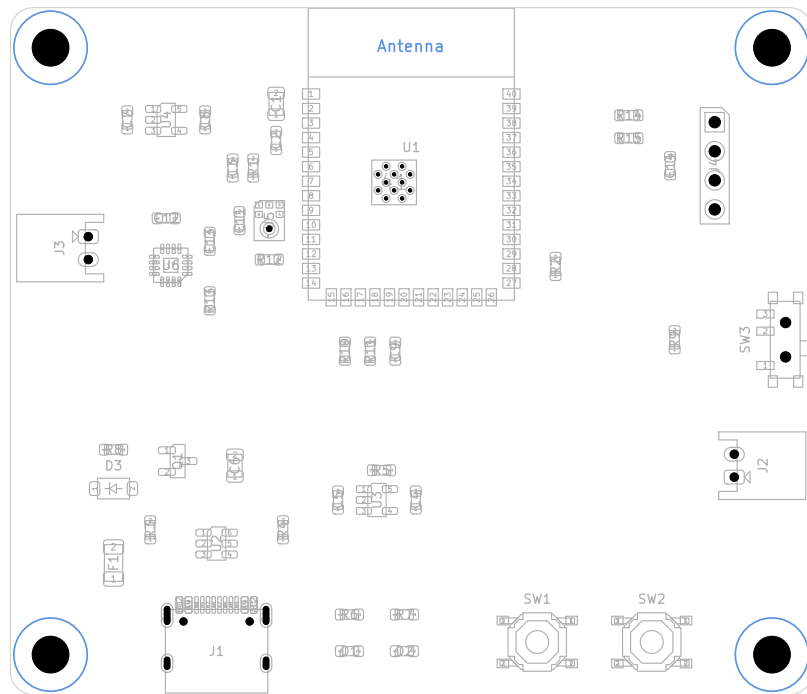

ASSEMBLY NOTES

1. Parts per BOM (LCSC numbers). Do not fit: TP1-TP20 (test pads), H1-H4 (holes).
2. All SMD parts on top. J2, J3 (JST PH) and J4 (1x4 socket) are through-hole.
3. U5 is a bottom-port MEMS mic: no wash, no coating, keep the port hole open.
4. Polarity: D1, D2 (LEDs), D3 (diode), J2 battery pin 1 = +.
5. Speaker 4 or 8 ohm on J3. Battery: 1-cell Li-ion WITH protection board on J2.
6. Flash over USB-C. Arduino IDE: USB CDC On Boot = Enabled.

Team Novadian, IERT Prayagraj

Sheet:

File: nandi-pcb.kicad_pcb

Title: Nandi v1 main board

Size: A4


Date: 2026-09-21

Rev: 1.0

KiCad E.D.A. 10.0.6

Id: 1/2

KEEP-OUT ZONE

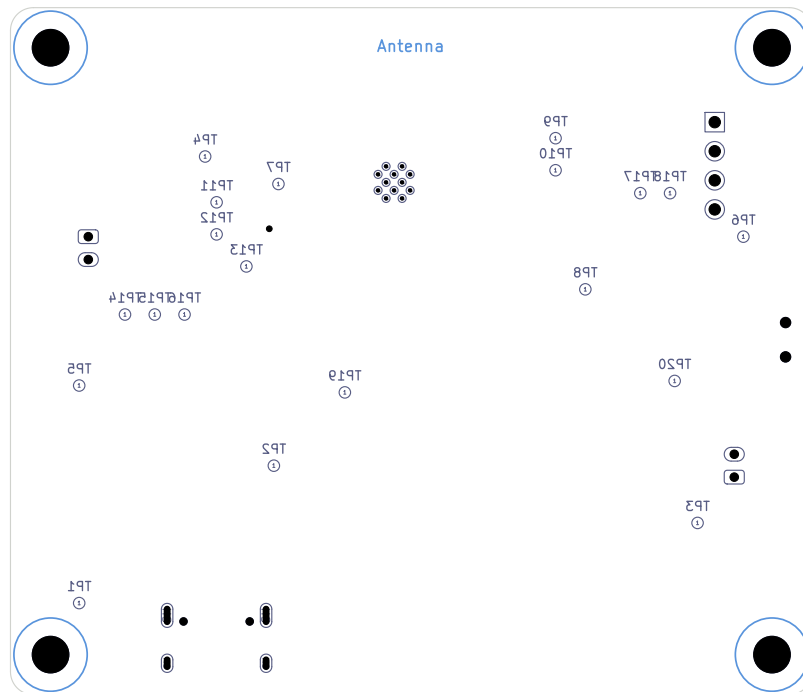

ASSEMBLY NOTES

1. Parts per BOM (LCSC numbers). Do not fit: TP1-TP20 (test pads), H1-H4 (holes).
2. All SMD parts on top. J2, J3 (JST PH) and J4 (1x4 socket) are through-hole.
3. U5 is a bottom-port MEMS mic: no wash, no coating, keep the port hole open.
4. Polarity: D1, D2 (LEDs), D3 (diode), J2 battery pin 1 = +.
5. Speaker 4 or 8 ohm on J3. Battery: 1-cell Li-ion WITH protection board on J2.
6. Flash over USB-C. Arduino IDE: USB CDC On Boot = Enabled.

Team Novadian, IERT Prayagraj

Sheet:

File: nandi-pcb.kicad_pcb

Title: Nandi v1 main board

Size: A4

Date: 2026-09-21

Rev: 1.0

KiCad E.D.A. 10.0.6

Id: 2/2