9th GEN LED FLOOD LIGHT











Features & Advantages:

1. Exquisite Appearance

The unique triangular shape with distinct edges of the floodlight provides a distinctive texture, and the sleek design adds a touch of elegance. Black and gray-brown finishes are for choices.

2. Excellent Heat Dissipation

Constructed with ADC12 aluminum alloy and utilizing an integrated diecasting process, the efficient heat emission f in design enhances the product's heat dissipation capabilities.

3. CCT & Wattage Adjustable

Be equipped with CCT and Wattage adjustment capabilities, as well as photocell function.

4. Multiple Installation & Bracket Options

Three installation brackets – Yoke, Knuckle, Slip-fitter are available, all allowing for angle adjustments to suit differe nt installation scenarios.


5. Strong Waterproof Performance


Besides IP65 waterproof rating, the fixture includes a drainage groove to prevent water accumulation during rainy w eather, more suitable for outdoor use in various weather conditions.


Lighting Parameters:

Power	35W	80W	120W	300W
Rate Current	0.320A	0.733A	1.11A	2.77A
weight	1457g	2250g	2850g	6150g
Wattage abjutstable	15W/25W/35W	50W/60W/80W	80W/100W/120W	200W/240W/300W
Working Voltage	AC120-277V			
Color Temperature	3000/4000/5000K			
lamp's Luminous Efficiency	120LM/W			
Color Rendering Index	Ra＞70			
Operating Temperature	-40°F～+104°F			
Storage Temperature	-40°F～+158°F			
Environment Location	Wet Location			
Life-span	30000H			
Materials	ADC12			
The color of the lamp shell	Brown/black			
Mounting	Bracket fixed			


Installation instruction：

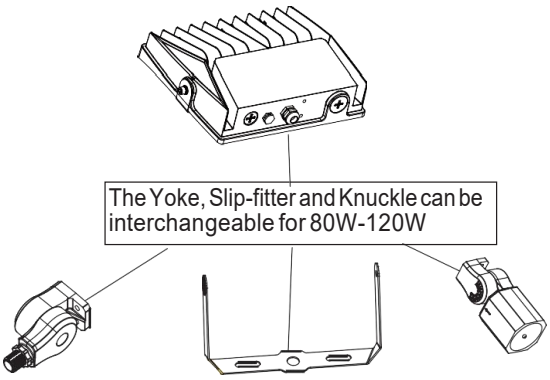

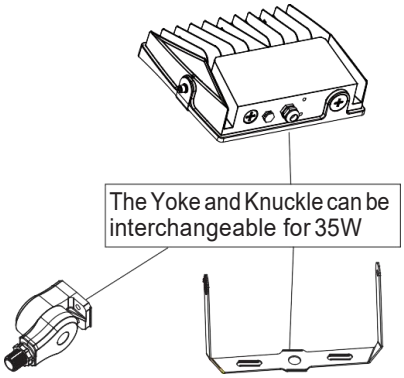


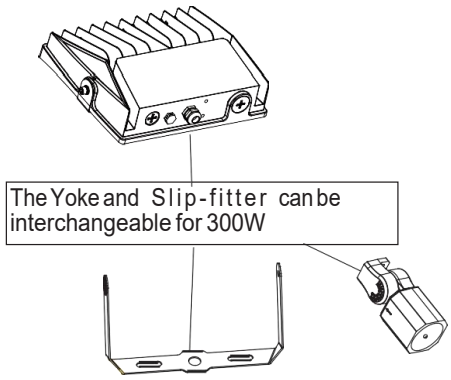


Product Dimension；

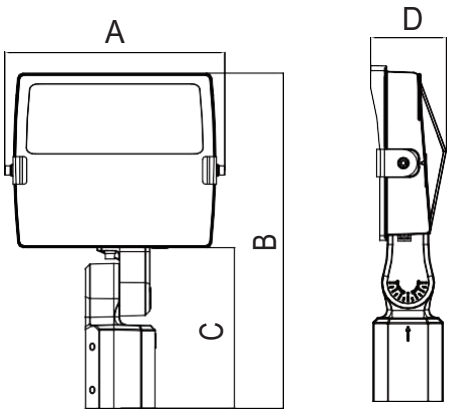

(slip-fitter)

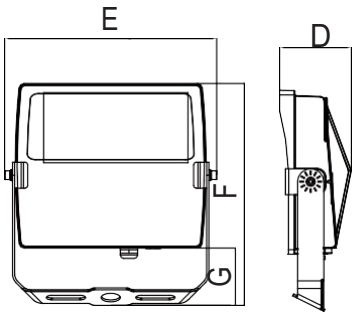

(Yoke)

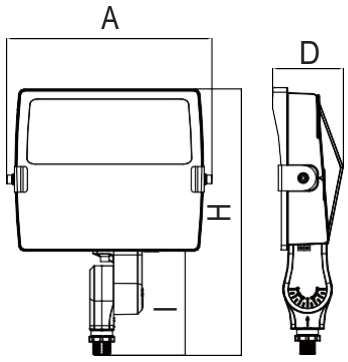


(Knuckle)


ITEM	A	B	C	D	E	F	G	H	I
FL0903-35W	/	/	/	2.87″	8.55″	8.66″	2.57″	9.13″	3.03″
FL0908-80W	9.42″	14.35 ″	6.9″	3.23″	9.61″	10.07″	2.6″	12.28″	4.8″
FL0912-120W	10.6 ″	15.52 ″	6.9″	3.25″	10.87″	11.35″	2.7″	13.44″	4.8″
FL0930-300W	16.53 ″	19.88 ″	6.7 ″	4.52 ″	16.29 ″	17.4 ″	4.21 ″	/	/

Installation Instruction (Slip- itter)


1.Loosen the screw used to fix the upper and the lower mount in rotating shaft by Hexagon wrench.

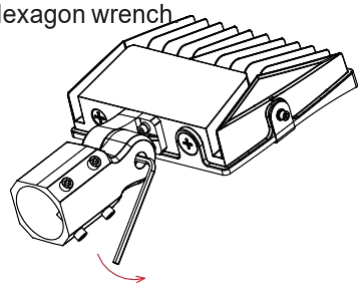


2.Rotate the bracket to proper Angle.

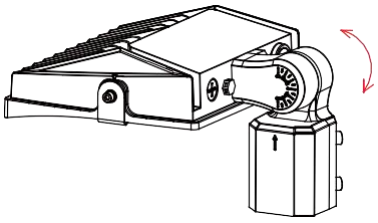


3.Lock the upper and lower brackets by Hexagon wrench.



4.Connect wires.

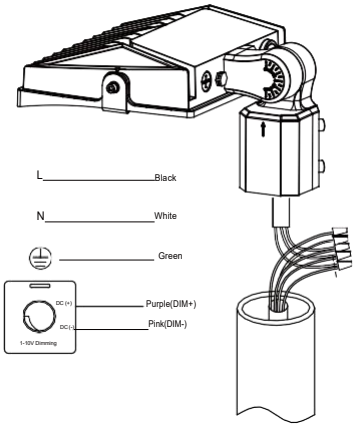


5.Fix the bracket to lamp pole by hexagonal wrench.

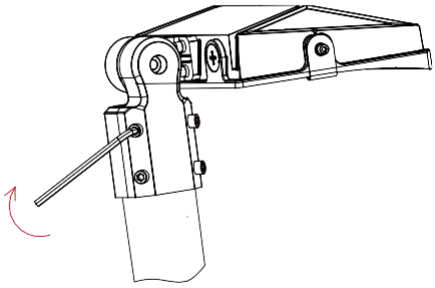


Notice: The maximum diameter of lamp pole is Ø60, lamp adjustable angle is 0° -90°

Installation Instruction (Kunckle)


1. Use screw key to open the junction-box.

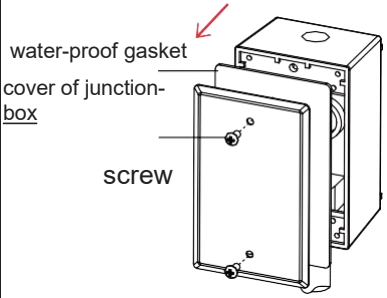


2.Put the wires of lamp into the junction-box.

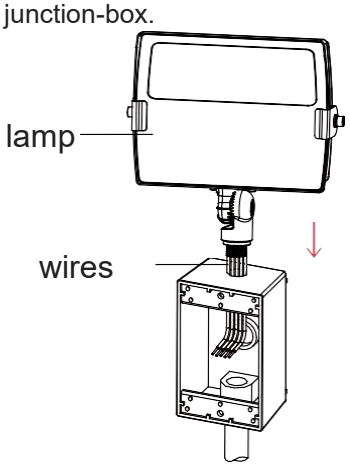


3.Screw up the knuckle mount into junction-box.

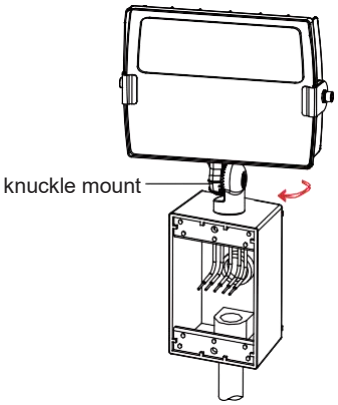


4.Use wire-nuts to connect the wires of lamp and junction-box

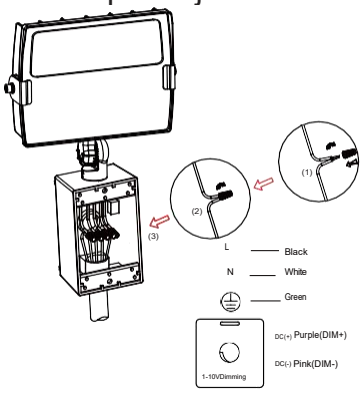


5. lock the junction-box with screw key

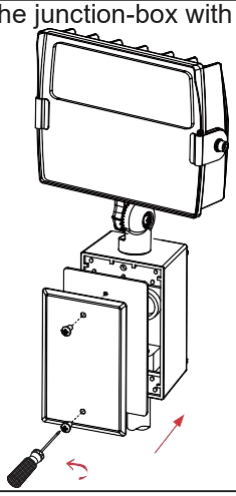


6.Use hex-key to screw off the hex-screw in knuckle mount.

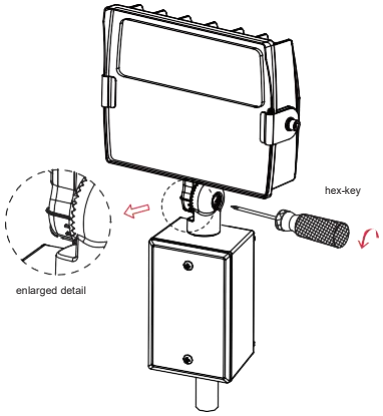

7.Adjust the lamp into suitable angle.

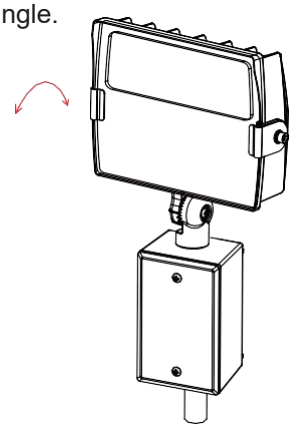


8.Use hex-key to screw up the hex-crew. Installation completed.

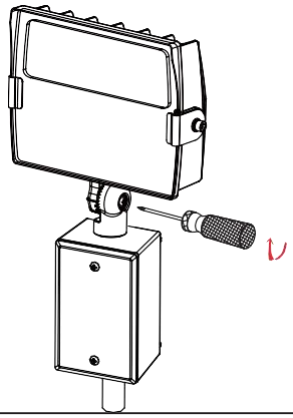


Installation Instruction (Yoke)


1.Mark the position of the fixing holes with foold light bracket, then drill the fixing holes

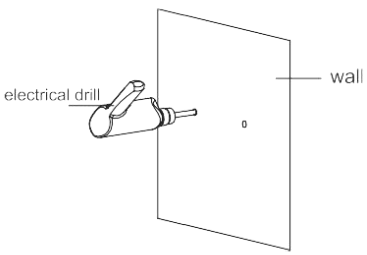


2.Drive in the bolts to the pre-drilled holes with thread outside, as the below pic indicate.




3.Make the bracket face tightly to the wall through the thead.




4.Fasten the srew nut clockwise with provided hardware by wrench.

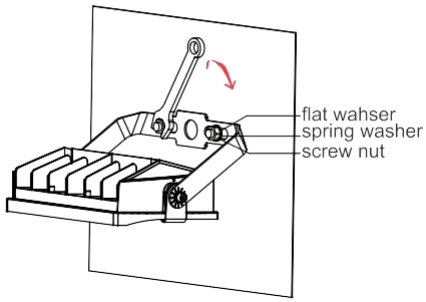


5.Rotate the light to the proper angle and fasten the srews.

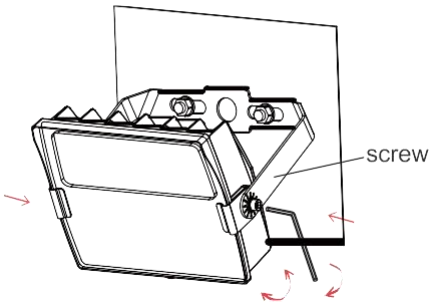

6.Fasten the srew both sides with allen driver.

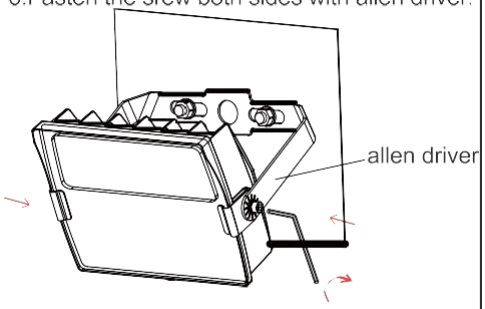


7.Connect wires

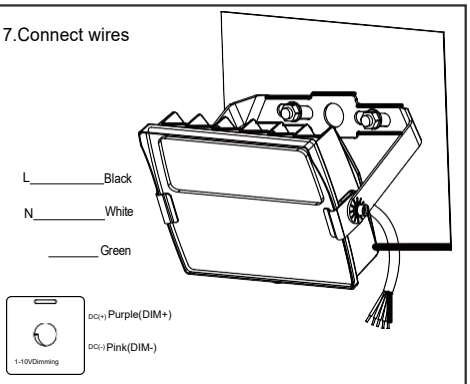




Step of adjusting Power

Step 1: Put the front of fixture downward,then twist out the cover with a cross screwdriver.

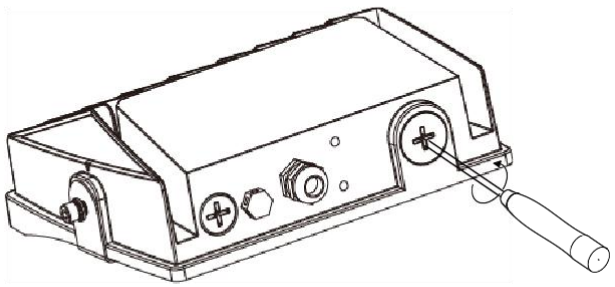

Step 2: Take out the cover and put it aside temporarily.

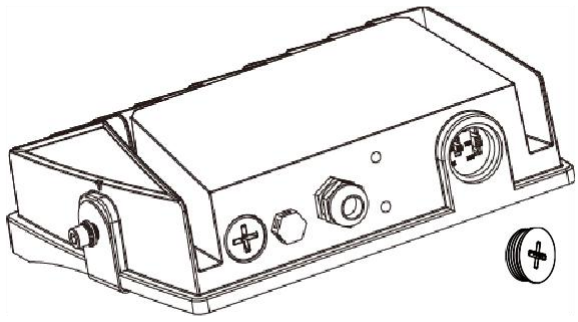

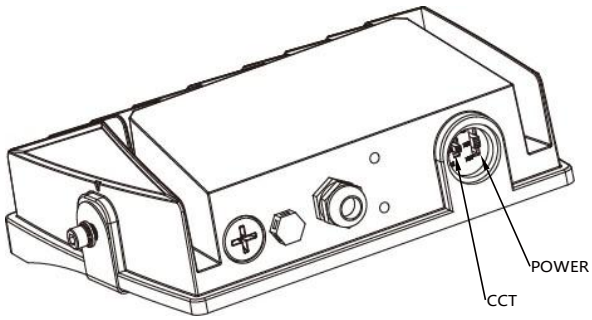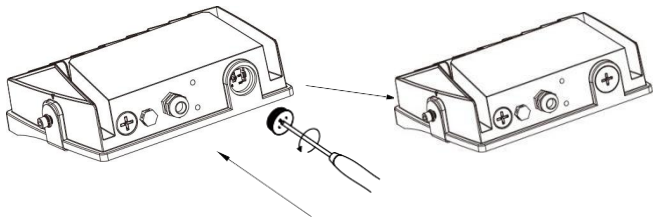Step 3: Select desired color temprature and wattage.	Step 4: Screw the cover back into the fixture.
	

NOTE

1. Only persons qualifed for electrical work should carry out the electrical work;
2. Please cut off the power supply in any abnormal situation;
3. Please clean the floodlight shell termly;
4. Please do not wipe with water or caustic solution;
5. Be sure to ground the fixture;
6. Be careful when using and storing;
7. Avoid high pressure.