DIGWISE

Introduction to Liberty Metric

Hockchen 2022/08/31

Confidential C

Our Contribution in DTCO

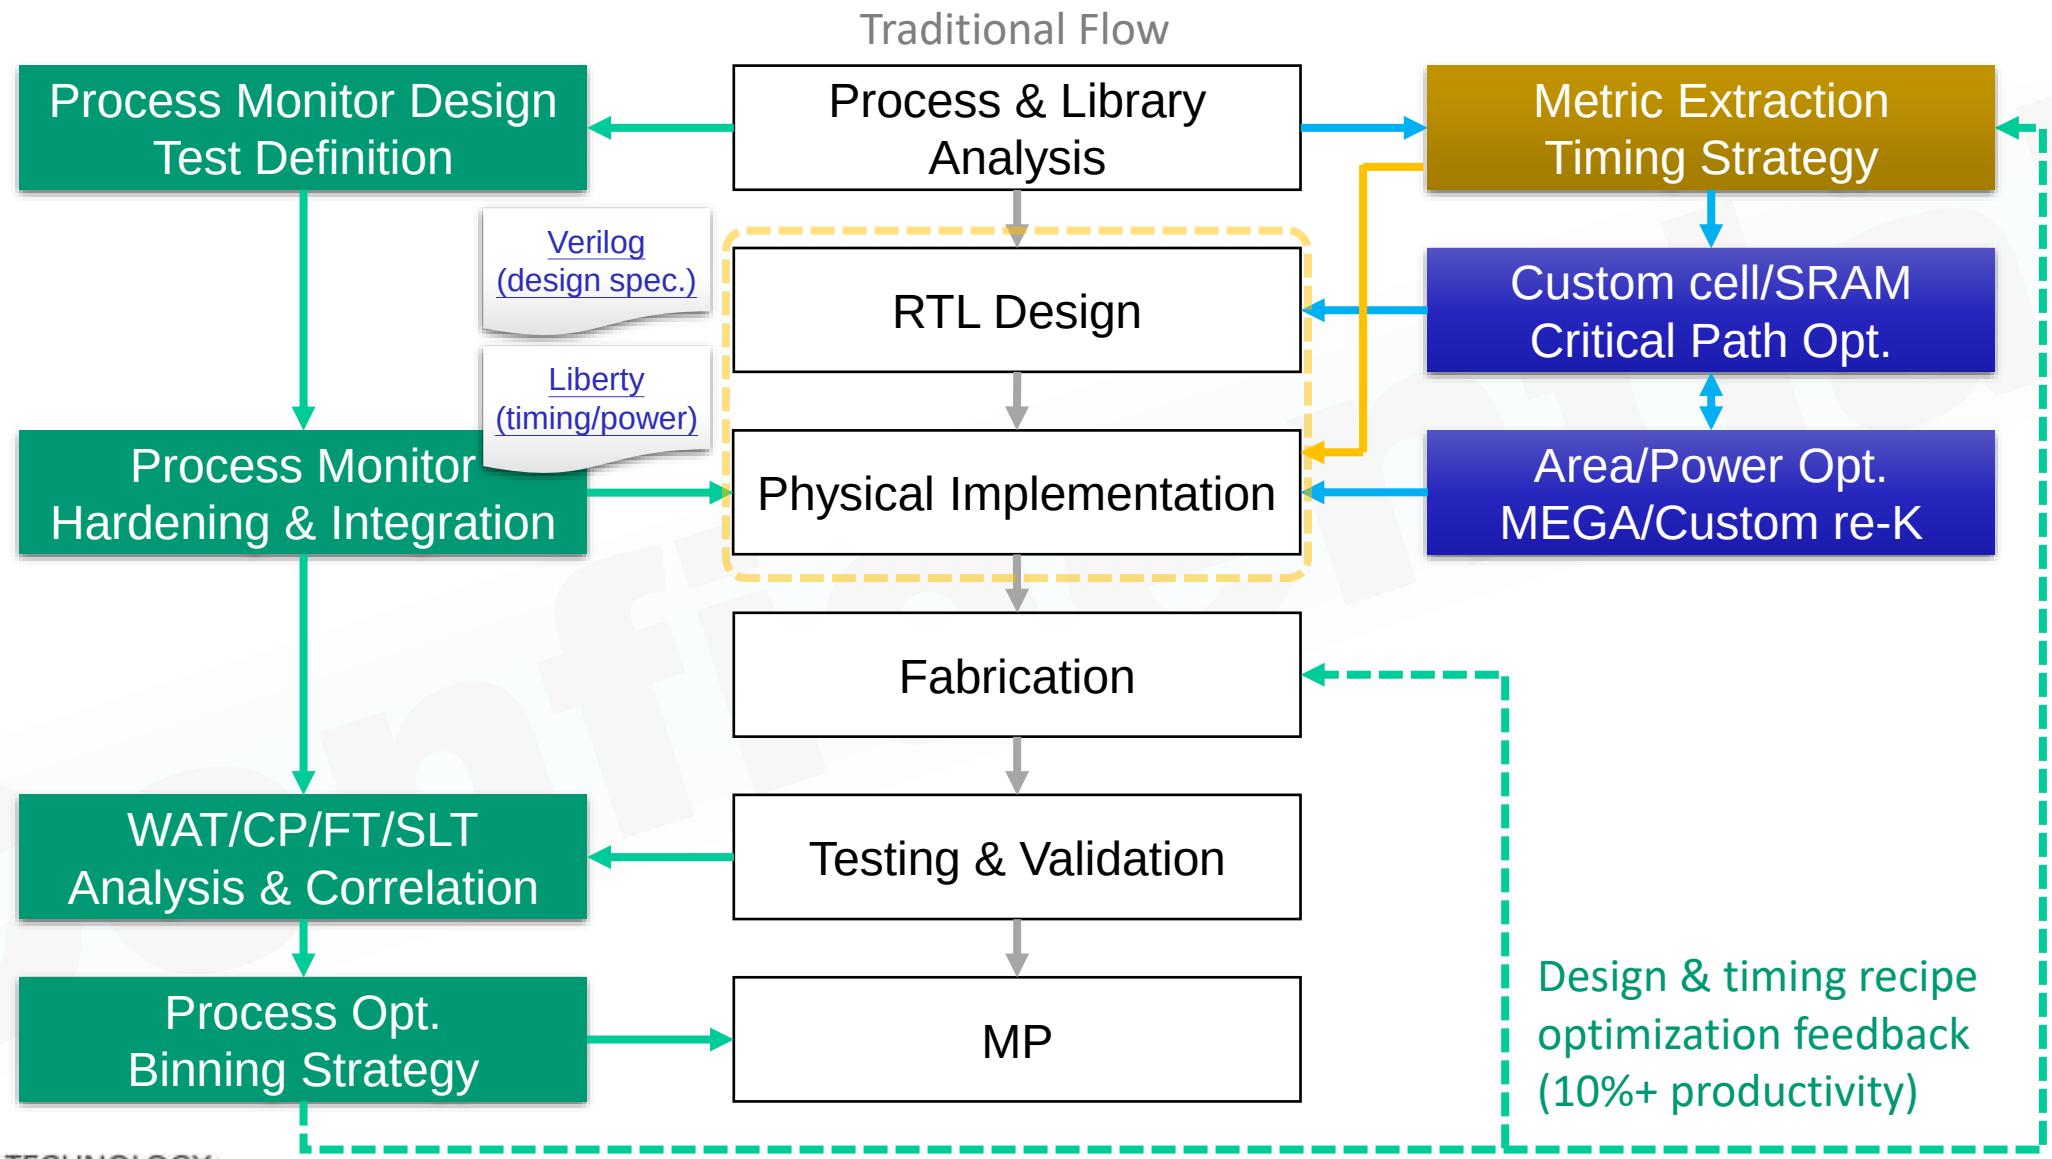

DIGWISE TECHNOLOGY
崛智科技有限公司

Metric

who is taller?

Design Metric

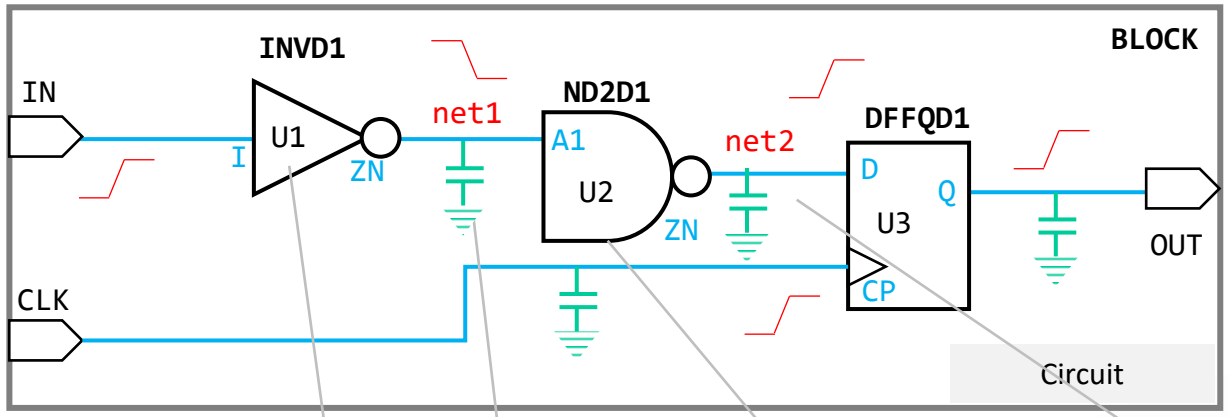

Verilog Model

```
module BLOCK(IN, OUT, CLK);
input IN, CLK;
output OUT;
INVD1 U1 ( .I(IN), .ZN(net1) );
ND2D1 U2 ( .A1(net1), .ZN(net2) );
DFFQD1 U3 ( .D(net2), .CP(CLK), .Q(OUT) );
endmodule
```

```
Delay ('I,ZN,', 'combinational', 'cell_fall')
Trans: [0.0032, 0.0079, 0.0173, 0.036 , 0.0735, 0.1485, 0.2984, 0.5983]
Load:  [0.00018, 0.00052, 0.0012 , 0.00256, 0.00527, 0.01069, 0.02153, 0.04321]
Value:[[0.011, 0.016, 0.024, 0.041, 0.075, 0.143, 0.278, 0.548],
       [0.014, 0.019, 0.028, 0.045, 0.079, 0.146, 0.281, 0.552],
       [0.019, 0.025, 0.034, 0.052, 0.085, 0.153, 0.288, 0.559],
       [0.028, 0.034, 0.045, 0.064, 0.099, 0.167, 0.302, 0.572],
       [0.043, 0.051, 0.064, 0.085, 0.123, 0.194, 0.329, 0.6  ],
       [0.068, 0.08 , 0.097, 0.122, 0.166, 0.242, 0.383, 0.655],
       [0.103, 0.125, 0.153, 0.189, 0.239, 0.326, 0.48 , 0.762],
       [0.153, 0.191, 0.239, 0.298, 0.371, 0.472, 0.648, 0.956]]
```

```
Trans ('A1,ZN,', 'combinational', 'rise_transition')
Trans: [0.0032, 0.0079, 0.0173, 0.036 , 0.0735, 0.1485, 0.2984, 0.5983]
Load:  [0.00018, 0.00041, 0.00087, 0.00179, 0.00364, 0.00733, 0.01472, 0.0295]
Value:[[0.015, 0.022, 0.035, 0.061, 0.113, 0.218, 0.427, 0.844],
       [0.016, 0.022, 0.035, 0.061, 0.113, 0.218, 0.427, 0.844],
       [0.018, 0.024, 0.037, 0.062, 0.113, 0.218, 0.426, 0.844],
       [0.021, 0.028, 0.041, 0.066, 0.116, 0.218, 0.427, 0.844],
       [0.025, 0.032, 0.047, 0.074, 0.124, 0.224, 0.429, 0.844],
       [0.04 , 0.045, 0.056, 0.086, 0.141, 0.241, 0.44 , 0.847],
       [0.07 , 0.077, 0.088, 0.107, 0.163, 0.274, 0.475, 0.872],
       [0.126, 0.138, 0.153, 0.176, 0.211, 0.318, 0.541, 0.944]]
```

```
Trans ('I,ZN,', 'combinational', 'fall_transition')
Trans: [0.0032, 0.0079, 0.0173, 0.036 , 0.0735, 0.1485, 0.2984, 0.5983]
Load:  [0.00018, 0.00052, 0.0012 , 0.00256, 0.00527, 0.01069, 0.02153, 0.04321]
Value:[[0.01 , 0.017, 0.032, 0.062, 0.121, 0.24 , 0.477, 0.951],
       [0.011, 0.018, 0.033, 0.062, 0.121, 0.24 , 0.477, 0.951],
       [0.012, 0.02 , 0.034, 0.063, 0.121, 0.24 , 0.477, 0.951],
       [0.014, 0.023, 0.038, 0.067, 0.124, 0.24 , 0.477, 0.951],
       [0.02 , 0.027, 0.044, 0.074, 0.131, 0.245, 0.477, 0.951],
       [0.035, 0.043, 0.054, 0.086, 0.147, 0.261, 0.487, 0.953],
       [0.063, 0.073, 0.087, 0.109, 0.17 , 0.293, 0.52 , 0.973],
       [0.112, 0.129, 0.15 , 0.178, 0.219, 0.337, 0.584, 1.038]]
```

```
Delay ('A1,ZN,', 'combinational', 'cell_rise')
Trans: [0.0032, 0.0079, 0.0173, 0.036 , 0.0735, 0.1485, 0.2984, 0.5983]
Load:  [0.00018, 0.00041, 0.00087, 0.00179, 0.00364, 0.00733, 0.01472, 0.0295]
Value:[[0.016, 0.02 , 0.027, 0.042, 0.071, 0.13 , 0.249, 0.485],
       [0.019, 0.023, 0.03 , 0.045, 0.075, 0.134, 0.252, 0.489],
       [0.025, 0.029, 0.037, 0.052, 0.082, 0.141, 0.259, 0.496],
       [0.034, 0.039, 0.048, 0.065, 0.096, 0.155, 0.274, 0.51 ],
       [0.051, 0.057, 0.068, 0.087, 0.121, 0.183, 0.303, 0.539],
       [0.081, 0.09 , 0.103, 0.125, 0.164, 0.233, 0.357, 0.596],
       [0.127, 0.142, 0.164, 0.193, 0.239, 0.318, 0.456, 0.706],
       [0.196, 0.222, 0.259, 0.309, 0.375, 0.466, 0.626, 0.903]]
```

PPA Problem Formulation

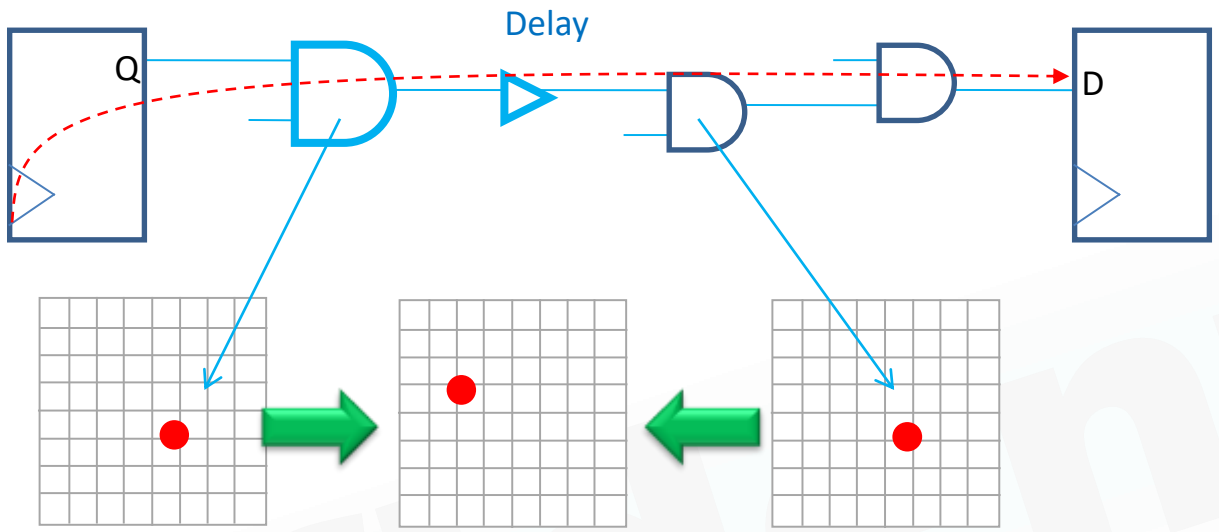

Sizing or buffering to guarantee the operating corner

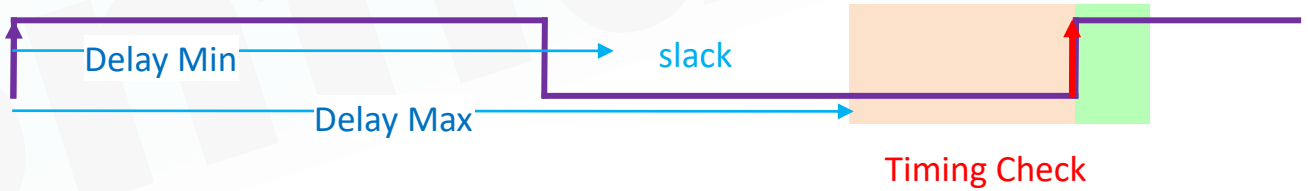

Given a logic path, minimize the timing path delay, area, energy and leakage while satisfying the maximum transition constraint for all operating corners, wherein cell sizing and load splitting (buffering) may be utilized.

What is Liberty Metric

release/<version>/base_ulvt/lib/CCS

base_ulvttt_0p29v_105c_typical_ccs.lib
base_ulvttt_0p29v_50c_typical_ccs.lib
base_ulvttt_0p29v_85c_typical_ccs.lib
base_ulvttt_0p31v_25c_typical_ccs.lib
base_ulvttt_0p31v_50c_typical_ccs.lib
base_ulvttt_0p31v_85c_typical_ccs.lib
base_ulvttt_0p33v_25c_typical_ccs.lib
base_ulvttt_0p33v_50c_typical_ccs.lib
base_ulvttt_0p35v_50c_typical_ccs.lib
base_ulvttt_0p35v_85c_typical_ccs.lib
base_ulvttt_0p75v_25c_typical_ccs.lib
base_ulvttt_0p75v_85c_typical_ccs.lib
…

1000+ CCS, ~290MB/lib

metric/JSON/<version>/*.json

~20MB/json

metric/metric/<version>/LSC/*.csv
metric/metric/<version>/merge_LSC.csv

~3MB/csv

merge to a single DB

cell	corner	volt	temp	area	leak	tr	tf	dr	df
NAND2V1_66S6T10UL_1	tt	0.29	50	0.05227	1.29540	0.08012	0.13440	0.07324	0.11323
			85	0.05227	4.28505	0.06820	0.11640	0.05909	0.09651
			105	0.05227	7.76380	0.06399	0.11049	0.05224	0.08912
		0.31	25	0.05227	0.52076	0.07656	0.11954	0.07460	0.10631
			50	0.05227	1.41850	0.06894	0.10969	0.06389	0.09463
			85	0.05227	4.68190	0.06081	0.09902	0.05239	0.08259
		0.33	25	0.05227	0.56828	0.06579	0.09864	0.06514	0.08944
			50	0.05227	1.54540	0.05998	0.09184	0.05707	0.08125
			85	0.05227	5.09010	0.05404	0.08472	0.04780	0.07234
		0.35	50	0.05227	1.67620	0.05320	0.07859	0.05172	0.07121
			85	0.05227	5.50930	0.04886	0.07400	0.04409	0.06445
		0.75	25	0.05227	1.88702	0.02228	0.02689	0.01787	0.02131
			85	0.05227	15.81210	0.02312	0.02855	0.01639	0.02199

PVT as DB index

LUT/LSC
by timing-arc

extracted metric

DIGWISE TECHNOLOGY
崛智科技有限公司

Extraction Flow

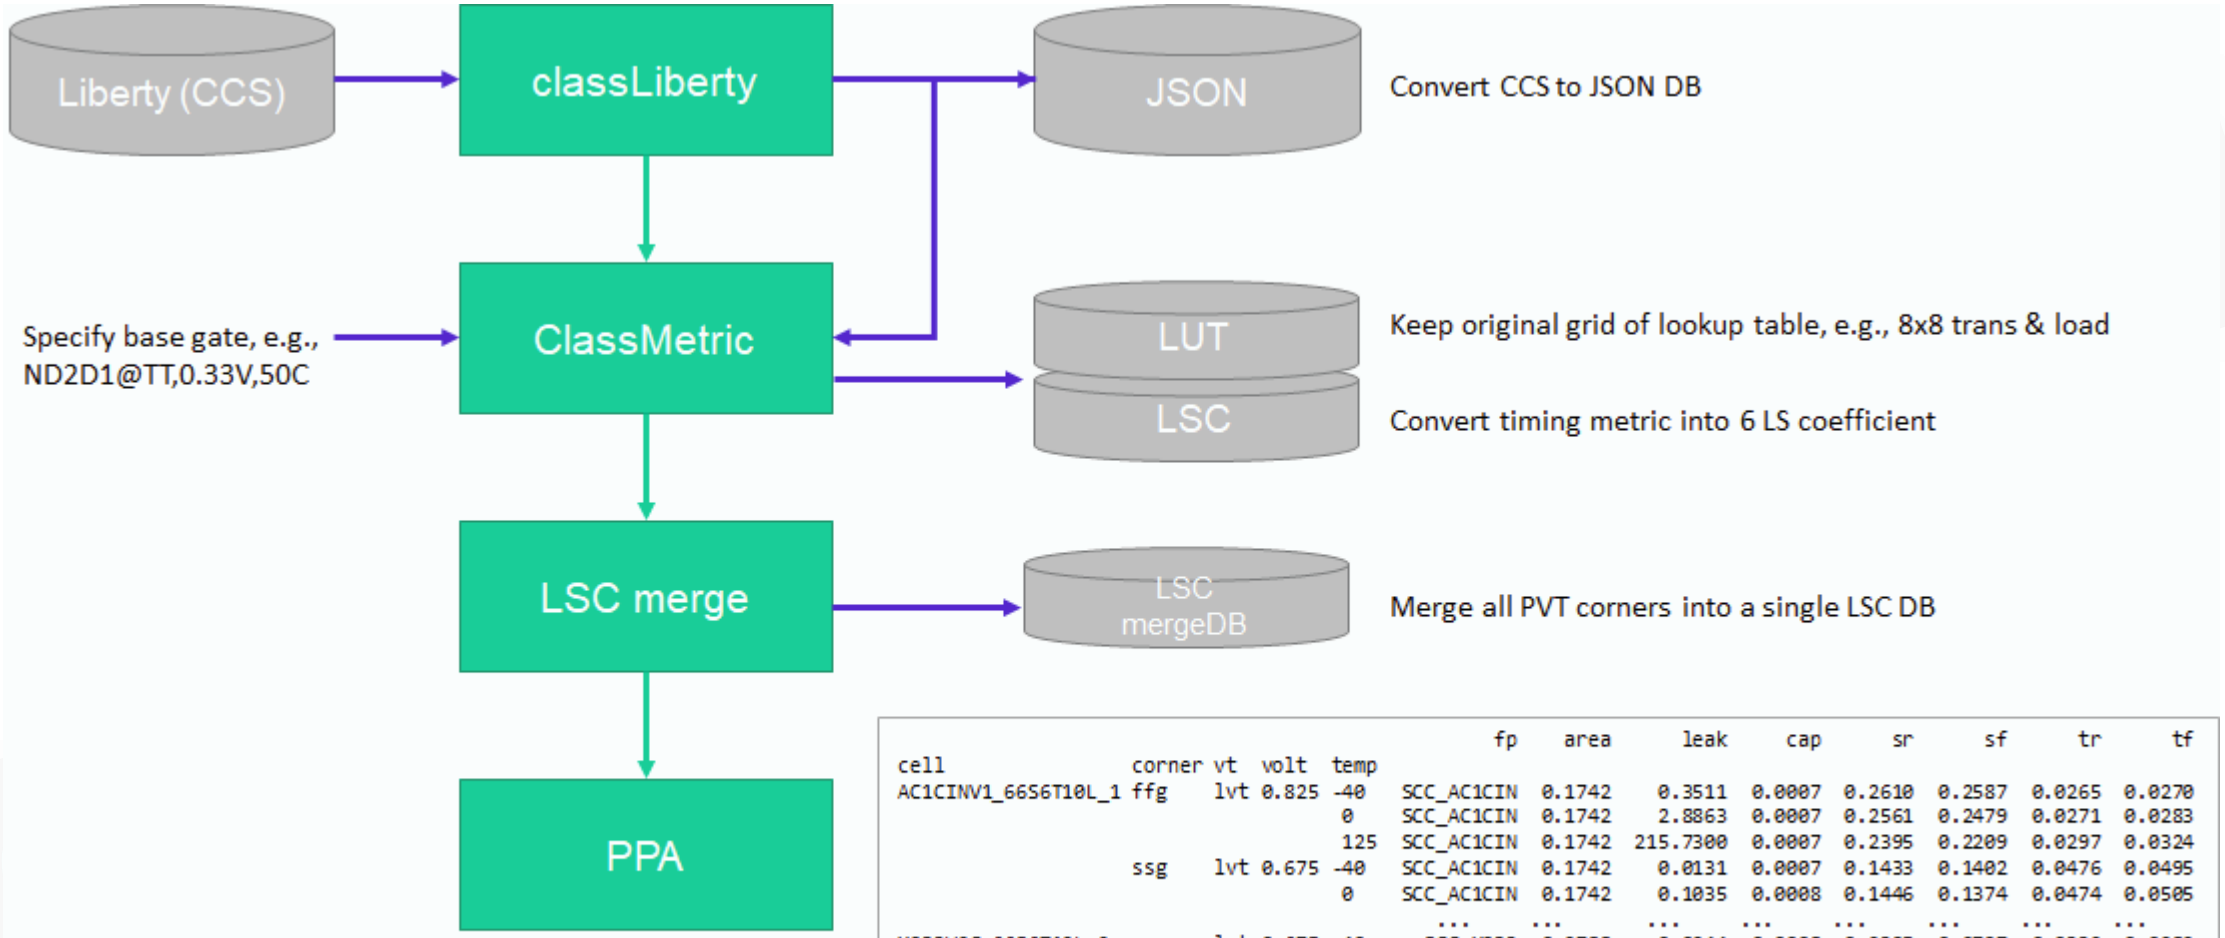

cell	corner	vt	volt	temp	fp	area	leak	cap	sr	sf	tr	tf
AC1CINV1_66S6T10L_1	ffg	lvt	0.825	-40	SCC_AC1CIN	0.1742	0.3511	0.0007	0.2610	0.2587	0.0265	0.0270
				0	SCC_AC1CIN	0.1742	2.8863	0.0007	0.2561	0.2479	0.0271	0.0283
				125	SCC_AC1CIN	0.1742	215.7300	0.0007	0.2395	0.2209	0.0297	0.0324
	ssg	lvt	0.675	-40	SCC_AC1CIN	0.1742	0.0131	0.0007	0.1433	0.1402	0.0476	0.0495
				0	SCC_AC1CIN	0.1742	0.1035	0.0008	0.1446	0.1374	0.0474	0.0505
					...	...	...	...	...	...	...	...
XOR3V2C_66S6T12L_2	ssg	lvt	0.675	-40	SCC_XOR3	0.2788	0.0244	0.0008	0.2395	0.2797	0.0332	0.0282
				0	SCC_XOR3	0.2788	0.1807	0.0008	0.2460	0.2765	0.0325	0.0286
				125	SCC_XOR3	0.2788	27.9940	0.0008	0.2489	0.2652	0.0329	0.0302
	tt	lvt	0.750	25	SCC_XOR3	0.2788	2.6772	0.0008	0.3634	0.3725	0.0222	0.0210
				85	SCC_XOR3	0.2788	27.7160	0.0008	0.3570	0.3597	0.0228	0.0219

Metric Extraction: LUT

	vt	P	V	T	cell	fp	area	leak	cap	sr	sf	tr	tf	cr	cf	pr	pf	lutT	lutP
bwph240l8p57pd_base_lvttt_0p36v_0c_t	lvt	tt	0.4	0	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	0.23	0.00	0.01	0.02	0.25	0.09	0.40	0.39	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p36v_0c_t	lvt	tt	0.4	0	INVD1BWP240H8P57PDLVT	invd1	0.04	0.02	0.00	0.02	0.03	0.11	0.08	0.10	0.08	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_0c_t	lvt	tt	0.4	0	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	0.02	0.00	0.02	0.01	0.13	0.18	0.11	0.14	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_105c	lvt	tt	0.4	105	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	13.11	0.00	0.02	0.04	0.09	0.06	0.20	0.21	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p36v_105c	lvt	tt	0.4	105	INVD1BWP240H8P57PDLVT	invd1	0.04	1.46	0.00	0.04	0.04	0.06	0.06	0.05	0.05	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_105c	lvt	tt	0.4	105	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	1.46	0.00	0.04	0.02	0.07	0.12	0.06	0.09	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph24	lvttt_0p36v_25c_lvt			25	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	0.73	0.00	0.01	0.0		8	0.32	0.33	0.00	0.0		
bwph24	lvttt_0p36v_25c_lvt			25	INVD1BWP240H8P57PDLVT	invd1	0.04	0.08	0.00	0.02	0.0		7	0.08	0.07	0.00	(0.0		
bwph240l8p57pd_base_lvttt_0p36v_25c_lvt		tt	0.4	25	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	0.08	0.00	0.02	0.01	0.11	0.16	0.09	0.13	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_50c_lvt		tt	0.4	50	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	2.04	0.00	0.01	0.03	0.15	0.07	0.27	0.28	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p36v_50c_lvt		tt	0.4	50	INVD1BWP240H8P57PDLVT	invd1	0.04	0.22	0.00	0.03	0.03	0.08	0.07	0.07	0.06	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_50c_lvt		tt	0.4	50	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	0.22	0.00	0.03	0.02	0.09	0.14	0.08	0.11	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_85c_lvt		tt	0.4	85	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	7.04	0.00	0.02	0.03	0.11	0.06	0.22	0.23	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p36v_85c_lvt		tt	0.4	85	INVD1BWP240H8P57PDLVT	invd1	0.04	0.78	0.00	0.03	0.04	0.07	0.06	0.06	0.05	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p36v_85c_lvt		tt	0.4	85	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	0.78	0.00	0.03	0.02	0.07	0.12	0.06	0.10	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph240l8p57pd_base_lvttt_0p44v_0c_t	lvt	tt	0.4	0	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	0.31	0.00	0.03	0.06	0.07	0.04	0.15	0.15	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p44v_0c_t	lvt	tt	0.4	0	INVD1BWP240H8P57PDLVT	invd1	0.04	0.03	0.00	0.05	0.06	0.05	0.04	0.05	0.04	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p44v_0c_t	lvt	tt	0.4	0	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	0.03	0.00	0.05	0.03	0.05	0.07	0.05	0.06	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph240l8p57pd_base_lvttt_0p44v_105c	lvt	tt	0.4	105	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	17.30	0.00	0.05	0.07	0.04	0.03	0.11	0.11	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p44v_105c	lvt	tt	0.4	105	INVD1BWP240H8P57PDLVT	invd1	0.04	1.93	0.00	0.07	0.07	0.04	0.03	0.03	0.03	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p44v_105c	lvt	tt	0.4	105	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	1.92	0.00	0.07	0.04	0.04	0.06	0.04	0.05	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',
bwph240l8p57pd_base_lvttt_0p44v_25c_	lvt	tt	0.4	25	DFQD1BWP240H8P57PDLVT	dfqd1	0.27	0.98	0.00	0.04	0.06	0.06	0.03	0.13	0.14	0.00	0.00	{('CP,Q,',	{('CP,Q,',
bwph240l8p57pd_base_lvttt_0p44v_25c_	lvt	tt	0.4	25	INVD1BWP240H8P57PDLVT	invd1	0.04	0.11	0.00	0.06	0.07	0.04	0.04	0.04	0.04	0.00	(0.00)	{('I,ZN,',	{('I,ZN,',
bwph240l8p57pd_base_lvttt_0p44v_25c_	lvt	tt	0.4	25	ND2D1BWP240H8P57PDLVT	nd2d1	0.05	0.10	0.00	0.05	0.03	0.05	0.07	0.05	0.06	0.00	0.00	{('A1,ZN,',	{('A1,ZN,',

Library PVT Metric Timing LUT Power LUT

Metrics characterized @ trans, load = 40ps, 1.7fF

Timing/Power LUT

Encapsulated LUT with key values as (arc,ttype,ctype)

			index_1	index_2	values
A1,ZN,	combinational	fall_transition	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.022591, 0.032241, 0.051562, ...
		cell_rise	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.014066, 0.017375, 0.023895, ...
		cell_fall	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.021565, 0.027368, 0.038805, ...
		rise_transition	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.013660, 0.019359, 0.030829, ...
A2,ZN,	combinational	fall_transition	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.022592, 0.032264, 0.051622, ...
		cell_rise	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.015145, 0.018477, 0.025039, ...
		cell_fall	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.023371, 0.029119, 0.040510, ...
		rise_transition	[0.0032, 0.0079, 0.0173,	[0.00018, 0.00041, 0.00087,	[0.015120, 0.020889, 0.032385, ...

DIGWISE TECHNOLOGY
崛智科技有限公司

Metric Extraction: LSC

	vt	P	V	T	cell		fp	area	leak	cap	sr	sf	tr	tf	dr	df	pr	pf	metrics
base_lvttt_0p36v_0c_typical_ccs	lvt	tt	0.36	0	DFQD1BWP240H8P57PDLVT		dfqd1	0.27	0.23	0.00	0.01	0.02	0.25	0.09	0.40	0.39	0.00	0.00	{('CP,Q,', 'ri
base_lvttt_0p36v_0c_typical_ccs	lvt	tt	0.36	0	INVD1BWP240H8P57PDLVT		invd1	0.04	0.02	0.00	0.02	0.03	0.11	0.08	0.10	0.08	0.00	(0.00)	{('I,ZN,', 'cc
base_lvttt_0p36v_0c_typical_ccs	lvt	tt	0.36	0	ND2D1BWP240H8P57PDLVT		nd2d1	0.05	0.02	0.00	0.02	0.01	0.13	0.18	0.11	0.14	0.00	0.00	{('A1,ZN,', 'c
base_lvttt_0p36v_105c_typical_c	lvt	tt	0.36	105	DFQD1BWP240H8P57PDLVT		dfqd1	0.27	13.11	0.00	0.02	0.04	0.09	0.06	0.20	0.21	0.00	0.00	{('CP,Q,', 'ri
base_lvttt_0p36v_105c_typical_c	lvt	tt	0.36	105	INVD1BWP240H8P57PDLVT		invd1	0.04	1.46	0.00	0.04	0.04	0.06	0.06	0.05	0.05	0.00	(0.00)	{('I,ZN,', 'cc
base_lvttt	Library	ypical_c	lvt		PVT		ND2D1BWP240H8P57PDLVT	nd2d1	0.05	1.46	0.00	Metric	0.07	0.12	0.06	0.09	0.00	0.00	{(LSC
base_lvttt		pical_cc	lvt		25		DFQD1BWP240H8P57PDLVT	dfqd1	0.27	0.73	0.00		0.19	0.08	0.32	0.33	0.00	0.00	{(metrics
base_lvttt_0p36v_25c_typical_cc	lvt	tt	0.36	25	INVD1BWP240H8P57PDLVT		invd1	0.04	0.08	0.00	0.02	0.03	0.09	0.07	0.08	0.07	0.00	(0.00)	{(
base_lvttt_0p36v_25c_typical_cc	lvt	tt	0.36	25	ND2D1BWP240H8P57PDLVT		nd2d1	0.05	0.08	0.00	0.02	0.01	0.11	0.16	0.09	0.13	0.00	0.00	{(
base_lvttt_0p36v_50c_typical_cc	lvt	tt	0.36	50	DFQD1BWP240H8P57PDLVT		dfqd1	0.27	2.04	0.00	0.01	0.03	0.15	0.07	0.27	0.28	0.00	0.00	{('CP,Q,', 'ri
base_lvttt_0p36v_50c_typical_cc	lvt	tt	0.36	50	INVD1BWP240H8P57PDLVT		invd1	0.04	0.22	0.00	0.03	0.03	0.08	0.07	0.07	0.06	0.00	(0.00)	{('I,ZN,', 'cc
base_lvttt_0p36v_50c_typical_cc	lvt	tt	0.36	50	ND2D1BWP240H8P57PDLVT		nd2d1	0.05	0.22	0.00	0.03	0.02	0.09	0.14	0.08	0.11	0.00	0.00	{('A1,ZN,', 'c
base_lvttt_0p36v_85c_typical_cc	lvt	tt	0.36	85	DFQD1BWP240H8P57PDLVT		dfqd1	0.27	7.04	0.00	0.02	0.03	0.11	0.06	0.22	0.23	0.00	0.00	{('CP,Q,', 'ri
base_lvttt_0p36v_85c_typical_cc	lvt	tt	0.36	85	INVD1BWP240H8P57PDLVT		invd1	0.04	0.78	0.00	0.03	0.04	0.07	0.06	0.06	0.05	0.00	(0.00)	{('I,ZN,', 'cc
base_lvttt_0p36v_85c_typical_cc	lvt	tt	0.36	85	ND2D1BWP240H8P57PDLVT		nd2d1	0.05	0.78	0.00	0.03	0.02	0.07	0.12	0.06	0.10	0.00	0.00	{('A1,ZN,', 'c
base_lvttt_0p44v_0c_typical_ccs	lvt	tt	0.44	0	DFQD1BWP240H8P57PDLVT		dfqd1	0.27	0.31	0.00	0.03	0.06	0.07	0.04	0.15	0.15	0.00	0.00	{('CP,Q,', 'ri
base_lvttt_0p44v_0c_typical_ccs	lvt	tt	0.44	0	INVD1BWP240H8P57PDLVT		invd1	0.04	0.03	0.00	0.05	0.06	0.05	0.04	0.05	0.04	0.00	(0.00)	{('I,ZN,', 'cc
base_lvttt_0p44v_0c_typical_ccs	lvt	tt	0.44	0	ND2D1BWP240H8P57PDLVT		nd2d1	0.05	0.03	0.00	0.05	0.03	0.05	0.07	0.05	0.06	0.00	0.00	{('A1,ZN,', 'c
base_lvttt_0p44v_105c_typical_c	lvt	tt	0.44	105	DFQD1BWP240H8P57PDLVT		dfqd1	0.27	17.30	0.00	0.05	0.07	0.04	0.03	0.11	0.11	0.00	0.00	{('CP,Q,', 'ri

Metrics characterized @ trans, load = 40ps, 1.7fF

Encapsulated LSC with key values as (arc,ttype,ctype)

LSC metrics

			metric	coeff
A1,ZN,	combinational	fall_transition	0.0908024	[0.015407755176671863, 41.29951297003873, 22.3...
		cell_rise	0.0547047	[0.006486304221577642, 16.77994615785185, -104...
		cell_fall	0.0758079	[0.012672860017655243, 26.979833277102507, -91...
		rise_transition	0.0573029	[0.00922035581253383, 24.4780841525638, 7.2453...
A2,ZN,	combinational	fall_transition	0.0892851	[0.015248332470100986, 41.46343045194753, 18.7...
		cell_rise	0.0563164	[0.007993053419577371, 16.586521826143425, -97...
		cell_fall	0.0780313	[0.01565863319027824, 26.50575687412519, -74.1...
		rise_transition	0.0586536	[0.010574893715241061, 24.638121118893128, 2.3...
A1,ZN,	fall_power	NaN	-5.16309e-06	[-4.840359560913905e-06, 0.0003662896964675783...
	rise_power	NaN	7.86713e-05	[7.924763904973348e-05, 0.00022636803988297093...
A2,ZN,	fall_power	NaN	-4.36705e-06	[-4.0917817024074655e-06, 0.000287274152767297...
	rise_power	NaN	9.37976e-05	[9.467791446892202e-05, -2.9697067520466334e-0...
,A1,!A2	fall_power	NaN	3.23029e-05	[3.228303397738344e-05, 5.271234649423687e-07,...
	rise_power	NaN	-2.86602e-05	[-2.86192925503315e-05, -1.0786302709023273e-0...
,A2,!A1	fall_power	NaN	2.75222e-05	[2.791441165194605e-05, -1.0310684745203868e-0...
	rise_power	NaN	-2.50182e-05	[-2.5004590914418427e-05, -3.5513090962259144e...

DIGWISE TECHNOLOGY
崛智科技有限公司

Prediction & Insight

cell	Vt	P	V	T	fp	area	leak	cap	sr	sf	tr	tf	dr	df
BUFV1_66S6T10UL_1	ulvt	ssgs	0.33	50	BUF	0.069696381805e-05)	0.00050738	0.0303934	0.0324712	0.0704753	0.0676136	0.0899569	0.0896664
BUFV1_66S6T12UL_1	ulvt	ssgs	0.33	50	BUF	0.069696381805e-05)	0.00052333	0.0282593	0.0342274	0.0751146	0.0647827	0.0929238	0.0918847
INV1_66S6T10UL_1	ulvt	ssgs	0.33	50	INV	0.034848649996386)	0.00041693	0.0310316	0.0310565	0.0711927	0.0709208	0.0605221	0.0617353
INV1_66S6T12UL_1	ulvt	ssgs	0.33	50	INV	0.034848381373686)	0.00043127	0.0288426	0.0329291	0.0758514	0.0671689	0.0653558	0.0602361
BUFV1_66S6T10UL_1	ulvt	tt	0.33	85	BUF	0.069696971131634)	0.00049528	0.0585046	0.0574207	0.0372579	0.0380562	0.04841	0.0478952
BUFV1_66S6T12UL_1	ulvt	tt	0.33	85	BUF	0.069696969736452)	0.00051122	0.051581	0.0587468	0.0413768	0.037645	0.0517458	0.0513147
INV1_66S6T10UL_1	ulvt	tt	0.33	85	INV	0.034848474213056)	0.00041847	0.0599603	0.0559553	0.0405209	0.0425397	0.0321614	0.0362152
INV1_66S6T12UL_1	ulvt	tt	0.33	85	INV	0.034848475210129114)	0.00043304	0.0529172	0.0574821	0.0448372	0.0414404	0.0367702	0.0365368
BUFV1_66S6T10UL_1	ulvt	ffgs	0.31	50	BUF	0.069696968456701075)	0.00046698	0.0622114	0.0662005	0.0348629	0.0333091	0.0437334	0.0428946
BUFV1_66S6T12UL_1	ulvt	ffgs	0.31	50	BUF	0.069696968713916355)	0.00047794	0.0525649	0.0668637	0.0401527	0.033364	0.0482822	0.0472899
INV1_66S6T10UL_1	ulvt	ffgs	0.31	50	INV	0.034848475949330114)	0.00040171	0.0640698	0.0645256	0.0383014	0.0375334	0.0294912	0.0313151
INV1_66S6T12UL_1	ulvt	ffgs	0.31	50	INV	0.034848474855769843)	0.00041143	0.0541265	0.0653455	0.043856	0.0372577	0.0355464	0.0325097
BUFV1_66S6T10UL_1	ulvt	ffgs	0.31	85	BUF	0.069696967817881239)	0.00047443	0.0738662	0.0737169	0.0299532	0.0300039	0.0372073	0.0361167
BUFV1_66S6T12UL_1	ulvt	ffgs	0.31	85	BUF	0.069696967817882663)	0.00048753	0.0624075	0.0740799	0.0344124	0.0302683	0.0409732	0.0401705
INV1_66S6T10UL_1	ulvt	ffgs	0.31	85	INV	0.034848475519719353)	0.00041047	0.0760188	0.0722786	0.033837	0.0345728	0.0240424	0.0278569
INV1_66S6T12UL_1	ulvt	ffgs	0.31	85	INV	0.034848473193944234)	0.00042207	0.0641586	0.0728106	0.038633	0.0345587	0.0292917	0.0288138
BUFV1_66S6T10UL_1	ulvt	ffgs	0.33	105	BUF	0.069696961618554172)	0.0004844	0.0893126	0.0874263	0.0250067	0.025341	0.0311874	0.0298376
BUFV1_66S6T12UL_1	ulvt	ffgs	0.33	105	BUF	0.069696965915656022)	0.00049921	0.0760164	0.0876665	0.0284929	0.0256028	0.0340212	0.0333479
INV1_66S6T10UL_1	ulvt	ffgs	0.33	105	INV	0.034848473759121185)	0.00041731	0.0917342	0.0861669	0.0292051	0.030158	0.0205302	0.024512
INV1_66S6T12UL_1	ulvt	ffgs	0.33	105	INV	0.034848475492199357)	0.00043095	0.0780015	0.0866336	0.0329163	0.0300656	0.0247727	0.0250958
BUFV1_66S6T10UL_1	ulvt	ffgs	0.33	85	BUF	0.069696962218666343)	0.00048027	0.0833439	0.0837336	0.0265096	0.0263966	0.0334244	0.0323355
BUFV1_66S6T12UL_1	ulvt	ffgs	0.33	85	BUF	0.069696968178811875)	0.00049404	0.0710409	0.0842836	0.0302074	0.0265453	0.0364983	0.0358908
INV1_66S6T10UL_1	ulvt	ffgs	0.33	85	INV	0.034848473830354976)	0.00041272	0.085566	0.0822369	0.0305823	0.0310537	0.0226129	0.0257702
INV1_66S6T12UL_1	ulvt	ffgs	0.33	85	INV	0.034848479944949558)	0.00042526	0.0729062	0.0830398	0.0345109	0.03086	0.0270545	0.0264381
BUFV1_66S6T10UL_1	ulvt	ffgs	0.35	105	BUF	0.069696962478041162)	0.00048828	0.0987174	0.0970317	0.0226171	0.0228416	0.028672	0.0273869
BUFV1_66S6T12UL_1	ulvt	ffgs	0.35	105	BUF	0.069696965915653104)	0.00050386	0.0847318	0.0974244	0.0255658	0.0230193	0.0310418	0.030556

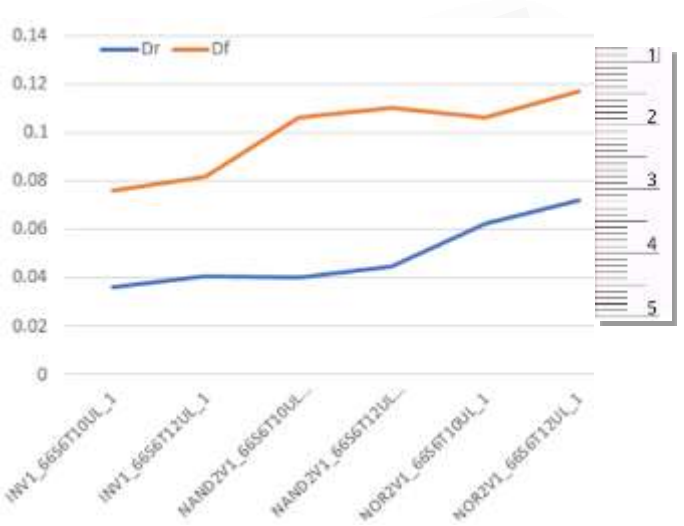

DIGWISE TECHNOLOGY
崚智科技有限公司

Metric Applications

Liberty Metric

Cell	FP	Slope	xD	Area	Current	Dmin	Dmax	DCmin	DCmax
AN2D0BWP20P90	an2d1	0.131	1.0	0.259	0.0160	0.021	0.043	FF,0.935,-40	SS,0.765,-40
AN2D0BWP16P90CPDLVT	an2d1	0.172	2.0	0.207	0.0165	0.019	0.035	FF,0.935,-40	SS,0.765,-40
AN2D0BWP16P90LVT	an2d1	0.177	2.0	0.259	0.0172	0.019	0.033	FF,0.935,-40	SS,0.765,-40
AN2D0BWP20P90CPDLVT	an2d1	0.157	2.0	0.207	0.0162	0.021	0.037	FF,0.935,-40	SS,0.765,-40
AN2D0BWP20P90CPDULVT	an2d1	0.204	2.0	0.207	0.0193	0.018	0.030	FF,0.935,-40	SS,0.765,125
AN2D0BWP20P90LVT	an2d1	0.165	2.0	0.259	0.0175	0.019	0.034	FF,0.935,-40	SS,0.765,-40
AN2D0BWP7D5T16P96CPDLVT	an2d1	0.175	2.0	0.184	0.0135	0.021	0.037	FF,0.935,-40	SS,0.765,-40
AN2D0BWP7D5T20P96CPDULVT	an2d1	0.207	2.0	0.184	0.0160	0.021	0.033	FF,0.935,-40	SS,0.765,125
AN2D0P75BWP20P90	an2d1	0.198	2.0	0.259	0.0218	0.020	0.040	FF,0.935,-40	SS,0.765,-40
AN2D0BWP16P90CPDULVT	an2d1	0.218	3.0	0.207	0.0199	0.018	0.029	FF,0.935,-40	SS,0.765,125
AN2D0BWP16P90ULVT	an2d1	0.230	3.0	0.259	0.0224	0.016	0.025	FF,0.935,-40	SS,0.765,125
AN2D0BWP18P90ULVT	an2d1	0.222	3.0	0.259	0.0218	0.016	0.026	FF,0.935,-40	SS,0.765,125
AN2D0BWP20P90ULVT	an2d1	0.214	3.0	0.259	0.0213	0.017	0.027	FF,0.935,-40	SS,0.765,125
AN2D0BWP7D5T16P96CPDULVT	an2d1	0.222	3.0	0.184	0.0171	0.020	0.031	FF,0.935,-40	SS,0.765,125
AN2D0P75BWP16P90CPDLVT	an2d1	0.260	3.0	0.207	0.0218	0.018	0.032	FF,0.935,-40	SS,0.765,-40
...									

Technology
Trend Analysis

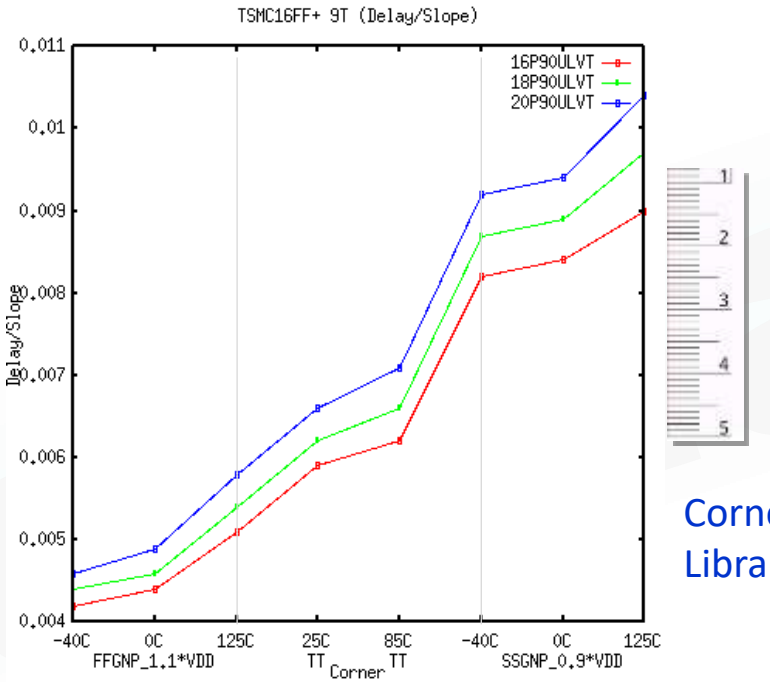

Corner Selection
Library/Cell Selection

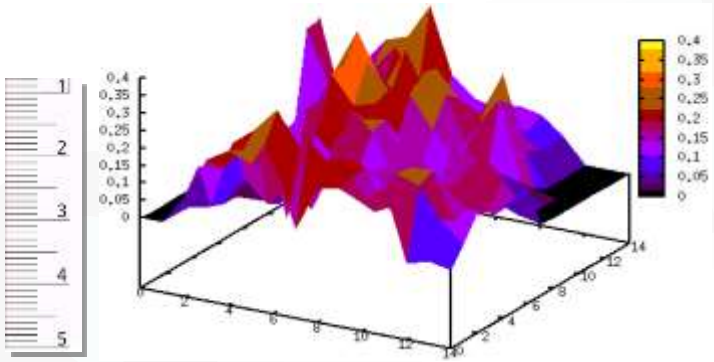

CPU Current Density

Instance	Cell	Delay	Dmin	Dmax
u_ca53_noram/u_ca53ifu_pf/avalid_if3_reg	SDFCNQND4BWP16P90ULVT	0.047	0.017	0.029
u_ca53_noram/u_ca53ifu_pf/FE_OCPC219072	INVD6BWP16P90ULVT	0.009	0.002	0.002
u_ca53_noram/u_ca53ifu_pf/FE_OCPC224282	BUFFD10BWP16P90ULVT	0.022	0.005	0.008
u_ca53_noram/u_ca53ifu_pf/g479784	MUX2D8BWP16P90ULVT	0.021	0.008	0.012
u_ca53_noram/u_ca53ifu_pf/FE_OCPC219057	INVD16BWP16P90ULVT	0.006	0.002	0.002
u_ca53_noram/u_ca53ifu_pf/FE_OCPC219058	INVD12BWP16P90ULVT	0.029	0.002	0.002
u_ca53_noram/u_ca53ifu_pf/FE_RC_14708_0	ND2D6BWP16P90ULVT	0.023	0.002	0.003
u_ca53_noram/u_ca53ifu_pf/FE_RC_14707_0	OAI21D8BWP16P90ULVT	0.012	0.003	0.004
u_ca53_noram/u_ca53ifu_pf/n0001D35	NR2D8BWP16P90ULVT	0.013	0.002	0.004
u_ca53_noram/u_ca53ifu_pf/n0026D478725	AN2D8BWP16P90ULVT	0.020	0.007	0.011
...				

Identify room for improvement (Critical Path)

DIGWISE TECHNOLOGY
崛智科技有限公司

Liberty Format

Comment Syntax

```
/* ... */
```

Single Attribute

```
name : value ;
```

Complex Attribute

```
name (value1 [, value2, ...]) ;
```

Group

```
type (name) { ... }
```

Library Group Example

```
library (...) {
    name : value ;
    name (value1 [, value2, ...]) ;
    type (...) {
        name : value;
        name (value1 [, value2, ...]) ;
        type (...) {
        ...
        }
    }
}
```

```
library(ulvttt_0p35v_85c_typical_ccs) {
  delay_model : table_lookup ;
  time_unit : 1ns ;
  voltage_unit : 1V ;
  current_unit : 1mA ;
  capacitive_load_unit(1, pf);
  leakage_power_unit : 1nW ;
  nom_process : 1 ;
  nom_temperature : 85 ;
  nom_voltage : 0.35 ;
  operating_conditions(tt_0p35v_85c_typical) {
    process : 1 ;
    process_label : tt ;
    temperature : 85 ;
    voltage : 0.35 ;
  }
  lu_table_template(tmg_ntin_oload_9x8) {
    variable_1 : input_net_transition ;
    variable_2 : total_output_net_capacitance ;
    index_1("1, 2, 3, 4, 5, 6, 7, 8, 9");
    index_2("1, 2, 3, 4, 5, 6, 7, 8");
  }
  cell(INV12_T10UL_1) {
    area : 0.226512 ;
    cell_footprint : INV ;
    cell_leakage_power : 69.744 ;
    leakage_power() {
      related_pg_pin : "VDD" ;
      when : "!I&ZN" ;
      value : "60.746" ;
    }
    ...
    pin(I) {
      capacitance : 0.0041901 ;
      direction : input ;
      ...
    }
    pin(ZN) {
      direction : output ;
      function : "(!I)" ;
      max_capacitance : 0.33677 ;
      max_transition : 0.52597 ;
      min_capacitance : 0.0002 ;
      related_power_pin : VDD ;

      internal_power() {
        related_pg_pin : "VDD" ;
        related_pin : "I" ;
        fall_power(pwr_tin_oload_9x8) {
          index_1("0.0015, 0.0037, 0.008, 0.0164, ...");
          index_2("0.0002, 0.0044133, 0.019203, ...");
          values("-0.00013627, -0.00010, -9.61e-05, ...",\
                 "-0.00014769, -0.00011, -9.83e-05, ...",\
                 ...
                 "0.000973, 0.000858, 0.000639, ...");
        }
      }
      timing() {
        related_pin : "I" ;
        timing_sense : negative_unate ;
        timing_type : combinational ;

        cell_fall(tmg_ntin_oload_9x8) {
          index_1("0.0015, 0.0037, 0.008, 0.0164, ...");
          index_2("0.0002, 0.0044133, 0.019203, ...");
          values("0.0042712, 0.0076647, 0.018101, ...",\
                 "0.0050221, 0.0086186, 0.019159, ...",\
                 ...
                 "0.0352, 0.06013, 0.1127, 0.1758, ...");
        }
      }
    } /* end pin */
  } /* end cell */
} /* end library */
```

DIGWISE TECHNOLOGY
崛智科技有限公司

Liberty Utility Specification

LibertyClass Functions:

- Convert liberty into JSON format
- Convert lookup table into numpy.array
- Convert lookup table into pandas.DataFrame
- Construct library DB and metric CSV from JSON
- Perform timing/power interpolation
- Perform timing/power regression (LS coefficient)
- Extract liberty metric (LUT)
- Extract liberty metric (LSC)
- Provide get_* APIs to access liberty data structure
- Provide lookup_* APIs to calculate/interpolate timing/power
- Provide plot_* APIs for visualization
- Provide dump_* APIs for data extraction/conversion

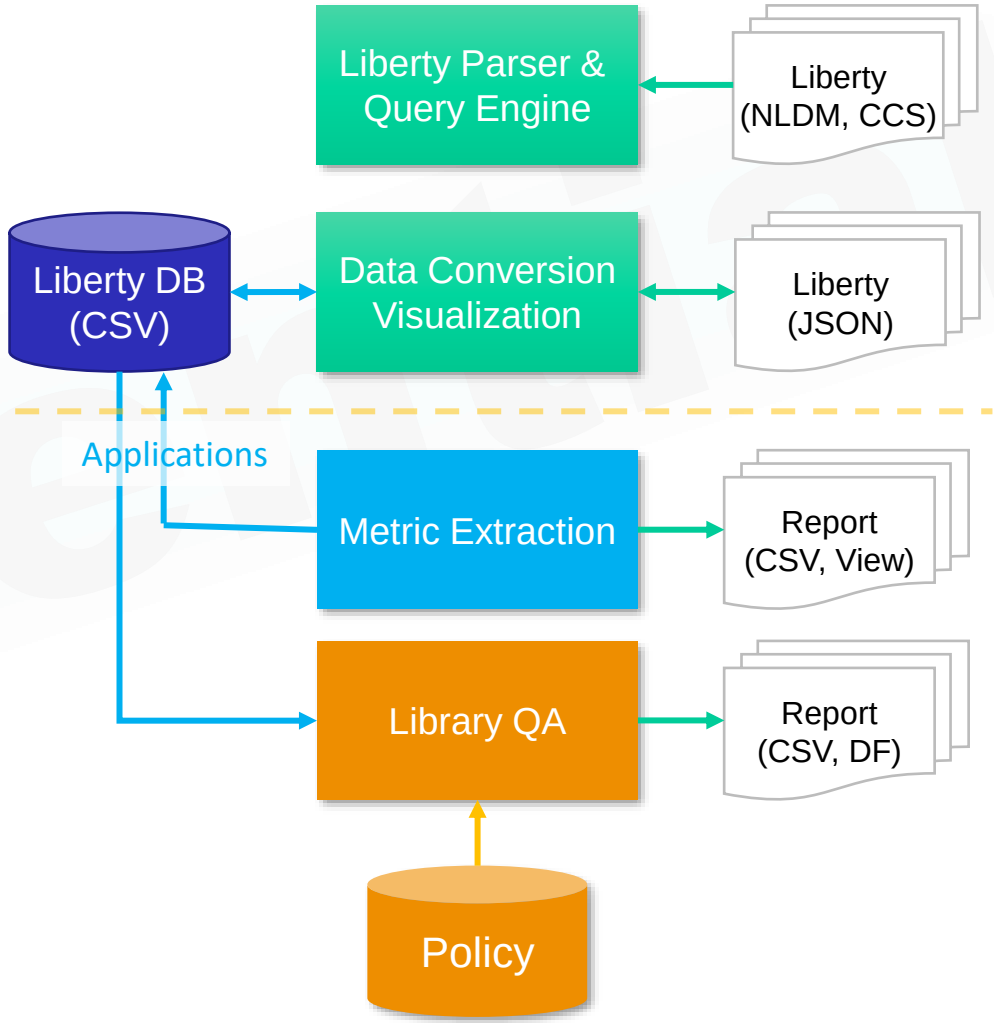

Liberty Parser & Data Structure

```
import sys
sys.path.append({path_to_liberty_parser})
from LibertyClass import liberty as lutil
```

alias

```
# load liberty
lib = 'tcbn16ffcllbwp16p90cpdlvtssgnp0p36vm40c.lib'
lnode = lutil.read_lib(lib,gzFlag=False)
lnode.keys()
lnode['cell'].keys()

P,V,T = lnode['nom_process'], \
    lnode['nom_temperature'], \
    lnode['nom_voltage'] # library PVT

# grab information by dictionary structure
# cell node
[v for v in lnode['cell']] # cell list in library
cnode = lnode['cell']['AN2D0BWP16P90CPDLVT’]
cnode = lutil.get_cell(lnode,'AN2D0BWP16P90CPDLVT')
cnode.keys()
cnode['name']
cnode['leakage_power']
cnode['cell_footprint']
cnode['area']
cnode['pin'].keys()

# pin node
inode = lnode['cell']['AN2D0BWP16P90CPDLVT']['pin']['Z']
inode = cnode['pin']['Z']
inode.keys()
inode['name']
inode['direction']
inode['function']
inode['max_transition']
```

```
# timing table
tnodeL = inode['timing ‘] # list of timing table
tnode = tnodeL[0] # 1st timing table
tnode.keys()
tnode['related_pin']
tnode['timing_sense']
tnode['timing_type']

# delay lookup table
lut = tnode['cell_rise'] # a dictionary
lut.keys()
shape = len(lut['index_1']),len(lut['index_2'])
tran,load = lut['index_1'],lut['index_2']
values = np.array(lut['values']).reshape(shape)

# convert to pandas DataFrame
import pandas as pd
df = pd.DataFrame(values,columns=load,index=tran)
print(df)

# map into numpy array
import numpy as np
y,x,cfall = tnode['cell_fall'].values() # delay fall
y,x,cfall = map(np.array,tnode['cell_fall'].values())

# encapsulate tables indexed by arc and timing type
lutL = lutil.get_cell_timing(cnode) # query all tables
timing tables
[v for v in lutL]

# encapsulate timing table into dataframe
dt = lutil.get_cell_timing(cnode,todf=True) # as dataframe
print(dt)
```

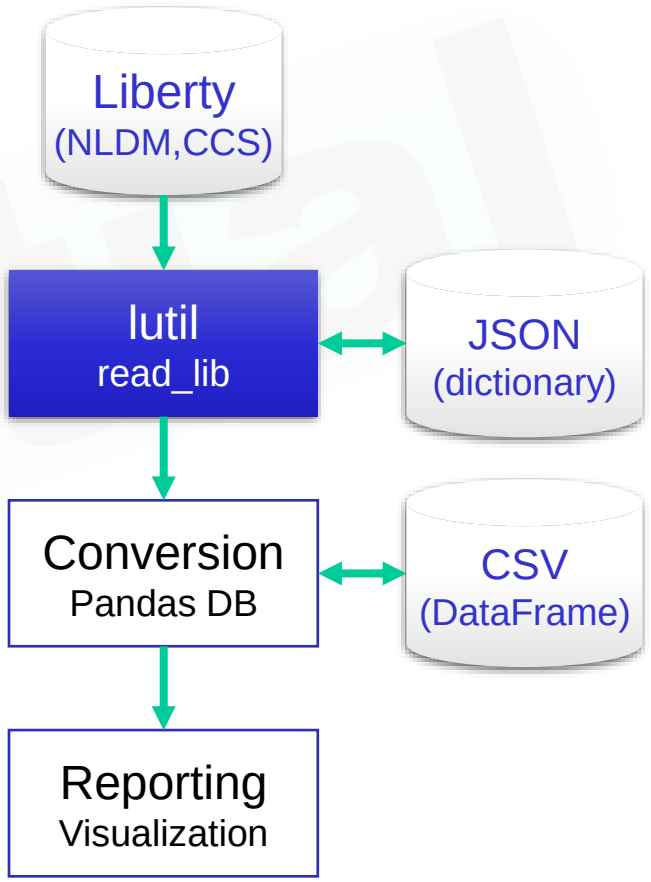

Liberty to JSON

```
timing () {
  related_pin : "CP";
  timing_sense : non_unate;
  timing_type : rising_edge;
  cell_rise (delay_template_8x8) {
    index_1 ("0.0016, 0.00255, 0.00595, 0.0127, 0.0262, 0.0531, 0.10685, 0.2143, 0.4291");
    index_2 ("0.0002, 0.00043, 0.00094, 0.0023, 0.0044, 0.0095, 0.02056, 0.0445");
    values ( \
      "0.1037, 0.1075, 0.1141, 0.1257, 0.1476, 0.1924, 0.2837, 0.4947", \
      "0.1042, 0.1082, 0.1146, 0.1263, 0.1481, 0.1929, 0.2887, 0.4953", \
      "0.1065, 0.1099, 0.1164, 0.1281, 0.1499, 0.1948, 0.2905, 0.4971", \
      "0.1096, 0.1134, 0.1201, 0.1317, 0.1536, 0.1984, 0.2940, 0.5007", \
      "0.1163, 0.1217, 0.1268, 0.1384, 0.1603, 0.2051, 0.3008, 0.5073", \
      "0.1279, 0.1171, 0.1383, 0.1500, 0.1718, 0.2166, 0.3124, 0.5190", \
      "0.1478, 0.1513, 0.1582, 0.1699, 0.1918, 0.2366, 0.3324, 0.5393", \
      "0.1806, 0.1844, 0.1911, 0.2027, 0.2246, 0.2694, 0.3652, 0.5720", \
      "0.2257, 0.2295, 0.2362, 0.2479, 0.2698, 0.3146, 0.4105, 0.6174" \
    );
  }
```

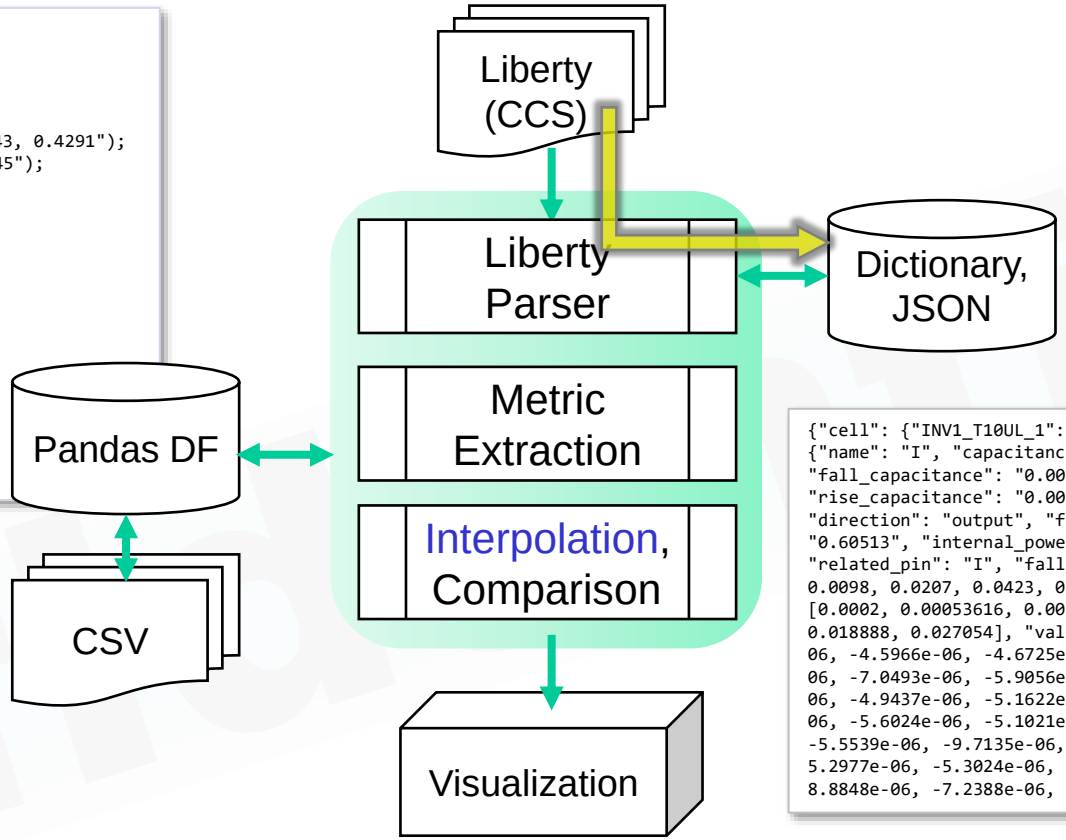


```
# load CCS
import glob
libL = glob.glob(f'{path}/liberty/*.lib')
lnode = lutil.read_lib(libL[0],gzFlag=False)
lnode.keys()
[v for v in lnode['cell']]

# convert to JSON
for lib in libL:
    lnode = lutil.read_lib(lib,gzFlag=False)
    lname = lnode['library']
    lutil.dump_json(lnode,
        f'{path}/exercise/JSON/{lname}.json',
        cname_re='.*OR2V1_.*_1|.*NAND2V1_.*_1|.*INV1_.*_1|DQV1E.*_1')
```


```
{"cell": {"INV1_T10UL_1": {"name": "INV1_T10UL_1", "pin": {"I":
{"name": "I", "capacitance": "0.00041847", "direction": "input",
"fall_capacitance": "0.00041858", "max_transition": "0.6905",
"rise_capacitance": "0.00041836"}, "ZN": {"name": "ZN",
"direction": "output", "function": "(!I)", "max_transition":
"0.60513", "internal_power": [{"related_pg_pin": "VDD",
"related_pin": "I", "fall_power": {"index_1": [0.0015, 0.0043,
0.0098, 0.0207, 0.0423, 0.0855, 0.1717, 0.344, 0.6905], "index_2":
[0.0002, 0.00053616, 0.0017162, 0.0039695, 0.0074802, 0.012406,
0.018888, 0.027054], "values": [-5.7963e-06, -5.102e-06, -4.6658e-
06, -4.5966e-06, -4.6725e-06, -4.8371e-06, -5.0765e-06, -5.3834e-
06, -7.0493e-06, -5.9056e-06, -5.0261e-06, -4.8051e-06, -4.8077e-
06, -4.9437e-06, -5.1622e-06, -5.4599e-06, -8.5339e-06, -7.0564e-
06, -5.6024e-06, -5.1021e-06, -4.9978e-06, -5.086e-06, -5.2712e-06,
-5.5539e-06, -9.7135e-06, -8.3154e-06, -6.4153e-06, -5.5659e-06, -
5.2977e-06, -5.3024e-06, -5.4339e-06, -5.6857e-06, -9.6476e-06, -
8.8848e-06, -7.2388e-06, -6.1593e-06, -5.6943e-06, -5.
```


Characteristic, Trend, PPA

Cell & Timing Table

```
#%% grab cell & timing table with API
cnodeL = lutil.get_cells(lnode,'AN2D0 ‘) # list of cell node
cnode = cnodeL[0]

tnodeL = cnode['pin']['Z']['timing’]) # list of timing nodes

lutT = lutil.get_cell_timing(cnode) # grab timing table as dictionary
[v for v in lutT] # key value of (arc,ttype,ctype)

lutT = lutil.get_cell_timing(cnode,ctype='fall') # delay & transition fall table
[v for v in lutT]

lutil.plot_cell_timing(cnode) # grab all timing tables
lutil.plot_cell_timing(cnode,ctype='cell_fall') # grab delay table
lutil.plot_cell_timing(cnode,ctype='fall_transition') # grab transition table
lutil.plot_lut(lutT,keys=('A1,Z,', 'combinational', 'cell_fall')) # visualization
```

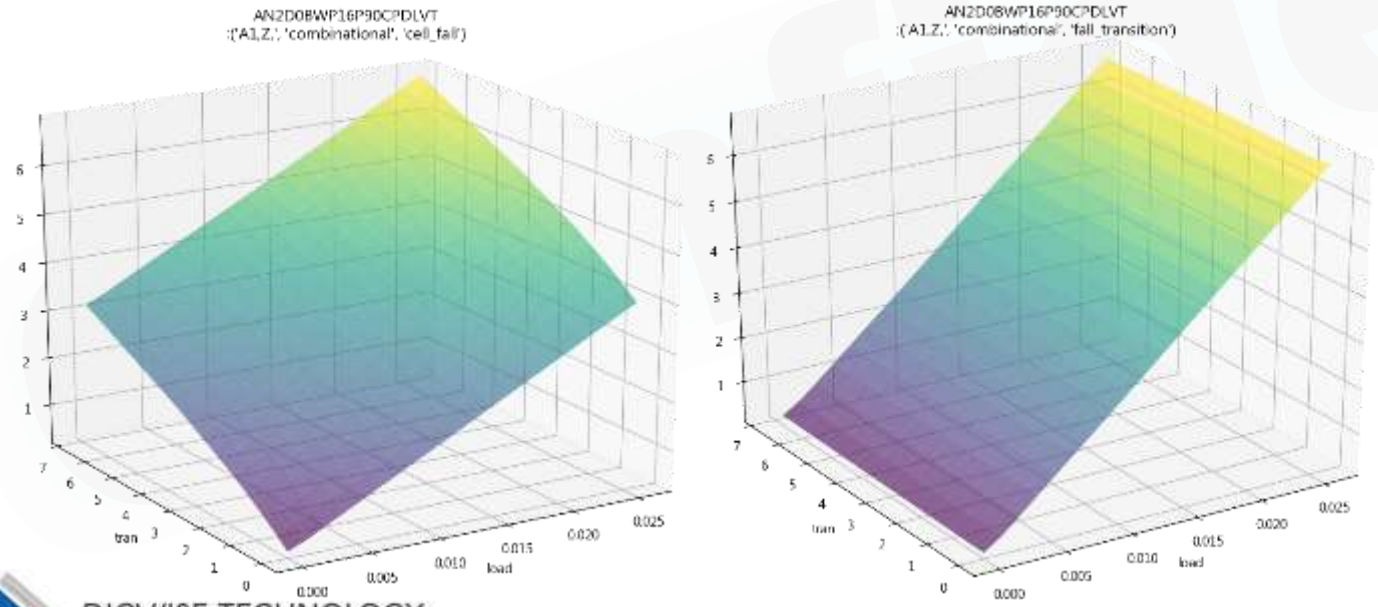

Library Node: **lnode** (dictionary) `lnode.keys()`

Cell Node: **cnode**←lnode[‘cell’] (dictionary) `cnode.keys()` `cnode['pin'].keys()`

Pin Node: **inode**← cnode[‘pin’][‘Z’] (dictionary) `inode.keys()`

Timing Tables: **tnodeL** ← inode[‘timing’] (list)

Timing Node: **tnode** ← tnodeL[0] (dictionary) `tnode.keys()`

Lookup Table Node: **lut** ← tnode[‘cell_rise’] (dictionary) `lut.keys()`

index_2: load/clock

index_1: trans/data

lut

DIGWISE TECHNOLOGY
崐智科技有限公司

Pandas DataFrame Conversion

```
import pandas as pd
lnode = lutil.load_json('ulvttt_0p33v_85c_typical_ccs.json')
[v for v in lnode['cell']] # cell list
cnode = lutil.get_cell(lnode,'INV1_66S6T10UL_1') # lnode['cell']['INV1_66S6T10UL_1']

lutL = lutil.get_cell_timing(cnode)
[v for v in lutL] # all available hash keys

lut = lutL[('I,ZN,', 'combinational', 'cell_rise')] # delay rise lookup table
tran,load,tr = map(np.array,lut.values())
tran,load,tf = map(np.array,lutL[('I,ZN,', 'combinational', 'cell_fall')].values())
tr = tr.reshape(len(tran),len(load))
tf = tf.reshape(len(tran),len(load))

tran = (tran*1000).round(3) # ps
load = (load*1000).round(3) # fF
dr = pd.DataFrame(tr,columns=load,index=tran)
df = pd.DataFrame(tf,columns=load,index=tran)
(dr/df).round(2) # delay imbalance

# INV1_66S6T12UL_1
lutL = lutil.get_cell_timing(liberty.get_cell(lnode,'INV1_66S6T12UL_1'))
tran,load,tr = map(np.array,lutL[('I,ZN,', 'combinational', 'cell_rise')].values())
tran,load,tf = map(np.array,lutL[('I,ZN,', 'combinational', 'cell_fall')].values())
tr = tr.reshape(len(tran),len(load))
tf = tf.reshape(len(tran),len(load))

tran = (tran*1000).round(3) # ps
load = (load*1000).round(3) # fF
dr = pd.DataFrame(tr,columns=load,index=tran)
df = pd.DataFrame(tf,columns=load,index=tran)

(dr/df).round(2) # delay imbalance
```

INV1_66S6T10UL_1 delay imbalance

	0.200	0.536	1.716	3.970	7.480	12.406	18.888	27.054
1.5	0.95	0.94	0.93	0.92	0.92	0.92	0.92	0.92
4.3	0.94	0.94	0.93	0.92	0.92	0.92	0.92	0.92
9.8	0.93	0.93	0.93	0.92	0.92	0.92	0.92	0.92
20.7	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
42.3	0.87	0.90	0.92	0.92	0.92	0.92	0.92	0.92
85.5	0.80	0.85	0.90	0.92	0.92	0.92	0.92	0.92
171.7	0.70	0.77	0.86	0.90	0.91	0.92	0.92	0.92
344.0	0.56	0.66	0.79	0.86	0.90	0.91	0.91	0.92
690.5	0.38	0.52	0.69	0.79	0.85	0.88	0.90	0.91

INV1_66S6T12UL_1 delay imbalance

	0.200	0.483	1.475	3.370	6.321	10.463	15.913	22.779
1.5	1.05	1.06	1.06	1.06	1.07	1.06	1.07	1.07
4.3	1.04	1.04	1.05	1.06	1.06	1.06	1.06	1.07
9.8	1.02	1.03	1.04	1.05	1.06	1.06	1.06	1.07
20.7	1.00	1.01	1.03	1.04	1.05	1.06	1.06	1.06
42.3	0.97	0.99	1.01	1.03	1.04	1.05	1.05	1.06
85.5	0.92	0.95	0.99	1.01	1.02	1.03	1.04	1.05
171.7	0.85	0.89	0.95	0.99	1.00	1.02	1.03	1.04
344.0	0.76	0.82	0.90	0.95	0.98	1.00	1.01	1.02
690.5	0.63	0.72	0.83	0.90	0.94	0.97	0.99	1.00

Timing & Power Visualization

```
# load liberty from JSON
lib = ' ulvttt_0p33v_85c_typical_ccs.json'
lnode = lutil.load_json(lib)
cnode = lutil.get_cell(lnode,'DQV1E_T10UL_1’)
lutT = lutil.get_cell_timing(cnode) # all timing tables
lutP = lutil.get_cell_power(cnode)  # all power tables

# plot cell delay & transition
lutil.plot_lut(lutT,keys=('CK,Q,D', 'rising_edge', 'cell_rise'))
lutil.plot_lut(lutT,keys=('CK,Q,D', 'rising_edge', 'rise_transition'))

# plot timing constraint
lutil.plot_lut(lutT,keys=[('CK,D,', 'hold_rising', 'rise_constraint'),
                          ('CK,D,', 'setup_rising', 'rise_constraint')])
lutil.plot_lut(lutT,keys=[('CK,D,', 'hold_rising', 'fall_constraint'),
                          ('CK,D,', 'setup_rising', 'fall_constraint')])
```

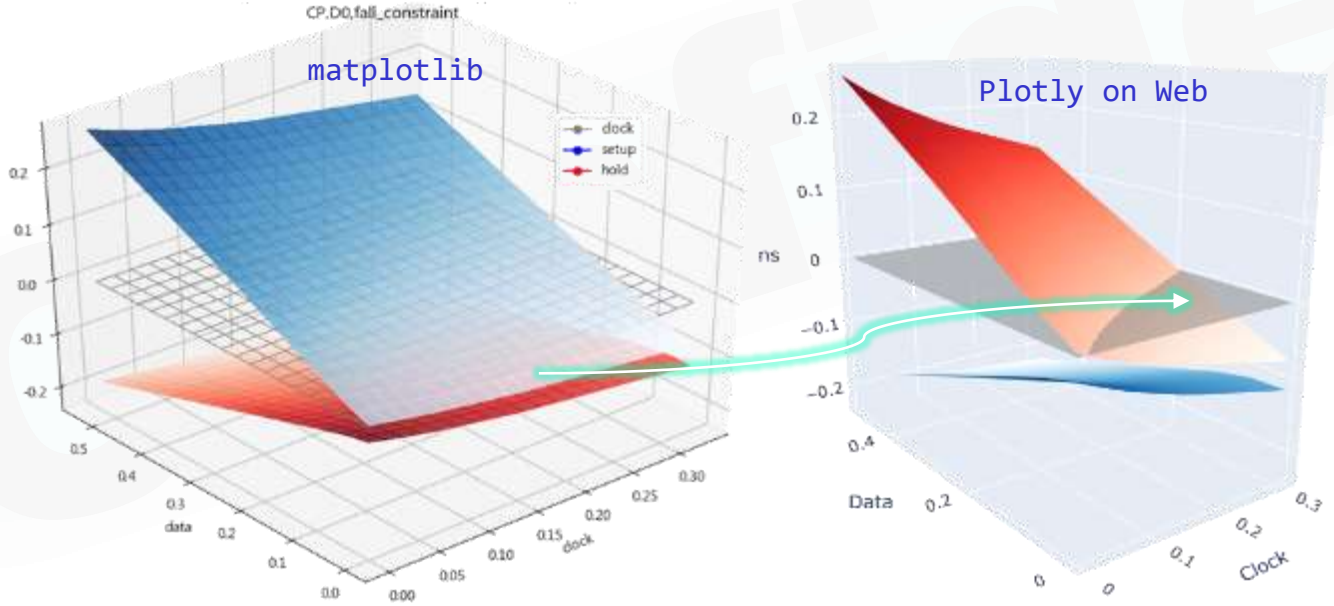

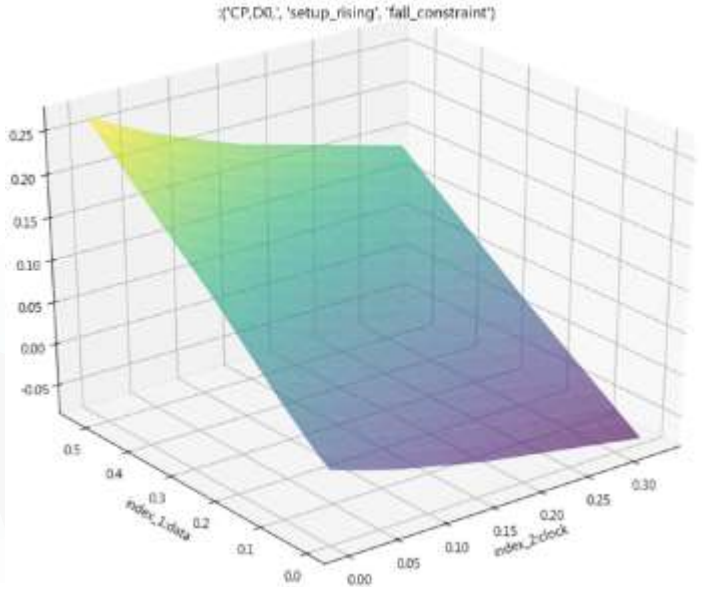

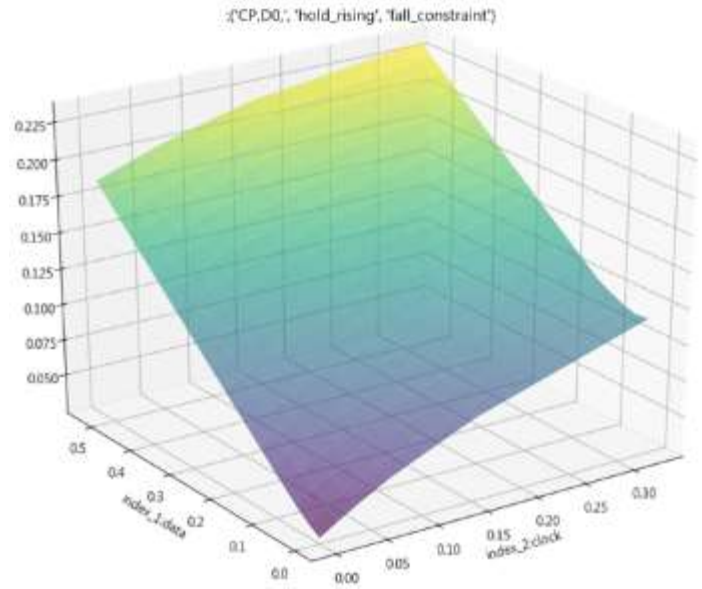

DIGWISE TECHNOLOGY
崛智科技有限公司

Timing/Power Table Lookup

```
lutT = lutil.get_cell_timing(cnode)
[v for v in lutT]

# decapsulate lookup table
lut = lutT[('A1,ZN,', 'combinational', 'cell_rise')]
y,x,v = map(np.array,lut.values())

# convert lut into dataframe
d = lutil.lut2df(lut)

# timing interpolation based on the specified transition & load
lutil.table_lookup(lut,trans=0.0207,load=0.0010072,dflag=True)


# lookup cell arc timing based on the specified transition & load
lutil.lookup_cell_timing(cnode,ctype='cell_rise',
    trans=0.0207,load=0.0010072,dflag=True)

lutil.lookup_cell_timing(cnode,ctype='cell_fall',
    trans=0.0207,load=0.0010072,dflag=True)
```

load

transition

index_2	0.000200	0.000379	0.001007	...	0.006699	0.010150	0.014497
index_1				...			
0.0015	0.008991	0.010693	0.016545	...	0.068989	0.10068	0.14068
0.0043	0.010278	0.012048	0.017969	...	0.070451	0.10222	0.14225
0.0098	0.012435	0.014374	0.020632	...	0.073292	0.10503	0.14510
0.0207	0.015996	0.018175	0.025128	...	0.078947	0.11063	0.15071
0.0423	0.021470	0.024484	0.032539	...	0.089738	0.12184	0.16192
0.0855	0.027694	0.032269	0.044478	...	0.108550	0.14241	0.18354
0.1717	0.034010	0.040676	0.058925	...	0.140210	0.17730	0.22168
0.3440	0.038747	0.048142	0.074508	...	0.193120	0.23657	0.28577
0.6905	0.037839	0.050992	0.087983	...	0.262930	0.32811	0.39416

[9 rows x 8 columns]
interpolation(0.0207,0.0010072)= 0.025128
A1->ZN@()= 0.025128

index_2	0.000200	0.000379	0.001007	...	0.006699	0.010150	0.014497
index_1				...			
0.0015	0.009524	0.011232	0.017124	...	0.069588	0.10132	0.14144
0.0043	0.010827	0.012572	0.018499	...	0.070966	0.10275	0.14272
0.0098	0.013105	0.014983	0.021179	...	0.073836	0.10558	0.14560
0.0207	0.016830	0.018942	0.025760	...	0.079452	0.11118	0.15114
0.0423	0.022852	0.025595	0.033373	...	0.090275	0.12237	0.16238
0.0855	0.030123	0.034314	0.045807	...	0.109250	0.14290	0.18403
0.1717	0.037926	0.044104	0.061178	...	0.141050	0.17805	0.22247
0.3440	0.044806	0.053520	0.078357	...	0.194530	0.23748	0.28641
0.6905	0.047286	0.059499	0.094357	...	0.265280	0.32978	0.39562

[9 rows x 8 columns]
interpolation(0.0207,0.0010072)= 0.02576
A2->ZN@()= 0.02576

Interpolation

```
from scipy import interpolate
import matplotlib.pyplot as plt
import numpy as np
from mpl_toolkits.mplot3d import Axes3D

lutT = lutil.get_cell_timing(liberty.get_cell(lnode,'INV1_66S6T12UL_1'))
tran,load,tr = map(np.array,lutT[('I,ZN,', 'combinational', 'rise_transition')].values())

tran = tran*1000 # ps
load = load*1000 # fF
tr = tr.reshape(len(tran),len(load))

# fine-grained grid
ptran = np.arange(tran[0],tran[-1]*1.1,(tran[-1]-tran[0])/20)
pload = np.arange(load[0],load[-1]*1.1,(load[-1]-load[0])/20)

# interpolation
ip = interpolate.interp2d(load,tran,tr,kind='linear')
pz = ip(pload,ptran) # predict

x,y = np.meshgrid(load,tran) # original grid
px,py = np.meshgrid(pload,ptran) # prediction grid

f = plt.figure(figsize=(8,6))
ax = Axes3D(f)
ax.scatter(x,y,tr,color='b',alpha=0.5,label='LUT ‘) # original grid
ax.plot_surface(px,py,pz,cmap=plt.cm.viridis,alpha=0.5,label='Interpolation')
ax.set_xlabel('load (pF)')
ax.set_ylabel('trans (ns)')
ax.view_init(60,250)
plt.show()
```

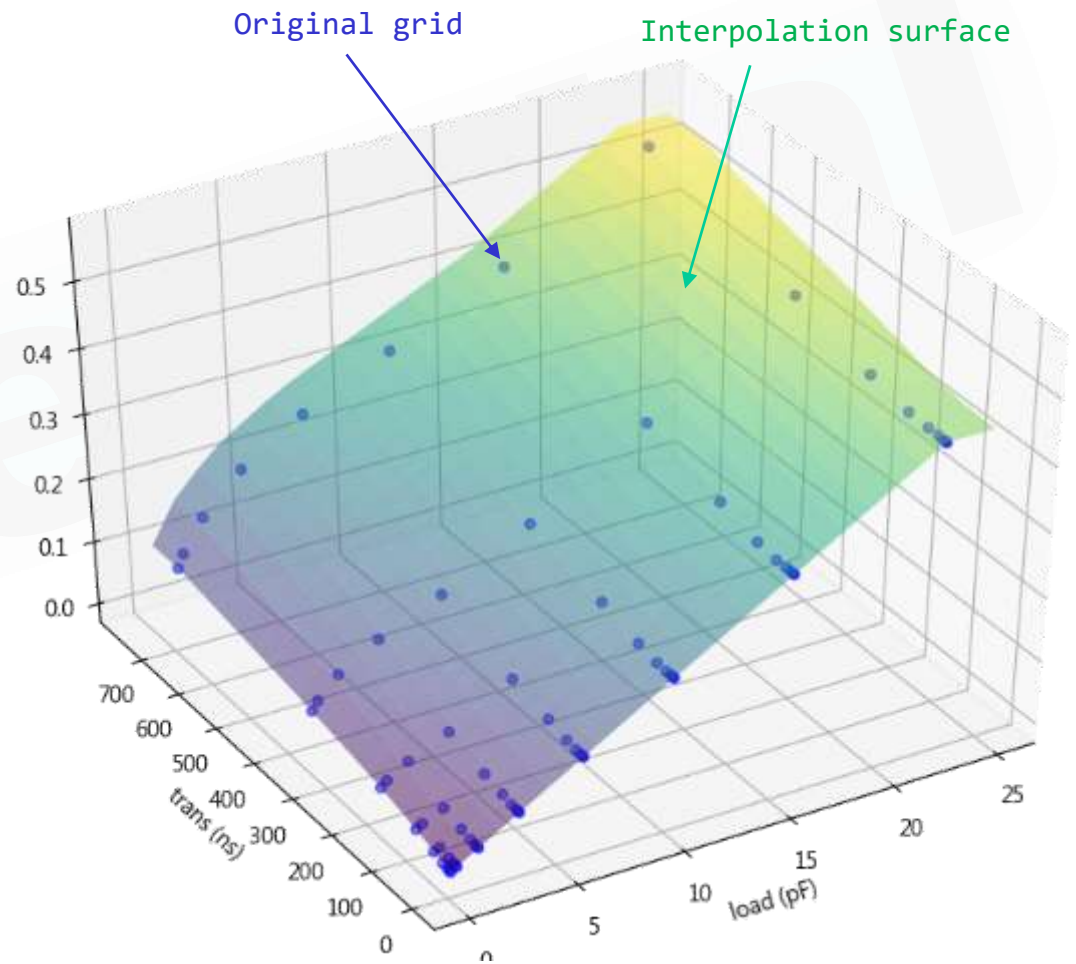

Batch Comparison

```
import numpy as np
ts = lutL[('CP,D0,', 'setup_rising', 'rise_constraint')]
th = lutL[('CP,D0,', 'hold_rising', 'rise_constraint')]

# sweep data=10ps~400ps per 10ps @clock=100ps
data,cock = np.arrange(10,410,10),[0.1]
y,x,z = ts['index_1'], ts['index_2'] ,np.array(ts['values'])
lutil.interpolate_luty,x,z,data,clock)

#%% convert to DataFrame & comparison
import glob, re
libL = glob.glob('lib/tcbn16ffc*.lib')
tagL, dfL = [],[]
for lib in libL:
    tag = re.match('.*tcbn16ffc(.*).lib',lib).groups()[0]
    lnode = lutil.read_lib(lib,gzFlag=False)
    d = lutil.lib2df(lnode)
    tagL += [tag]
    dfL += [d]
df = pd.concat(dfL,keys=tagL,names=['lib'])
df.iloc[:,:1]
```

```
#%%
df = df.reset_index().set_index(['lib','cell','ctype','ttype'])
d1 = df.loc['lvtssgnp0p36vm40c','AN2D0BWP16P90CPDLVT','cell_rise','combinational']
d2 = df.loc['ulvtffgnp0p44vm40c','AN2D0BWP16P90CPDLVT','cell_rise','combinational']

# comparison based on the same transition range 10ps~400ps @the proper clock=10ps
data,clock = [0.01,0.1,0.2,0.3,0.4],[0.1]
y,x,z = np.array(d1['index_1']),np.array(d1['index_2']),np.array(d1['values'])
ts1 = lutil.interpolate_lut(y,x,z,[0.01,0.1,0.2,0.3,0.4],[0.1])

y,x,z = np.array(d2['index_1']),np.array(d2['index_2']),np.array(d2['values'])
ts2 = lutil.interpolate_lut(y,x,z,[0.01,0.1,0.2,0.3,0.4],[0.1])
```

					index_1
lib	cell	arc	ttype	ctype	
lvtssgnp0p36vm40c	AN2D0BWP16P90CPDLVT	A1,Z,	combinational	rise_transition	[0.0039, 0.0317, 0.0872, ...
				cell_fall	[0.0039, 0.0317, 0.0872, ...
				fall_transition	[0.0039, 0.0317, 0.0872, ...
				cell_rise	[0.0039, 0.0317, 0.0872, ...
lvttt0p4v25c	AN2D0BWP16P90CPDLVT	A1,Z,	combinational	rise_transition	[0.0039, 0.0317, 0.0872, ...
				cell_fall	[0.0039, 0.0317, 0.0872, ...
				fall_transition	[0.0039, 0.0317, 0.0872, ...
				cell_rise	[0.0039, 0.0317, 0.0872, ...
ulvtffgnp0p44vm40c	AN2D0BWP16P90CPDLVT	A1,Z,	combinational	rise_transition	[0.0039, 0.0317, 0.0872, ...
				cell_fall	[0.0039, 0.0317, 0.0872, ...
				fall_transition	[0.0039, 0.0317, 0.0872, ...
				cell_rise	[0.0039, 0.0317, 0.0872, ...

Visualization & Comparison

```
cnode = lutil.get_cell(lnode,'DQV1E_T10UL_1')
lutT = lutil.get_cell_timing(cnode)
[v for v in lutT]

# combine constraint rise & fall
keyL = [('CK,CK,', 'min_pulse_width', 'rise_constraint'),
        ('CK,CK,D', 'min_pulse_width', 'fall_constraint')]
lutil.plot_lut(lutT,keys= keyL)

# combine delay rise & fall
keyL = [('CK,Q,D', 'rising_edge', 'cell_rise'),
        ('CK,Q,!D', 'rising_edge', 'cell_fall')]
lutil.plot_lut(lutT,keys= keyL)

# combine setup & hold
keyL = [('CK,D,', 'hold_rising', 'rise_constraint'),
        ('CK,D,', 'setup_rising', 'rise_constraint')]
lutil.plot_lut(lutT,keys= keyL,xylabel=('clock','data'))


# plot cell timing API
lutil.plot_cell_timing(cnode,arc='CK,Q,',ctype='cell')

lutil.plot_cell_timing(cnode,
    arc='CK,D,',ctype='rise_constraint',
    xylabel=('clock','data'))

lutil.plot_cell_constraint(cnode,
    arc='CK,D',ctype='rise_constraint')
```

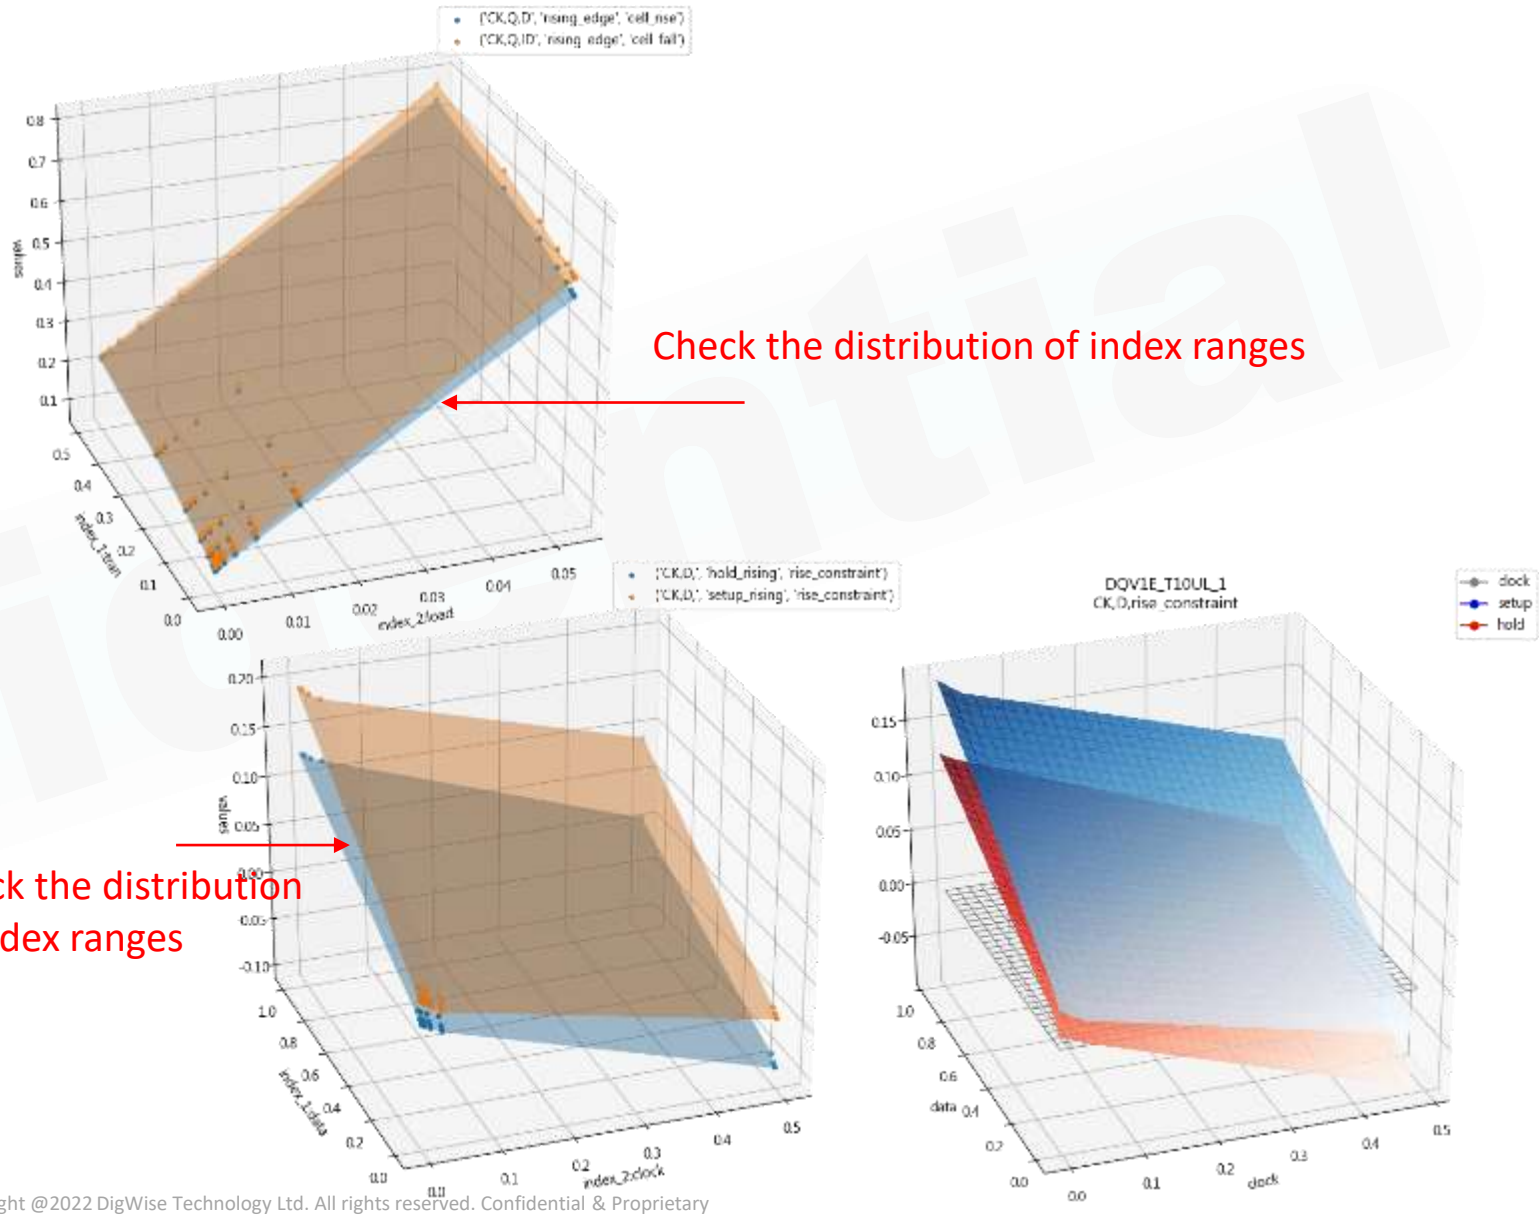

DIGWISE TECHNOLOGY
崛智科技有限公司

Driving Slope

```
Slope := loading/transition

def lutSlope(lut):
    d = lutil.lut2df(lut)
    delta_load = d.columns[-2]-d.columns[1]
    delta_tran = d.iloc[1:-2,-2]-d.iloc[1:-2,1]
    s = delta_load/delta_tran
return s.mean()
```

```
lnode = libDB['ulvttt_0p33v_85c_typical_ccs']
cnode = lnode['cell']['NAND2V1_66S6T10UL_1']
lutT = lutil.get_cell_timing(cnode)
tr = lutil.lut2df(lutT[('A1,ZN,', 'combinational', 'rise_transition')])
tf = lutil.lut2df(lutT[('A1,ZN,', 'combinational', 'fall_transition')])
sr,sf = lutil.lookup_cell_slope(cnode,dflag=True)
```

lookup table: ('A1,ZN,', 'combinational', 'fall_transition'), slope=0.030267

index_1 \ index_2 (loading)	0.000200	0.000379	0.001007	0.002207	0.004076	0.006699	0.010150	0.014497
0.0015	0.018769	0.024801	0.045968	0.086483	0.14956	0.23825	0.35457	0.50089
0.0043	0.018816	0.024794	0.045979	0.086449	0.14961	0.23806	0.35416	0.50100
0.0098	0.019326	0.025249	0.046107	0.086573	0.14954	0.23819	0.35390	0.50119
0.0207	0.020805	0.026734	0.047298	0.087011	0.14954	0.23825	0.35458	0.50112
0.0423	0.023963	0.029383	0.050440	0.089751	0.15132	0.23851	0.35436	0.50108
0.0855	0.034962	0.039962	0.056701	0.095947	0.15737	0.24292	0.35700	0.50206
0.1717	0.052500	0.059251	0.078376	0.109870	0.16930	0.25581	0.36837	0.51063
0.3440	0.079855	0.089415	0.116250	0.153520	0.20156	0.28021	0.39359	0.53631
0.6905	0.123240	0.137060	0.175010	0.227640	0.28910	0.35813	0.45092	0.58412

transition

lookup table: ('A2,ZN,', 'combinational', 'fall_transition'), slope=0.030113

index_1 \ index_2	0.000200	0.000379	0.001007	0.002207	0.004076	0.006699	0.010150	0.014497
0.0015	0.018751	0.024799	0.046008	0.086478	0.14939	0.23795	0.35467	0.50170
0.0043	0.018770	0.024785	0.046008	0.086444	0.14949	0.23807	0.35411	0.50147
0.0098	0.019109	0.025096	0.046126	0.086475	0.14934	0.23801	0.35431	0.50034
0.0207	0.020098	0.026076	0.046907	0.086821	0.14958	0.23814	0.35438	0.50169
0.0423	0.021939	0.027725	0.048988	0.088639	0.15072	0.23848	0.35446	0.50121
0.0855	0.030324	0.035371	0.053351	0.092982	0.15474	0.24138	0.35669	0.50146
0.1717	0.046197	0.052202	0.070547	0.103380	0.16309	0.25057	0.36416	0.50768
0.3440	0.072674	0.080559	0.103590	0.139310	0.18867	0.26746	0.38153	0.52613
0.6905	0.113290	0.124930	0.157470	0.204240	0.26191	0.33204	0.42651	0.55984

Falling slope

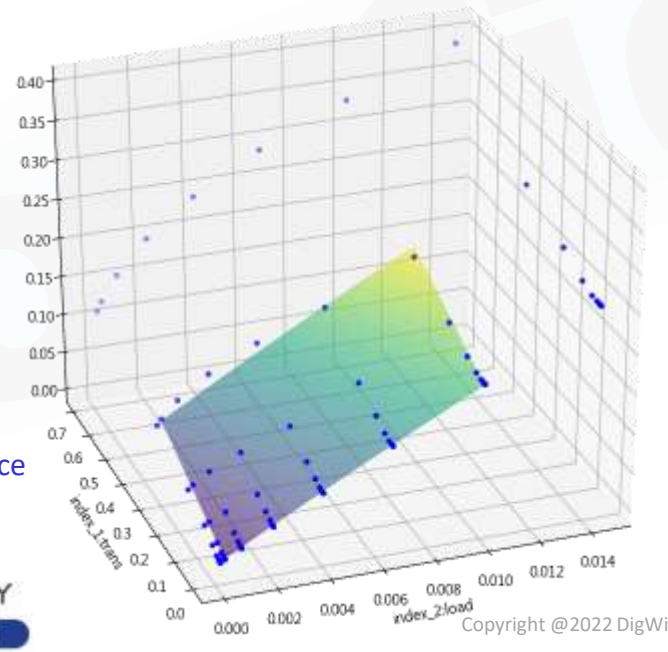

Driving slope surface

DIGWISE TECHNOLOGY
崛智科技有限公司

Table Lookup & Metric Extraction

```
#%% timing lookup
lib = 'base_ulvttt_0p33v_85c_typical_ccs.json'
lnode = lutil.load_json(lib)
cnode = lnode['cell']['INV1_66S6T10UL_1' ]

# grab timing table
lutL = lutil.get_cell_timing(cnode)
tran,load,cr = map(np.array,lutL[('I,ZN,', 'combinational', 'rise_transition')].values())
cr = cr.reshape(len(tran),len(load))
v = lutil.table_lookup(lut,0.04,0.004,dflag=True) # 40ps, 4fF

# grab cell information with API
c,s = lutil.lookup_cell_pincap(cnode,dflag=True)
l,s = lutil.lookup_cell_leakage(cnode,dflag=True)
tr,s = lutil.lookup_cell_timing(cnode,ttype='rise_transition',trans=0.04,load=0.004,dflag=True)
tf,s = lutil.lookup_cell_timing(cnode,ttype='fall_transition',trans=0.04,load=0.004,dflag=True)
dr,s = lutil.lookup_cell_timing(cnode,ttype='cell_rise',trans=0.04,load=0.004,dflag=True)
dr,s = lutil.lookup_cell_timing(cnode,ttype='cell_fall',trans=0.04,load=0.004,dflag=True)
pr,s = lutil.lookup_cell_power(cnode,ttype='rise_power',trans=0.04,load=0.004,dflag=True)
pf,s = lutil.lookup_cell_power(cnode,ttype='fall_power',trans=0.04,load=0.004,dflag=True)

#% metric extraction, cell,fp,leak,[tr,tf,dr,df,pr,pf]
lib = 'ulvttt_0p33v_85c_typical_ccs.json'
lnode = lutil.load_json(lib)

#cell fp leak [tr,tf,dr,df,pr,pf]
d = lutil.dump_cells(lnode,'CNSCC7_INV1_66S6T10UL_1')

# metrix extraction: all cells
d = lutil.dump_cells(lnode,.*')
d.round(4)
```

cell	fp	area	leak	tr	tf	dr	df	pr	pf
INV1_66S6T10UL_1	INV	0.0348	4.7055	0.0082	0.0086	0.0081	0.0085	0.0000	-0.0
INV1_66S6T12UL_1	INV	0.0348	3.7393	0.0091	0.0083	0.0090	0.0085	0.0001	-0.0
NAND2V1_66S6T10UL_1	ND2	0.0523	5.1413	0.0103	0.0188	0.0093	0.0172	0.0001	-0.0
NAND2V1_66S6T12UL_1	ND2	0.0523	4.1366	0.0115	0.0182	0.0103	0.0170	0.0001	-0.0
NOR2V1_66S6T10UL_1	NR2	0.0523	5.3066	0.0187	0.0108	0.0168	0.0096	0.0001	-0.0
NOR2V1_66S6T12UL_1	NR2	0.0523	4.1848	0.0215	0.0106	0.0193	0.0097	0.0001	-0.0

Design & Library Metric Extraction

```
timing () {
  related_pin : "CP";
  timing_sense : non_unate;
  timing_type : rising_edge;
  cell_rise (delay_template_8x8_MBDFULVT) {
    index_1 ("0.0016, 0.00255, 0.00595, 0.0127, 0.0262, 0.0531, 0.10685, 0.2143, 0.4291");
    index_2 ("0.0002, 0.00043, 0.00094, 0.0023, 0.0044, 0.0095, 0.02056, 0.0445");
    values ( \
      "0.1037, 0.1075, 0.1141, 0.1257, 0.1476, 0.1924, 0.2837, 0.4947", \
      "0.1042, 0.1082, 0.1146, 0.1263, 0.1481, 0.1929, 0.2887, 0.4953", \
      "0.1065, 0.1099, 0.1164, 0.1281, 0.1499, 0.1948, 0.2905, 0.4971", \
      "0.1096, 0.1134, 0.1201, 0.1317, 0.1536, 0.1984, 0.2940, 0.5007", \
      "0.1163, 0.1217, 0.1268, 0.1384, 0.1603, 0.2051, 0.3008, 0.5073", \
      "0.1279, 0.1171, 0.1383, 0.1500, 0.1718, 0.2166, 0.3124, 0.5190", \
      "0.1478, 0.1513, 0.1582, 0.1699, 0.1918, 0.2366, 0.3324, 0.5393", \
      "0.1806, 0.1844, 0.1911, 0.2027, 0.2246, 0.2694, 0.3652, 0.5720", \
      "0.2257, 0.2295, 0.2362, 0.2479, 0.2698, 0.3146, 0.4105, 0.6174" \
    );
  }
```

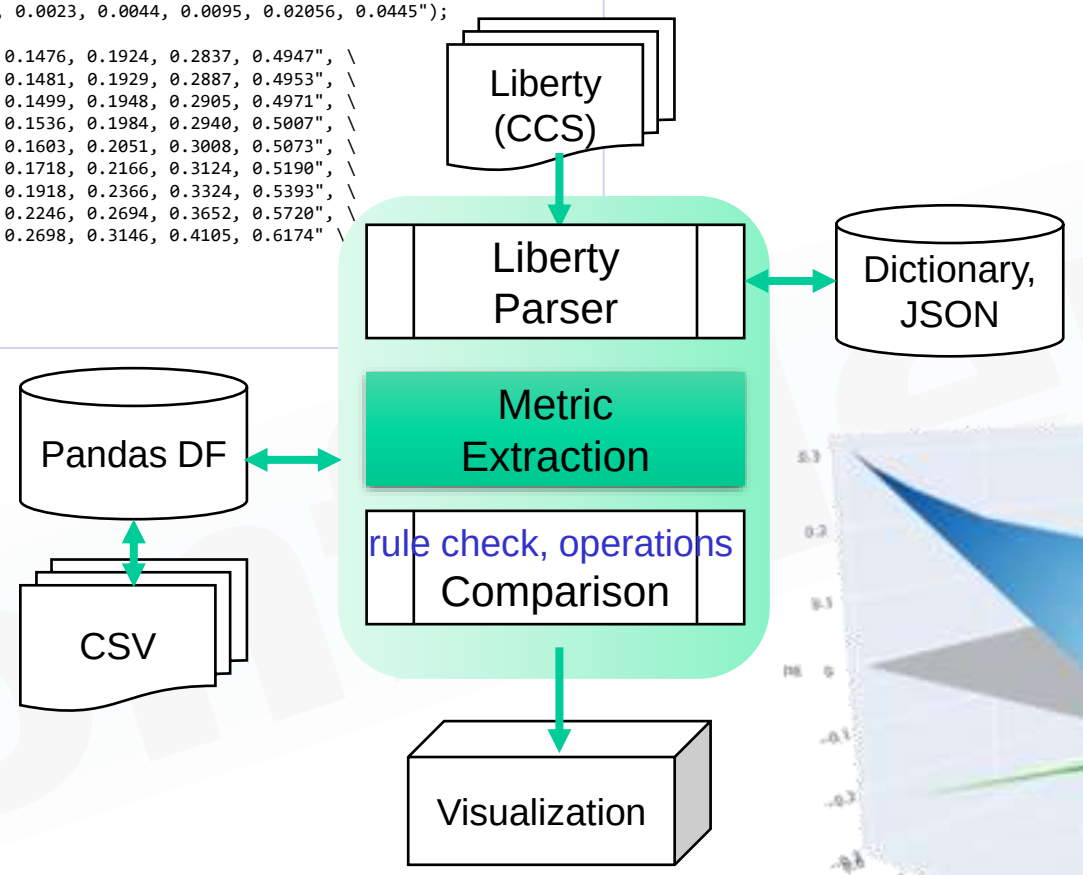


```
index,cell,src,pin,ctype,ttype,when,index_1,index_2,values
0,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.00020,0.1037
1,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.00043,0.1075
2,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.00094,0.1141
3,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.00203,0.1257
4,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.00440,0.1476
5,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.00950,0.1924
6,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.02056,0.2837
7,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00160,0.04450,0.4947
8,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00255,0.00020,0.1042
9,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.00255,0.00043,0.1082
…
62,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.2143,0.02056,0.3652
63,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.2143,0.04450,0.5720
64,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.00020,0.2257
65,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.00043,0.2295
66,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.00094,0.2362
67,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.00230,0.2479
68,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.00440,0.2690
69,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.00950,0.3146
70,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.02060,0.4105
71,MBDFULVT,CP,Q0,cell_rise,rising_edge,,0.4291,0.04450,0.6174
```

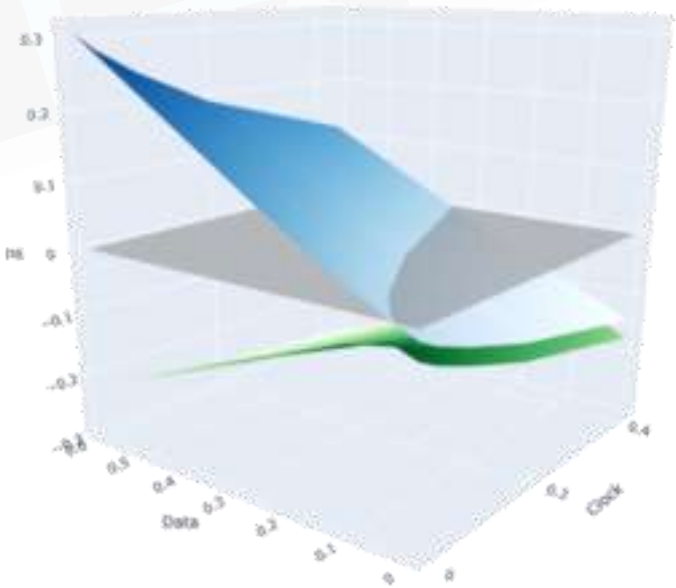

Sweep transition/PVT for comparison

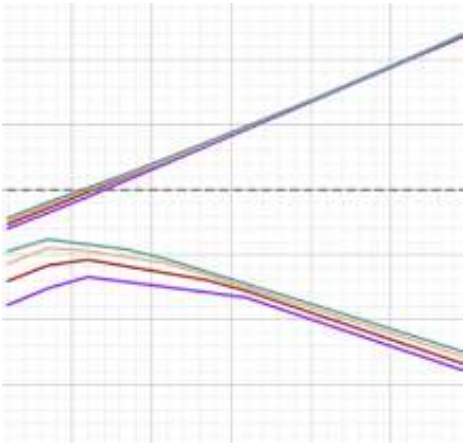

Characteristic, Trend, PPA

Machine-learning for Physical Design

T	index_1	index_2	values
25	[0.0016, 0.006, 0.0147,...	[0.0002, 0.000562037, ...	[0.00766415, 0.00858535, 0.0108921, ...
50	[0.0016, 0.006, 0.0147,...	[0.0002, 0.000562037, ...	[0.00674201, 0.00755051, 0.0095632, ...
85	[0.0016, 0.006, 0.0147,...	[0.0002, 0.000562037, ...	[0.00577513, 0.00646485, 0.0081795, ...
120	[0.0016, 0.006, 0.0147,...	[0.0002, 0.000562037, ...	[0.00506849, 0.00567545, 0.0071815, ...

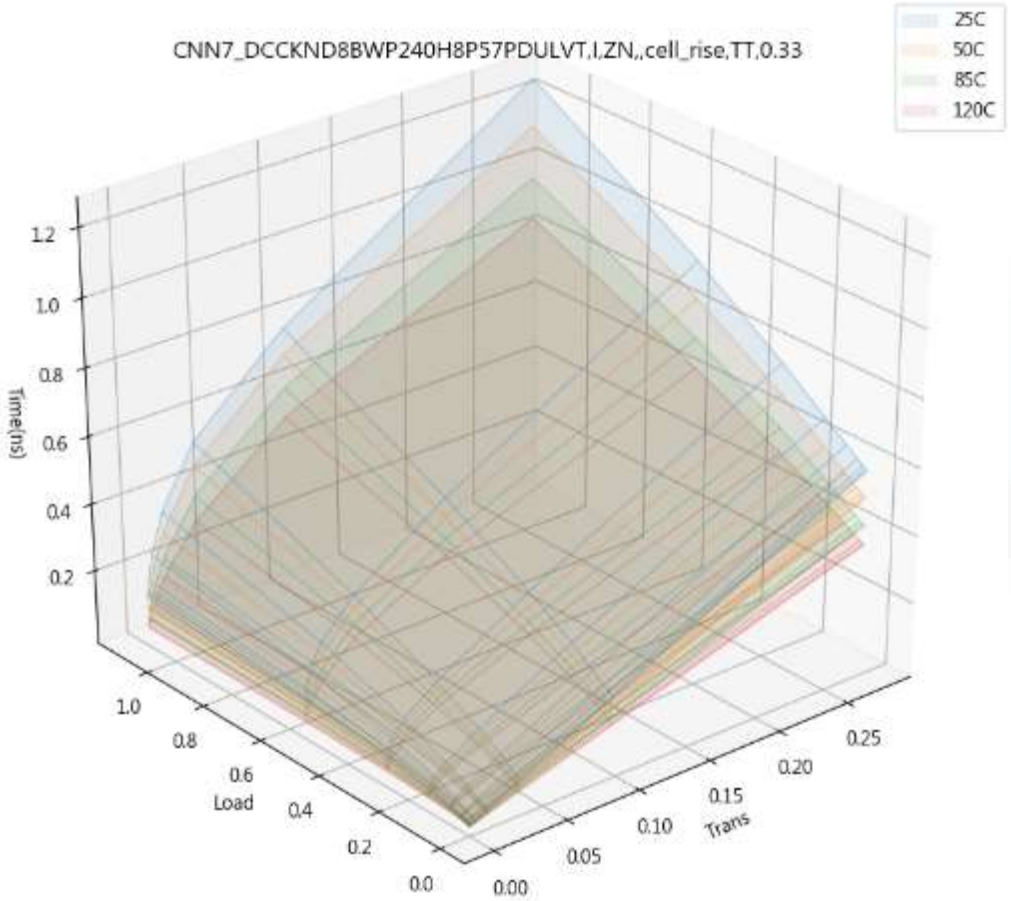

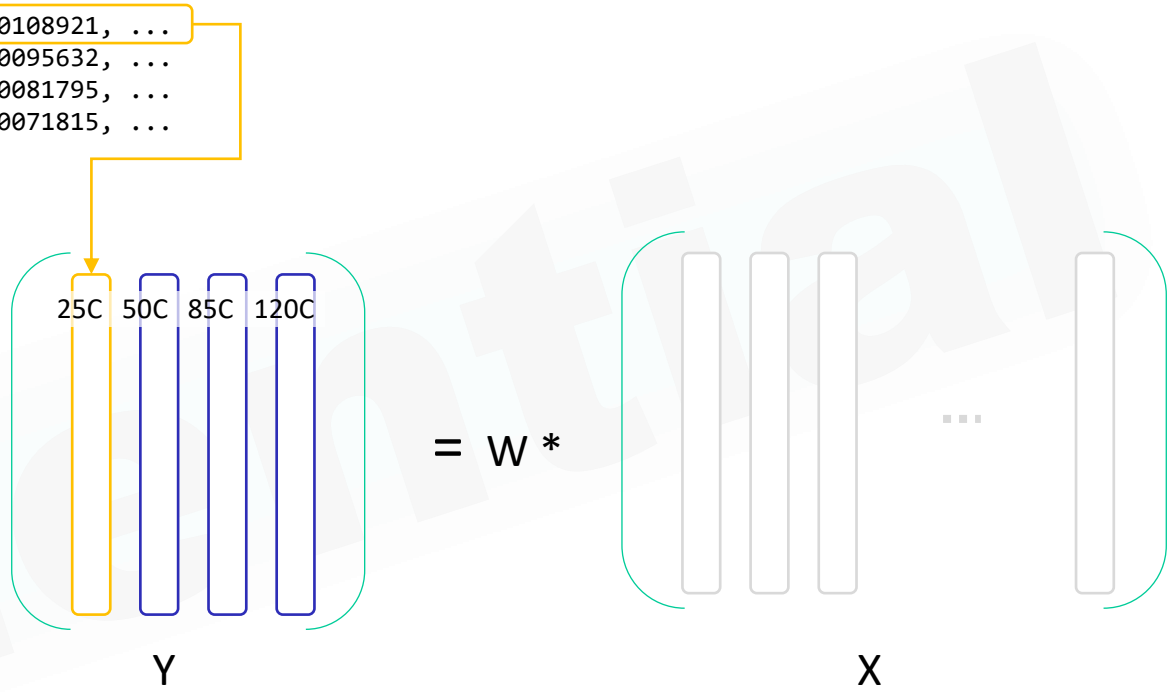

Temperature regression

Y = w1*T+w2*tran+w3*tran^2+w4*load+w5*load^2+w6*tran*load+w7*tran^2*load+w8*tran*load^2+b

DIGWISE TECHNOLOGY
崛智科技有限公司

LS Regression

```
# predict timing & power vectors from LS coefficient
T = np.array(
    [np.ones(gx.shape)]+
    [gx**i for i in range(1,order+1)]+
    [gy**i for i in range(1,order+1)]+
    [gx**i * gy**j for i,j in mxy] # covariate (order-1)
    ).T
C,_,_,_ = scipy.linalg.lstsq(T,z) # LS regression
p = np.dot(T,C) # predict with LS coefficient
```

Predict = $\begin{bmatrix} 1 & X & X^2 & Y & Y^2 & XY \end{bmatrix}^T$ * [C0, C1, C2, C3, C4, C5]

LS coefficient

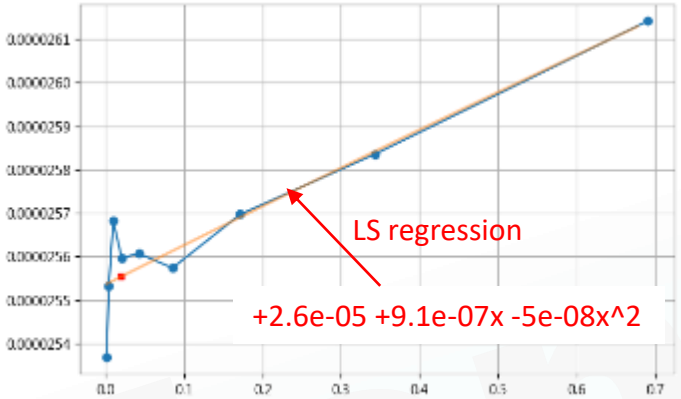

-7.1e-06 -0.00036x +0.041x^2 +2.8e-05y +7.6e-05y^2 -0.0051x*y

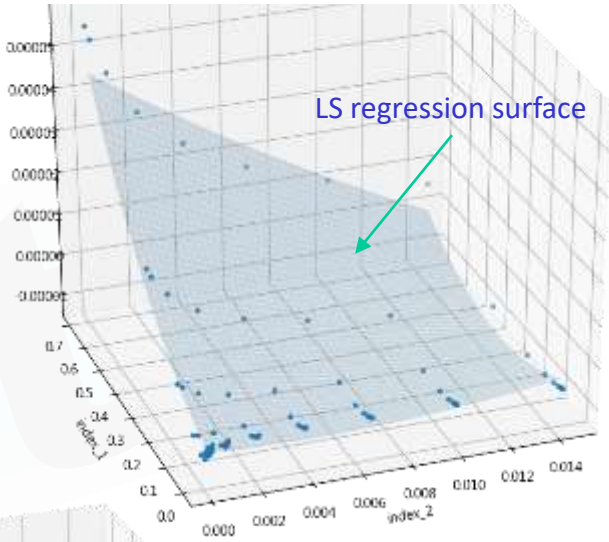

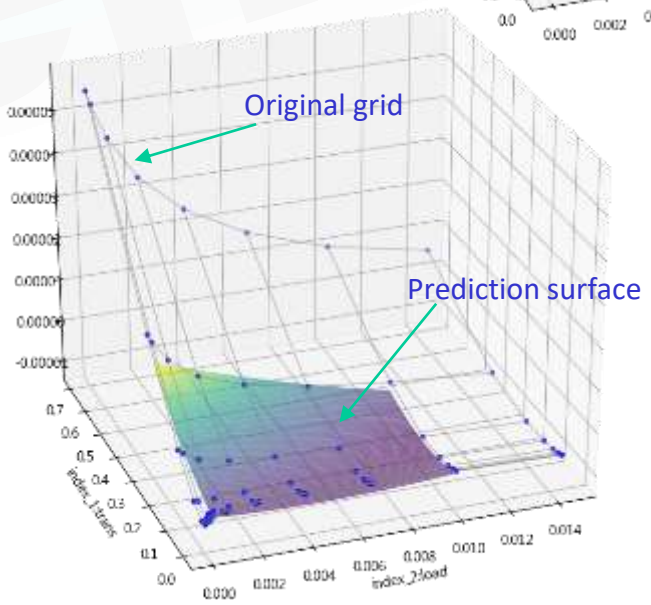


```
# 1-D
lut = lutP[',A1,!A2', 'fall_power']
C,p = lutil.lut2lsCoeff(lut,order=2,dflag=True)
d = lutil.lut2df(lut)

# 2-D
lut = lutP['A1,ZN,A2', 'fall_power']
C,p = lutil.lut2lsCoeff(lut,order=2,dflag=True)
d = lutil.lut2df(lut)

# predict one point
d = lutil.lut2df(lut)
tran,load = 0.0423,0.002207 # trans & load

# prediction surface
p = np.dot(np.array([1,load,load**2,tran,tran**2,load*tran]).T,C)
```

DIGWISE TECHNOLOGY
崛智科技有限公司

Precise Leakage Modeling & Evaluation

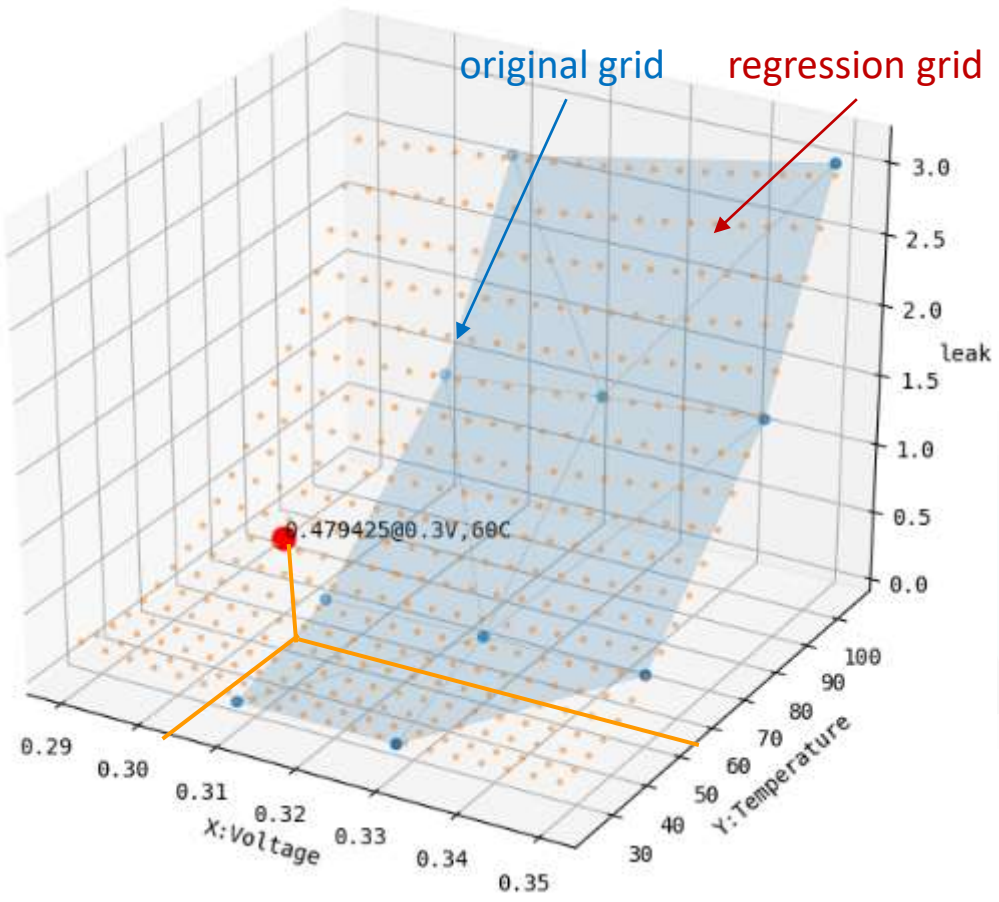

Step1: each process corner, ~3 voltage x 3 temperature, ~9 grid points, which can be perfectly fitted with 6 LS coefficients, as *f(V,T)*

Step2: fit 3 process corners respectively, and formulate process as one of the input parameters, which can be perfectly fitted with 10~16 LS coefficients, as *f(V,T,P)*

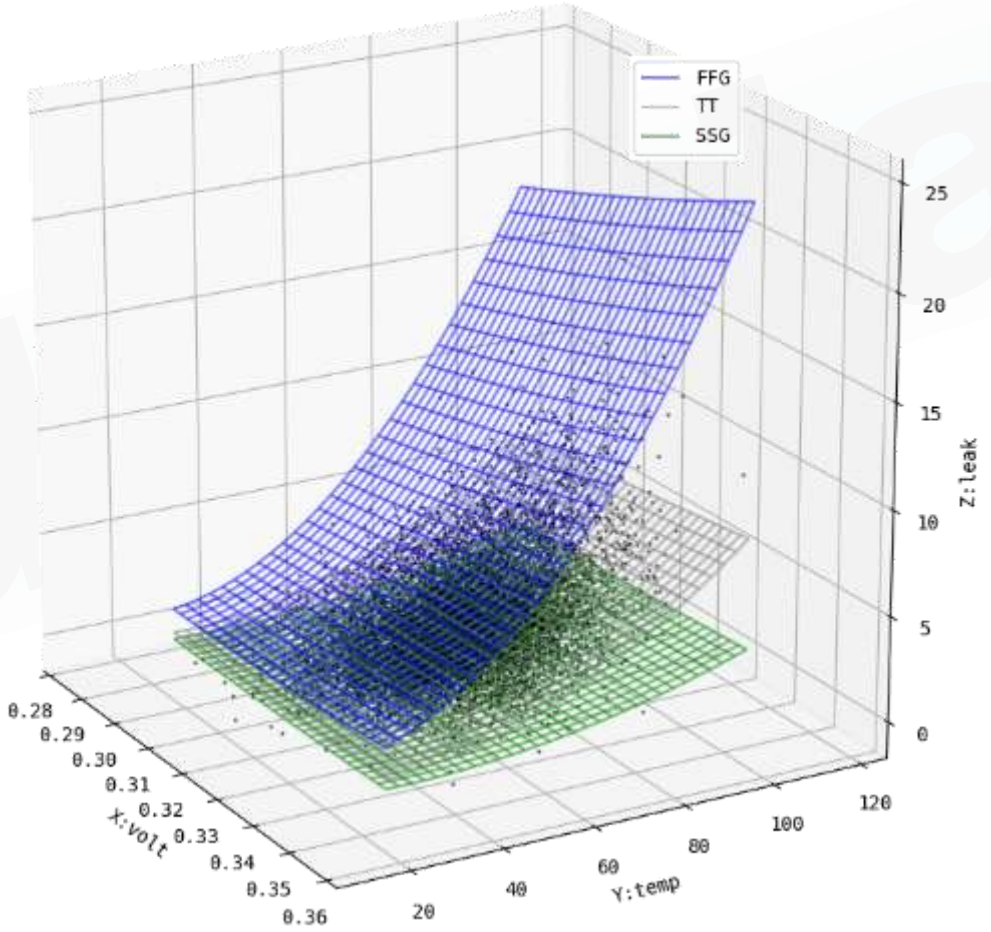

Step3: evaluate the leakage distribution following a probability density function

DIGWISE TECHNOLOGY
崛智科技有限公司

DIGWISE

Application

Metric Visualization

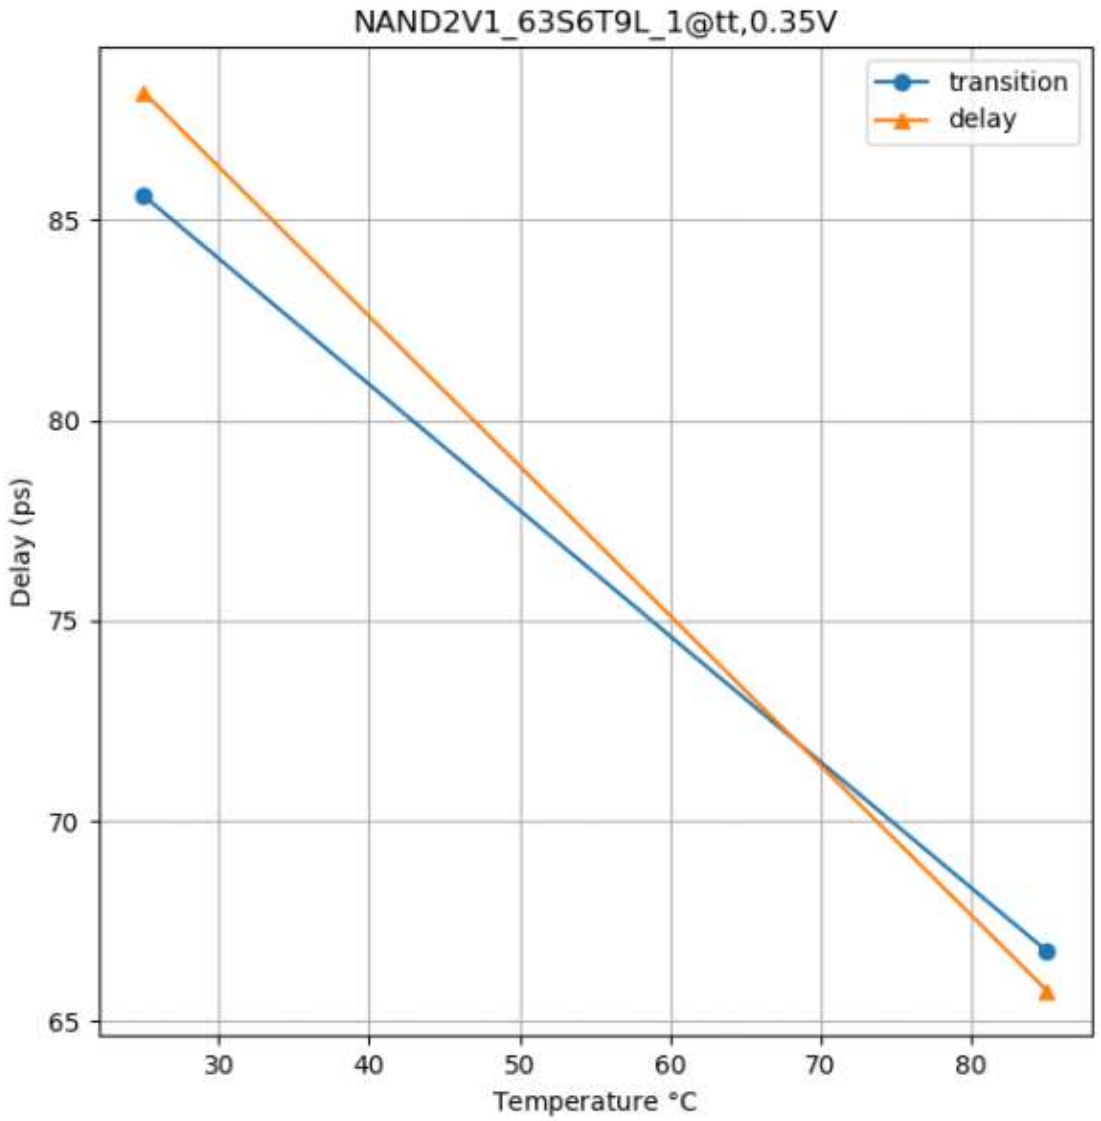

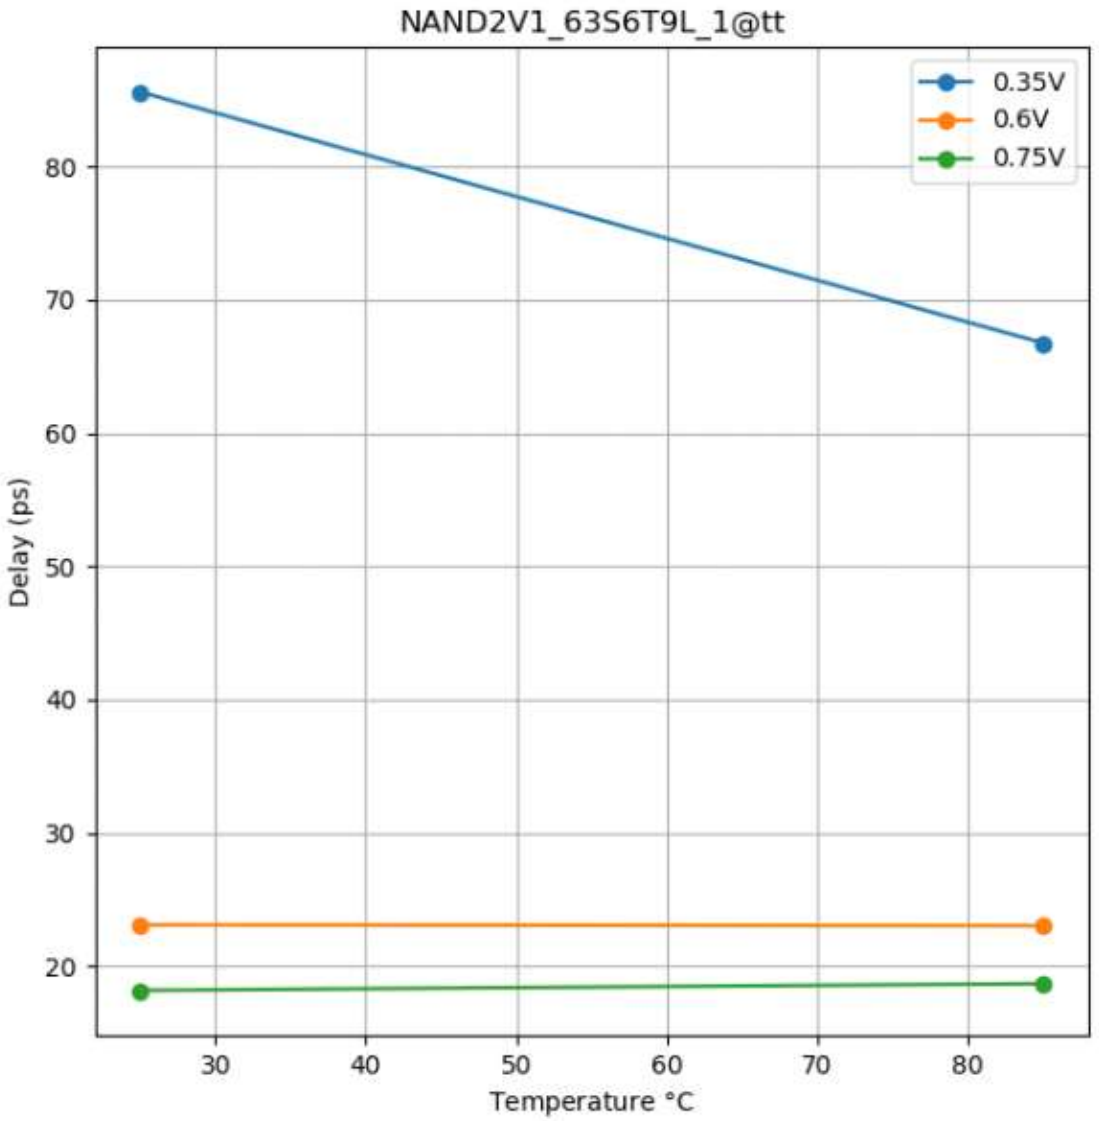

Temperature Inversion

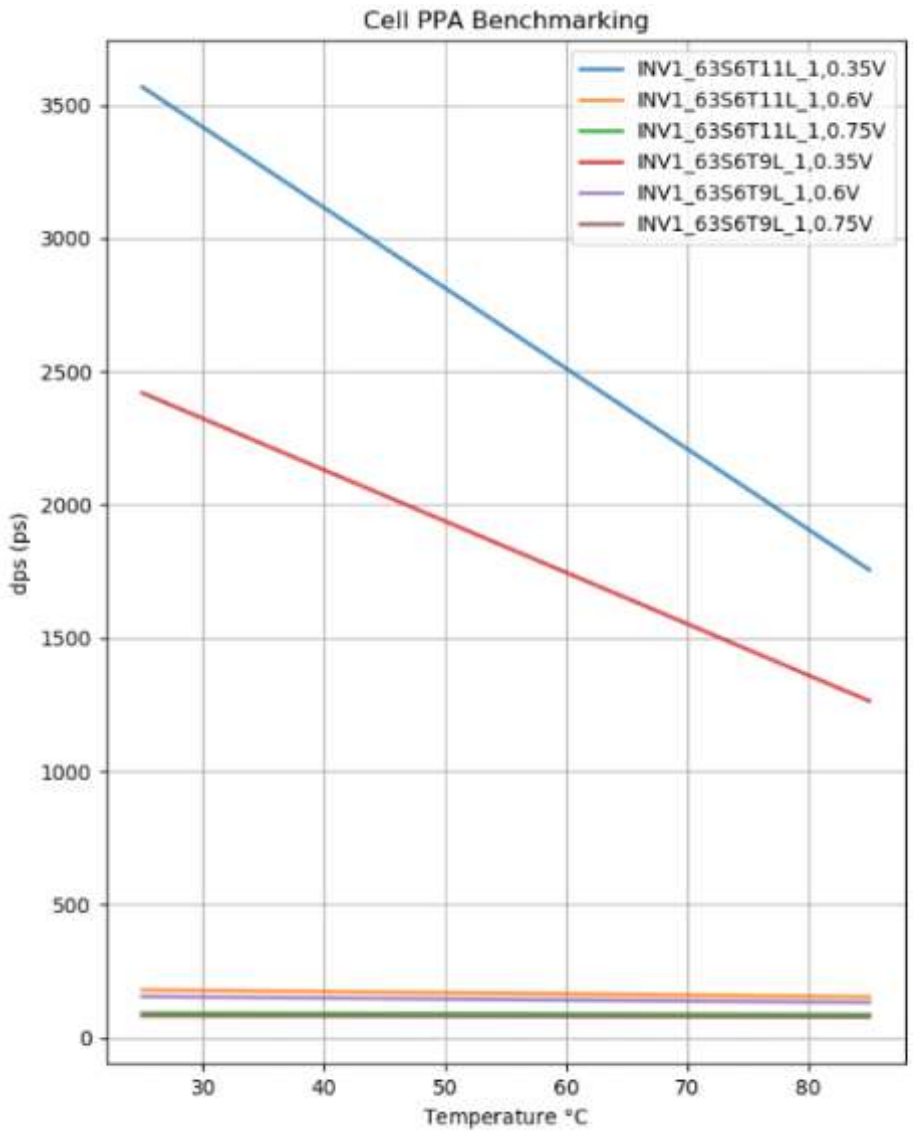

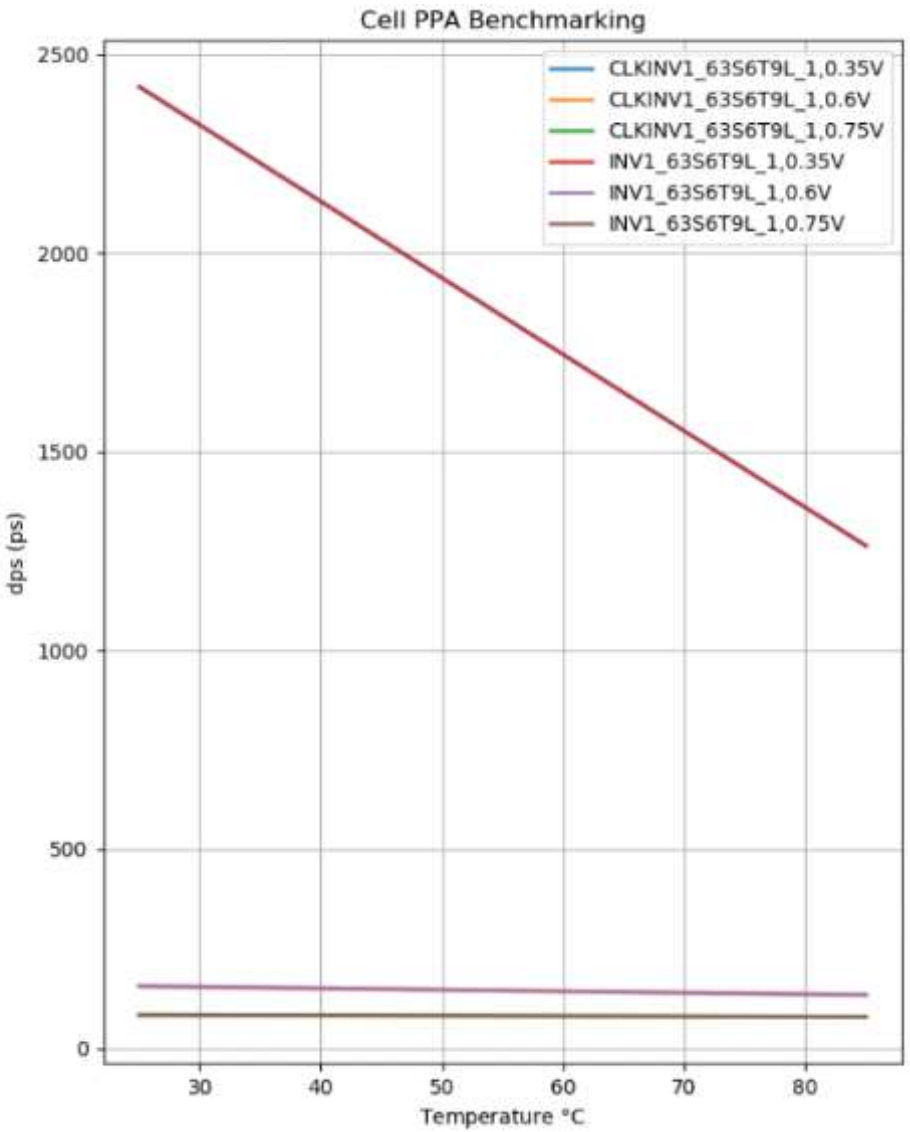

DIGWISE TECHNOLOGY
崛智科技有限公司

Slew Imbalance

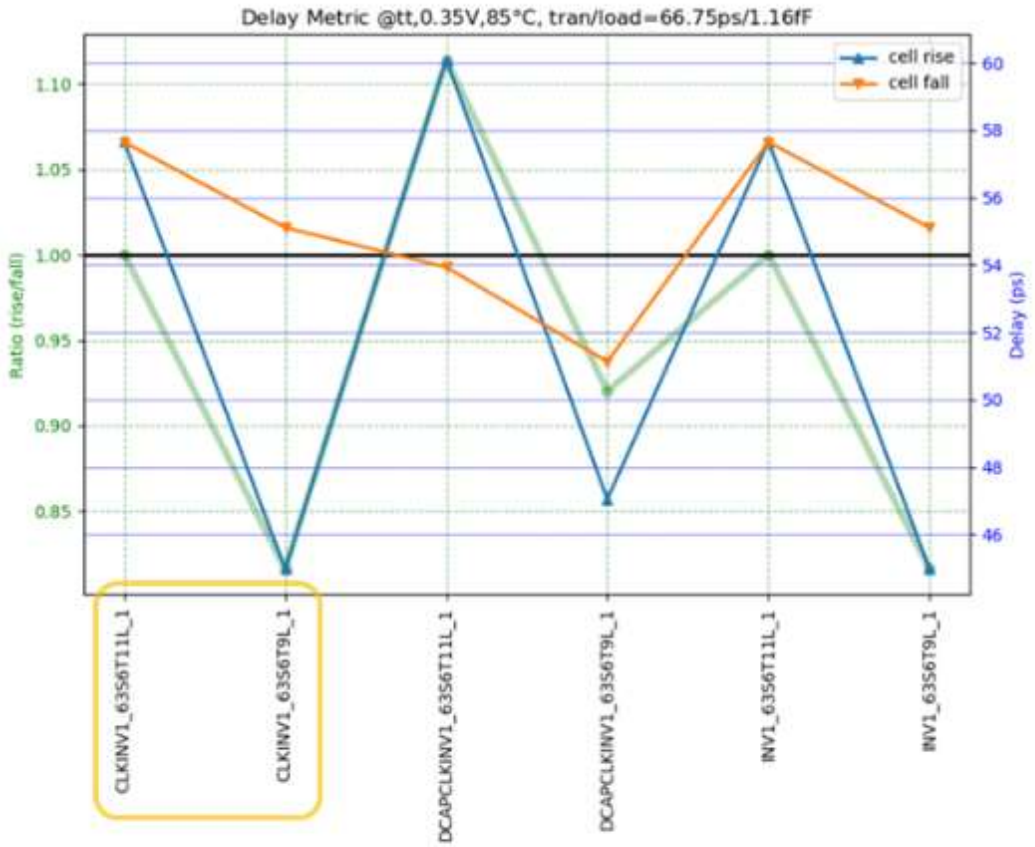

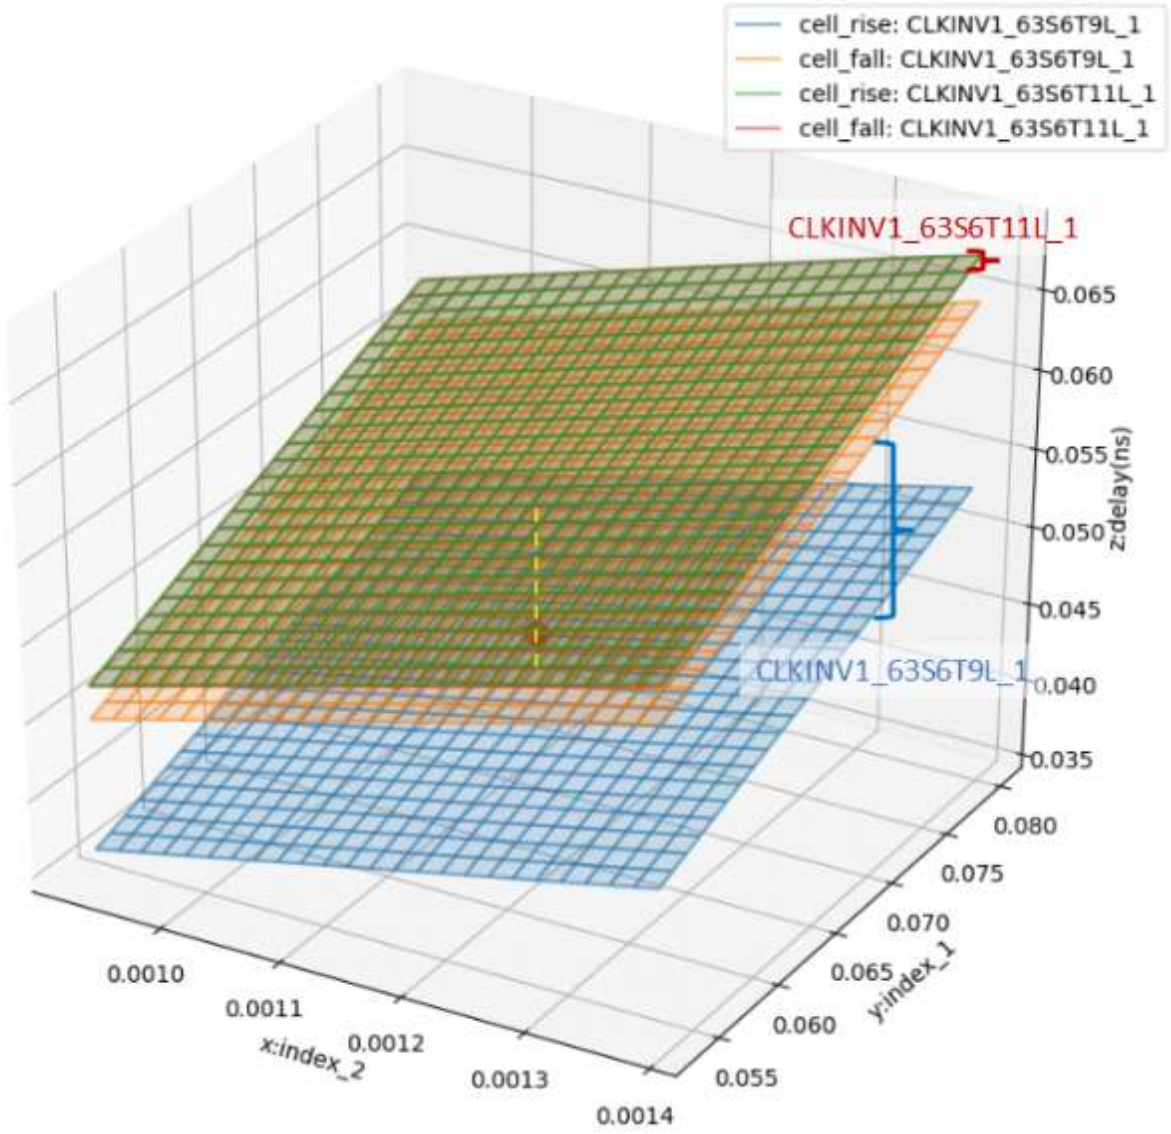

DIGWISE TECHNOLOGY
崚智科技有限公司

Timing Constraint Batch Comparison

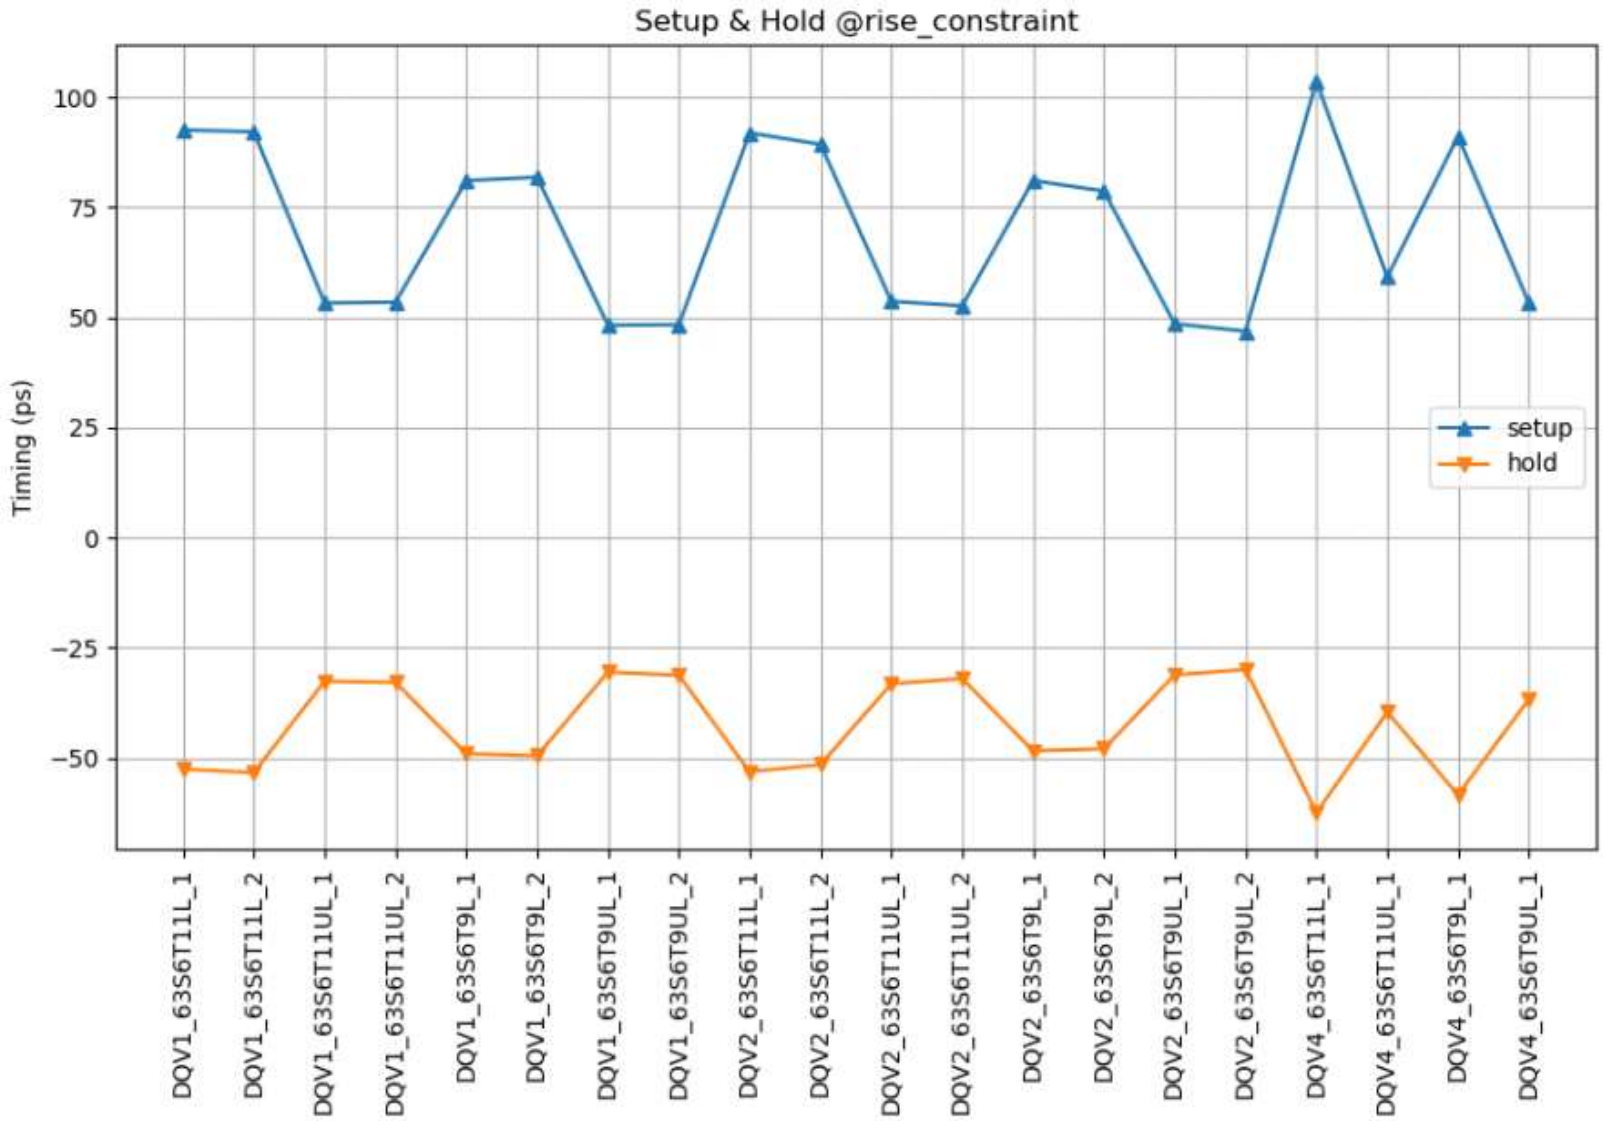

DIGWISE TECHNOLOGY
崛智科技有限公司