



# Parts Catalog - ML-1910/1915 ML-2525/2525W/2580N



1. Speed
  - ML- 2525/2525W/2580N : 24 ppm in A4
  - ML- 1910/1915 : 18 ppm in A4

2. Processor
  - Jupiter4e 150 Mhz
  - Chorus3 360 Mhz (Only 2525W, 2580N)

3. Printer Language Emulations
  - SPL, PCL6 (Only 2580N)

4. Memory
  - 8 MB
  - 64 MB (Only 2525W, 2580N)

5. Interfaces
  - One USB port
  - One 10/100 BaseT network connector (2580N)
  - One IEEE 802.11 b/g wireless LAN (2525W)

6. Toner cartridge
  - Initial : 0.7K (1910/ 1915)  
1K (2525/2525W/2580N)
  - Sales : 1.5K / 2.5K two types

**This Parts Catalog is a property of Samsung Electronics Co.,Ltd.  
Any unauthorized use of this manual can be punished under  
applicable International and/or domestic law.**

# Exploded View and Parts List

## Contents

Power Cord .....	2
Thumbnail .....	3
1. Main .....	4
2. Top Cover.....	6
3. Cover .....	8
4. Front Cover .....	10
5. Rear Cover .....	12
6. Main Frame .....	14
7. Main Drive Bracket (ML-1910) .....	18
8. Main Drive Bracket (ML-2580N) .....	20
9. Base Frame-Pick Up .....	22
10. Fuser .....	24
11. Cassette .....	26


## Power Cord

Power Cord differs by countries. Please check your country code.


Top View	Side View	Part Code
		Usable Country Code
		3903-000020
		XAZ
		3903-000042
		SEE / STS / XSA / XSG XSS / XEV / XEG
		3903-000050
		XFA / XIP
		3903-000067
		XEU / XSS
		3903-000082
		XIL

Top View	Side View	Part Code
		Usable Country Code
		3903-000085
		XAA / XAX
		3903-000133
		KOR
		3903-000146
		XBH
		3903-000182
		ETS
		3903-000227
		TED

## Thumbnail

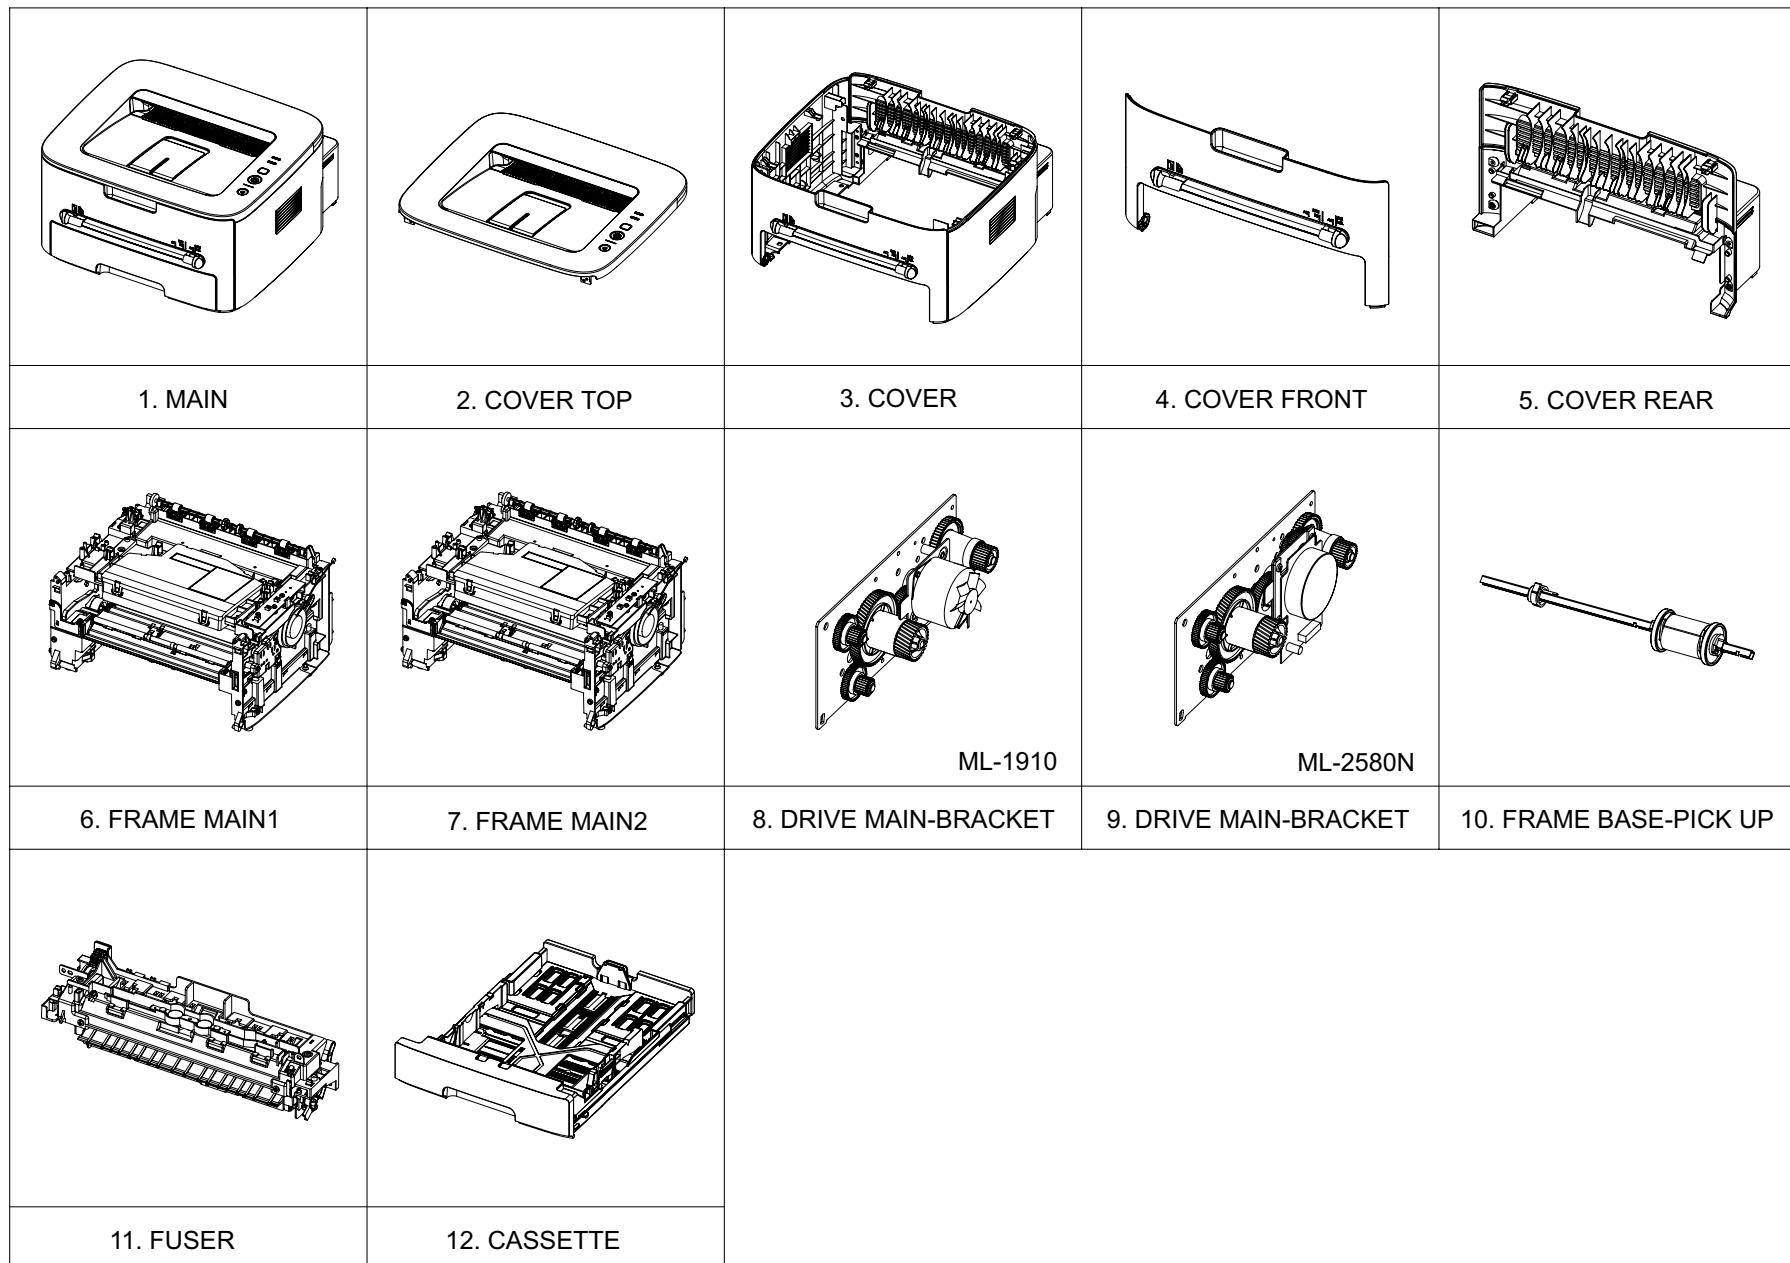

## 1. Main

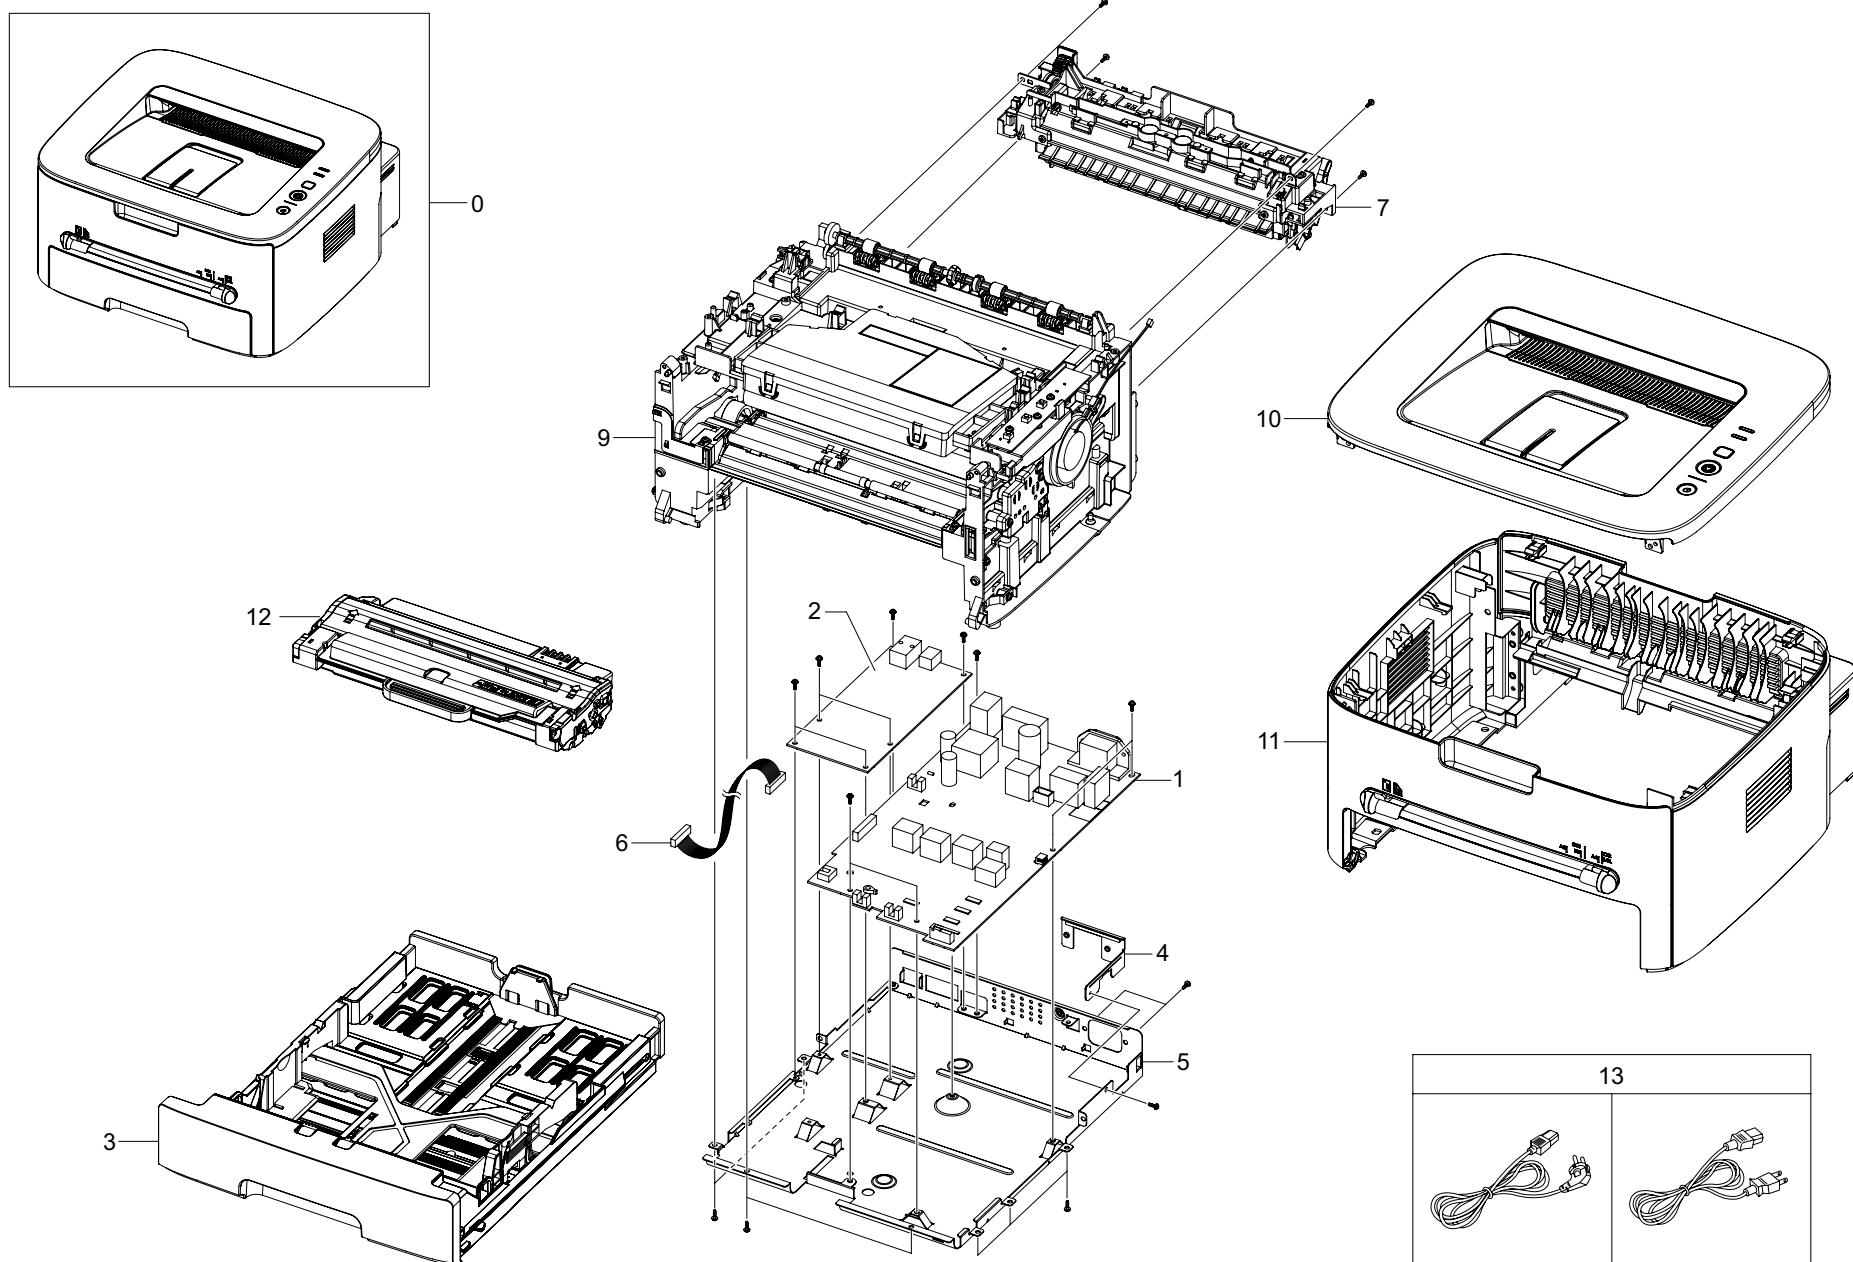


## Main Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	ML-1910	A4 Mono laser printer, 18 ppm	1		
0	ML-1915	A4 Mono laser printer, 18 ppm			
0	ML-2525	A4 Mono laser printer, 24 ppm	1		
0	ML-2525W	A4 Mono laser printer, 24 ppm	1		
0	ML-2580N	A4 Mono laser printer, 24 ppm , Network	1		
1	JC44-00178A	SMPS/HVPS-V1	1	SA	110V
1	JC44-00179A	SMPS/HVPS-V2	1	SA	220V
2	JC92-02135A	PBA-CONTROLLER	1	SA	ML-2580N/Others
2	JC92-02135B	PBA-CONTROLLER	1	SA	ML-2580N/SEE
2	JC92-02135C	PBA-MAIN	1	SA	ML-2580N/XEV
2	JC92-02135D	PBA-MAIN	1	SA	ML-2581N/XIL
2	JC92-02135E	PBA-MAIN	1	SA	ML-2580NK
2	JC92-02135F	PBA-MAIN	1	SA	ML-2580N/ETS
2	JC92-02136A	PBA-CONTROLLER	1	SA	ML-191x/Others
2	JC92-02136B	PBA-CONTROLLER	1	SA	ML-191x/SEE
2	JC92-02136C	PBA-MAIN	1	SA	ML-1910K/1915K
2	JC92-02136D	PBA-MAIN	1	SA	ML-1911/XIL
2	JC92-02137A	PBA-CONTROLLER	1	SA	ML-2525/Others
2	JC92-02137B	PBA-CONTROLLER	1	SA	ML-2525/SEE
2	JC92-02137C	PBA-MAIN	1	SA	ML-2525K
2	JC92-02137D	PBA-MAIN	1	SA	ML-2526/XIL

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC90-00939A	CASSETTE	1	SA	ML-1915/2525
3	JC90-00939B	CASSETTE	1	SA	ML-1910/2580N
4	JC61-00601A	BRACKET-P-INLET	1	SA	
5	JC63-02410A	SHIELD-ENGINE	1	SNA	
6	JC39-01235A	HARNESS-ENGINE	1	SA	ML-1910
6	JC39-00240A	CBF HARNESS-ENGINE	1	SC	ML-2580N
7	JC91-00946A	FUSER	1	SA	110V
7	JC91-00946B	FUSER	1	SA	110V
7	JC91-00945A	FUSER	1	SA	220V
7	JC91-00945B	FUSER	1	SA	220V
9	JC93-00038B	FRAME MAIN	1	SA	ML-1910
9	JC93-00038A	FRAME MAIN	1	SA	ML-2580N
10	JC95-01017B	COVER-TOP	1	SA	ML-1910
10	JC95-01017A	COVER-TOP	1	SA	ML-2580N
10	JC95-01091B	COVER-TOP	1	SA	ML-1915/2525
11	JC95-01020B	COVER	1	SNA	ML-1910
11	JC95-01020A	COVER	1	SNA	ML-2580N
11	JC95-01092B	COVER	1	SNA	ML-1915/2525
12	-	CARTRIDGE-TONER	1	SNA	
13	-	CBF-POWER CORD	1	SA	Refer to Power cord page

## 2. Top Cover

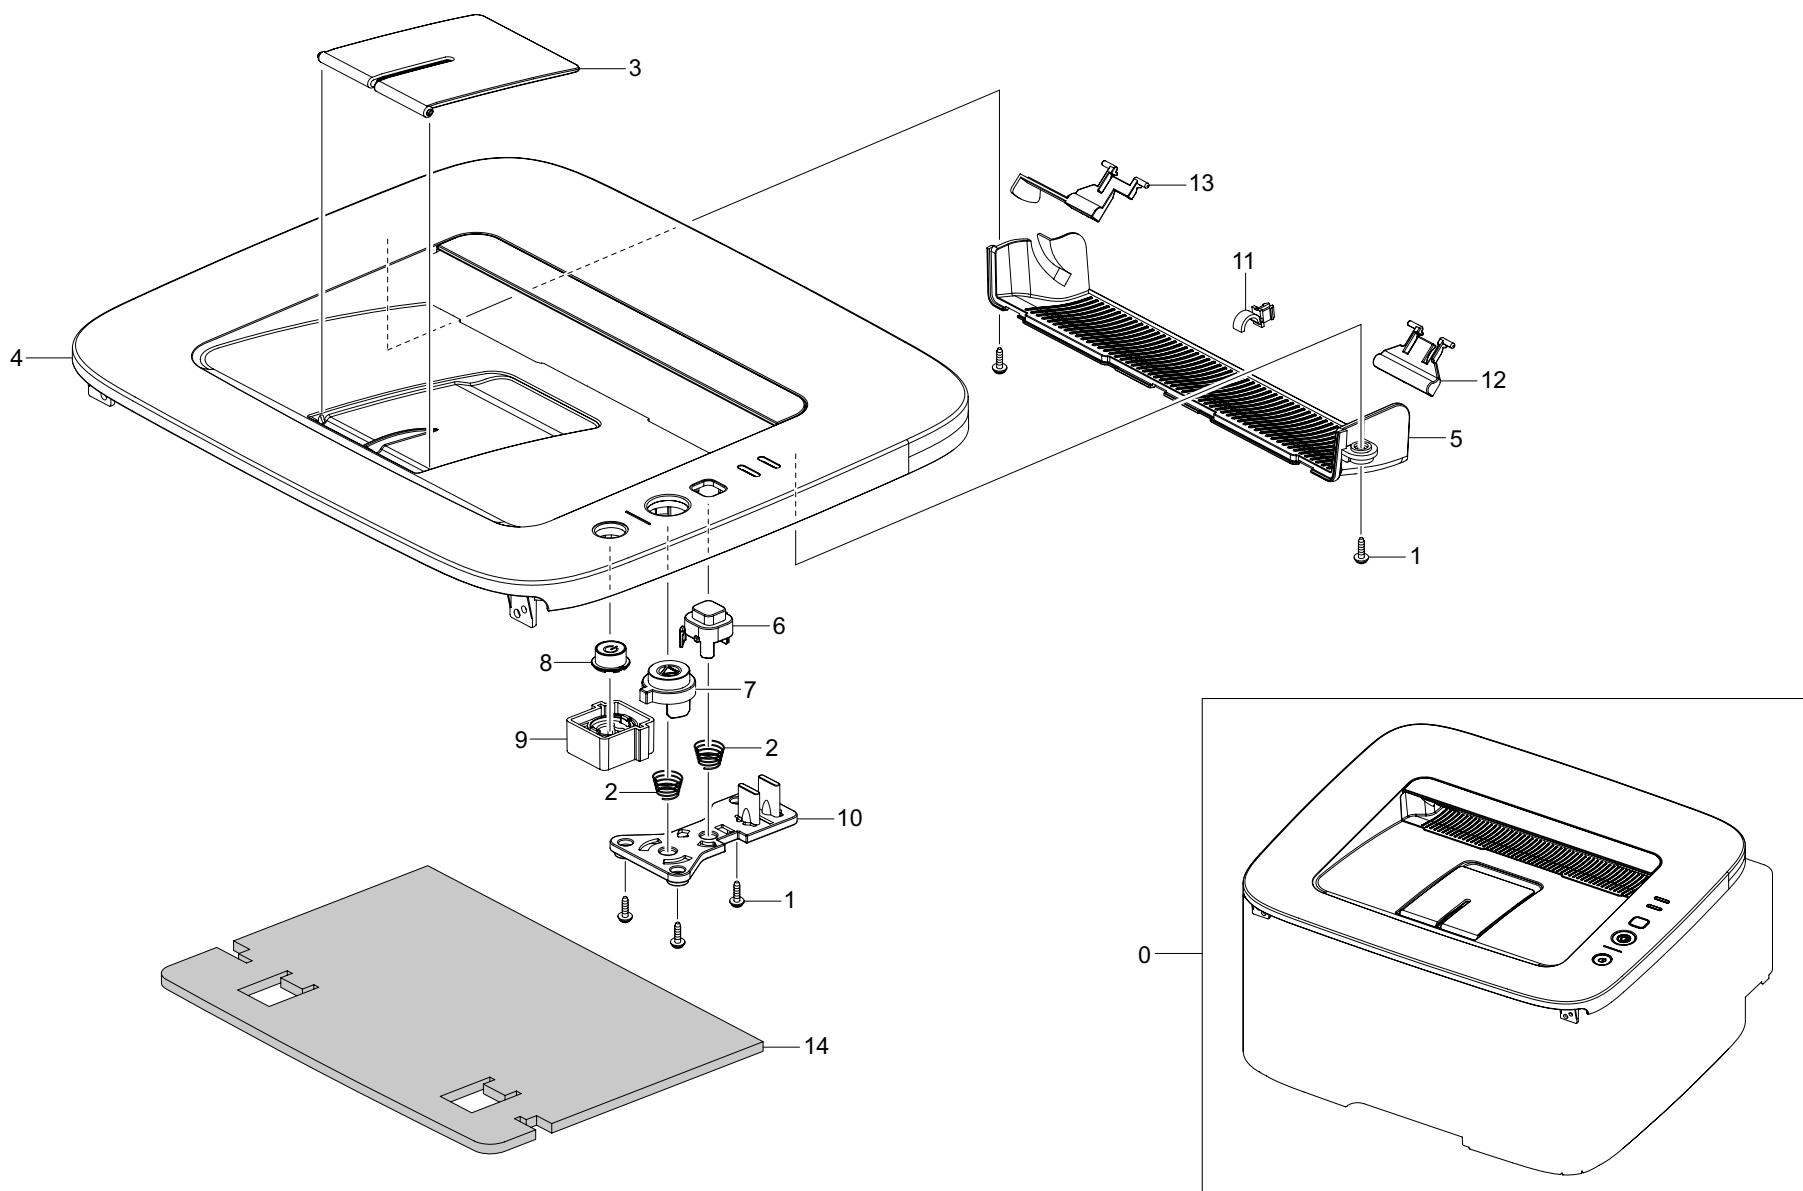


## Top Cover Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01017B	COVER-TOP	1	SA	ML-1910
0	JC95-01017A	COVER-TOP	1	SA	ML-2580N
0	JC95-01091B	COVER-TOP	1	SA	ML-1915/2525
1	6003-000196	SCREW-TAPTYPE	5	SA	
2	6107-001169	SPRING-CS	2	SA	
3	JC72-01346H	PMO-STACKER	1	SA	ML-1910/2580N
3	JC72-01346J	PMO-STACKER	1	SA	ML-1915/2525
4	JC63-02335B	COVER-TOP	1	SNA	ML-1910
4	JC63-02335A	COVER-TOP	1	SNA	ML-2580N
4	JC63-02416A	COVER-TOP	1	SNA	ML-1915
4	JC63-02416B	COVER-TOP	1	SNA	ML-2525
5	JC63-02390A	COVER-EXIT	1	SNA	ML-1910/2580N

Drawer#	SEC_Code	Description	QT'y	Service	Remark
5	JC63-02390B	COVER-EXIT	1	SNA	ML-1915/2525
6	JC64-00500A	KEY-PRINT_SCREEN	1	SA	
7	JC64-00501A	KEY-START	1	SA	ML-1910/2580N
7	JC64-00501B	KEY-START	1	SA	ML-1915/2525
8	JC64-00502A	KEY-POWER	1	SA	ML-1910/2580N
8	JC64-00502B	KEY-POWER	1	SA	ML-1915/2525
9	JC64-00504A	KEY-POWER HOLDER	1	SA	
10	JC67-00413A	LENS-LED	1	SNA	
11	JC72-00387A	PMO-BUSHING_F/DOWN	1	SA	
12	JC72-01343A	PMO-SUB_M_STACKER	1	SA	
13	JC61-03446A	STACKER-BIN-FULL	1	SNA	
14	JC72-01565A	SPONGE-COVER_TOP	1	SNA	ML-2580N

### 3. Cover

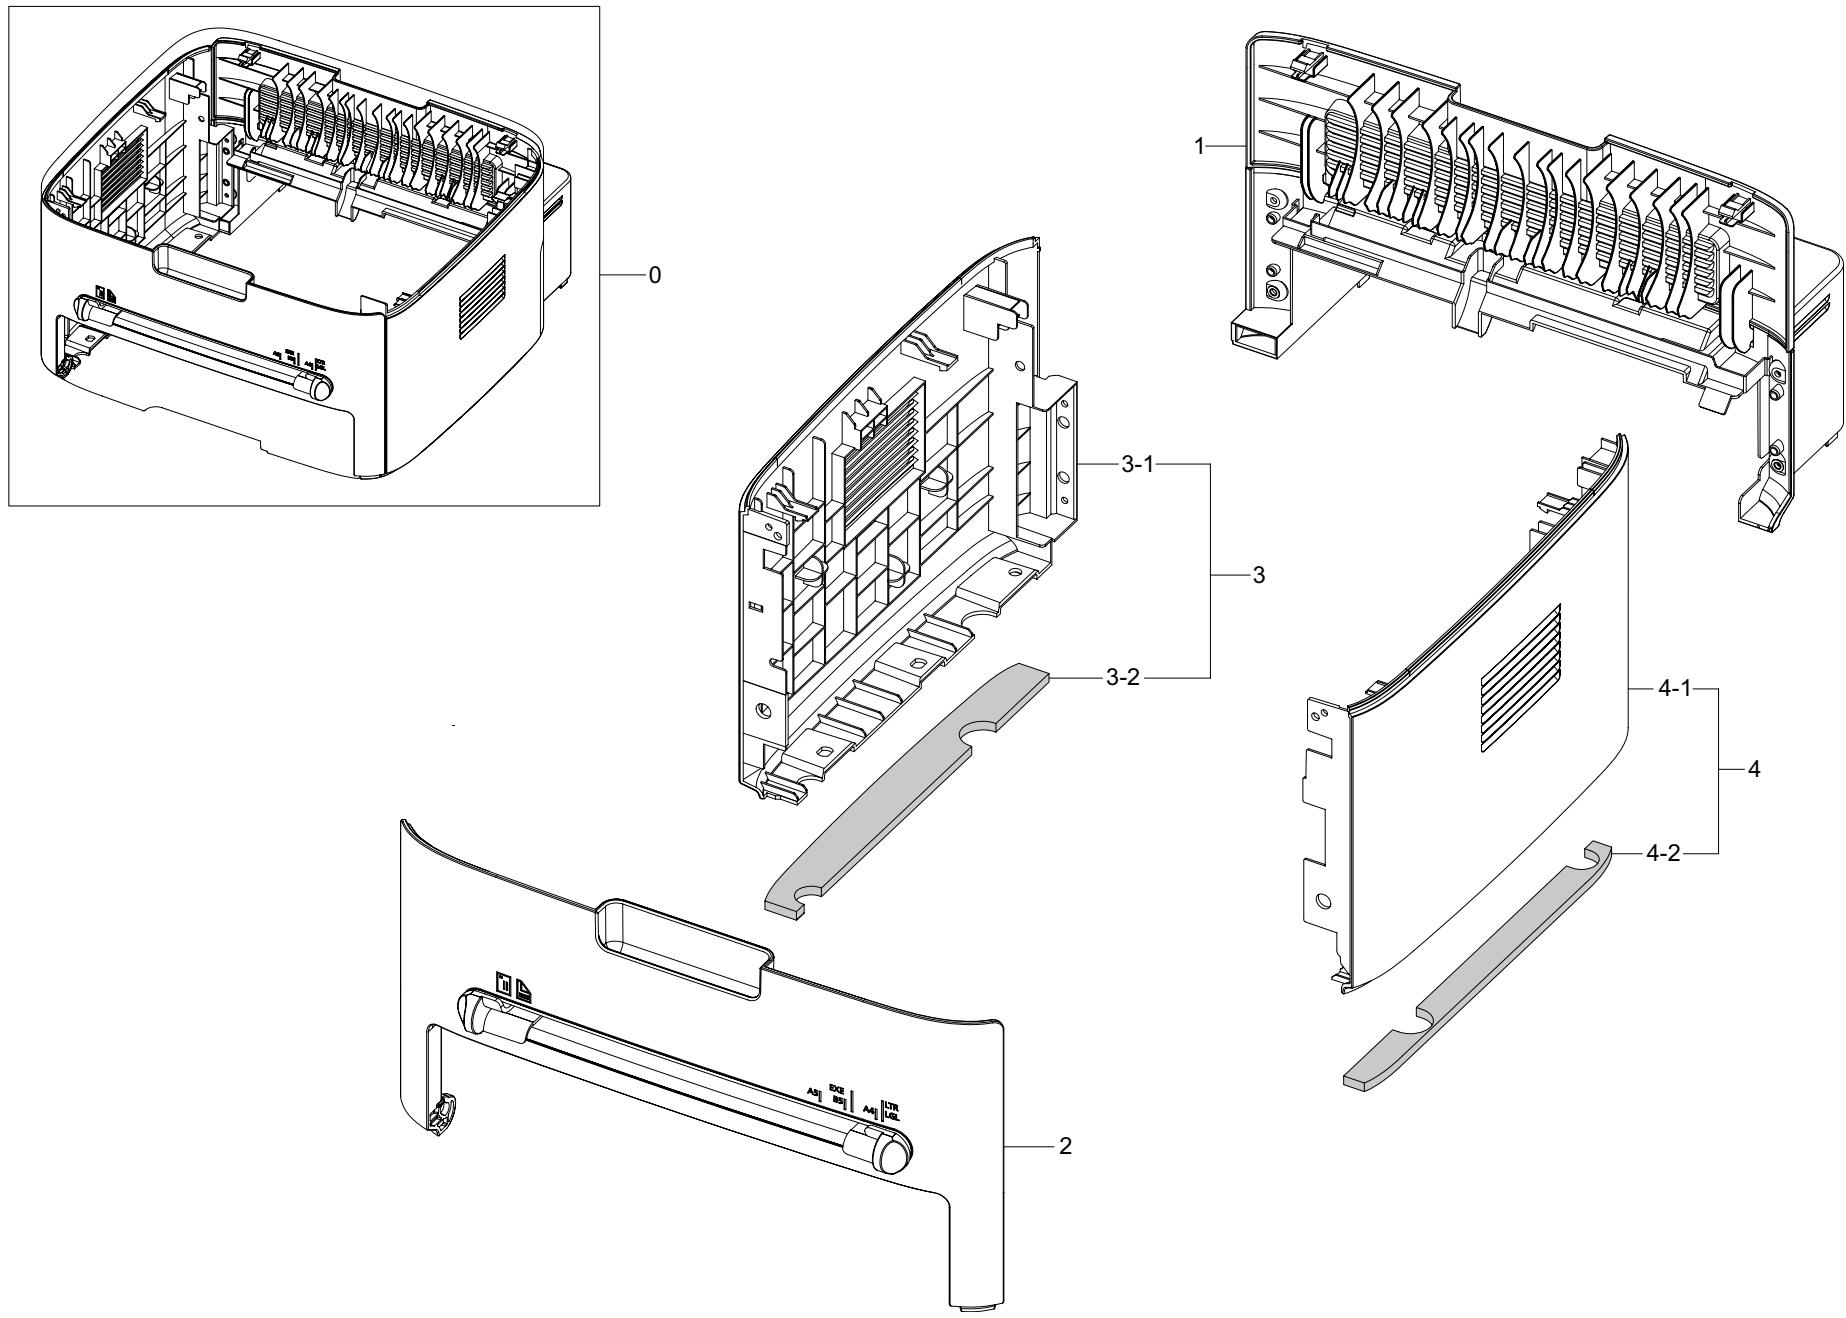


**Cover Parts List**

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01020B	COVER	1	SA	ML-1910
0	JC95-01020A	COVER	1	SA	ML-2580N
0	JC95-01092A	COVER	1	SA	ML-1915
0	JC95-01092B	COVER	1	SA	ML-2525
1	JC95-01018B	COVER-REAR	1	SA	ML-1910
1	JC95-01018A	COVER-REAR	1	SA	ML-2580N
1	JC95-01093A	COVER-REAR	1	SA	ML-1915
1	JC95-01093B	COVER-REAR	1	SA	ML-2525
2	JC95-01019A	COVER-FRONT	1	SA	ML-1910/2580N
2	JC95-01019B	COVER-FRONT	1	SA	ML-1915/2525
3	JC63-02392A	COVER-LEFT	1	SNA	ML-1910

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC63-02392B	COVER-LEFT	1	SNA	ML-1915
3	JC95-01139B	COVER-LEFT	1	SNA	ML-2525
3	JC95-01139A	COVER-LEFT	1	SNA	ML-2580N
3-1	JC63-02392A	COVER-LEFT	1	SNA	ML-2580N
3-2	JC72-01566A	SPONGE-COVER_LEFT	1	SNA	ML-2580N
4	JC63-02393A	COVER-RIGHT	1	SNA	ML-1910
4	JC63-02393B	COVER-RIGHT	1	SNA	ML-1915
4	JC95-01140B	COVER-RIGHT	1	SNA	ML-2525
4	JC95-01140A	COVER-RIGHT	1	SNA	ML-2580N
4-1	JC63-02393A	COVER-RIGHT	1	SNA	ML-2581N
4-2	JC72-01567A	SPONGE-COVER_RIGHT	1	SNA	ML-2582N

#### 4. Front Cover

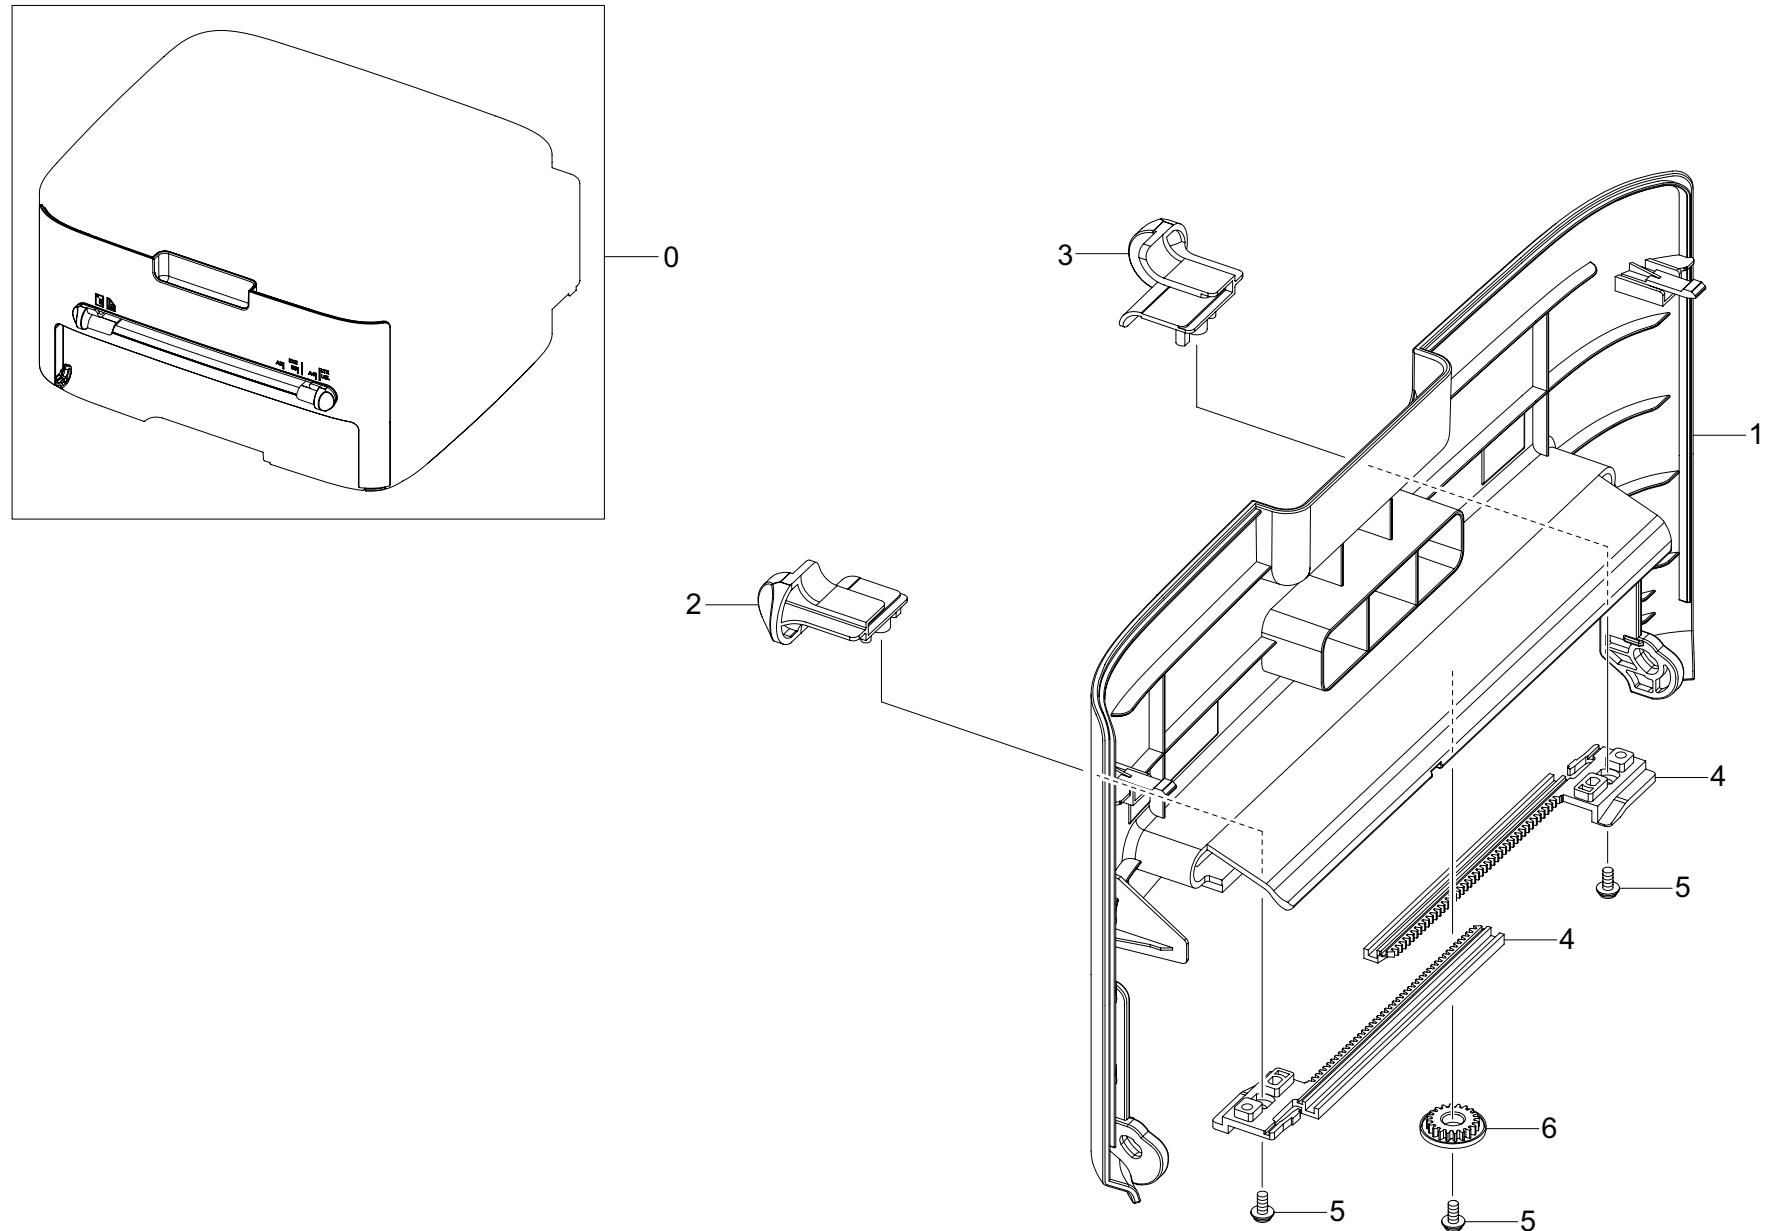



## Front Cover Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01019A	COVER-FRONT	1	SA	ML-1910/2580N
0	JC95-01019B	COVER-FRONT	1	SA	ML-1915/2525
1	JC63-02396A	COVER-FRONT	1	SNA	ML-1910/2580N
1	JC63-02396B	COVER-FRONT	1	SNA	ML-1915/2525
2	JC70-00477G	ADJUST-MENUAL_R	1	SA	ML-1910/2580N
2	JC70-00477F	ADJUST-MENUAL_R	1	SA	ML-1915/2525

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3	JC70-00476G	ADJUST-MENUAL_L	1	SA	ML-1910/2580N
3	JC70-00476F	ADJUST-MENUAL_L	1	SA	ML-1915/2525
4	JC70-00304A	ADJUST RACK-M-MANUAL	2	SA	
5	6003-000264	SCREW-TAPTYPE	3	SNA	
6	JC66-00387A	GEAR-RACK_PINION	1	SA	

## 5. Rear Cover

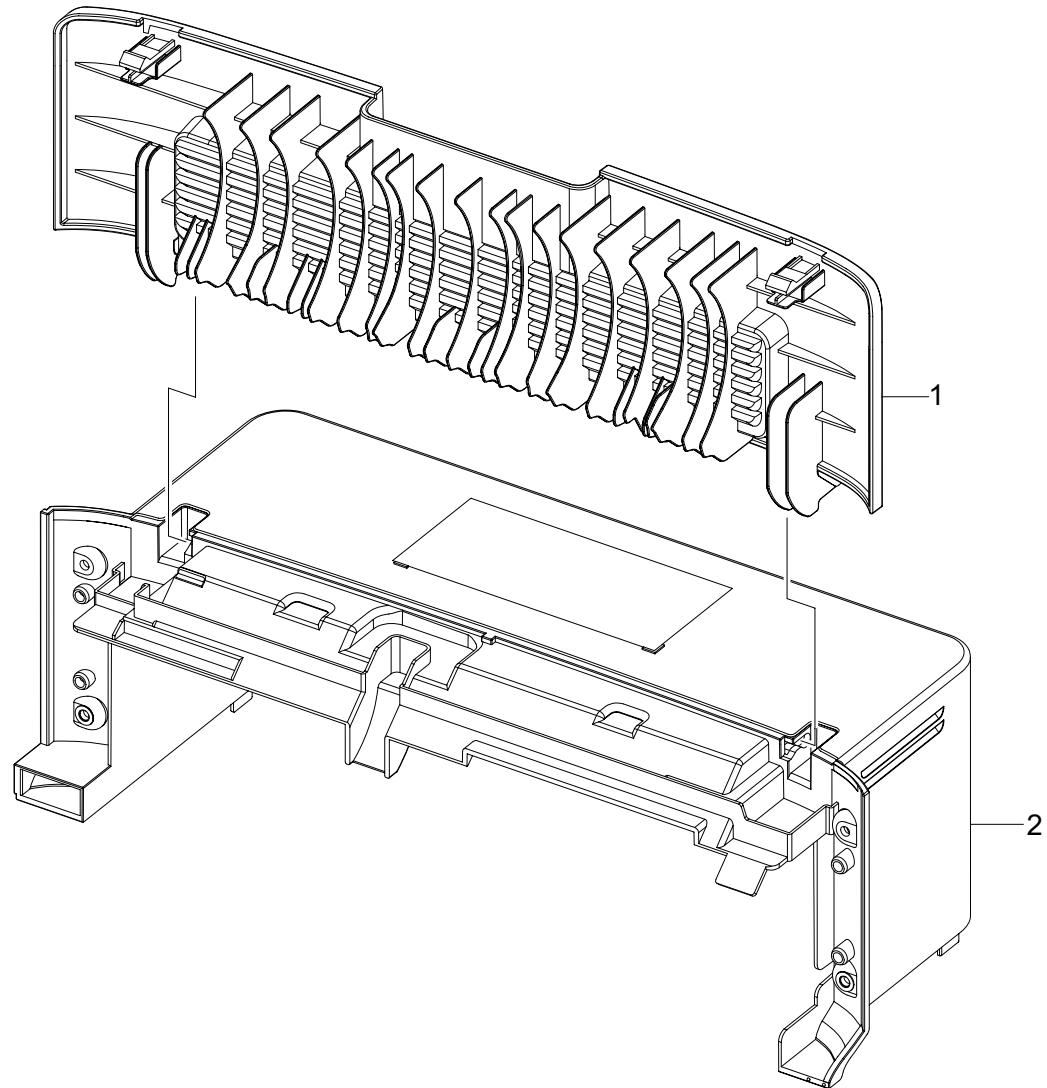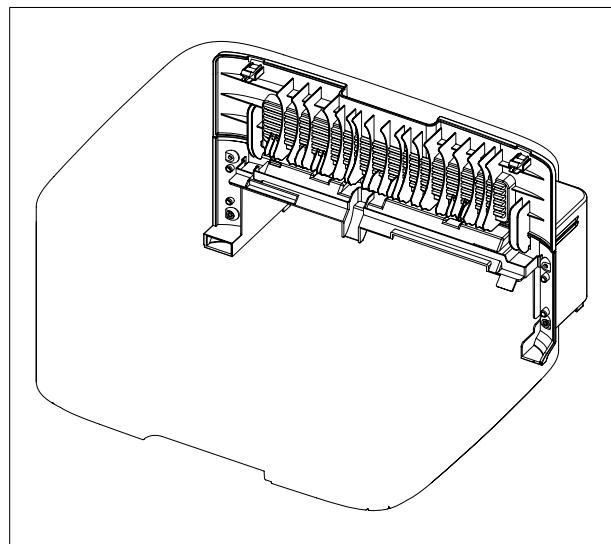


## Rear Cover Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC95-01018B	COVER-REAR	1	SA	ML-1910
0	JC95-01018A	COVER-REAR	1	SA	ML-2580N
0	JC95-01093A	COVER-REAR	1	SA	ML-1915/2525
1	JC63-02395B	COVER-REAR-DOWN	1	SNA	ML-1910

Drawer#	SEC_Code	Description	QT'y	Service	Remark
1	JC63-02395A	COVER-REAR-DOWN	1	SNA	ML-2580N
1	JC63-02417B	COVER-REAR-DOWN	1	SNA	ML-1915/2525
2	JC63-02394A	COVER-REAR	1	SNA	ML-1910/2580N
2	JC63-02394A	COVER-REAR	1	SNA	ML-1915/2525

## 6. Main Frame 1

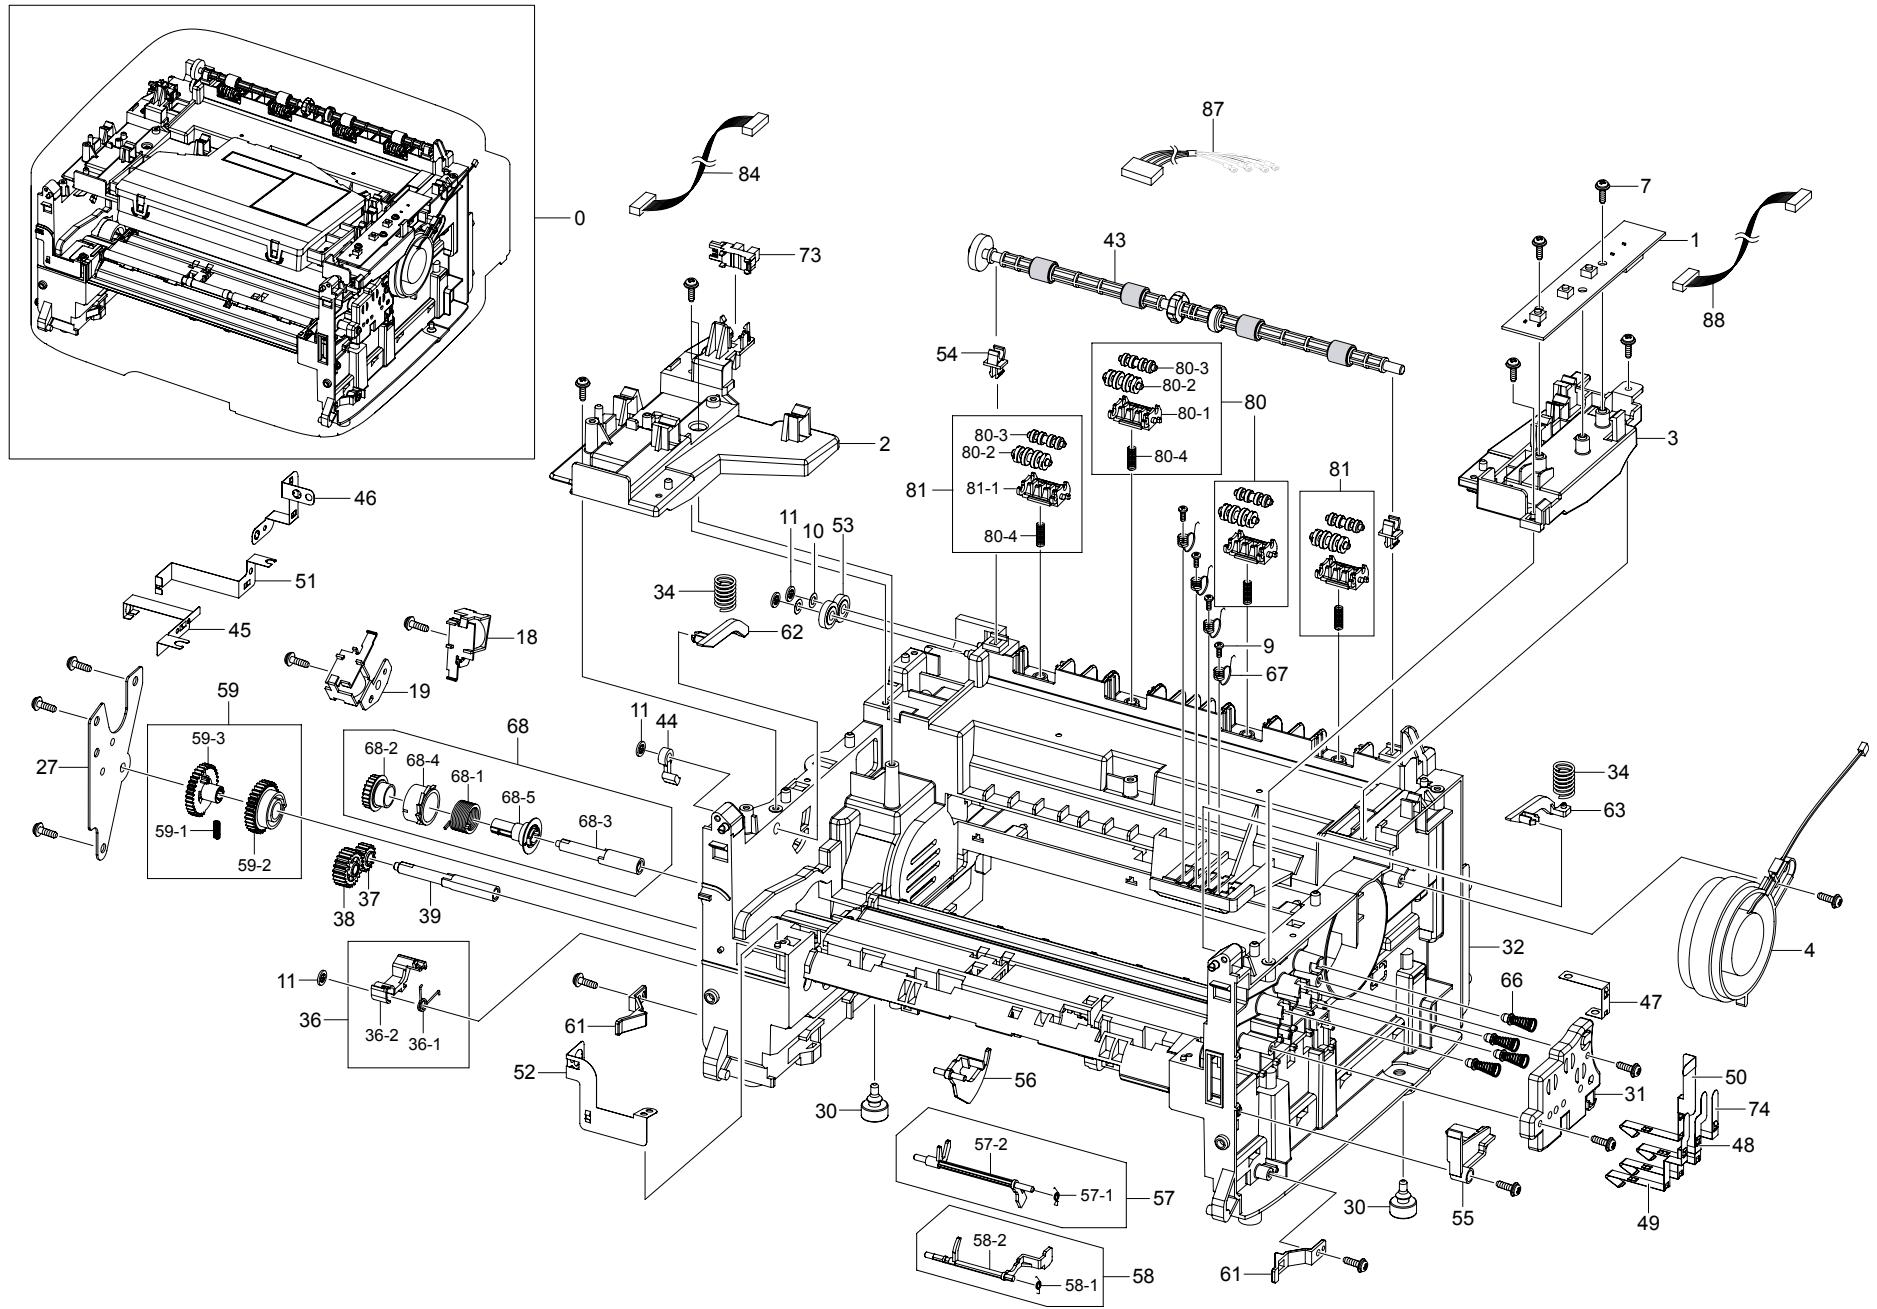

## Main Frame 2

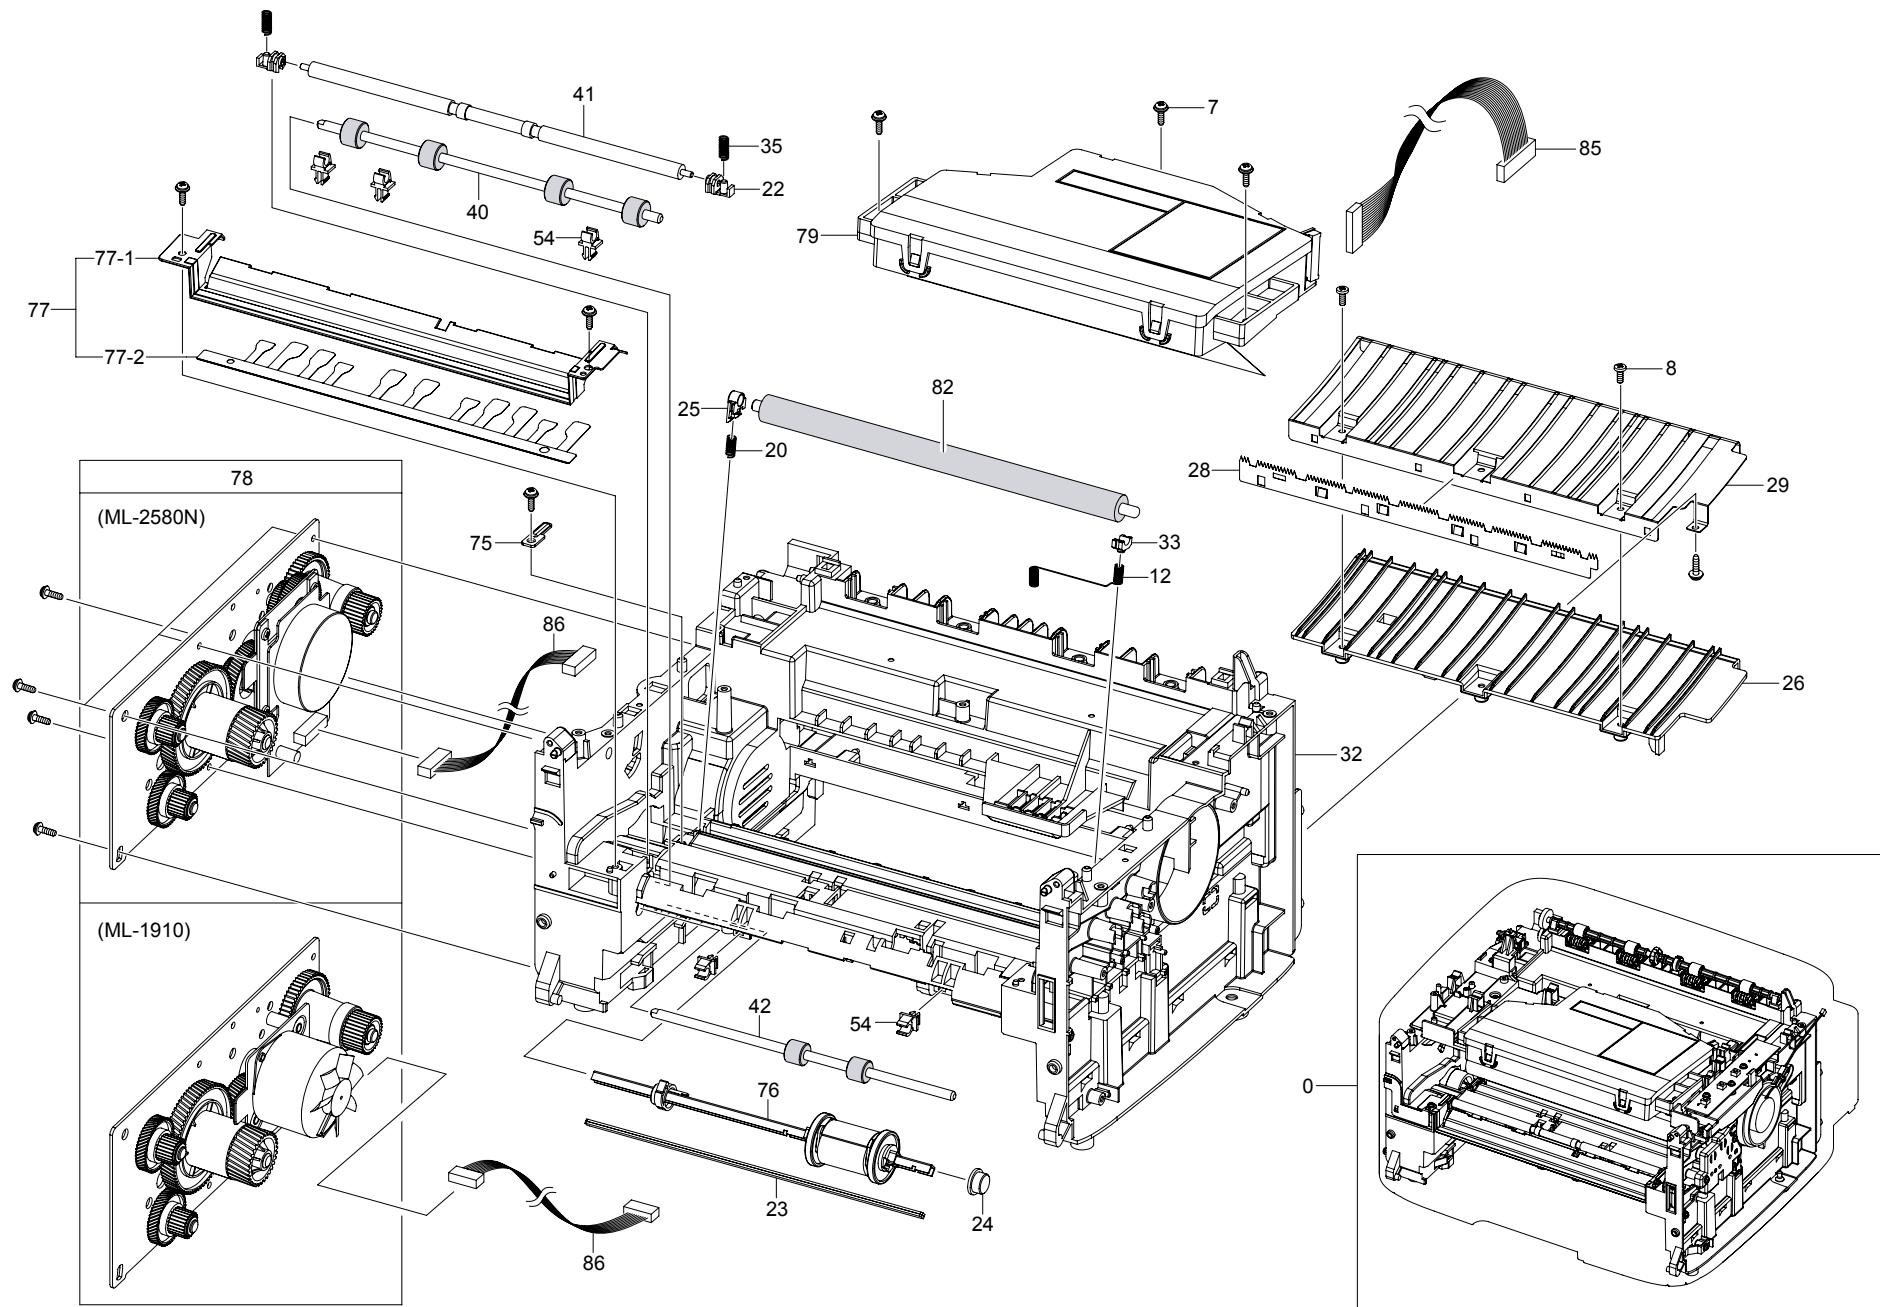

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00038B	FRAME MAIN	1	SA	ML-1910/1915
0	JC93-00038A	FRAME MAIN	1	SA	ML-2525/2580N
1	JC92-02138A	PBA-OPE	1	SA	
2	JC61-03447A	FRAME-HOLDER_LSU_L	1	SNA	
3	JC61-03448A	FRAME-HOLDER_LSU_R	1	SNA	
4	JC31-00087A	FAN-DC	1	SA	ML-2580N
7	6003-000196	SCREW-TAPTYPE	32	SA	
8	6003-000282	SCREW-TAPTYPE	2	SNA	
9	6002-000308	SCREW-TAPTYPE	4	SNA	
10	6031-001051	WASHER-PLAIN	2	SNA	
11	6044-000001	RING-CS	4	SA	
12	6107-001162	SPRING-ETC	1	SA	
18	JC33-00026A	SOLENOID-PICK UP	1	SA	
19	JC33-00025B	SOLENOID-MANUAL	1	SA	
20	6107-001370	SPRING-CS	1	SA	
22	JC61-00585A	BUSH-M-FEED IDLE	2	SA	
23	JC66-00720A	SHAFT-P-CORE	2	SA	
24	JC61-00587A	BUSH-M-PICK_UP R	1	SA	
25	JC61-00588A	BUSH-M-TR L	1	SA	
26	JC61-00594A	GUIDE-M-TR RIB	1	SA	
27	JC61-00602A	BRACKET-P-FEED	1	SA	
28	JC61-00604A	PLATE-P-SAW	1	SA	
29	JC61-00607A	GUIDE-P-TR	1	SA	
30	JC61-40001A	FOOT-ML80	2	SA	
31	JC61-03467A	HOUSING-TERMINAL	1	SNA	
32	JC61-03322A	FRAME-BASE	1	SNA	
33	JC61-02468A	BUSH-TR_L	1	SA	
34	JC61-70932A	SPRING ETC-GUIDE DEVE	2	SA	
35	JC61-70958A	SPRING ETC-TR	2	SA	
36	JC93-00106A	FRAME-LEFT STOPPER PICK UP	1	SA	
36-1	6107-001170	SPRING-TS	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
36-2	JC66-00377A	CAM-M-PICK_UP	1	SA	
37	JC66-00394A	GEAR-FEED 2	1	SA	
38	JC66-00396A	GEAR-IDLE 23	1	SA	
39	JC66-00398A	SHAFT-FEED	1	SA	
40	JC66-00526B	ROLLER-REGI	1	SA	
41	JC66-00527A	SHAFT-FEED IDLE	1	SA	
42	JC66-00598A	ROLLER-FEED	1	SA	
43	JC93-00097A	FRAME-ROLLER EXIT FACE DOWN	1	SA	
44	JC61-03524A	STOPPER-LEVER_DR	1	SA	
45	JC70-00308A	IPR-P-GROUND_DRIVE	1	SNA	
46	JC63-02411A	GROUND-FUSER	1	SNA	
47	JC70-00311A	IPR-P-GROUND_TR	1	SNA	
48	JC65-00042A	TERMINAL-CON	1	SA	
49	JC65-00041A	TERMINAL-SUPPLY	1	SA	
50	JC65-00043A	TERMINAL-CR	1	SA	
51	JC70-00335A	IPR-P_GROUND_DRIVE2	1	SNA	
52	JC70-00458A	IPR-P-GROUND_GUIDE PAPER	1	SNA	
53	JC72-00143A	PMO-GEAR_EXIT_DRV16	2	SNA	
54	JC72-00382B	PMO-BUSHING FEED	7	SA	
55	JC72-00974A	PMO-ACTUATOR CVR OPEN	1	SA	
56	JC72-00975A	PMO-ACTUATOR EMPTY	1	SA	
57	JC93-00110A	FRAME-LOWER ACTUATOR FEED	1	SA	
57-1	6107-001164	SPRING-TS	1	SA	
57-2	JC72-00976A	PMO-ACTUATOR FEED	1	SA	
58	JC93-00109A	FRAME-LOWER ACTUATOR MANUAL	1	SA	
58-1	6107-001165	SPRING-TS	1	SA	
58-2	JC72-00977A	PMO-ACTUATOR MANUAL	1	SA	
59	JC97-03141A	MEA UNIT-GEAR_PICKUP	1	SA	
59-1	6107-001167	SPRING-CS	1	SA	
59-2	JC72-00979A	PMO-GEAR PICK_UP A	1	SC	
59-3	JC72-00980A	PMO-GEAR PICK_UP B	1	SC	


## Main Frame Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
61	JC72-00983A	PMO-LOCKER CST	2	SA	
62	JC72-00984A	PMO-PLATE GUIDE DEVE_L	1	SA	
63	JC72-00985A	PMO-PLATE GUIDE DEVE_R	1	SA	
66	JC75-00049A	MEC-TERMINAL	4	SA	
67	JC65-00019A	TERMINAL-CRUM	4	SA	
68	JC97-01788A	MEA UNIT-CLUTCH	1	SA	
68-1	6107-001171	SPRING-TS	1	SA	
68-2	JC66-00393A	GEAR-FEED 1	1	SA	
68-3	JC66-00398A	SHAFT-FEED	1	SA	
68-4	JC72-00978A	PMO-COLLAR_SPRING	1	SA	
68-5	JC72-00981A	PMO-HUB CLUTCH	1	SNA	
73	0604-001393	PHOTO-INTERRUPTER	1	SA	
74	JC70-00312A	IPR-P-TERMINAL CON	1	SA	
75	JC61-03440A	BRACKET-BUSH_TR L	1	SA	
76	JC93-00085A	FRAME BASE-PICK UP	1	SA	
77	JC93-00108A	FRAME-FRONT GUIDE PAPER	1	SA	
77-1	JC61-00718A	GUIDE-P-PAPER	1	SA	
77-2	JC63-02483A	SHEET-GUIDE_PAPER	1	SA	
78	JC93-00083A	DRIVE MAIN-BRACKET	1	SA	ML-1910

Drawer#	SEC_Code	Description	QT'y	Service	Remark
78	JC93-00003A	DRIVE MAIN-BRACKET	1	SA	ML-2580N
79	JC97-03585A	LSU	1	SNA	
80	JC93-00107A	FRAME-ROLLER DECURL	2	SA	
80-1	JC61-01172A	HOLDER-M-EXIT F/DOWN	1	SNA	
80-2	JC66-00830A	ROLLER-M-EXIT FR	1	SA	
80-3	JC66-00824A	ROLLER-M-EXIT MAIN	1	SA	
80-4	6107-001163	SPRING-CS	1	SA	
81	JC93-00107B	FRMAE-ROLLER DECURL	2	SA	
81-1	JC61-02702B	HOLDER-EXIT ROLLER			
80-2	JC66-00830A	ROLLER-M-EXIT FR	1	SA	
80-3	JC66-00824A	ROLLER-M-EXIT MAIN	1	SA	
80-4	6107-001163	SPRING-CS	1	SA	
84	JC39-01066A	HARNESS-BINFULL	1	SA	
85	JC39-01067A	HARNESS-LSU	1	SA	
86	JC39-01083A	HARNESS-STEP_MOTOR_CLUTCH	1	SA	ML-1910
86	JC39-01080A	HARNESS-BLDC_MOTOR_CLUTCH	1	SA	ML-2580N
87	JC39-01081A	HARNESS-CRUM	1	SA	
88	JC39-01228A	HARNESS-OPE	1	SNA	

## 7. Main Drive Bracket (ML-1910)

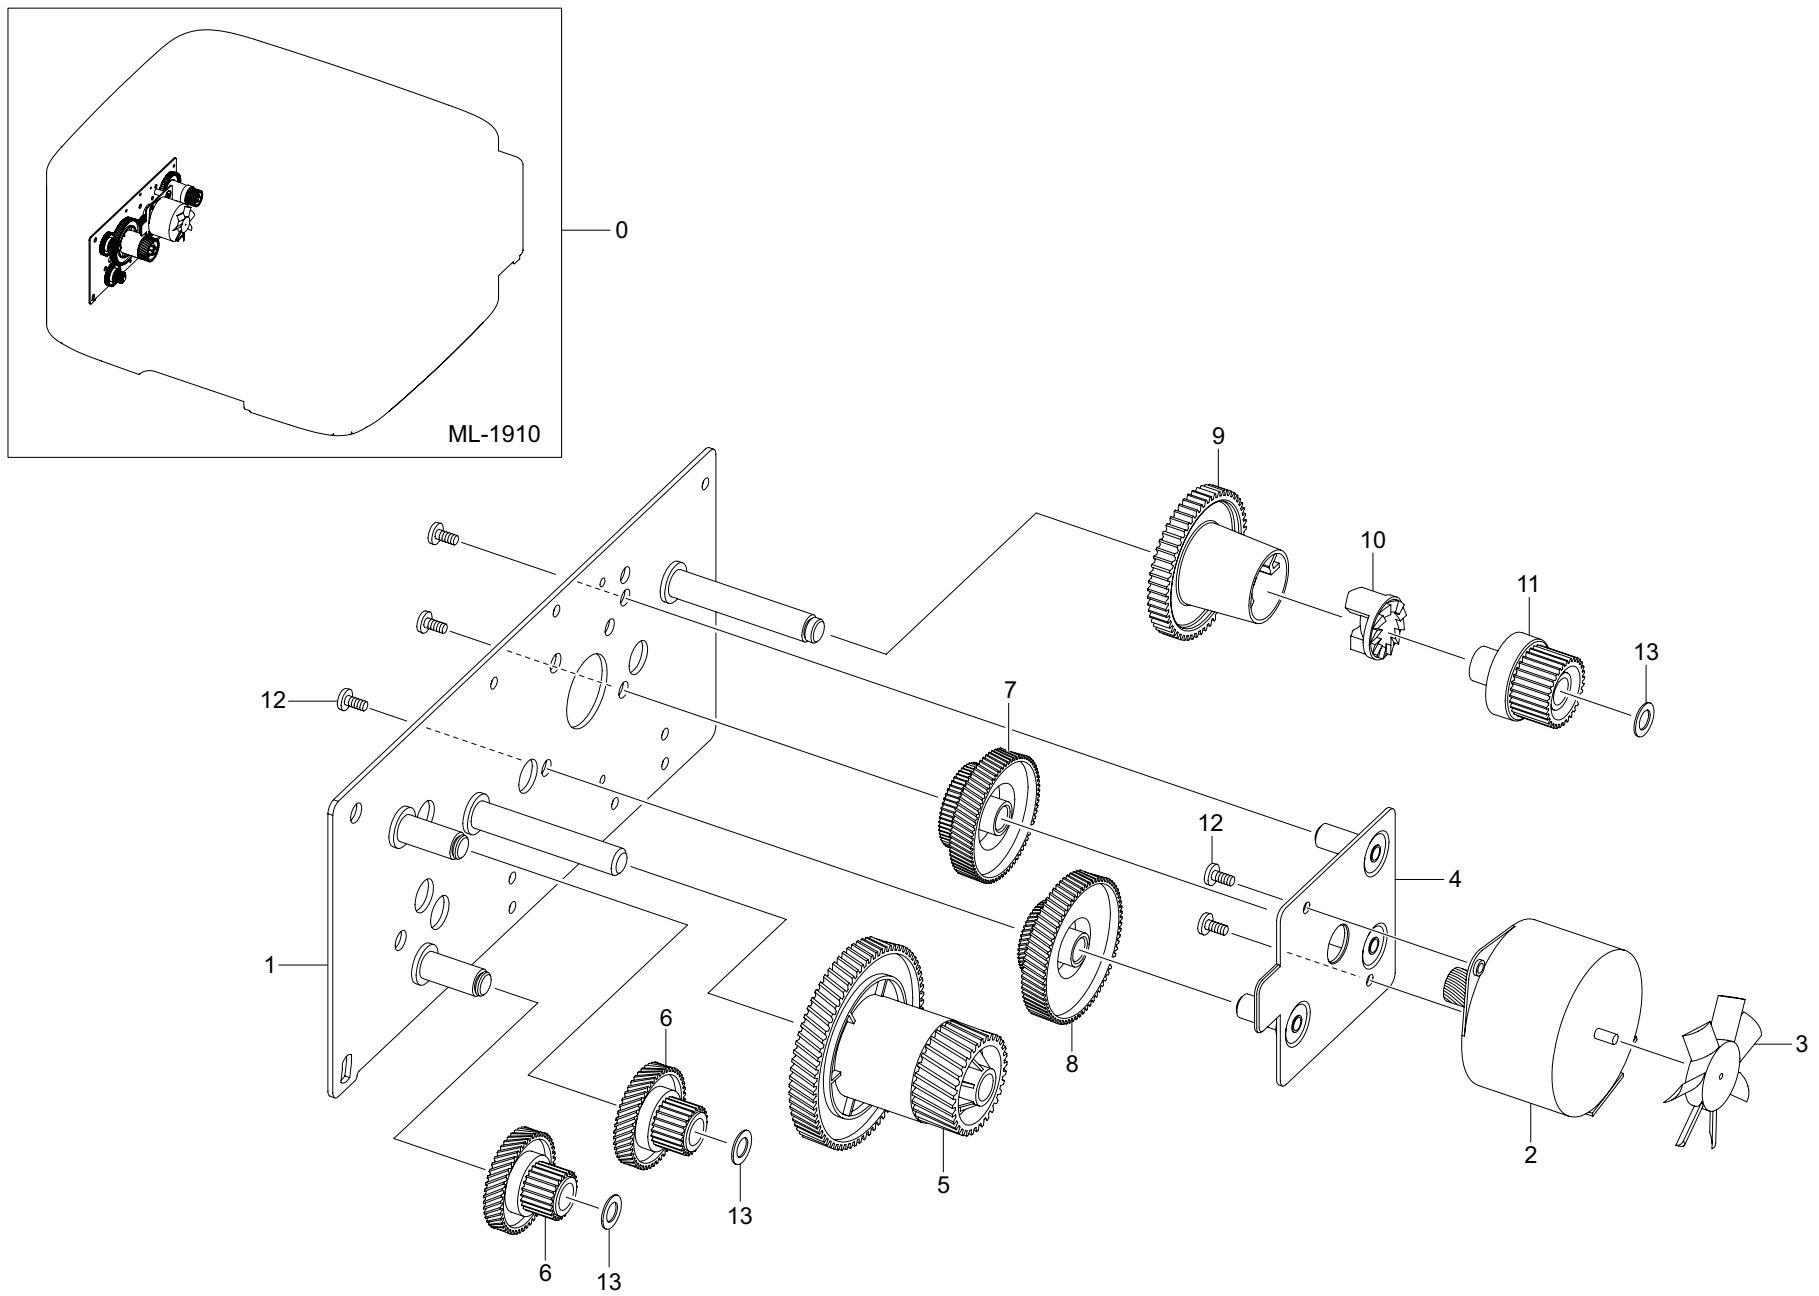


## Main Drive Bracket (ML-1910) Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00083A	DRIVE MAIN-BRACKET	1	SA	ML-1910
1	JC61-00598B	BRACKET-P-GEAR 1400	1	SC	
2	JC31-00028D	MOTOR STEP	1	SNA	
3	JC72-00825A	PMO-IMPELLER_DRV	1	SA	
4	JC61-03395A	BRACKET-MOTOR_STEP	1	SA	
5	JC66-02316A	GEAR-RDCN_OPC	1	SA	
6	JC66-00389A	GEAR-RDCN 57/18	2	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
7	JC66-00392A	GEAR-RDCN 90/31	1	SA	
8	JC66-00390A	GEAR-RDCN 103/41	1	SA	
9	JC66-01203A	GEAR-DRV FUSER OUT	1	SA	
10	JC66-00340A	GEAR-HUB CLUTCH	1	SA	
11	JC66-01202A	GEAR-DRV FUSER IN	1	SA	
12	6003-000269	SCREW-TAPTYPE	5	SA	
13	6031-000023	WASHER-PLAIN	3	SA	

## 8. Main Drive Bracket (ML-2580N)

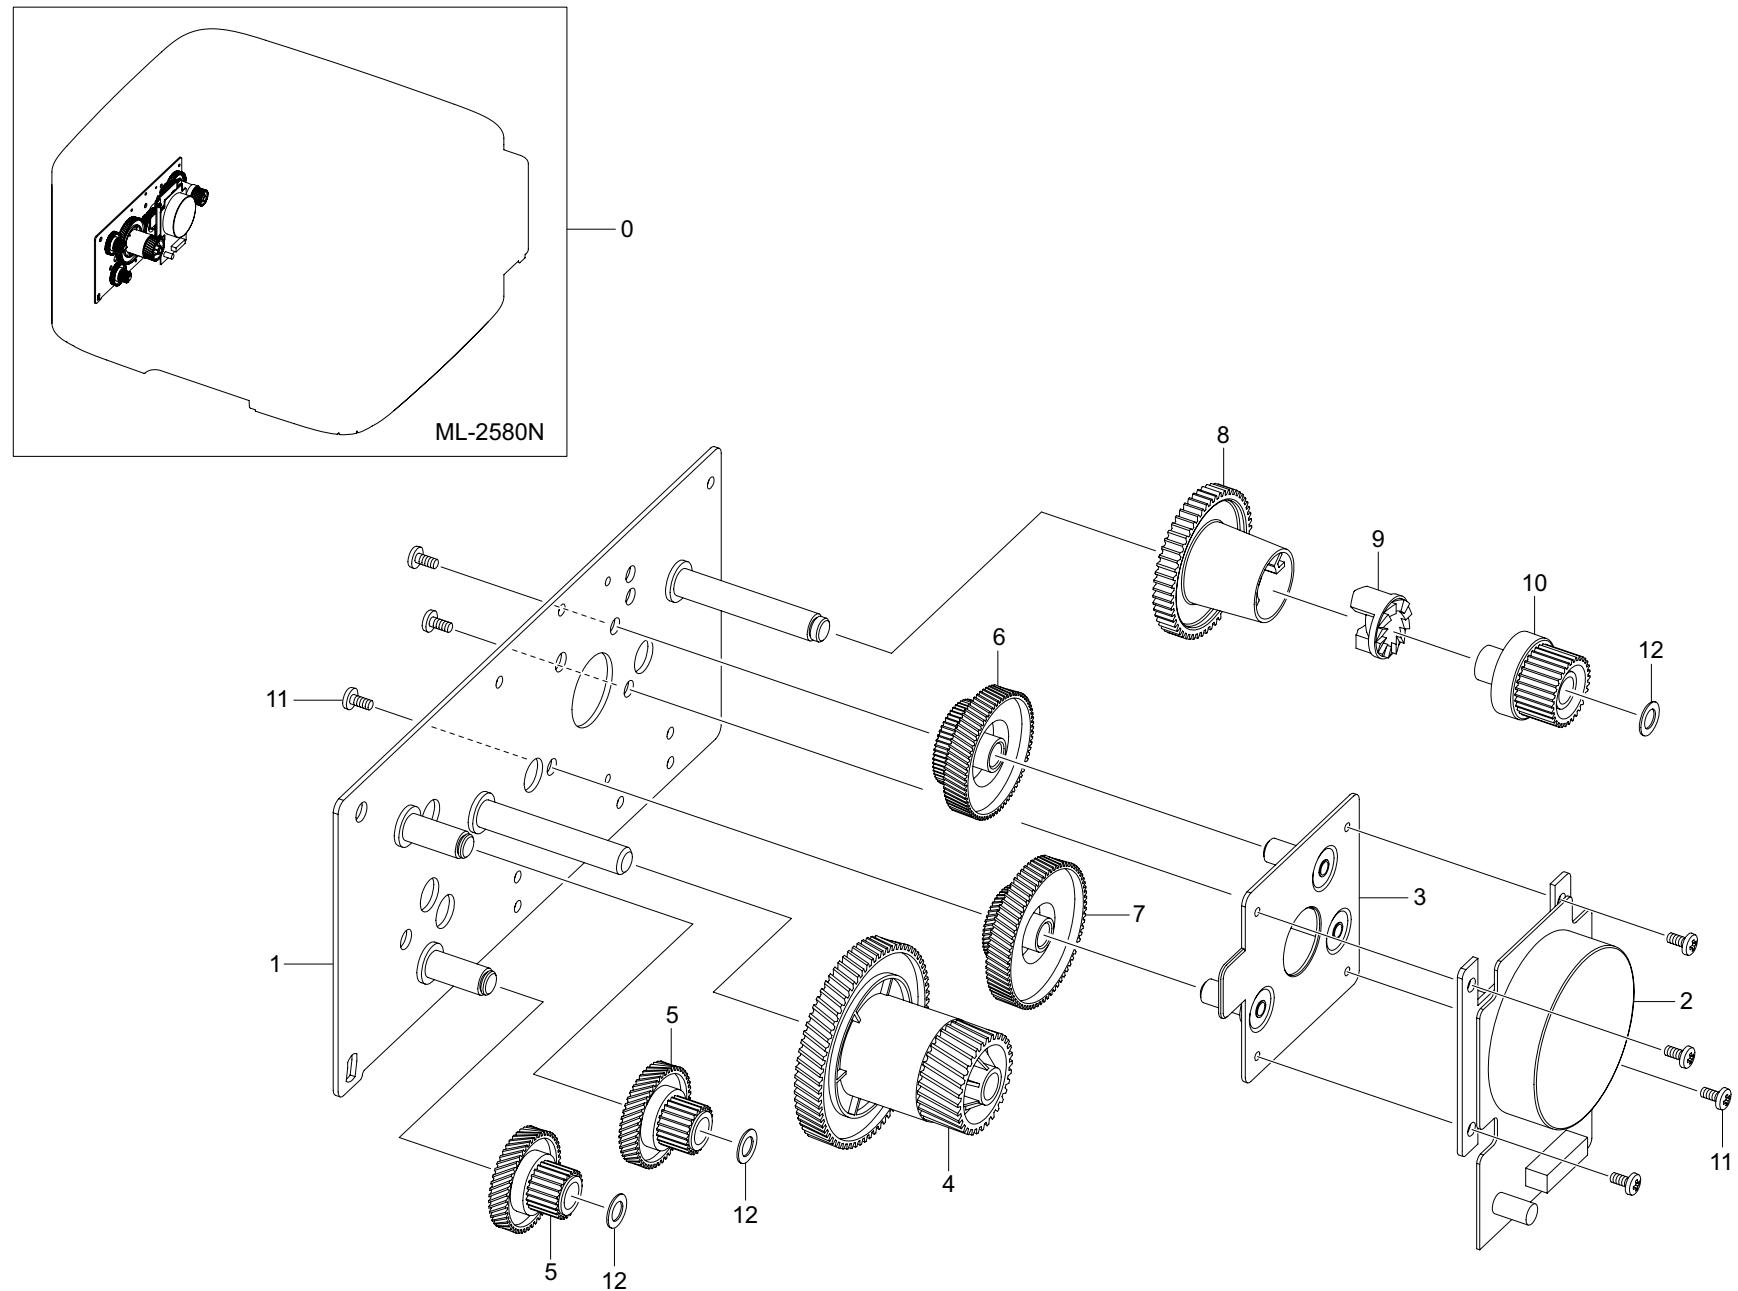


## Main Drive Bracket (ML-2580N) Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00003A	DRIVE MAIN-BRACKET	1	SA	ML-2525/2580N
1	JC61-00598B	BRACKET-P-GEAR 1400	1	SC	
2	JC31-00122A	MOTOR BLDC	1	SNA	
3	JC61-03396A	BRACKET-MOTOR_BLDC	1	SA	
4	JC66-02316A	GEAR-RDCN_OPC	1	SA	
5	JC66-00389A	GEAR-RDCN 57/18	2	SA	
6	JC66-00392A	GEAR-RDCN 90/31	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
7	JC66-00390A	GEAR-RDCN 103/41	1	SA	
8	JC66-01203A	GEAR-DRV FUSER OUT	1	SA	
9	JC66-00340A	GEAR-HUB CLUTCH	1	SA	
10	JC66-01202A	GEAR-DRV FUSER IN	1	SA	
11	6003-000269	SCREW-TAPTYPE	7	SA	
12	6031-000023	WASHER-PLAIN	3	SA	

## 9. Base Frame-Pick Up

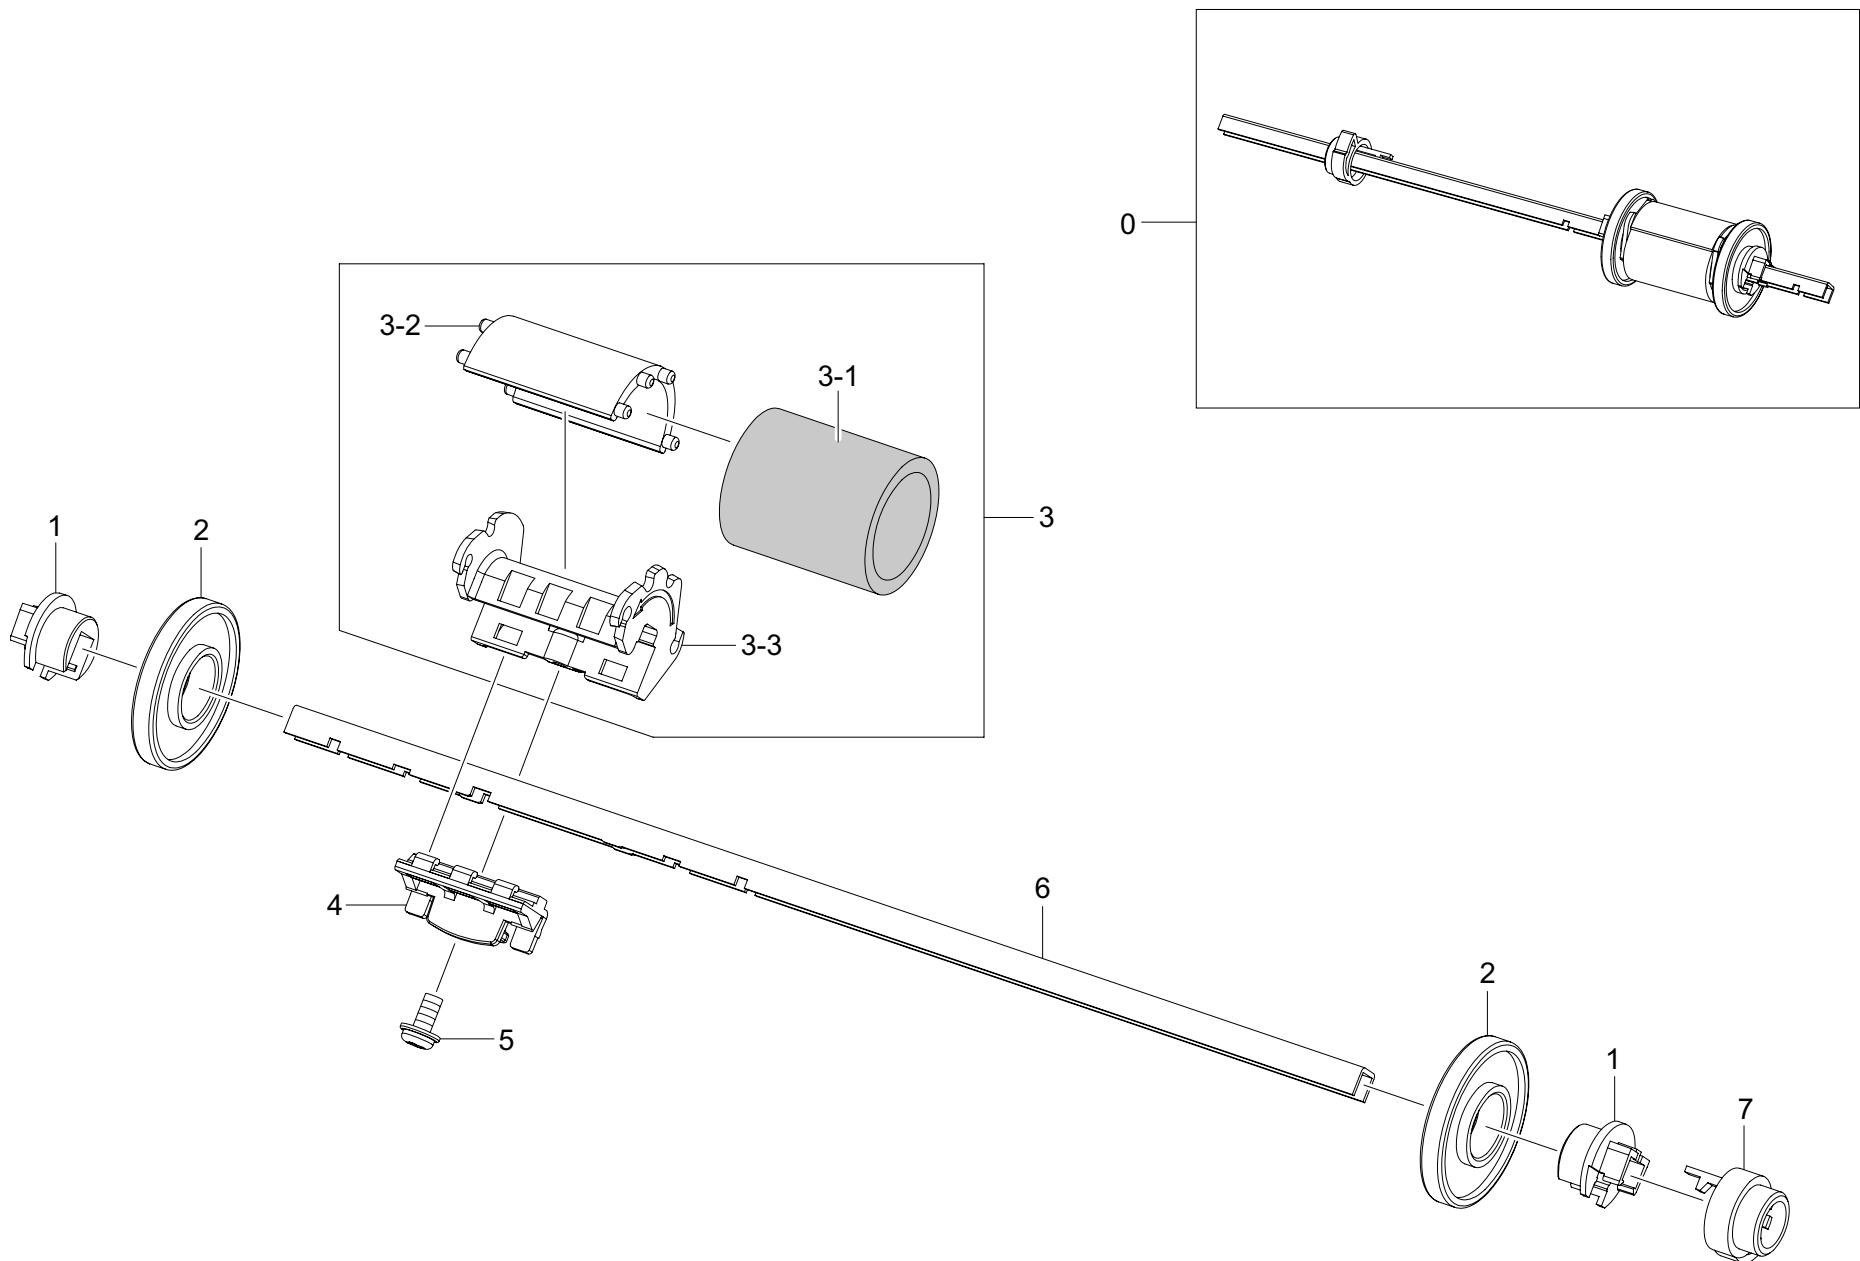


## Base Frame-Pick Up Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC93-00085A	FRAME BASE-PICK UP	1	SA	
1	JC61-03477A	STOPPER-PICK_UP	2	SA	
2	JC72-00982A	PMO-IDLE PICK_UP	2	SA	
3	JC93-00087A	FRAME BASE-PICK UP RUBBER	1	SA	
3-1	JC73-00315A	RUBBER-PICK_UP	1	SA	
3-2	JC61-03514A	HOUSING-PICKUP_RUB	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
3-3	JC61-03435A	HOUSING-PICKUP	1	SA	
4	JC61-03485A	HOLDER-PICKUP	1	SA	
5	6003-000264	SCREW-TAPTYPE	1	SNA	
6	JC66-00399A	SHAFT-P-PICK_UP	1	SA	
7	JC61-00586A	BUSH-M-PICK_UP L	1	SA	

## 10. Fuser

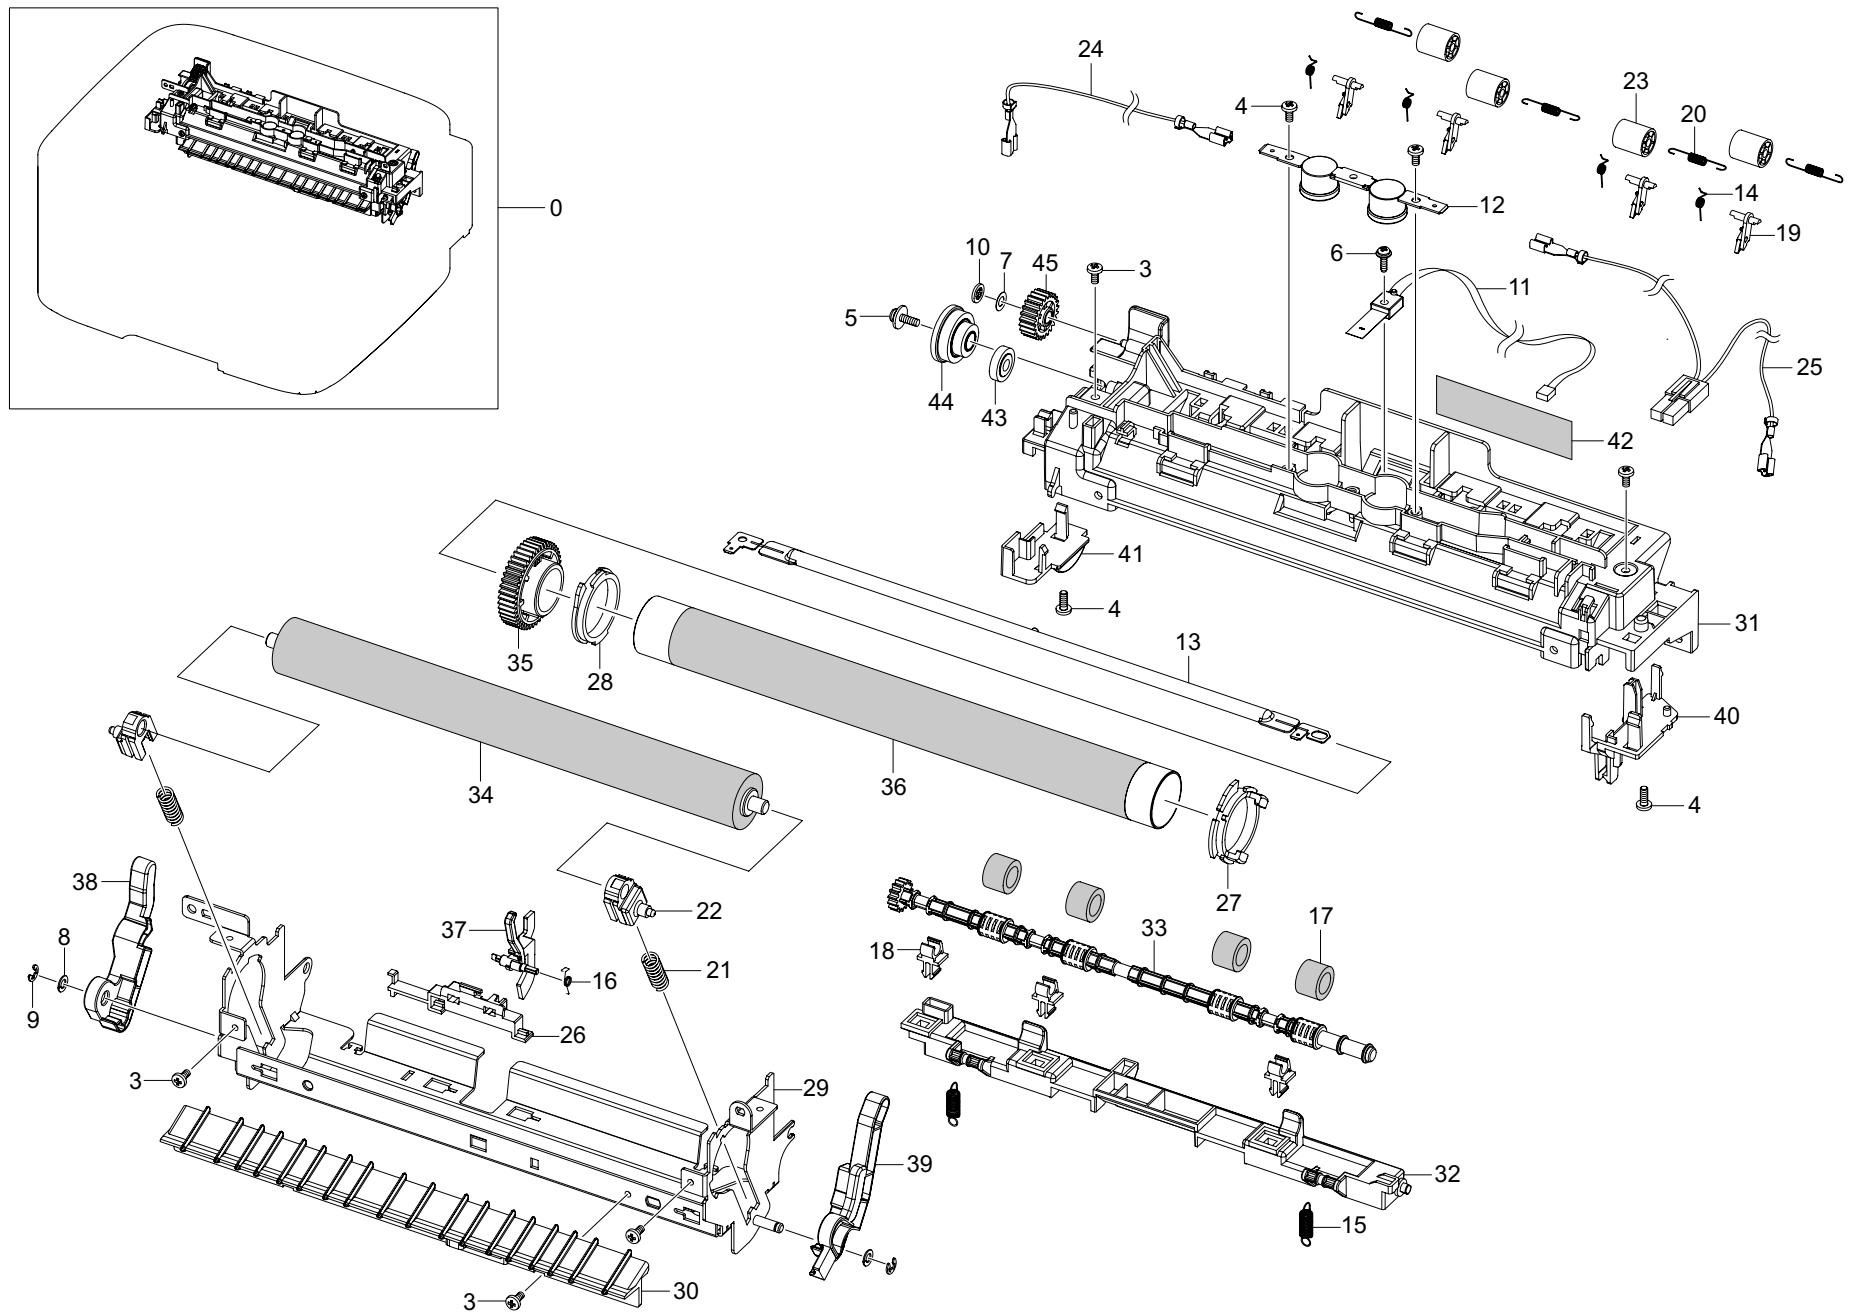


## Fuser Parts List

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC91-00946A	FUSER	1	SA	110V / A type
0	JC91-00946B	FUSER	1	SA	220V / B type
0	JC91-00945A	FUSER	1	SA	110V / C type
0	JC91-00945B	FUSER	1	SA	220V / D type
3	6003-000269	SCREW-TAPTYPE	5	SA	
4	6003-000282	SCREW-TAPTYPE	4	SNA	
5	6006-001078	SCREW-TAPTYPE	1	SNA	
6	6003-000196	SCREW-TAPTYPE	1	SA	
7	6031-001051	WASHER-PLAIN	1	SNA	
8	6031-001584	WASHER-PLAIN	2	SA	
9	6044-000159	RING-C	2	SA	
10	6044-000001	RING-CS	1	SA	
11	1404-001447	THERMISTOR-NTC ASSY	1	SA	
12	4712-001031	THERMOSTAT	1	SA	
13	4713-001211	LAMP-HALOGEN	1	SA	110V
13	4713-001212	LAMP-HALOGEN	1	SA	220V
14	6107-001800	SPRING-TS	4	SA	
15	6107-001802	SPRING-ES	2	SA	
16	6107-001165	SPRING-TS	1	SA	
17	JC73-00017A	RMO-RUBBER_EXIT	4	SA	
18	JC72-00382A	PMO-BUSHING TX	3	SNA	
19	JC61-03685A	GUIDE-CLAW	4	SNA	
20	JC61-70976A	SPRING ETC-FUSER EXIT	4	SNA	
21	JC61-00056A	SPRING ETC-PR(7300)	2	SA	
22	JC61-03473A	BUSH-PR HIGH	2	SNA	
23	JC72-40361A	PMO-ROLLER_EXIT	4	SNA	

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
24	JC39-00819A	HARNESS-FUSER JOINT	1	SA	
25	JC39-01082A	HARNESS-FUSER AC	1	SA	
26	JC61-00581A	HOLDER-ACTUATOR	1	SA	
27	JC61-00887A	BUSH-M-HR R_R2	1	SA	
28	JC61-00888A	BUSH-M-HR L_R2	1	SA	
29	JC61-03449A	FRAME-FUSER	1	SNA	
30	JC61-03450A	GUIDE-INPUT	1	SNA	
31	JC63-02412A	COVER-FUSER	1	SNA	
32	JC63-02413A	COVER-FUSER DUMMY	1	SNA	
33	JC66-00380A	ROLLER-M-EXIT F/UP	1	SA	
34	JC66-00600A	ROLLER-PRESSURE	1	SA	A/B Type
34	JC66-00600B	ROLLER-PRESSURE	1	SA	C/D Type
35	JC66-01254A	GEAR-FUSER	1	SA	
36	JC66-01256A	ROLLER-HEAT	1	SA	A/B Type
36	JC66-01256B	ROLLER-HEAT	1	SA	C/D Type
37	JC66-02364A	ACTUATOR-EXIT	1	SNA	
38	JC66-02365A	LEVER-LINK JAM L	1	SNA	
39	JC66-02366A	LEVER-LINK JAM R	1	SNA	
40	JC67-00414A	CAP-FUSER LAMP R	1	SNA	
41	JC67-00415A	CAP-FUSER LAMP L	1	SNA	
42	JC68-01581B	LABEL-CAUTION	1	SNA	110V
42	JC68-01581C	LABEL-CAUTION	1	SNA	220V
43	JC72-00143A	PMO-GEAR_EXIT_DRV16	1	SNA	
44	JC66-02317A	GEAR-RDCN_EXIT	1	SA	
45	JC66-00396A	GEAR-IDLE 23	1	SA	

## 11. Cassette

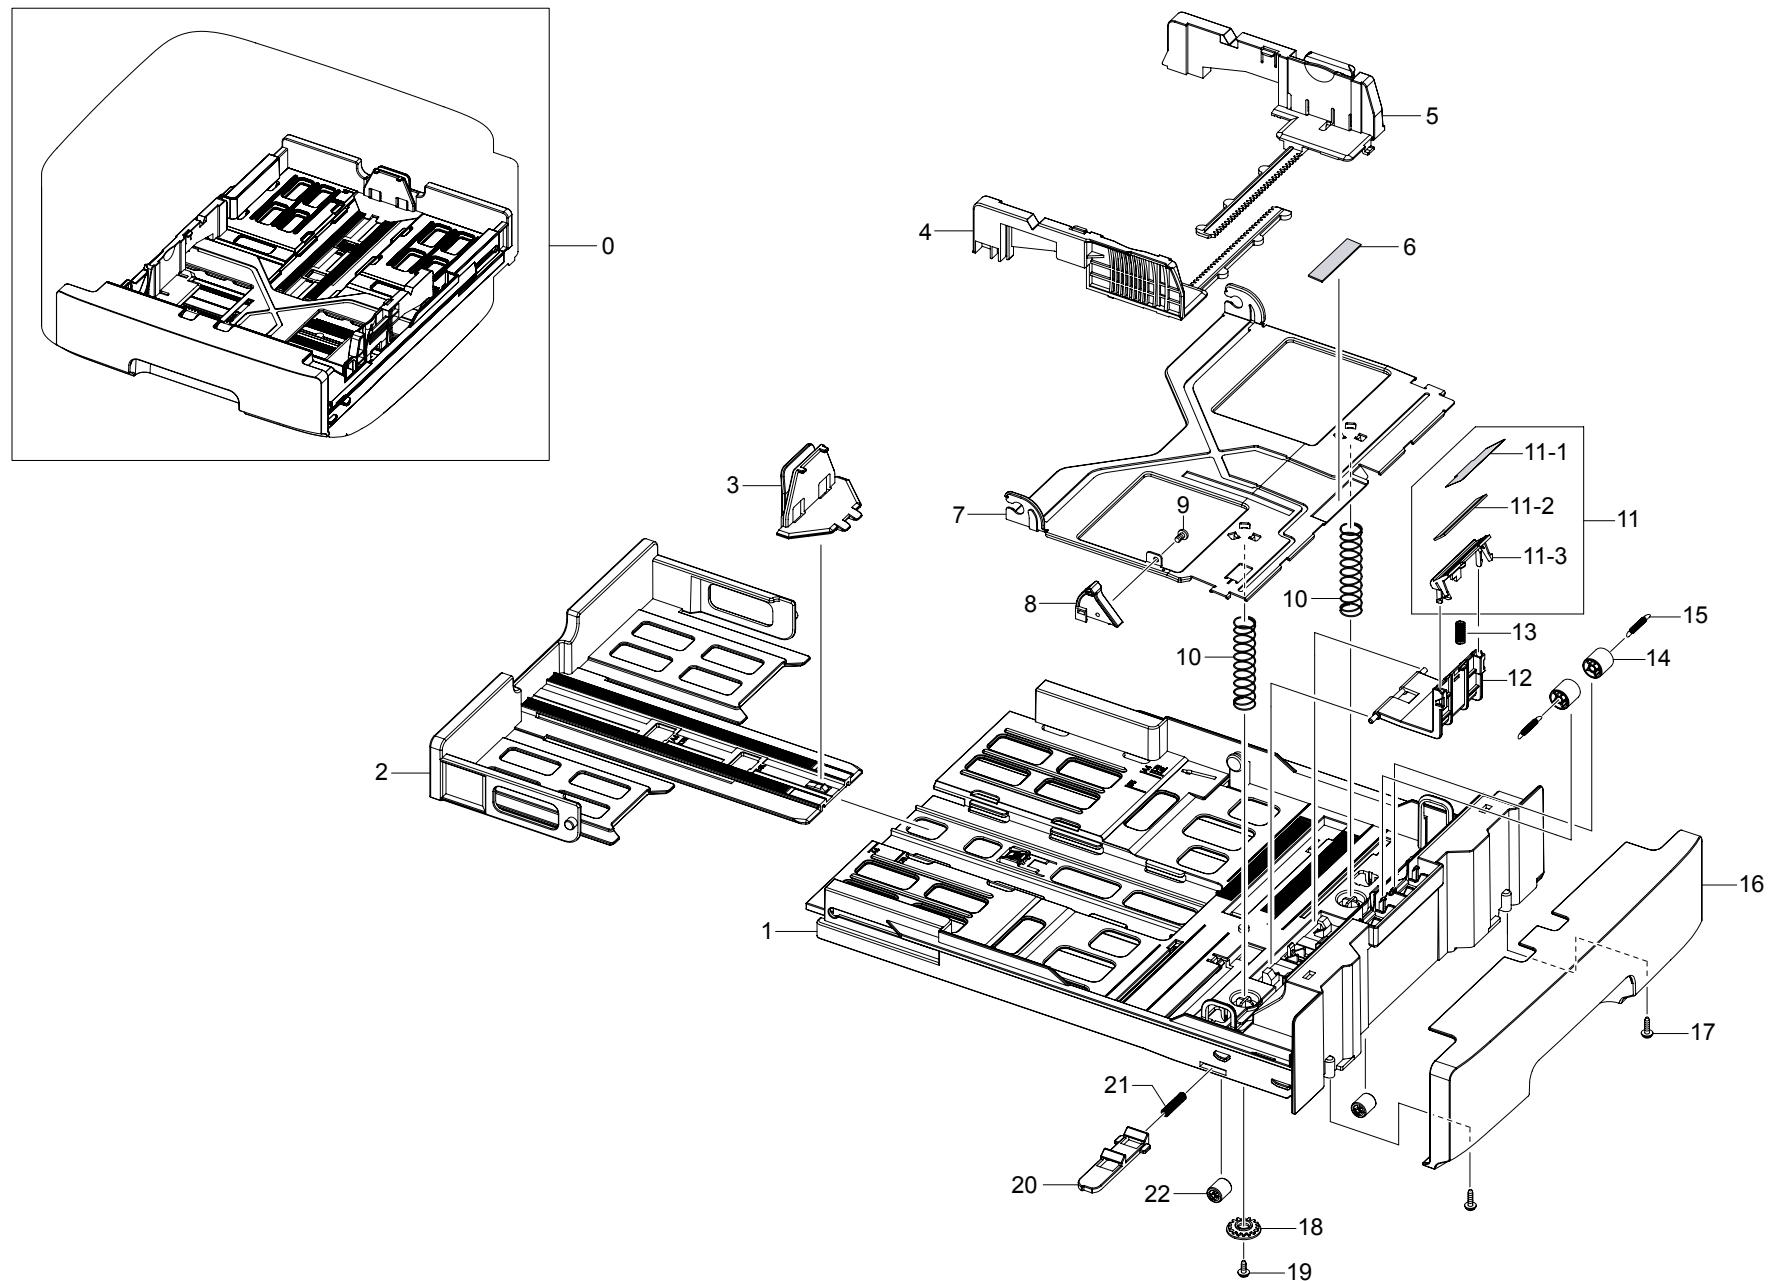

## Cassette Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	QT'y	Service	Remark
0	JC90-00939A	CASSETTE	1	SA	ML-1915/2525
0	JC90-00939B	CASSETTE	1	SA	ML-1910/2580N
1	JC61-03343A	FRAME-CASSETTE	1	SNA	
2	JC61-03341A	GUIDE-EXTENSION CST	1	SNA	ML-1915/2525
2	JC61-03341B	GUIDE-EXTENSION CST	1	SNA	ML-1910/2580N
3	JC72-00971A	PMO-EXTENSION SMALL	1	SA	
4	JC70-00300A	ADJUST-M-CASSETTE_L	1	SA	
5	JC70-00301A	ADJUST-M-CASSETTE_R	1	SA	
6	JC73-00141A	RPR-PAD CASSETTE	1	SA	
7	JC61-00603A	PLATE-P-KNOCK_UP	1	SNA	
8	JC66-00719A	CAM-M-KNOCK UP	1	SA	
9	6003-000261	SCREW-TAPTYPE	1	SNA	
10	6107-001166	SPRING-CS	2	SA	
11	JC90-00941A	CASSETTE-HOLDER PAD	1	SA	
11-1	JC63-00290A	SHEET-HOLDER PAD	1	SA	

Drawer#	SEC_Code	Description	QT'y	Service	Remark
11-2	JC73-00140A	RPR-FRICTION PAD	1	SA	
11-3	JC61-03344A	HOLDER-PAD	1	SA	
12	JC61-01978A	HOUSING-HOLDER PAD	1	SA	
13	JC61-70911A	SPRING ETC-EXIT ROLL FD	1	SA	
14	JC66-00529C	ROLLER-IDLE FEED	2	SA	ML-1915/2525
14	JC66-00529A	ROLLER-M-IDLE FEED	2	SA	ML-1910/2580N
15	6107-001047	SPRING-ES	2	SA	
16	JC63-02341A	COVER-CASSETTE	1	SNA	ML-1915/2525
16	JC63-02341B	COVER-CASSETTE	1	SNA	ML-1910/2580N
17	6003-000196	SCREW-TAPTYPE	2	SA	
18	JG66-40003A	GEAR-PINION	1	SA	
19	6003-000264	SCREW-TAPTYPE	1	SNA	
20	JC72-00972A	PMO-PLATE_LOCKER	1	SA	
21	JG61-70531A	SPRING ETC-LOCKER,PLATE	1	SA	
22	JC72-40981A	PMO-ROLLER UPPER DP	2	SA	