

Adaptive Advance-Time Control for nFAPI Split under Unpredictable Latency

Ming-Hong HSU*, Ray-Guang Cheng*, and Co-author 1[†]

*Dept. of Electronic and Computer Engineering, National Taiwan University of Science and Technology, Taiwan

[†]Affiliation 2

Email: crg@mail.ntust.edu.tw

Abstract—

Index Terms—nFAPI, O-RAN, Functional Split, Adaptive Control.

for intermediate-layer splits operating under non-ideal transport environments.

I. Introduction

A. Background and Motivation

To address the diverse demands of 5G networks, the 3rd Generation Partnership Project (3GPP) and the O-RAN Alliance have standardized the disaggregation of traditional base stations into Open Central Units (O-CUs), Open Distributed Units (O-DUs), and Open Radio Units (O-RUs) [1]. Among the proposed architectures, three functional split configurations have emerged as mainstream: Option 2 (O-CU/O-DU), Option 7.2 (O-DU/O-RU), and Option 6 (O-DU High/Low) [2].

These splits present distinct synchronization requirements and management strategies. Option 2 relies on sequence numbers and deep buffering over general packet-switched networks, making its timing constraints relatively relaxed. Option 7.2 [3], operating within the physical layer, demands strict phase/symbol-level synchronization enforced by hardware Precision Time Protocol (PTP) over Time-Sensitive Networking (TSN). Occupying a unique intermediate position is Option 6 (standardized as nFAPI by the Small Cell Forum [4]), which separates the MAC and PHY layers. Option 6 requires frame/slot-level synchronization and focuses on delay management, offering the flexibility to operate over general packet-switched networks without the prohibitive costs of TSN.

The rationale for deploying the MAC layer (O-DU High) in a cloud environment via Option 6 is primarily driven by resource pooling, as Layer 2 processing complexity scales dynamically with user equipment (UE) density [5]. However, migrating the MAC layer to a Virtualized Network Function (VNF) introduces endogenous processing latency that compresses the available margin for fronthaul transmission delay. Unlike Option 7.2, which rigidly drops out-of-window packets, Option 6 must adaptively manage delays to ensure slot-level synchronization over non-deterministic Ethernet transport. Existing open-source implementations typically employ static timing advance configurations, which fail to accommodate dynamic network jitter and server processing variations, leading to frequent scheduling failures (e.g., missing subframes).

This highlights a fundamental gap in current disaggregated RAN designs: the lack of adaptive timing control mechanisms

B. Related Works

The evolution of Radio Access Network (RAN) architectures from Distributed RAN (D-RAN) to Open RAN (O-RAN) requires a thorough study of functional splits [2], [6], [7]. The MAC-PHY split (Option 6), standardized by the Small Cell Forum (SCF) as nFAPI [4], [8], is suitable for small cell deployments. It allows the MAC layer to be virtualized on commercial servers while the PHY layer remains on dedicated hardware.

The performance of the nFAPI split depends on the transport network. Practical deployments often use non-ideal fronthaul, such as Shared Ethernet or DOCSIS. Mehran and MacKenzie [9] demonstrated that uplink throughput drops to zero with a small increase in fronthaul delay. Furthermore, server processing delay is unpredictable. Khalaf et al. [10] indicated that server delay increases under high CPU utilization, causing the MAC scheduler to miss its timing window.

To address fronthaul latency, Huang and Zhang [11] proposed a distributed MAC scheduling scheme. While this scheme reduces the impact of delayed grants, it introduces a “split-brain” issue with multiple schedulers. Akgun et al. [12] utilized intelligent scheduling to adapt modulation based on interference, but did not solve the sub-millisecond timing of message delivery itself. Existing OpenAirInterface (OAI) reference models typically rely on static timing windows, leading to frequent “missing subframe” errors when network jitter exceeds configured limits. This paper bridges this gap by proposing a centralized Adaptive Advance-Time Control algorithm to dynamically manage scheduling timing.

C. Research Scope and Contributions

In this paper, we focus on the nFAPI-based Option 6 split as a representative case of timing-sensitive yet transport-flexible RAN disaggregation. While Option 6 offers significant advantages in terms of reduced fronthaul bandwidth and deployment flexibility, its performance is highly sensitive to non-deterministic latency introduced by transport networks and server processing.

We identify that the root cause of performance degradation in such systems lies in the inability of the MAC scheduler

to adapt its transmission timing to dynamic end-to-end latency variations. Existing open-source implementations, such as OpenAirInterface (OAI), typically employ static timing advance configurations, which fail to accommodate fluctuating network conditions, leading to frequent synchronization failures and throughput degradation.

To address this issue, we propose an adaptive timing control framework that dynamically adjusts scheduling lead time based on real-time latency estimation. The proposed approach introduces a dual-loop architecture, where a convergence optimization loop estimates end-to-end delay characteristics, and a timing actuator dynamically compensates for timing offsets to ensure that scheduling messages arrive within the valid timing window.

The main contributions of this paper are summarized as follows:

- **Systematic Analysis of Timing Uncertainty in Split 6:** We characterize the impact of non-deterministic latency, including network jitter and processing delay, on synchronization stability in disaggregated RAN systems.
- **Adaptive Advance-Time Control Algorithm:** We propose a dynamic timing adjustment mechanism that continuously aligns scheduling decisions with varying transport delays, effectively mitigating timing violations.
- **Experimental Validation on OAI Platform:** We implement the proposed framework in a real-world testbed and demonstrate that it eliminates missing subframe errors and significantly improves throughput stability under non-ideal fronthaul conditions.

II. System Model

Before diving into the system details, this study introduces the adopted system framework. To integrate the Network Functional Application Platform Interface (nFAPI) with mainstream commercial equipment, the proposed system adopts a resilient two-stage split architecture. The network first connects via the Split 6 nFAPI interface between the network functions, and then translates to the standard O-RAN Split 7.2x interface to connect to a commercial Pegatron O-RU. Figure 1 illustrates this proposed system architecture and its delay management mechanism.

A. End-to-End Architecture

The system establishes a complete 5G end-to-end communication link, extending from the core to the user equipment:

- **Core Network (CN):** The central element responsible for routing, session management, and authenticating user data.
- **O-RAN Central Unit (O-CU):** A logical node that handles higher-layer protocol stacks, such as the Radio Resource Control (RRC) and Packet Data Convergence Protocol (PDCP). It connects with distributed units via the F1 interface.
- **O-RAN Distributed Unit (O-DU):** To optimize computational performance and deployment flexibility, the system separates the O-DU into an O-DU High and

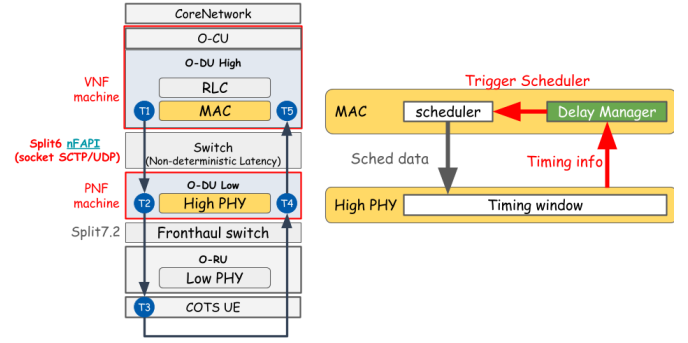


Fig. 1. System architecture and delay management mechanism.

an O-DU Low. The O-DU High is executed as a Virtualized Network Function (VNF) on a virtualized machine, whereas the O-DU Low is deployed as a Physical Network Function (PNF) on dedicated hardware.

- **Switch:** A commercial network switch is located between the VNF and PNF. This mid-layer connection utilizes the nFAPI protocol. However, traversing this packet-switched network inevitably generates non-deterministic latency.
- **O-RAN Radio Unit (O-RU):** A specialized hardware unit responsible for low-level physical layer (Low PHY) processing, digital beamforming, and Radio Frequency (RF) transmission.
- **Commercial Off-The-Shelf User Equipment (COTS UE):** Standard commercial smartphones or modems that act as the terminal receivers in the network.

B. O-DU High: MAC and Delay Manager

Within the Media Access Control (MAC) layer of the O-DU High, the core components handling timing mechanisms include the Scheduler and the nFAPI Delay Manager:

- **Scheduler:** Critical for allocating the available radio resources (such as time-frequency resource blocks) and determining the exact priority and timing of down-link/uplink data transmissions.
- **nFAPI Delay Manager:** This resides as the crucial control unit of this delay-aware architecture. Because unpredictable, unstable latency exists in the switch between the VNF and PNF, the Delay Manager continuously receives timing feedback from the lower physical layer. It uses this to dynamically calculate network jitter and proactively trigger the scheduler. This calculation guarantees that the scheduling instructions (Sched data) are generated ahead of time to account for network delays.

C. O-DU Low: High PHY and Timing Window

The O-DU Low manages the higher-level baseband processing of the physical layer (High PHY). At this level, the most critical synchronization mechanism is the nFAPI PNF Timing Window:

- **Timing Window:** A predefined, strict time duration. When the scheduling message (specifically the

DL_TTI.request) sent by the O-DU High propagates across the network, it must accurately arrive and fail exactly within this Window. Otherwise, the High PHY will reject the message and fail to process the subframe data.

- **Timing Info:** The PNF continuously monitors the exact arrival timestamp of these control messages and periodically sends this “Timing Info” back to the Delay Manager in the MAC layer. This establishes a closed-loop feedback control system, compensating for the unpredictable transmission latency variations between the VNF and PNF machines.

D. Key Validation Metrics

To evaluate the stability, synchronization accuracy, and real-time performance of the proposed algorithm under non-ideal environments, this study defines the following Key Validation Metrics:

- **MAC Layer HARQ RTT ($T_5 - T_1$):** Measures the Hybrid Automatic Repeat Request (HARQ) loop delay specifically at the MAC layer. This metric accurately reflects the feedback efficiency and operational health of the link layer.
- **VNF-PNF DL Latency ($T_2 - T_1$):** Measures the one-way downlink latency accumulated from the virtualized machine (VNF) to the physical machine (PNF). This metric is used to directly quantify and analyze the delay jitter impact injected by the intermediate Ethernet switch.

Note that RTT denotes the Round-Trip Time. To validate the split-architecture stability under non-ideal fronthaul conditions, network latency simulation is conducted at the uplink ($T_5 - T_4$) and downlink ($T_2 - T_1$) segments via Linux Traffic Control (TC).

To validate the proposed performance optimization within a realistic network environment, the system design leverages a commercial-grade deployment framework:

- **O-RAN Split 7.2x Interoperability:** While the Small Cell Forum (SCF) has standardized the nFAPI for the MAC-PHY split (Option 6) [13], commercial-grade Open Radio Units (O-RUs) natively support the O-RAN Split Option 7.2x. To achieve seamless integration with open-source stacks like OpenAirInterface [14], our system bridges these interfaces.
- **Hybrid System Architecture for E2E Validation:** To validate the nFAPI performance over a fully commercial ecosystem, this paper adopts a hybrid architecture (Split Option 6 + Split Option 7.2). This setup establishes a translation/interworking layer that enables the nFAPI-driven MAC/High-PHY to successfully interact with a commercial Pegatron O-RU, facilitating end-to-end verification using Commercial Off-The-Shelf (COTS) UEs.

III. Proposed Method

This section details the proposed dynamic timing adjustment algorithm. To resolve the unstable latency during packet

transmission between the PNF and VNF, we propose a Dual-Loop Timing Control Architecture.

A. Dual-Loop Architecture

The timing control of this system adopts a “policy-execution separation” dual-loop architecture, ensuring that the timing advancement on the VNF side can flexibly cope with network jitter without inducing unexpected oscillations:

- 1) **Convergence Optimization Loop (Policy):** Dynamically analyzes the statistical data reported by the PNF through the convergence optimization algorithm to determine the global target slot-ahead s_{ahead} .
- 2) **Timing Actuator Loop (Execution):** Executed by an independent VNF timing thread. This thread is the only unit in the system capable of altering the absolute sleep time and slot propagation, translating the upper-layer policy target and low-layer microsecond phase deviations into actual timing advancement.

B. VNF Timing Actuator

The core function of the VNF Timing Actuator is isolation and precise phase execution. Let `slot_duration` denote the slot duration. The target slot-ahead value, S_{next} , is determined by the policy loop. For microsecond-level phase correction, the actuator calculates the next absolute wake-up time, operating within a mutex-locked environment to mitigate long-term error accumulation. By adjusting the absolute wake-up time, it accurately translates the upper-layer policy target and low-layer microsecond phase deviations into actual timing advancement.

C. Adaptive Node Synchronization

To achieve microsecond-level phase alignment, the system utilizes an IEEE 1588 (PTP) style timestamp exchange. When the VNF receives the `UL_node_sync` message, it calculates the instantaneous timing offset (*offset*) based on four timestamps (t_1 to t_4). To avoid transient spikes, the *offset* and its variation (*error*) are smoothed using an Exponentially Weighted Moving Average (EWMA) model to produce the mean offset (μ_{offset}) and the mean absolute deviation (dev_{offset}), utilizing smoothing factors α and β . A dynamic synchronization threshold (*Threshold*) is then derived directly from the estimated jitter (dev_{offset}). If the absolute *offset* exceeds this *Threshold*, the system breaks the *offset* down into a slot adjustment (S_{adj}) and a microsecond-level adjustment ($\mu_{S_{adj}}$) based on the slot duration (`slot_duration`). These parameters are subsequently consumed by the VNF Timing Actuator to precisely align the local clock. The process is summarized in Algorithm 1.

D. Trigger Timing Control (Convergence Optimization)

To counteract fluctuating network latency and maintain scheduling robustness, this paper proposes a dynamic trigger timing control policy. Upon receiving timing statistics, specifically the worst-case late arrival (t_{arrive}) reported by the PNF, the system computes the deviation (*error*) and incorporates

Algorithm 1 Adaptive Node Synchronization

Require: t_1, t_2, t_3 (Timestamps from PNF UL_node_sync), t_4 (VNF local receive timestamp)

Ensure: S_{adj} (Slot adjustment), $\mu_{S_{adj}}$ (Microsecond adjustment)

Notation:

$offset$ (Instantaneous timing offset), μ_{offset} (EWMA mean offset)

dev_{offset} (EWMA mean absolute deviation / Jitter)

$Threshold$ (Dynamic synchronization threshold)

α, β (Smoothing factors, where $\alpha = 1/8, \beta = 1/4$)

Phase I: Timestamp Processing and Wrap-around Protection

1: $d_1 \leftarrow t_2 - t_1$

2: $d_2 \leftarrow t_4 - t_3$

Phase II: Offset and Dynamic Jitter Estimation

3: $offset \leftarrow (d_1 - d_2)/2$

4: $error \leftarrow offset - \mu_{offset}$

5: $\mu_{offset} \leftarrow \mu_{offset} + \alpha \cdot error$

6: $dev_{offset} \leftarrow dev_{offset} + \beta(|error| - dev_{offset})$

7: $Threshold \leftarrow dev_{offset}$

Phase III: Phase Alignment

8: if $|offset| > Threshold$ then

9: $S_{adj} \leftarrow \lfloor offset / slot_duration \rfloor$

10: $\mu_{S_{adj}} \leftarrow offset \pmod{slot_duration}$

11: Apply S_{adj} and $\mu_{S_{adj}}$ to adjust local clock

12: else

13: State $\leftarrow$ Synchronized

14: $S_{adj} \leftarrow 0, \mu_{S_{adj}} \leftarrow 0$

15: end if

16: return $S_{adj}, \mu_{S_{adj}}$

an EWMA model inspired by the Jacobson/Karels TCP RTT algorithm to estimate the mean latency (μ_{delay}) and jitter deviation (dev_{delay}), utilizing smoothing factors α and β .

Before making tracking adjustments, the algorithm establishes multiple Panic Criteria. A statistical anomaly is detected if the absolute $error$ exceeds $3 \cdot dev_{delay}$, indicating a sudden latency spike. A strict violation occurs if $t_{arrive} > slot_duration$, meaning the packet is late beyond the slot boundary. Either condition triggers a Fast Attack Panic Mode, radically incrementing the current trigger timing (S_{curr}) by 1 slot to calculate the next trigger timing (S_{next}) to ensure connection continuity and mitigate catastrophic deadline violations.

Conversely, to maximize low-latency operation in safe zones, a Proactive Latency Reduction mechanism is used. When the latency operates safely below an absolute boundary ($t_{arrive} \leq Safe_Margin$), a stability counter ($count_{stable}$) increments. Once this counter exceeds an adaptive stability threshold (N_{stable}) which scales dynamically by dev_{delay} , the system cautiously drops S_{curr} by 1 to determine S_{next} . This asymmetric response (fast expansion, slow decay) prevents ping-pong oscillation while minimizing round-trip time. Finally, S_{next} is limited within the allowable nFAPI timing

window. The adjustment strategy is condensed in Algorithm 2.

Algorithm 2 Trigger Timing Control

Require: t_{arrive} (Timing info from PNF)

Ensure: S_{next} (Trigger timing for the next MAC scheduling)

Notation:

S_{curr} (Current trigger timing), μ_{delay} (EWMA mean delay)

dev_{delay} (EWMA mean deviation)

$count_{stable}$ (Consecutive stable arrivals counter)

N_{stable} (Adaptive stability threshold, dynamically scaled by dev_{delay})

α, β (Smoothing factors, where $\alpha = 1/8, \beta = 1/4$)

Phase I: Delay Statistics Update

1: $error \leftarrow t_{arrive} - \mu_{delay}$

2: $\mu_{delay} \leftarrow \mu_{delay} + \alpha \cdot error$

3: $dev_{delay} \leftarrow dev_{delay} + \beta(|error| - dev_{delay})$

Phase II: Anomaly Detection

4: $IsAnomaly \leftarrow (|error| > 3 \cdot dev_{delay}) \vee (t_{arrive} > slot_duration)$

Phase III: Timing Adjustment

5: if $IsAnomaly$ then

6: $S_{next} \leftarrow S_{curr} + 1$

7: $count_{stable} \leftarrow 0$

8: else if $t_{arrive} \leq Safe_Margin$ then

9: $count_{stable} \leftarrow count_{stable} + 1$

10: if $count_{stable} \geq N_{stable}$ then

11: $S_{next} \leftarrow S_{curr} - 1$

12: $count_{stable} \leftarrow 0$

13: else

14: $S_{next} \leftarrow S_{curr}$

15: end if

16: else

17: $S_{next} \leftarrow S_{curr}$

18: $count_{stable} \leftarrow 0$

19: end if

20: Limit S_{next} within the allowable nFAPI timing window

21: return S_{next}

IV. Experimental Results

Experiments were conducted to verify the proposed delay management method in an OpenAirInterface (OAI) nFAPI End-to-End environment. Each reported throughput value represents the average of 180 data points (3 independent trials $\times$ 60 samples per trial). We structure the evaluation into three parts: benchmarking peak throughput and MAC Round-Trip Time (RTT) against static baselines (Section IV-B), evaluating stability under network congestion (Section IV-C), and confirming the end-to-end functional deployment through an rApp demonstration video.

A. Experimental Scenario and rApp Framework

The testbed environment connects a series of high-performance servers, radio units, and a commercial smartphone. The detailed software and hardware configurations for the end-to-end network deployment are outlined below.

TABLE I
Testbed Node Configuration

Unit	Specification
Core Network (CN)	Open5GS
SW Stack / Branch	OpenAirInterface (2026.w13)
PNF Server	Intel® Xeon® Gold 6226R
PNF Server	Intel® Xeon® Gold 6433N
O-RU	Pegatron RU (P5G-Indoor O-RU-PR1450)
COTS UE	Samsung Galaxy S20

TABLE II
Wireless System Parameters

Parameter	Setting
Subcarrier Spacing	30 kHz
TDD Pattern	3D1S1U
MIMO / Ports	4-layer / 4T4R
Fronthaul	O-RAN F release

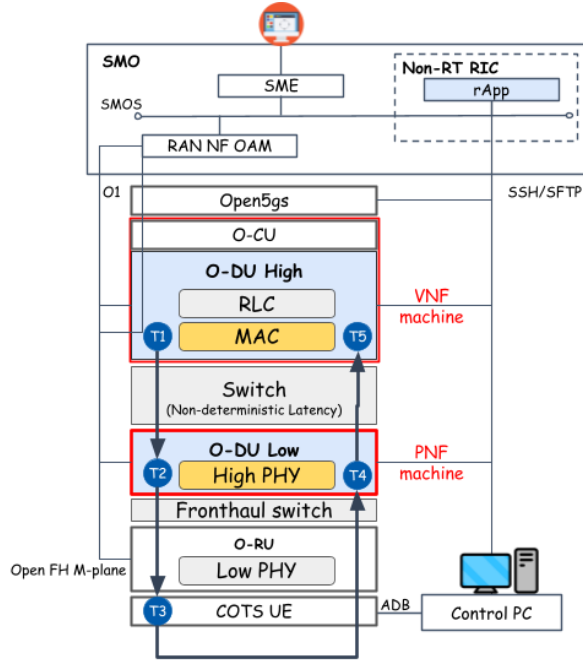


Fig. 2. Architecture of the rApp automated evaluation framework.

To ensure repeatable validation, an automated evaluation framework (rApp) was developed, as shown in Fig. 2. This rApp automates end-to-end experiments, data collection, and chart generation. Crucially, it manages the network latency simulation at $T_5 - T_4$ and $T_2 - T_1$ via Linux Traffic Control (TC) to systematically validate the split-architecture stability.

B. Scenario I: Performance Benchmark

We benchmark the peak throughput and MAC HARQ RTT against a static baseline. Under stable fronthaul conditions, the adaptive algorithm maintains line-rate throughput while ensuring a consistent timing margin, successfully mitigating transient jitter from the server operating system.

C. Scenario II: Stability under Network Congestion

Under simulated network congestion, the adaptive control dynamically adjusts the trigger timing to compensate for increased one-way delay. Unlike static methods that fail when jitter exceeds the timing window, our approach maintains synchronization and stable throughput by proactively advancing the scheduling cycle.

D. Functional Deployment Demonstration

To confirm the functional deployment of the proposed system, a demonstration video showcases the automated rApp lifecycle, including real-time latency monitoring and dynamic timing adjustment. The verification confirms that the adaptive algorithm successfully maintains link stability in a virtualized environment.

References

- [1] 3GPP, "Study on new radio access technology: Radio access architecture and interfaces," 3rd Generation Partnership Project (3GPP), Tech. Rep. TR 38.801, 2017, version 14.0.0.
- [2] K. Alam, M. A. Habibi, M. Tammen, D. Krummacker, W. Saad, M. D. Renzo, T. Melodia, X. Costa-Pérez, M. Debbah, A. Dutta, and H. D. Schotten, "A comprehensive tutorial and survey of o-ran: Exploring slicing-aware architecture, deployment options, use cases, and challenges," IEEE Communications Surveys & Tutorials, vol. 28, pp. 1637–1678, 2026.
- [3] O-RAN Alliance, "O-ran fronthaul working group control, user and synchronization plane specification," O-RAN Alliance, Tech. Rep. O-RAN.WG4.CUS.0-v11.00, 2023.
- [4] S. C. Forum, "5g network fapi (nfapi) specification," Small Cell Forum, Tech. Rep. SCF225, 2020.
- [5] X. Foukas et al., "Computational resource consumption of 5g virtualized ran," in 2021 IEEE International Conference on Communications (ICC). IEEE, 2021.
- [6] L. M. P. Larsen, A. Checko, and H. L. Christiansen, "A survey of the functional splits in 5g next-generation radio access networks," IEEE Communications Surveys & Tutorials, vol. 21, no. 3, pp. 2349–2372, 2019.
- [7] J. Pérez-Romero, O. Sallent, A. Gelonch, X. Gelabert, B. Klaiqi, M. Kahn, and D. Campoy, "A tutorial on the characterisation and modelling of low layer functional splits for flexible radio access networks in 5g and beyond," IEEE Communications Surveys & Tutorials, vol. 25, no. 4, pp. 2791–2832, 2023.
- [8] Small Cell Forum, "5g nfapi specification," Small Cell Forum (SCF), Tech. Rep. SCF222, 2023. [Online]. Available: <https://www.smallcellforum.org/>
- [9] F. Mehran and R. MacKenzie, "Experimental evaluation of multi-vendor virtualized ran using non-ideal fronthaul," in 2020 IEEE 31st Annual International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC). IEEE, 2020.
- [10] B. N. Khalaf, W. H. Ali, R. S. Alhumaima, and H. A. J. Alshamary, "Delay aware resource allocation in oran through network optimization," IET Wireless Sensor Systems, 2024.
- [11] M. Huang and X. Zhang, "Distributed mac scheduling scheme for c-ran with non-ideal fronthaul in 5g networks," in Communication Infrastructure Research Lab (Intel Labs China). IEEE, 2026.
- [12] B. Akgun et al., "Interference-aware intelligent scheduling for virtualized private 5g networks," IEEE Access, vol. 12, 2024.
- [13] V. G. Douros, A. Garcia-Saavedra, and C.-P. Xavier, "nfapi: The standard interface for sdn-based 5g small cell networks," IEEE Communications Standards Magazine, vol. 2, no. 3, pp. 32–40, 2018.
- [14] X. Wang et al., "An open-source implementation of the 5g nr functional split option 6," in 2022 IEEE International Conference on Communications (ICC), 2022, pp. 1–6.