



STD 28N120-2408


White | 2835 | 120LED | 24V DC | 8mm | 50mm cut



Electrical & Mechanical Technical Data

Driver Types	CV (Resistor)
Voltage	24V DC
LED types	2835 SMD
LED QTY/m	120pcs
Power	9.6W/m 14.4W/m
CCT/Color Option	White
Binning tolerance	SDCM<3
CRI	Ra80+ , Ra90+ , Ra95+
TM30	Rf=95, Rg=103
Dimming function	PWM, 0-10V, DALI
PCB dimension	8mm x 3oz (1/2oz)
Cut points	50mm (6LEDs)
Standard length/reel	5meters
Beam angle	120°
IP Rating	IP20 (IP65,IP67,IP68)
Connection	2 x 0.5mm² / 20AWG wire / DC connector
Lifespan & Warranty	50,000Hrs & 5 years
ErP	F
Operating temp. (Tc)	-25°C...+70°C (-13°F...158°F)
Ambient temp. (Ta)	-25°C...+45°C (-13°F...113°F)
Storage temp. (Ts)	-30°C... 80°C (-22°F...176°F)
G.W. per reel (5m)	0.11 kg
Installation	3M 300LSE adhesive tape

Dimensions

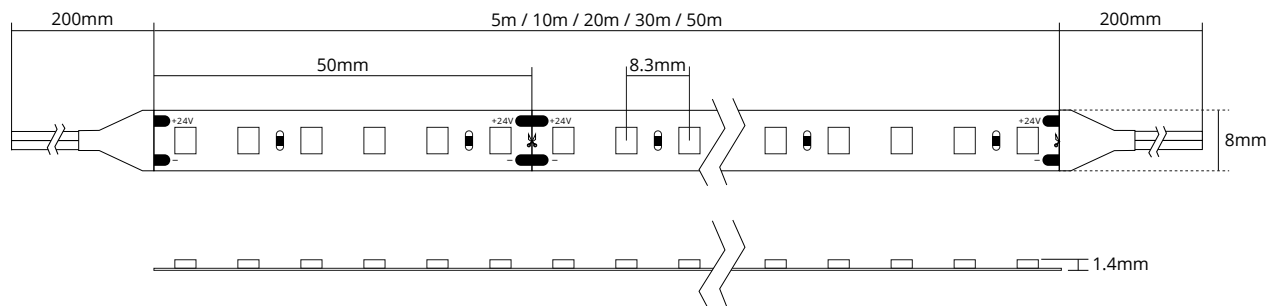


Light Technical Data



Type	Power	Product Code	CCT	CRI	PCB Width	Voltage	Cut Length	Lumen	Efficacy
White Ra90+ 	5W/m	LT-SW28N120-2780-2408-S096	2700K	Ra90+	8mm	24VDC	100mm	988Lm/m	103Lm/w
		LT-SW28N120-3080-2408-S096	3000K	Ra90+	8mm	24VDC	100mm	1056Lm/m	110Lm/w
		LT-SW28N120-3580-2408-S096	3500K	Ra90+	8mm	24VDC	100mm	1075Lm/m	112Lm/w
		LT-SW28N120-4080-2408-S096	4000K	Ra90+	8mm	24VDC	100mm	1161Lm/m	121Lm/w
		LT-SW28N120-4580-2408-S096	4500K	Ra90+	8mm	24VDC	100mm	1123Lm/m	117Lm/w
		LT-SW28N120-5080-2408-S096	5000K	Ra90+	8mm	24VDC	100mm	1113Lm/m	116Lm/w
		LT-SW28N120-5780-2408-S096	5700K	Ra90+	8mm	24VDC	100mm	1094Lm/m	114Lm/w
		LT-SW28N120-6580-2408-S096	6500K	Ra90+	8mm	24VDC	100mm	1104Lm/m	115Lm/w
	10W/m	LT-SW28N120-2780-2408-S144	2700K	Ra90+	8mm	24VDC	100mm	1512Lm/m	105Lm/w
		LT-SW28N120-3080-2408-S144	3000K	Ra90+	8mm	24VDC	100mm	1555Lm/m	108Lm/w
		LT-SW28N120-3580-2408-S144	3500K	Ra90+	8mm	24VDC	100mm	1641Lm/m	114Lm/w
		LT-SW28N120-4080-2408-S144	4000K	Ra90+	8mm	24VDC	100mm	1656Lm/m	115Lm/w
		LT-SW28N120-4580-2408-S144	4500K	Ra90+	8mm	24VDC	100mm	1598Lm/m	111Lm/w
		LT-SW28N120-5080-2408-S144	5000K	Ra90+	8mm	24VDC	100mm	1612Lm/m	112Lm/w
		LT-SW28N120-5780-2408-S144	5700K	Ra90+	8mm	24VDC	100mm	1596Lm/m	109Lm/w
		LT-SW28N120-6580-2408-S144	6500K	Ra90+	8mm	24VDC	100mm	1584Lm/m	110Lm/w
	14.4W/m	LT-SW28N120-2790-2408-S096	2700K	Ra90+	8mm	24VDC	100mm	862Lm/m	89.8Lm/w
		LT-SW28N120-3090-2408-S096	3000K	Ra90+	8mm	24VDC	100mm	897Lm/m	93.4Lm/w
		LT-SW28N120-3590-2408-S096	3500K	Ra90+	8mm	24VDC	100mm	912Lm/m	95Lm/w
		LT-SW28N120-4090-2408-S096	4000K	Ra90+	8mm	24VDC	100mm	979Lm/m	102Lm/w
		LT-SW28N120-4590-2408-S096	4500K	Ra90+	8mm	24VDC	100mm	969Lm/m	101Lm/w
		LT-SW28N120-5090-2408-S096	5000K	Ra90+	8mm	24VDC	100mm	998Lm/m	104Lm/w
		LT-SW28N120-5790-2408-S096	5700K	Ra90+	8mm	24VDC	100mm	988Lm/m	103Lm/w
		LT-SW28N120-6590-2408-S096	6500K	Ra90+	8mm	24VDC	100mm	980Lm/mm	102Lm/w

Mounting

Surface Mounted Series



Recessed Series



Angular Series



Wires



Wires

2PIN wire, 18/20/22AWG,
Black&Ged, L=200mm, loaded current 3A,
suitable for single color LED strip

Solderless Connector



Strip to Power

2PIN connector, 5/8/10/12mm
Suitable for single color LED strip



Strip to Strip

2PIN connector, 5/8/10/12mm
Suitable for single color LED strip



Strip to Strip Extension

2PIN connector, 5/8/10/12mm
Suitable for single color LED strip

Power supply

LRS Series Single Output Switching Power Supply (IP20 | Non-dimming)



LRS-150 series
Output Wattage: 150W
Output Voltage: 12V/24V/48V DC
Overcurrent and Overvoltage Protection
Dimension: 159*97*30mm (L*W*H)



LRS-350 series
Output Wattage: 350W
Output Voltage: 5V/12V/24V/48V DC
Overcurrent and Overvoltage Protection
Dimension: 215*115*30mm (L*W*H)

LPV Series Single Output Switching Power Supply (IP67 | Non-dimming)



LPV-60 series
Output Wattage: 60W
Output Voltage: 5V/12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 162.5*42.5*32mm (L*W*H)



LPVL-150 series
Output Wattage: 150W
Output Voltage: 12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 191*63*37.5mm (L*W*H)

XLG Series Constant Power Mode LED Driver (IP67 | Non-dimming)



XLG-75 series
Rated Wattage: 75W
Output Voltage: 12V/24V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 140*63*32mm (L*W*H)



XLG-100 series
Rated Wattage: 100W
Output Voltage: 12V/24V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 140*63*32mm (L*W*H)



XLG-150 series
Rated Wattage: 150W
Output Voltage: 12V/24V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 180*63*35.5mm (L*W*H)



XLG-200 series
Rated Wattage: 200W
Output Voltage: 12V/24V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 199*63*35.5mm (L*W*H)

ELG Series Constant Voltage+ Constant Current LED Driver (IP67 | Dimming)



ELG-75 series
Rated Wattage: 75W
Output Voltage: 12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 180*63*35.5mm (L*W*H)



ELG-150 series
Rated Wattage: 150W
Output Voltage: 12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 219*63*35.5mm (L*W*H)

HLG Series Constant Voltage + Constant Current LED Driver (IP67 | Dimming)



HLG-150H series
Rated Wattage: 150W
Output Voltage: 12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 228*68*38.8mm (L*W*H)



HLG-240H series
Rated Wattage: 240W
Output Voltage: 12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 244.2*68*38.8mm (L*W*H)



HLG-480H series
Rated wattage: 480W
Output Voltage: 12V/24V/48V DC
Overcurrent Overvoltage Overheat
Short Circuit Protection
Dimension: 262*125*43.8mm (L*W*H)

Controller



V1 Single Color LED Controller


Input voltage: 5-36VDC
Output voltage: 5-36VDC
Output power: 40W/96W/192W/288W
(5V/12V/24V/36V)
Operating temperature: -30°C~+ 55°C
Size: 114 x 38 x 26mm(L*W*H)




R6-1 Remote Controller

Output signal: RF(2.4GHz)
Working voltage: 3VDC(AA×2)
Remote distance: 30m
(Barrier-free space)
Size: 140 x 60 x 26mm(L*W*H)

Connectivity

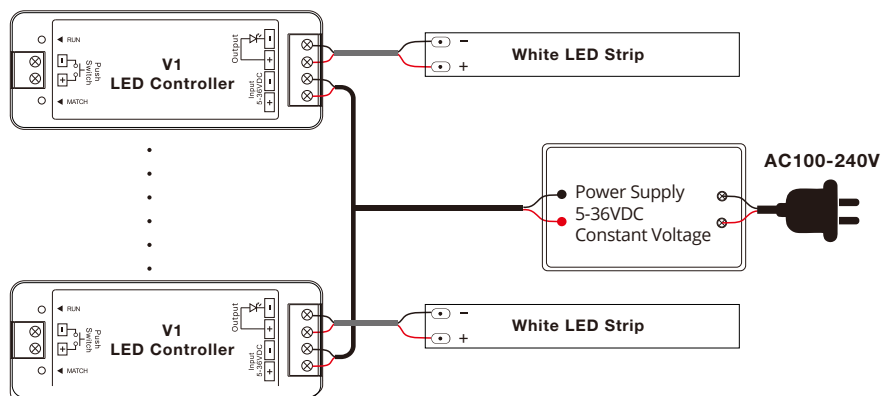

Packing

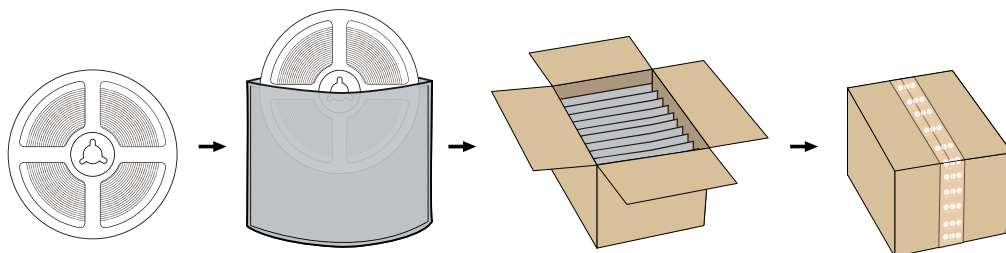

5meters/reel

1reel/bag

60bags/carton

40x40x23.5cm
7.37kgs/carton

Warning



- Product installation must be carried out by a qualified professional.
- Before installing make sure, that electrical power is turned OFF.
- Before installing make sure, that the fixing area can bear the total weight of the luminaire.
- Pay attention to polarity when connecting (installing) the product.
- Do not operate if the luminaire has been damaged.
- To protect the surface from dirt and fingerprints, we recommend the use of protective gloves during installation.
- Product warranty does not cover any damage caused by faulty installation and/or misuse.
- For further information, please contact the manufacturer.