

DIGITAL TEMPERATURE SENSOR

PX-7021

±0.1 °C accuracy from 1.4 µA, with an I²C and SMBus interface, in a 2 × 2 mm package

PRELIMINARY

±0.1 °C
ACCURACY, -20 °C TO 50 °C

1.4 µA
AT ONE READING A SECOND

2 × 2 mm
8-PIN DFN PACKAGE

1 Features

- ±0.1 °C maximum error from -20 °C to 50 °C
- ±0.3 °C maximum error from -40 °C to 125 °C
- 16-bit result, with a resolution of 0.0078 °C
- 1.4 µA at one reading a second, 0.1 µA in shutdown
- Supply from 1.6 V to 5.5 V, 5.5 V-tolerant interface
- I²C and SMBus, from 1 kHz to 1 MHz, with bus timeout
- Eight bus addresses, selected by three pins
- Alert output, in comparator or interrupt mode
- 8-pin DFN, 2 × 2 mm, with an exposed pad (Figure 1)

2 Applications

- Cold-chain loggers for vaccines and fresh food
- Wearable and home thermometry
- Battery packs, chargers and power banks
- Thermostats and building controls
- Thermal protection for processors and power stages
- Laboratory and medical instruments

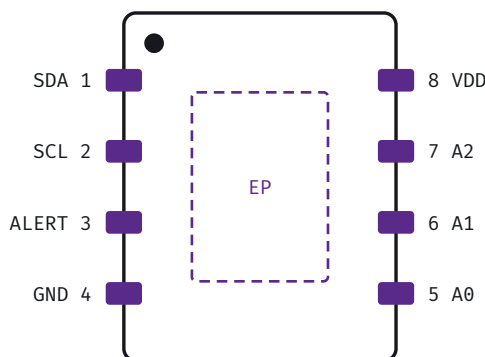


Figure 1. Pin configuration, 8-pin DFN, top view.

3 Description

The PX-7021 is a digital temperature sensor for coin-cell designs that must read within a tenth of a degree. A 16-bit converter reads an on-chip bandgap sensor, and every part is trimmed at two temperatures on the production line, so the board needs no calibration and the host no look-up table: one step of the result is 1/128 °C.

Between conversions the sensor sleeps: at one reading a second it draws 1.4 µA on average. Two limit registers drive the open-drain **ALERT** output, which can wake a sleeping host when the temperature leaves a window.

Figure 2 shows the typical circuit, with one decoupling capacitor and the bus pull-ups. With its address pins tied to ground the sensor answers at 48h.

Preview Engineering samples of the DFN versions are available now. The limits in Table 1 are preliminary and may change before production release.

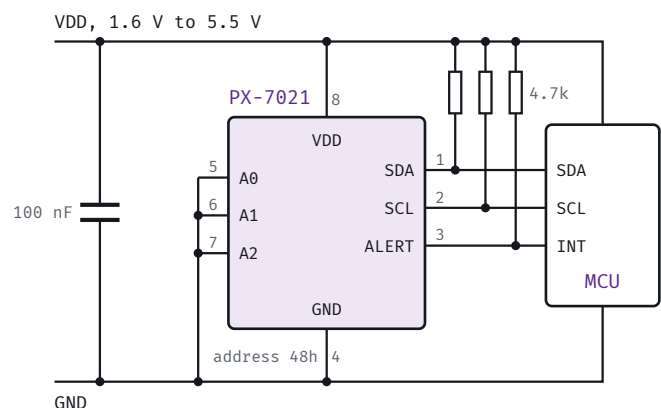


Figure 2. Typical application, bus address 48h.

Table 1. Electrical characteristics, $V_{DD} = 1.6\text{ V to }5.5\text{ V}$ and $T_A = -40\text{ °C to }125\text{ °C}$ unless noted

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Temperature sensor	Accuracy ¹	T_{ACC}	-20 °C to 50 °C		-0.1	±0.05 °C
			-40 °C to 125 °C		-0.3	±0.1 °C
	Resolution	16-bit result		0.0078		°C
	Repeatability ²	1 Hz, 100 readings		±0.008		°C
	Long-term drift ²	500 h at 125 °C		0.02		°C
Power supply	Supply voltage	V_{DD}	1.6	3.3	5.5	V
	Average supply current ³	I_{DD}	1 conversion per second		1.4	2.5 µA
	Supply current, converting	I_{CONV}		120	175	µA
	Shutdown current	I_{SD}	bus idle		0.1	0.5 µA
	Power-on reset threshold	V_{POR}	V_{DD} rising		1.2	1.45 V
Conversion	Conversion time	t_{CONV}	16-bit result		10.5	12 ms
			12-bit result		3.1	3.6 ms
	Conversion rate	f_{CONV}	continuous mode		0.25	8 Hz
Digital inputs and outputs	High-level input voltage	V_{IH}	0.7 V_{DD}			V
	Low-level input voltage	V_{IL}			0.3 V_{DD}	V
	Low-level output voltage	V_{OL}	3 mA sink			0.4 V
	Input leakage current	I_{IN}	-1			1 µA
	Pin capacitance	C_{IN}	3			pF
Serial interface	Clock frequency	f_{SCL}	Fast-mode Plus		1	1000 kHz
	Bus timeout	$t_{TIMEOUT}$	SMBus mode		25	30 35 ms

Typical values at 3.3 V and 25 °C. ¹ Tested at 25 °C and 50 °C, the rest by characterization. ² Characterized, not tested in production. ³ One conversion a second, bus idle.

4 Specifications

ABSOLUTE MAXIMUM RATINGS

- Supply voltage, V_{DD} to GND: **-0.3 V to 6 V**
- SDA, SCL and ALERT to GND: **-0.3 V to 6 V**
- A0 to A2 to GND: **-0.3 V to $V_{DD} + 0.3\text{ V}$**
- Current into any pin: **±10 mA**
- Storage temperature: **-60 °C to 150 °C**
- Electrostatic discharge, human-body model: **±2 kV**

Stress beyond these ratings can damage the device for good. Design to the operating conditions below.

4.1 Recommended operating conditions

Operate the sensor from 1.6 V to 5.5 V, at ambient temperatures from -40 °C to 125 °C, with less than 50 mV of ripple on the supply. The bus pull-ups may return to

any supply up to 5.5 V, so a sensor run from 1.8 V can share a bus with 5 V parts without a level shifter.

4.2 Electrical characteristics

Table 1 lists the limits over the full supply and temperature range. Typical values are the mean of the characterization lots at 3.3 V and 25 °C; they are not guaranteed. Accuracy is tested on every part at 25 °C and 50 °C; values marked ² come from characterization only.

5 Pin configuration and functions

Figure 1 shows the package from above. A dot on the top face marks pin 1, and the pins count counterclockwise from it. The exposed pad under the package is the sensor's thermal path to the board: solder it to a ground pour. **Table 2** describes each pin.

Table 2. Pin functions

Pin	Name	Type	Description
Power			
8	VDD	P	Supply, 1.6 V to 5.5 V. Decouple with 100 nF within 2 mm of the pin.
4	GND	G	Ground.
EP	EP	G	Exposed pad, the thermal path to the board. Solder it to ground.
Serial interface			
1	SDA	I/O	Serial data, open drain, 5.5 V-tolerant.
2	SCL	I	Serial clock, Schmitt-trigger input.
3	ALERT	O	Alert output, open drain. Leave it open when unused.
Address select			
5	A0	I	Address bit 0. Tie to GND or V _{DD} , never leave it floating.
6	A1	I	Address bit 1. Tie to GND or V _{DD} .
7	A2	I	Address bit 2. Tie to GND or V _{DD} .

Types: P power, G ground, I input, O open-drain output, I/O open-drain input and output.

6 Detailed description

A host talks to the PX-7021 through eleven registers, listed with their reset values in Table 3. Two-byte registers are read and written most significant byte first.

6.1 Temperature conversion

A conversion takes 10.5 ms at 16 bits and 3.1 ms at 12 bits. In continuous mode the sensor starts a new conversion at the programmed rate, from one every four seconds to eight a second, and sleeps in between; in one-shot mode it converts once, stores the result and shuts down again. The result register always holds the last complete reading, so a read never catches a conversion halfway.

The result is a signed 16-bit value in steps of 1/128 °C. Values above 7FFFh are negative: 1900h reads as 50 °C, and E700h as -50 °C.

6.2 Serial interface

The sensor is a target on an I²C or SMBus bus, at clock rates up to 1 MHz. Tie each of A0, A1 and A2 to ground or to the supply to choose one of eight addresses, from 48h to 4Fh. In SMBus mode a clock held low for more than 30 ms resets the interface, so a host that crashes in mid-

Table 3. Register map

Addr.	Register	Reset	Contents
Measurement			
00h	TEMP	8000h	The last complete result, read only. 8000h until the first result - Signed, in steps of 1/128 °C - At 12 bits, bits 3 to 0 read zero - Two bytes, most significant first
04h	STATUS	00h	Flags, read only. Reading STATUS releases ALERT in interrupt mode. - Bit 7, BUSY: still converting - Bit 6, HIGH: a result crossed THIGH - Bit 5, LOW: a result crossed TLOW - Bit 4, TRIM: the trim check failed at power-on
Configuration			
01h	CONFIG	0000h	Operating mode and alert behavior. - Bits 15 and 14, MODE: continuous, one-shot or shutdown - Bit 13, RES: a 12-bit result instead of 16 bits - Bit 12, AVG: each result averages eight readings - Bits 11 and 10, FAULTS: 1, 2, 4 or 6 results beyond a limit before ALERT asserts - Bit 9, POL: ALERT active high - Bit 8, INT: interrupt mode instead of comparator mode
05h	RATE	02h	Conversion rate in continuous mode. 00h to 05h: 0.25, 0.5, 1, 2, 4 or 8 conversions a second - Higher values read back as 05h
06h	ONESHOT	00h	Any write starts one conversion. - Shuts down again afterwards - Ignored in continuous mode
07h	OFFSET	0000h	Added to every result, in the format of TEMP. - From -8 °C to 8 °C - Cleared by a power-on reset
Limits			
02h	TLOW	F600h	Low limit, in the format of TEMP. -20 °C after reset - Keep it below THIGH
03h	THIGH	3C00h	High limit, in the format of TEMP. 120 °C after reset - In comparator mode, ALERT releases below TLOW

Continued on the next page

Table 3. Register map (continued)

Addr.	Register	Reset	Contents
Identification			
0Eh	SERIAL	—	A 48-bit number unique to each part, read only. Read six bytes, from 0Eh
FEh	MAKER	5058h	Manufacturer, read only: PX in ASCII.
FFh	DEVICE	7021h	Device, read only. - Bits 15 to 4: the part number, 702h - Bits 3 to 0: the silicon revision

Reset values apply at power-on and after a general-call reset.

transfer cannot lock the bus. The sensor also answers the I²C general-call reset command.

6.3 Alert output

The ALERT pin compares every result with the limits in THIGH and TLOW. In comparator mode it stays asserted while the temperature is above THIGH and releases once it falls below TLOW, which gives a thermostat its hysteresis. In interrupt mode it asserts once per crossing, and releases when the host reads STATUS, or when the sensor answers a read of the SMBus alert response address.

7 Packaging and ordering

Figure 3 draws the package and its land pattern: the DFN-8 body is 2 mm square and 0.55 mm high, with a 0.5 mm pin pitch and a 0.8 × 1.5 mm exposed pad. Table 4 lists the versions and their order codes. The top of each part carries its number over a date code, YWWL: the year, the work week and the lot.

Parts are rated at moisture sensitivity level 1, so they need no dry storage, and survive three reflow cycles at a peak of 260 °C. Reflow shifts the reading by less than 0.02 °C.

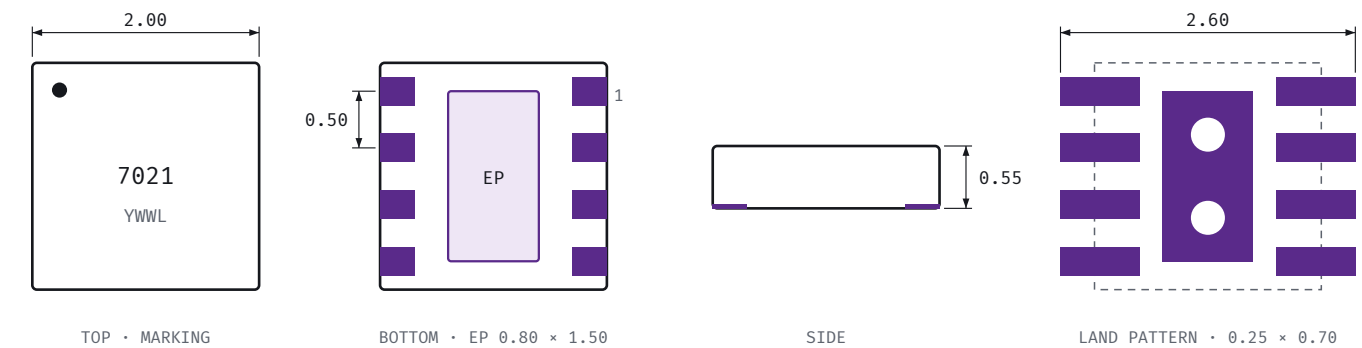


Figure 3. Package outline and land pattern, 8-pin DFN, in mm.

Table 4. Order codes

Order code	Package	Packing	Status
PX-7021-DFN-R	DFN-8, 2 × 2 mm	Reel of 3000	Preview
PX-7021-DFN-T	DFN-8, 2 × 2 mm	Cut tape, 250	Preview
PX-7021-CSP-R	WLCSP-4, 0.8 × 0.8 mm	Reel of 5000	Planned
PX-7021-EVM	Evaluation board	Box of 1	Available

WLCSP-4: fixed address 48h, no ALERT output.

8 Layout guidelines

The sensor measures the copper under its exposed pad. For air temperature, place it at the edge of the board, away from regulators and processors, and cut slots in the board around it so that heat from the rest of the circuit reaches it slowly. For the temperature of a surface, do the opposite: a solid pour and a row of vias carry heat from the surface to the pad. Keep the decoupling capacitor on the same side of the board as the sensor and close to its supply pin: 2 mm at most.

9 Revision history

Rev. 0.3, September 2026: preliminary release, with limits from the first characterization lots. Adds the WLCSP-4 version and the SMBus timeout.

Rev. 0.2, May 2026: advance information for early customers, with typical values only.

Rev. 0.1, February 2026: product brief, with the target accuracy and supply current.

A work of fiction: Pyxis Microdevices and the PX-7021 are imaginary, and so are these figures; do not design with them. Set in Fira Sans, Fira Sans Condensed and Fira Mono (SIL Open Font License) · Text and drawings: original, licensed CC BY 4.0.