0

monitor dual-channel emergency stop

ESTOP

ESTOP	S_EStop_Inst
Reset Type	1
Channel A	S_EStop_ChA
	0
Channel B	S_EStop_ChB
	0
Circuit Reset	S_EStop_ResetPB
	0
Fault Reset	S_EStop_FaultResetPB
	0

O1 CI CRHO II FP

1

Monitor dual-channel safety light curtain

DCS

DCS	S_Gate_Inst
Safety Function	LIGHT CURTAIN
Input Type	EQUIVALENT - ACTIVE HIGH
Discrepancy Time (Msec)	100
Restart Type	AUTOMATIC
Cold Start Type	AUTOMATIC
Channel A	S_LightCurtain_Clear_A
	0
Channel B	S_LightCurtain_Clear_B
	0
Input Status	S_LightCurtain_Ok
	0
Reset	S_Lightcurtain_resetPB
	0

O1 FP

2

Monitor dual-channel safety door switch

DCS

DCS	S_Door_Inst
Safety Function	SAFETY GATE
Input Type	EQUIVALENT - ACTIVE HIGH
Discrepancy Time (Msec)	100
Restart Type	AUTOMATIC
Cold Start Type	AUTOMATIC
Channel A	S_Door_ChA
	0
Channel B	S_Door_ChB
	0
Input Status	S_Door_InputBad
	0
Reset	S_Door_Ok
	0

O1 FP

3

Enable two-hand control when safety devices OK and validate two-hand buttons within discrepancy time

S_EStop_Ok S_LightCurtain_Ok S_Door_Ok S_TwoHand_Enable

THRSe	
THRSe	S_TH_Inst
Discrepancy Time (Msec)	500
Enable	S_TwoHand_Enable
	0
Disconnected	S_TH_Disconnected
	0
Right Button Normally Open	S_TwoHand_RightPB
	0
Right Button Normally Closed	0
Left Button Normally Open	S_TwoHand_LeftPB
	0
Left Button Normally Closed	0
Input Status	S_TH_InputStatus
	0
Reset	S_TwoHand_Reset
	0

O1 BR SB FP

4

combine all safety device outputs

S_EStop_Ok S_LightCurtain_Ok S_Door_Ok S_TwoHand_Ok S_AllDevicesOk

5

Latch safety trip on device fault

S_AllDevicesOk / S_SafetyTrip L

6

Accept manual reset when safety restored

S_SafetyResetPB S_Reset_OS S_AllDevicesOk S_ResetComplete L

7

Clear reset on new safety restored

S_AllDevicesOk / S_ResetComplete U

8

Permit machine run when safety and reset valid

S_AllDevicesOk S_ResetComplete S_SafeRunPermit

9

Combine safety instruction fault signals

S_EStop_FaultPresent
S_LightCurtain_FaultPresent
S_Door_FaultPresent
S_TwoHand_FaultPresent
S_SafetyFault

Clear safety trip after valid reset

10

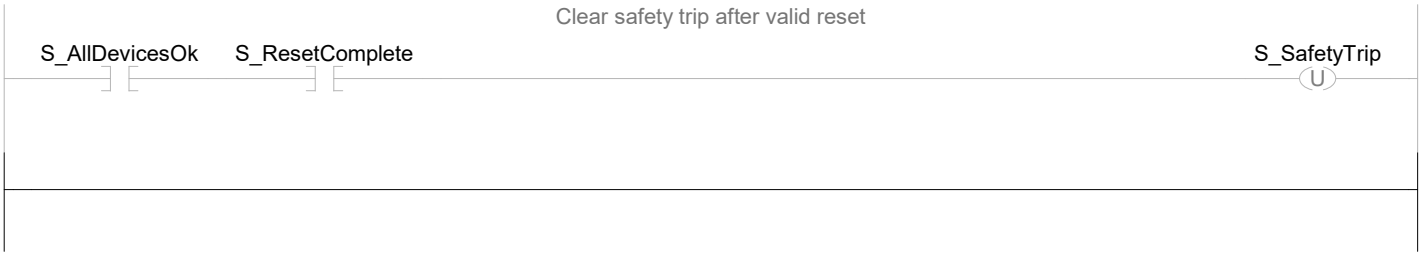

(End)