






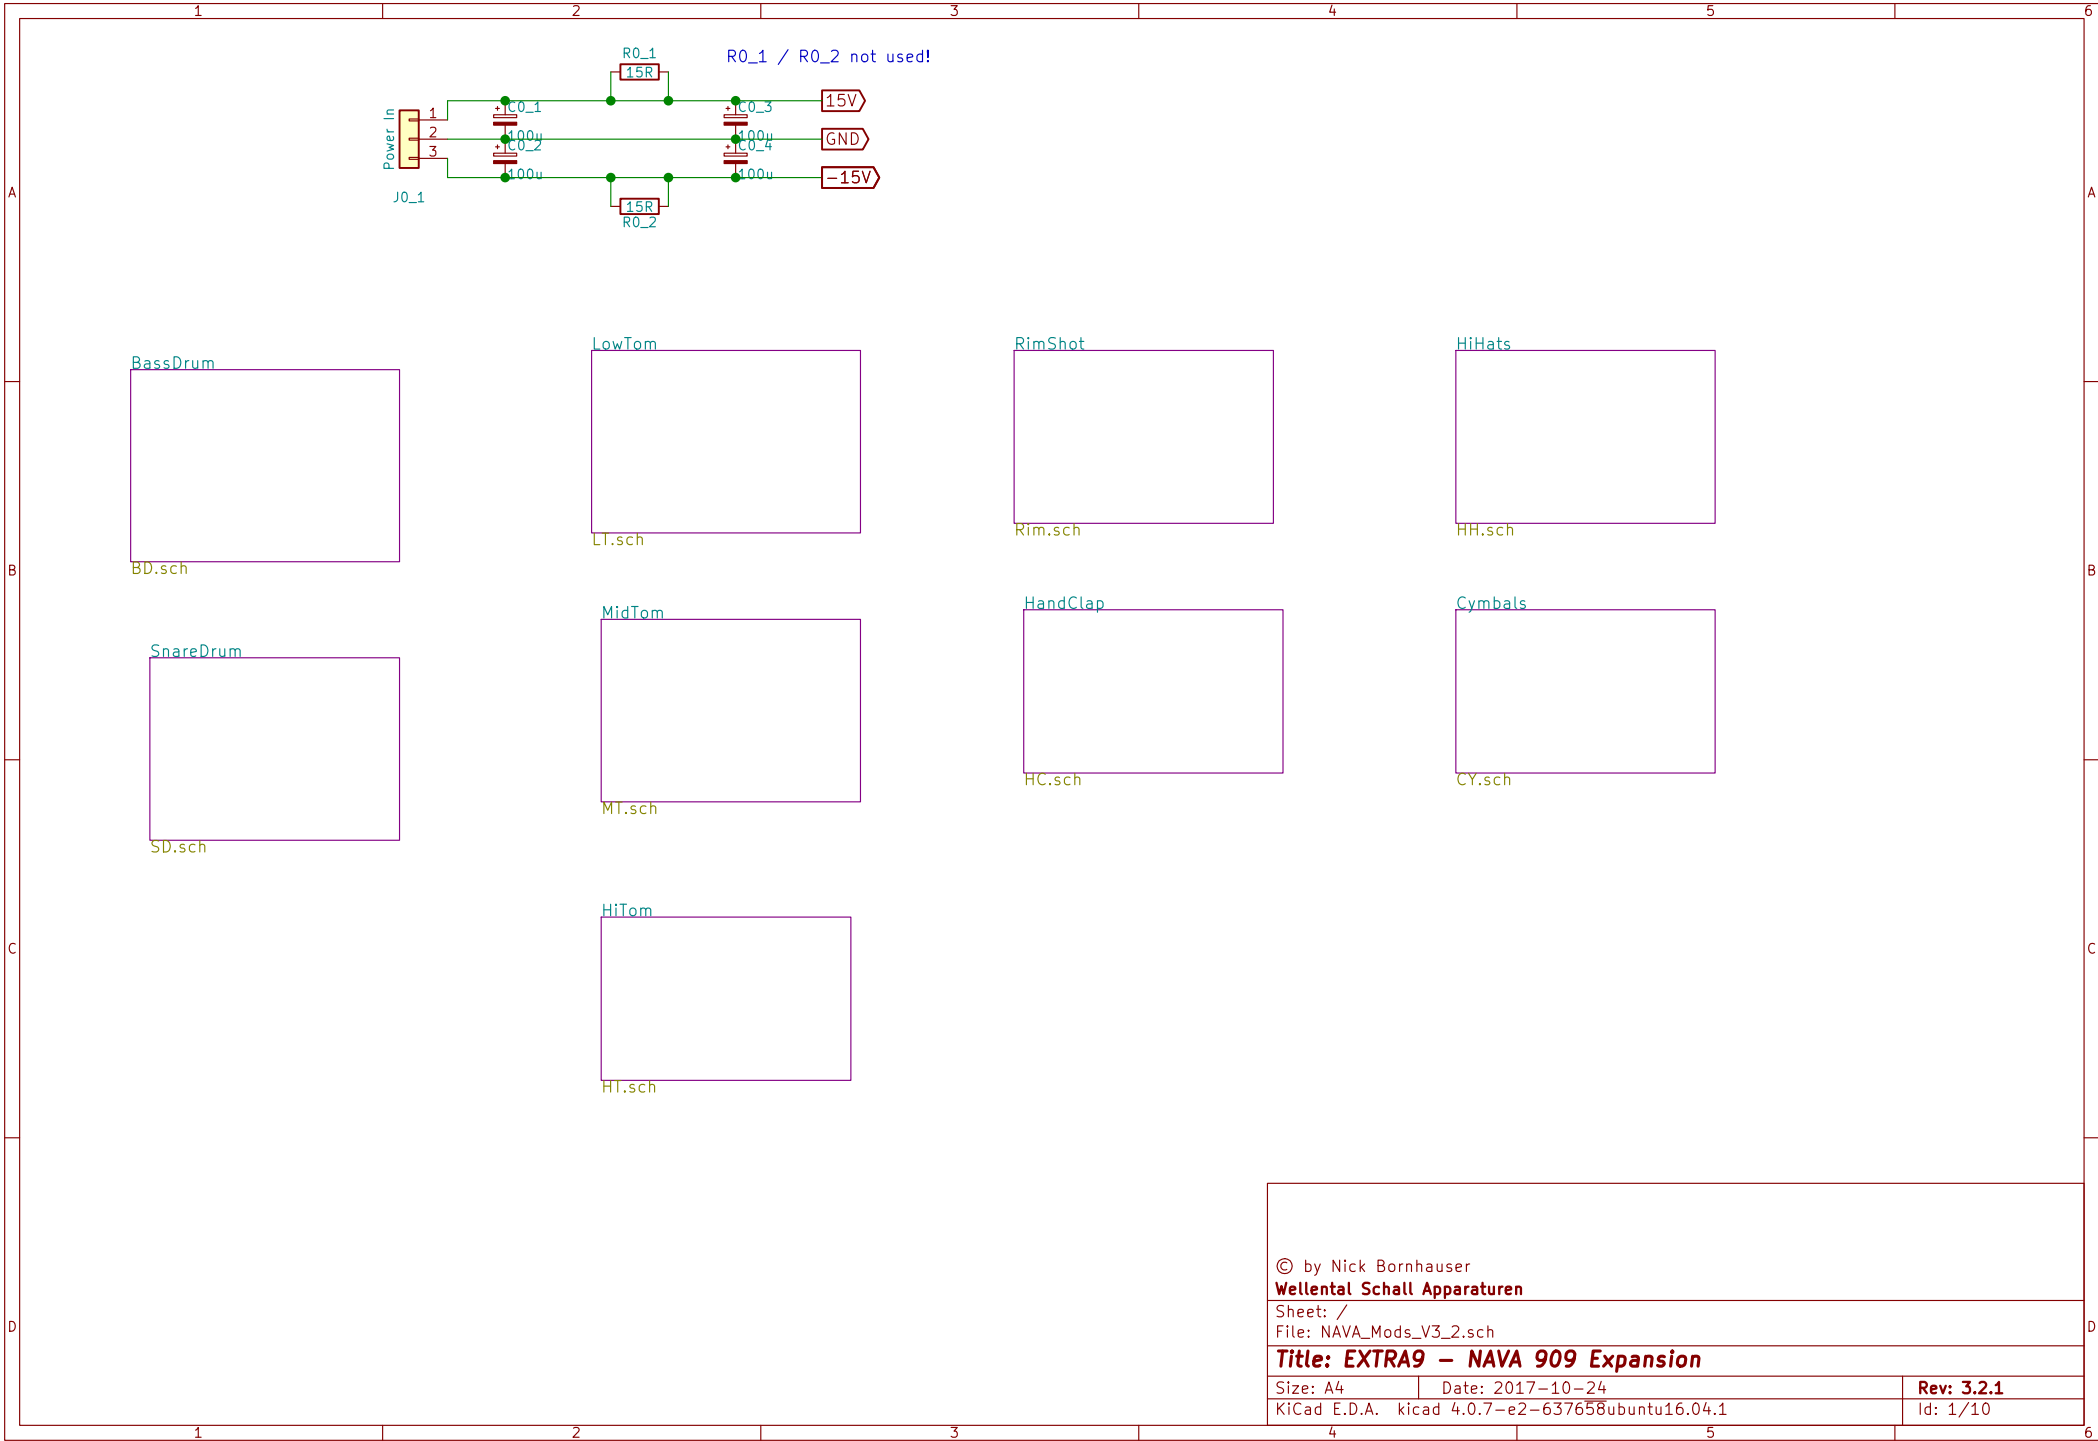


- remove R59
- In : left Pin R59 (junction IC 12B)
- Out : right Pin R59 (junction IC 13A)

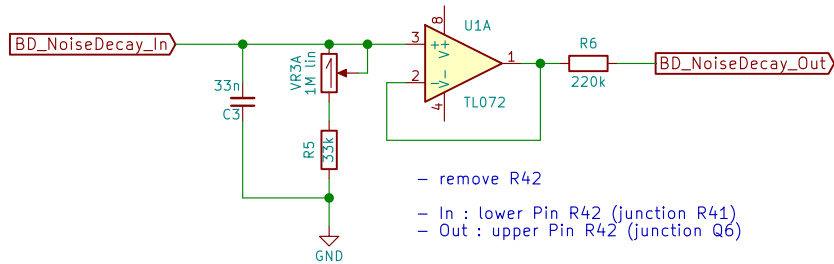


- remove R42
- In : lower Pin R42 (junction R41)
- Out : upper Pin R42 (junction Q6)



- remove R52
- In : left Pin R52 (junction IC13A)
- Out : right Pin R52 (junction D11)

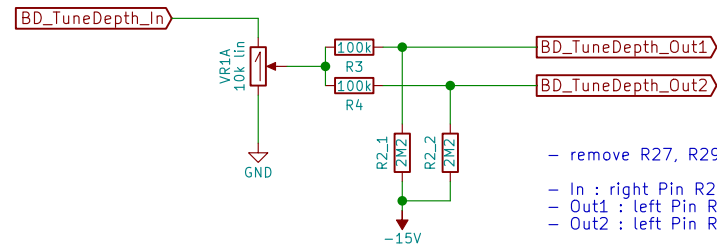



- remove R27, R29, R31
- In : right Pin R29 (junction IC12A)
- Out1 : left Pin R29 (junction IC12B)
- Out2 : left Pin R31 (junction IC12B)

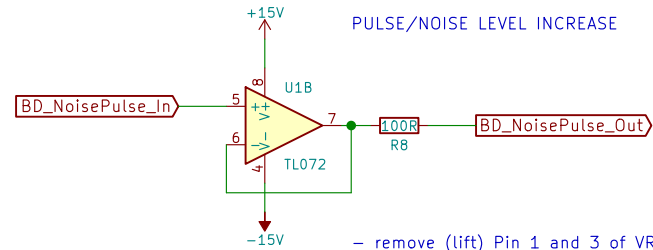

- remove (left) Pin 1 and 3 of VR3 (Attack Pot)
- In : Pin 3 on PCB
- Out: Pin 3 on Pot
- GND: Pin 1 on Pot

DECAY RANGE INCREASE
- C8 : 1uF replace

PITCH DECAY RANGE INCREASE (Tune Pot)
- C9 : 1uF replace
- R21 : 750R replace or 1k parallel
- R57 : 7k5 replace or 10k parallel

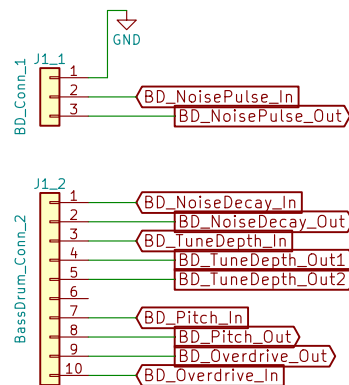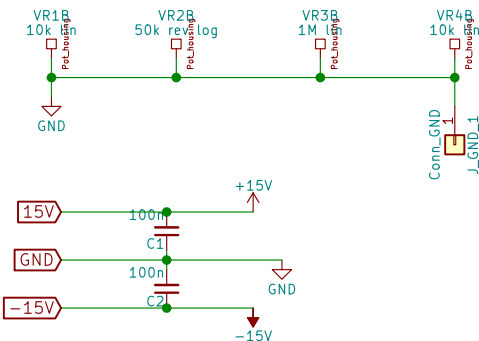





© by Nick Bornhauser
Wellental Schall Apparaturen

Sheet: /BassDrum/
File: BD.sch

Title: EXTRA9 – NAVA 909 Expansion



Size: A4 | Date: 2017-10-24
KiCad E.D.A. | kicad 4.0.7-e2-637658ubuntu16.04.1

Rev: 3.2.1
Id: 2/10

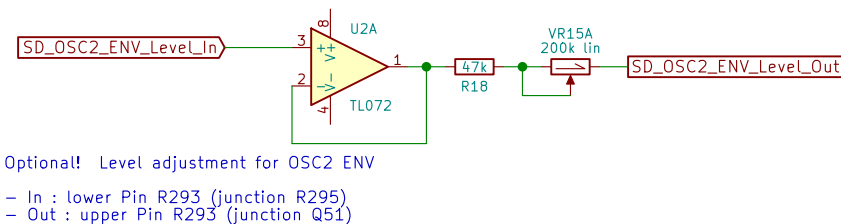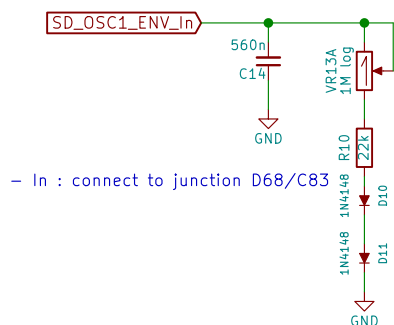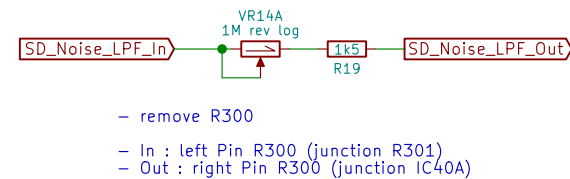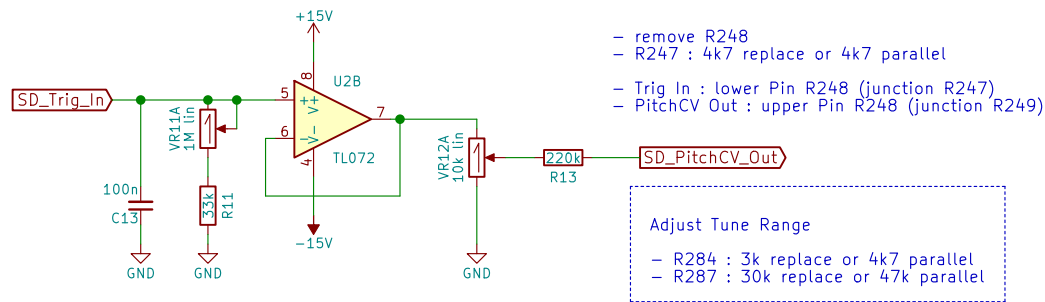

extended Tone Control (Noise Decay)

- R254 : 10k replace or 10k parallel

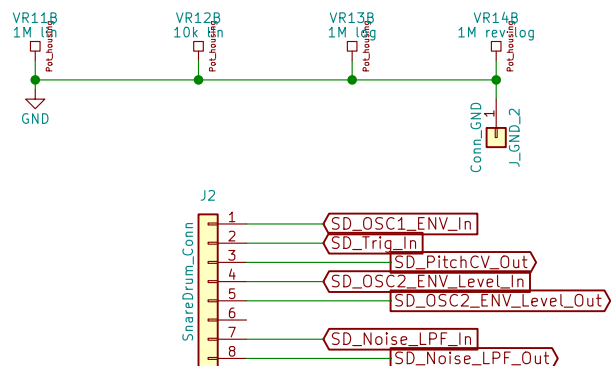


© by Nick Bornhauser
Wellental Schall Apparaturen


Sheet: /SnareDrum/
File: SD.sch

Title: EXTRA9 – NAVA 909 Expansion

Size: A4 Date: 2017-10-24
KiCad E.D.A. kicad 4.0.7-e2-637658ubuntu16.04.1








Rev: 3.2.1
Id: 3/10

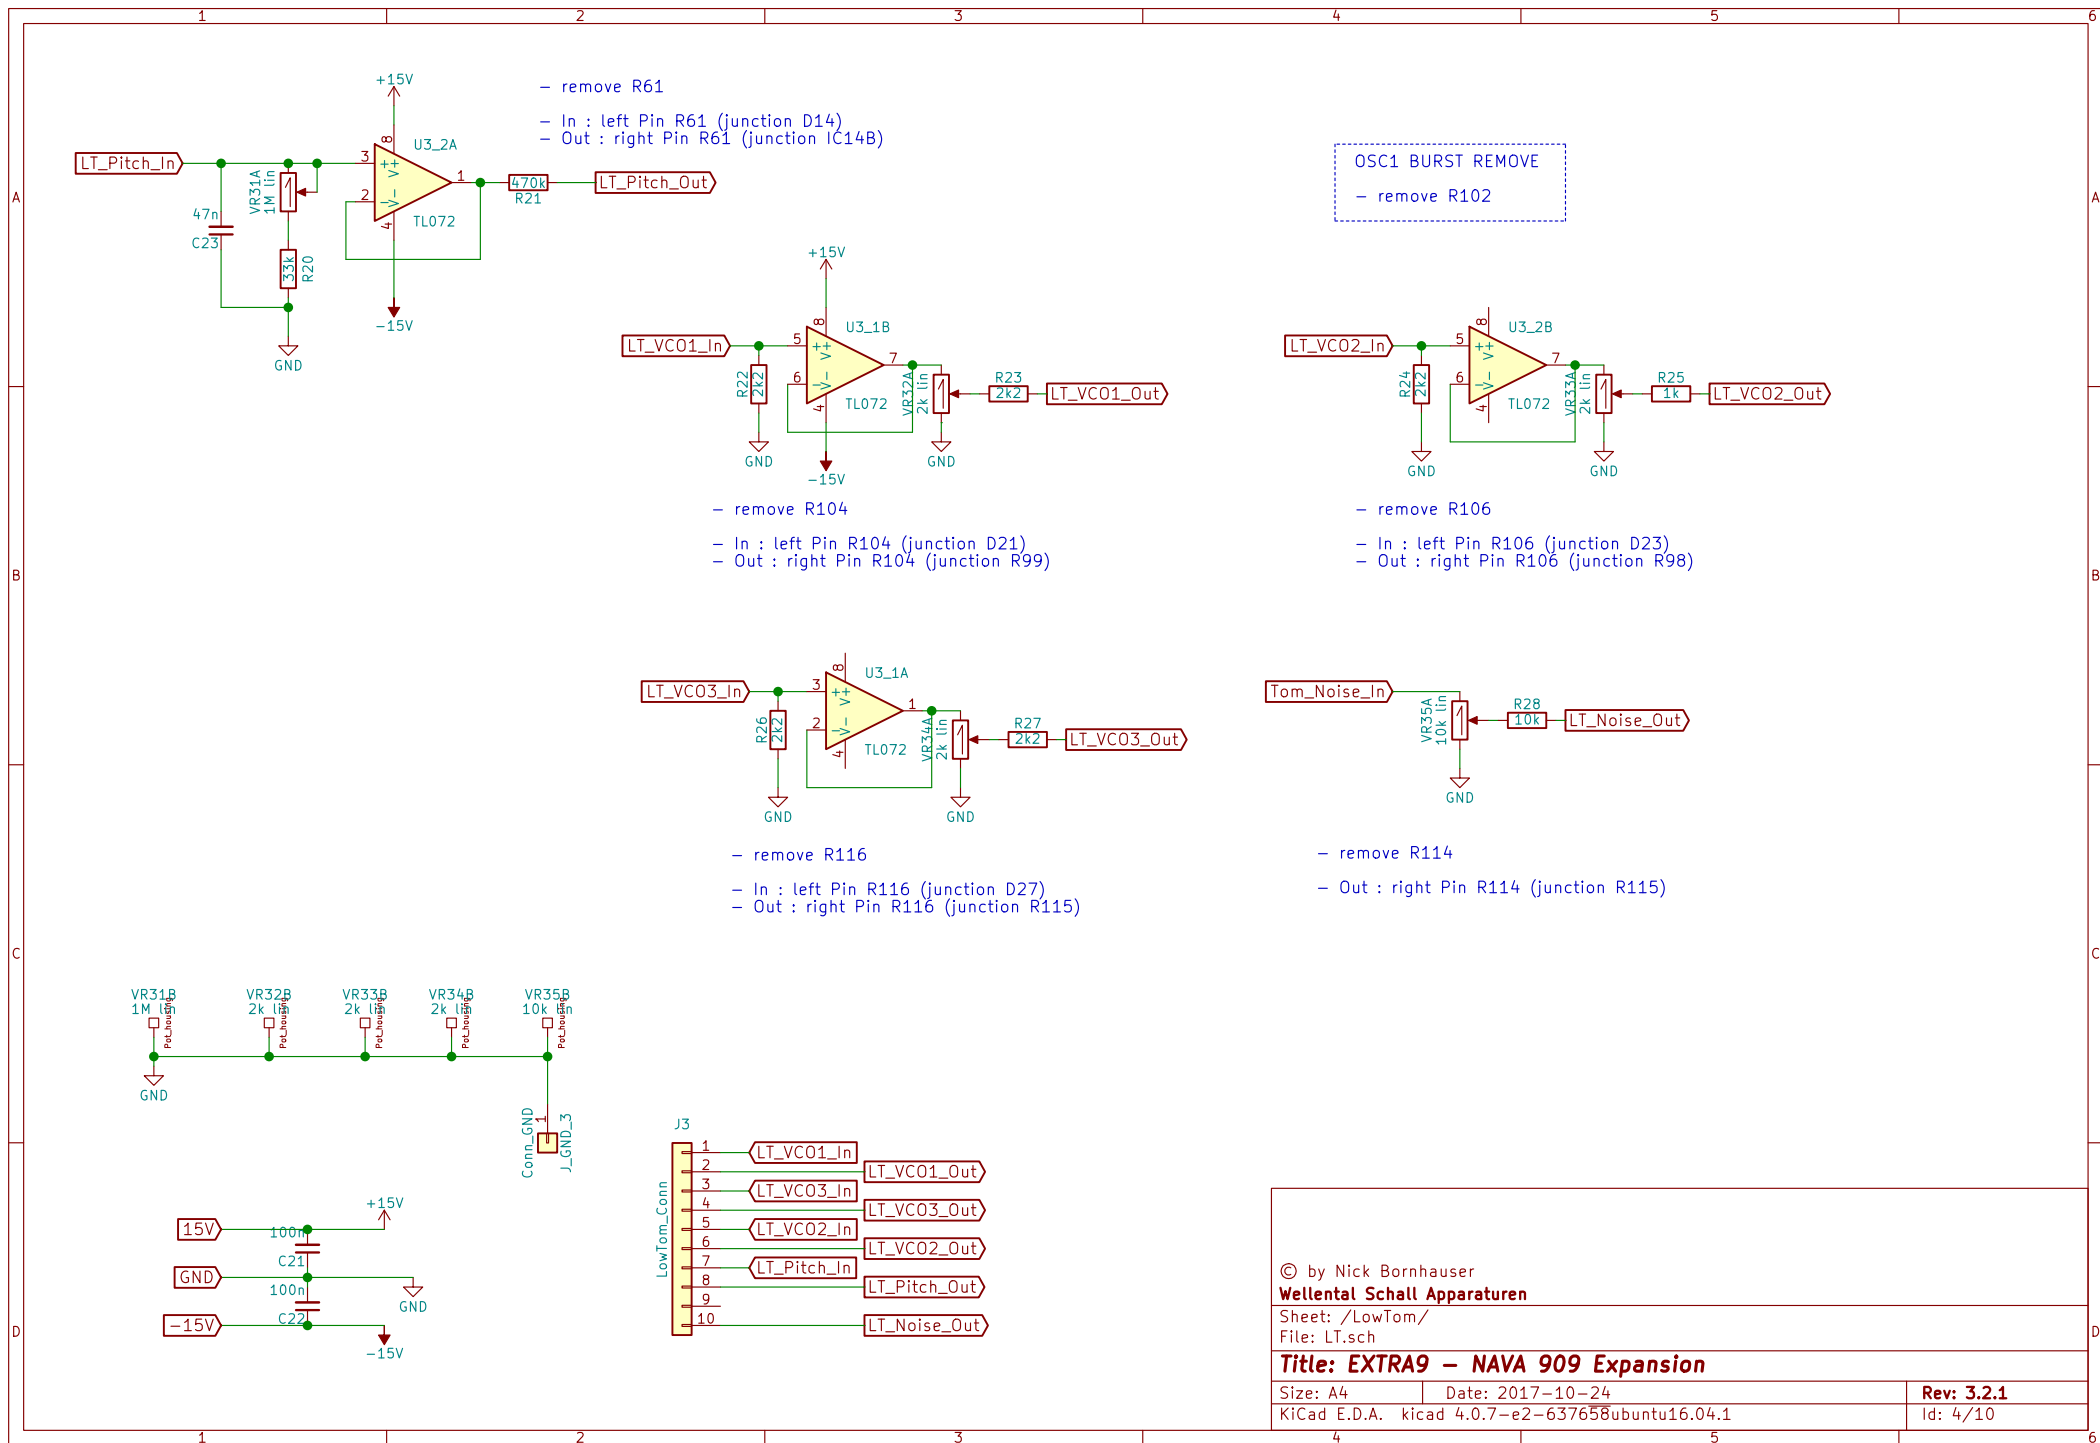

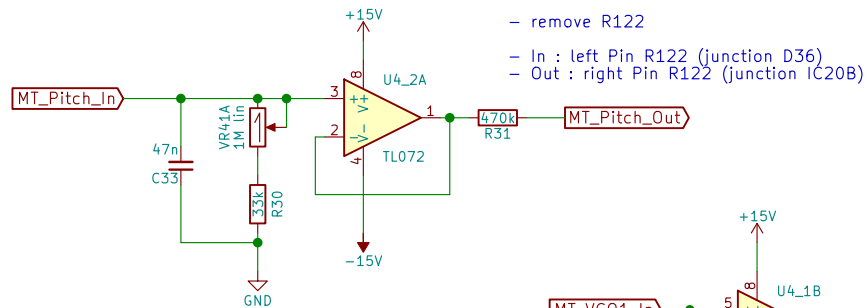

OSC1 BURST REMOVE

- remove R163

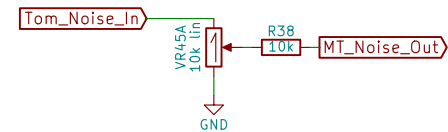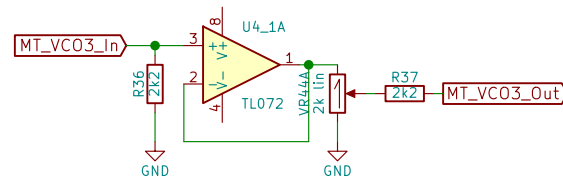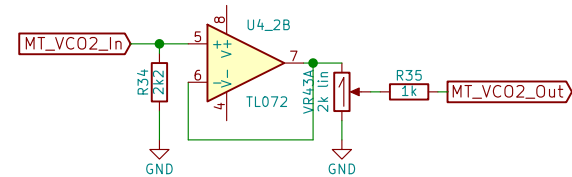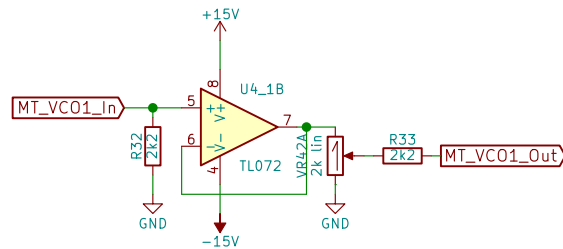

© by Nick Bornhauser

Wellental Schall Apparaturen

Sheet: /MidTom/

File: MT.sch

Title: EXTRA9 – NAVA 909 Expansion


Size: A4

Date: 2017-10-24

KiCad E.D.A. kicad 4.0.7-e2-637658ubuntu16.04.1

Rev: 3.2.1


Id: 5/10

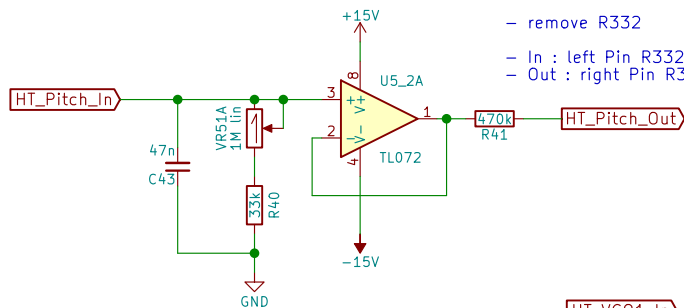


- remove R332
- In : left Pin R332 (junction D82)
- Out : right Pin R332 (junction IC42B)

OSC1 BURST REMOVE


- remove R359

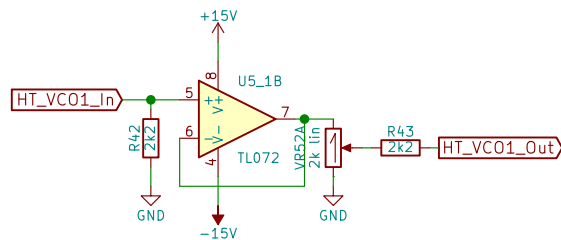


- remove R357
- In : left Pin R357 (junction D78)
- Out : right Pin R357 (junction R351)

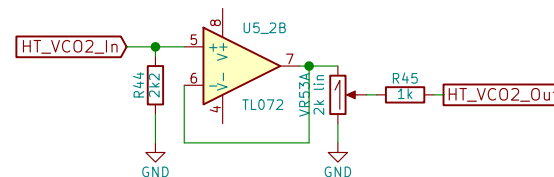




- remove R355
- In : left Pin R355 (junction D80)
- Out : right Pin R355 (junction R350)

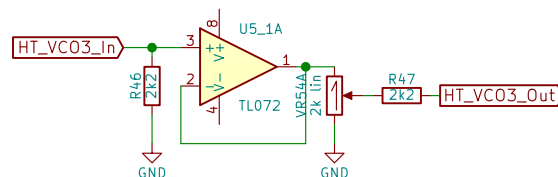

- remove R380
- In : left Pin R380 (junction D85)
- Out : right Pin R380 (junction R379)

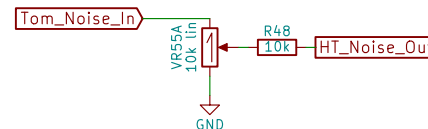

- remove R387
- Out : right Pin R387 (junction R379)



© by Nick Bornhauser

Wellental Schall Apparaturen

Sheet: /HiTom/

File: HT.sch

Title: EXTRA9 – NAVA 909 Expansion


Size: A4

Date: 2017-10-24


Rev: 3.2.1

KiCad E.D.A. kicad 4.0.7-e2-637658ubuntu16.04.1


Id: 6/10






- remove R414
- In : left Pin R414 (junction IC49A inv In)
- Out : right Pin R414 (junction IC49A Out)

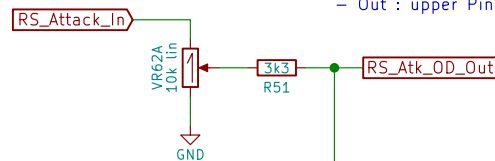

- remove R417
- In : lower Pin R417 (junction IC49B inv In)
- Out : upper Pin R417 (junction R408)



- remove R415
- In : lower Pin R415 (junction IC49A)




RS LEVEL INCREASE
- R419 : 2k2 parallel / 1k5 replace

© by Nick Bornhauser
Wellental Schall Apparaturen


Sheet: /RimShot/
File: Rim.sch

Title: EXTRA9 – NAVA 909 Expansion


Size: A4	Date: 2017-10-24	Rev: 3.2.1
KiCad E.D.A. kicad 4.0.7-e2-637658ubuntu16.04.1		Id: 7/10




- remove R207
- In : left Pin R207 (junction IC26B inv In)
- Out : right Pin R207 (junction IC26B Out)

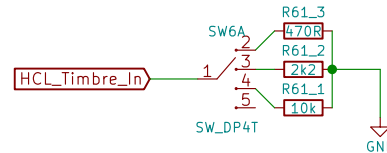



- remove R209
- In : lower Pin R209 (junction R208)






not used –
just for PCB routing

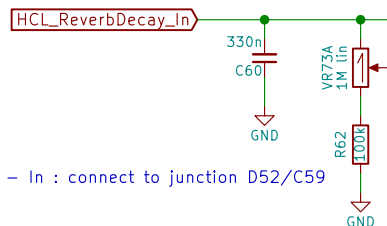

- In : connect to junction D52/C59

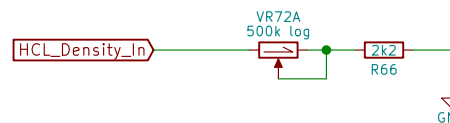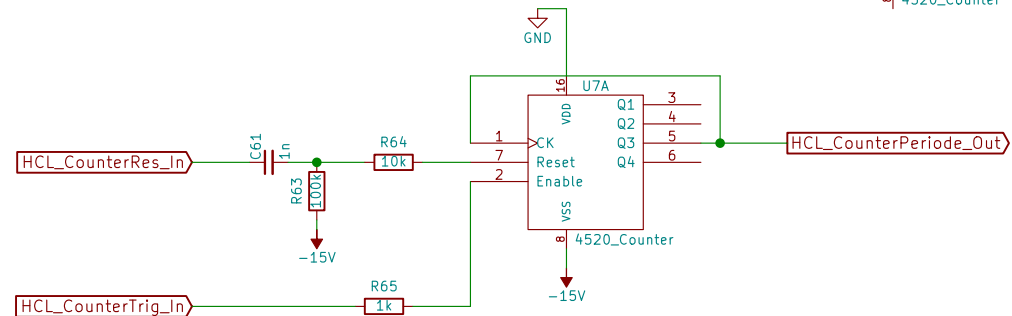

- remove C62 / (C64 recommended)
- remove R220
- R221 : 47k replace
- C65 : 220nF replace
- CounterRes_In : connect to upper Pin R213 (junction Q36)
- CounterTrig_In : connect to leftpin R221 (junction IC29 [13])
- CounterPeriode_Out : upper Pin C62 (junction IC29 [2])
- Density In : upper Pin R220 (junction IC29 [1])

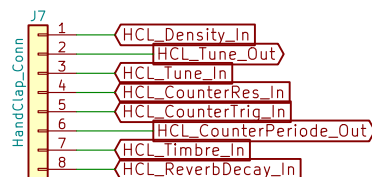


© by Nick Bornhauser
Wellental Schall Apparaturen


Sheet: /HandClap/
File: HC.sch

Title: EXTRA9 – NAVA 909 Expansion

Size: A4 Date: 2017–10–24
KiCad E.D.A. kicad 4.0.7–e2–637658ubuntu16.04.1

Rev: 3.2.1
Id: 8/10

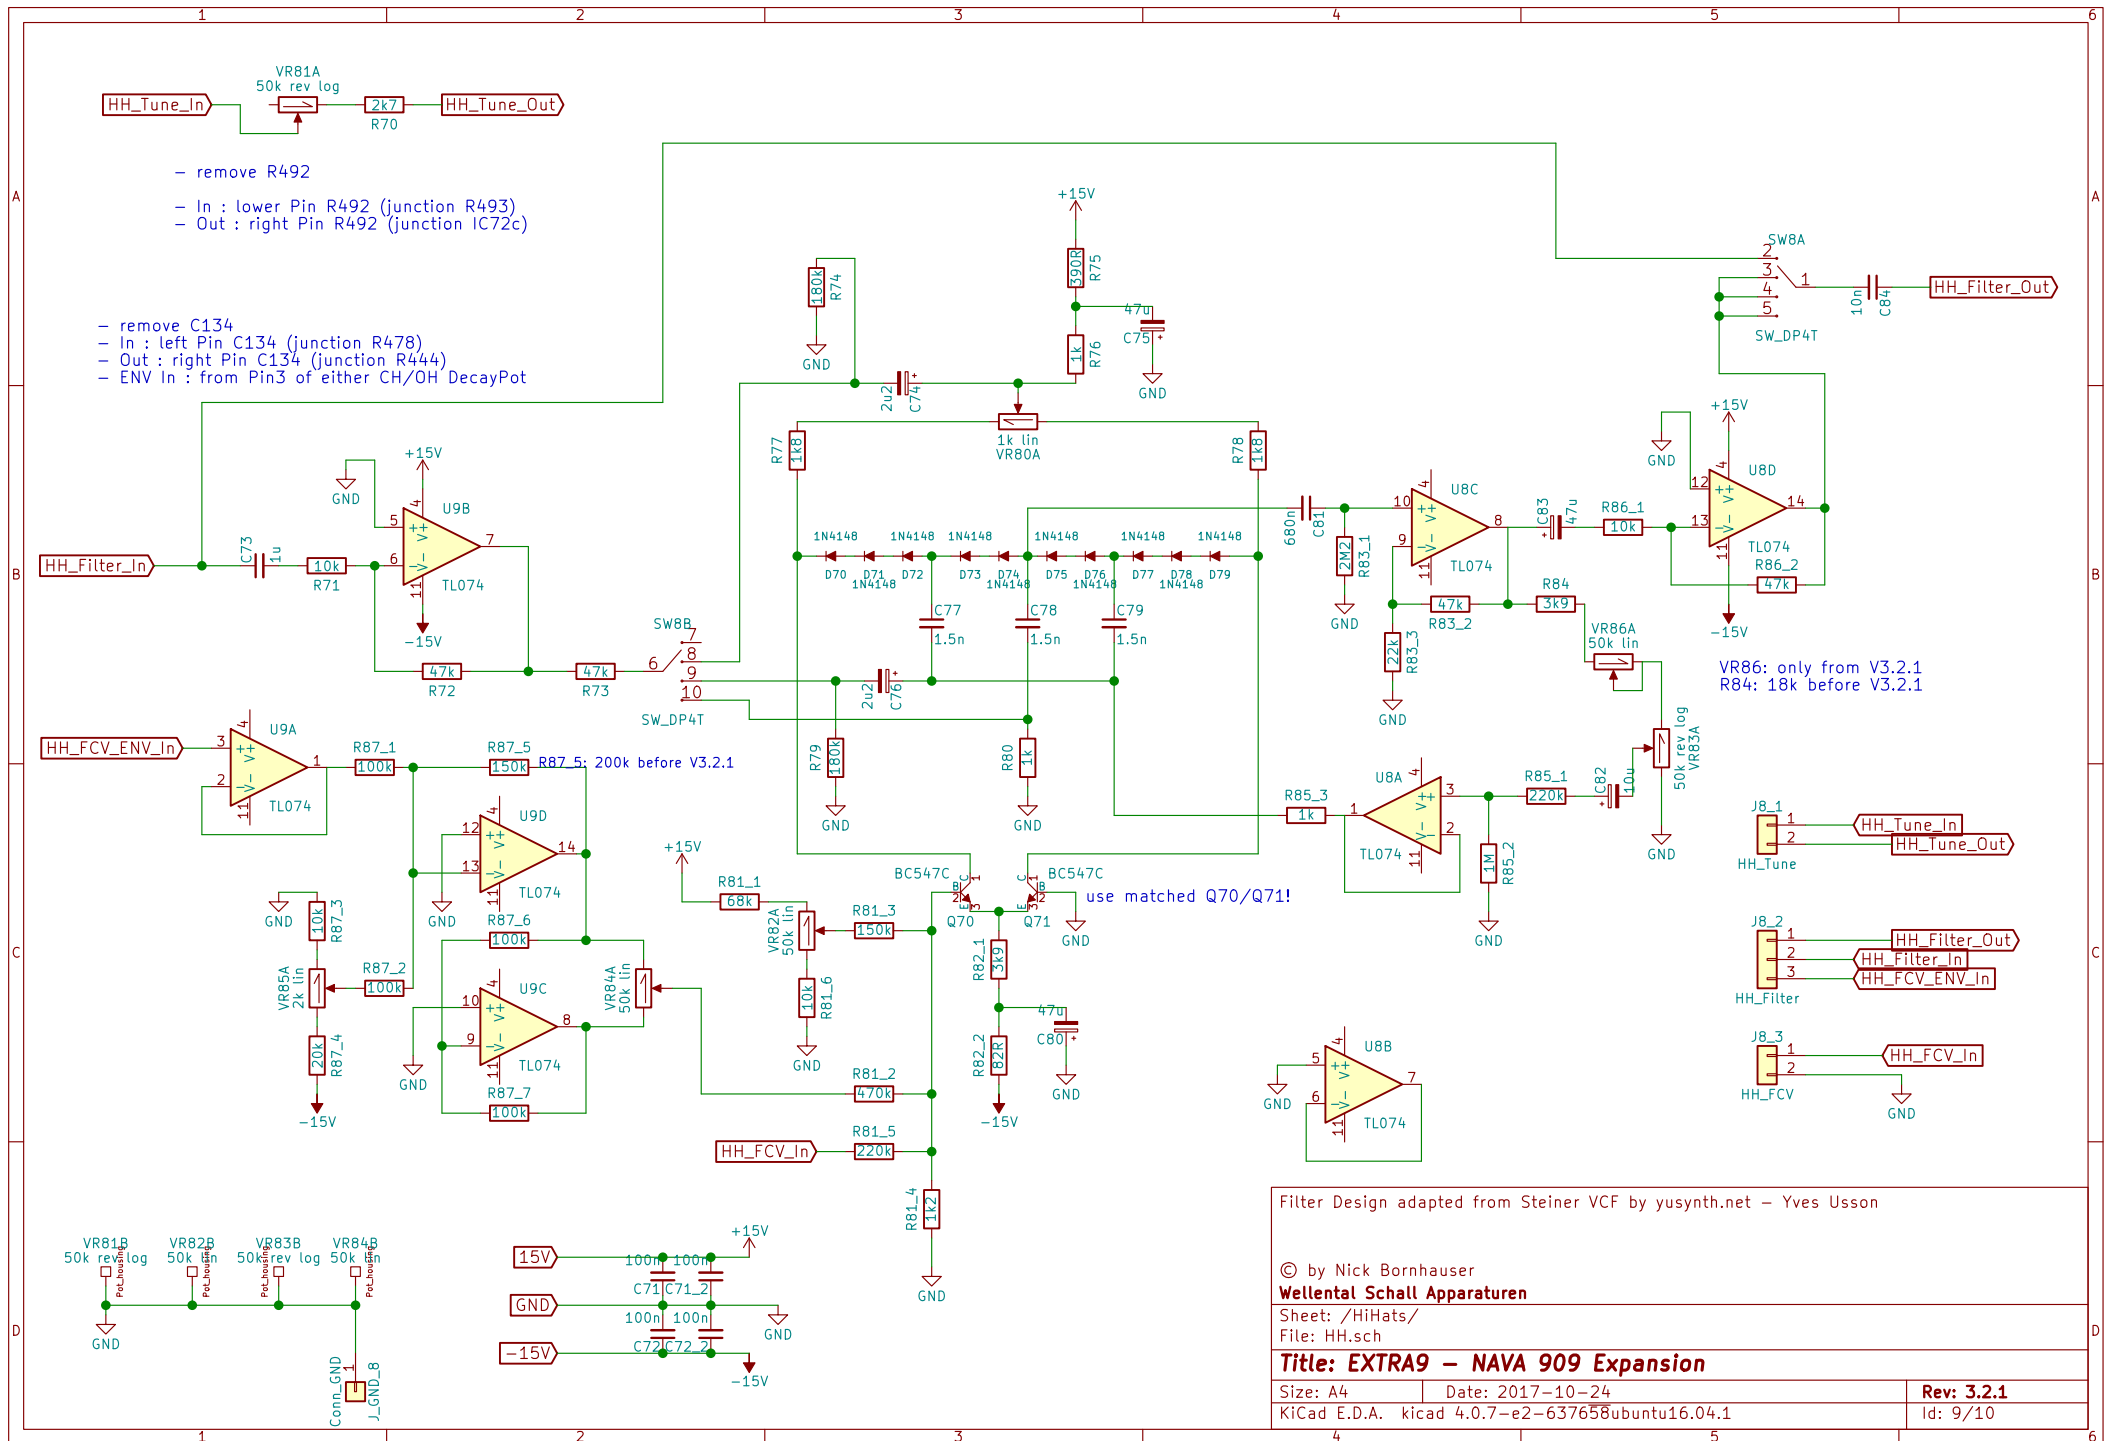

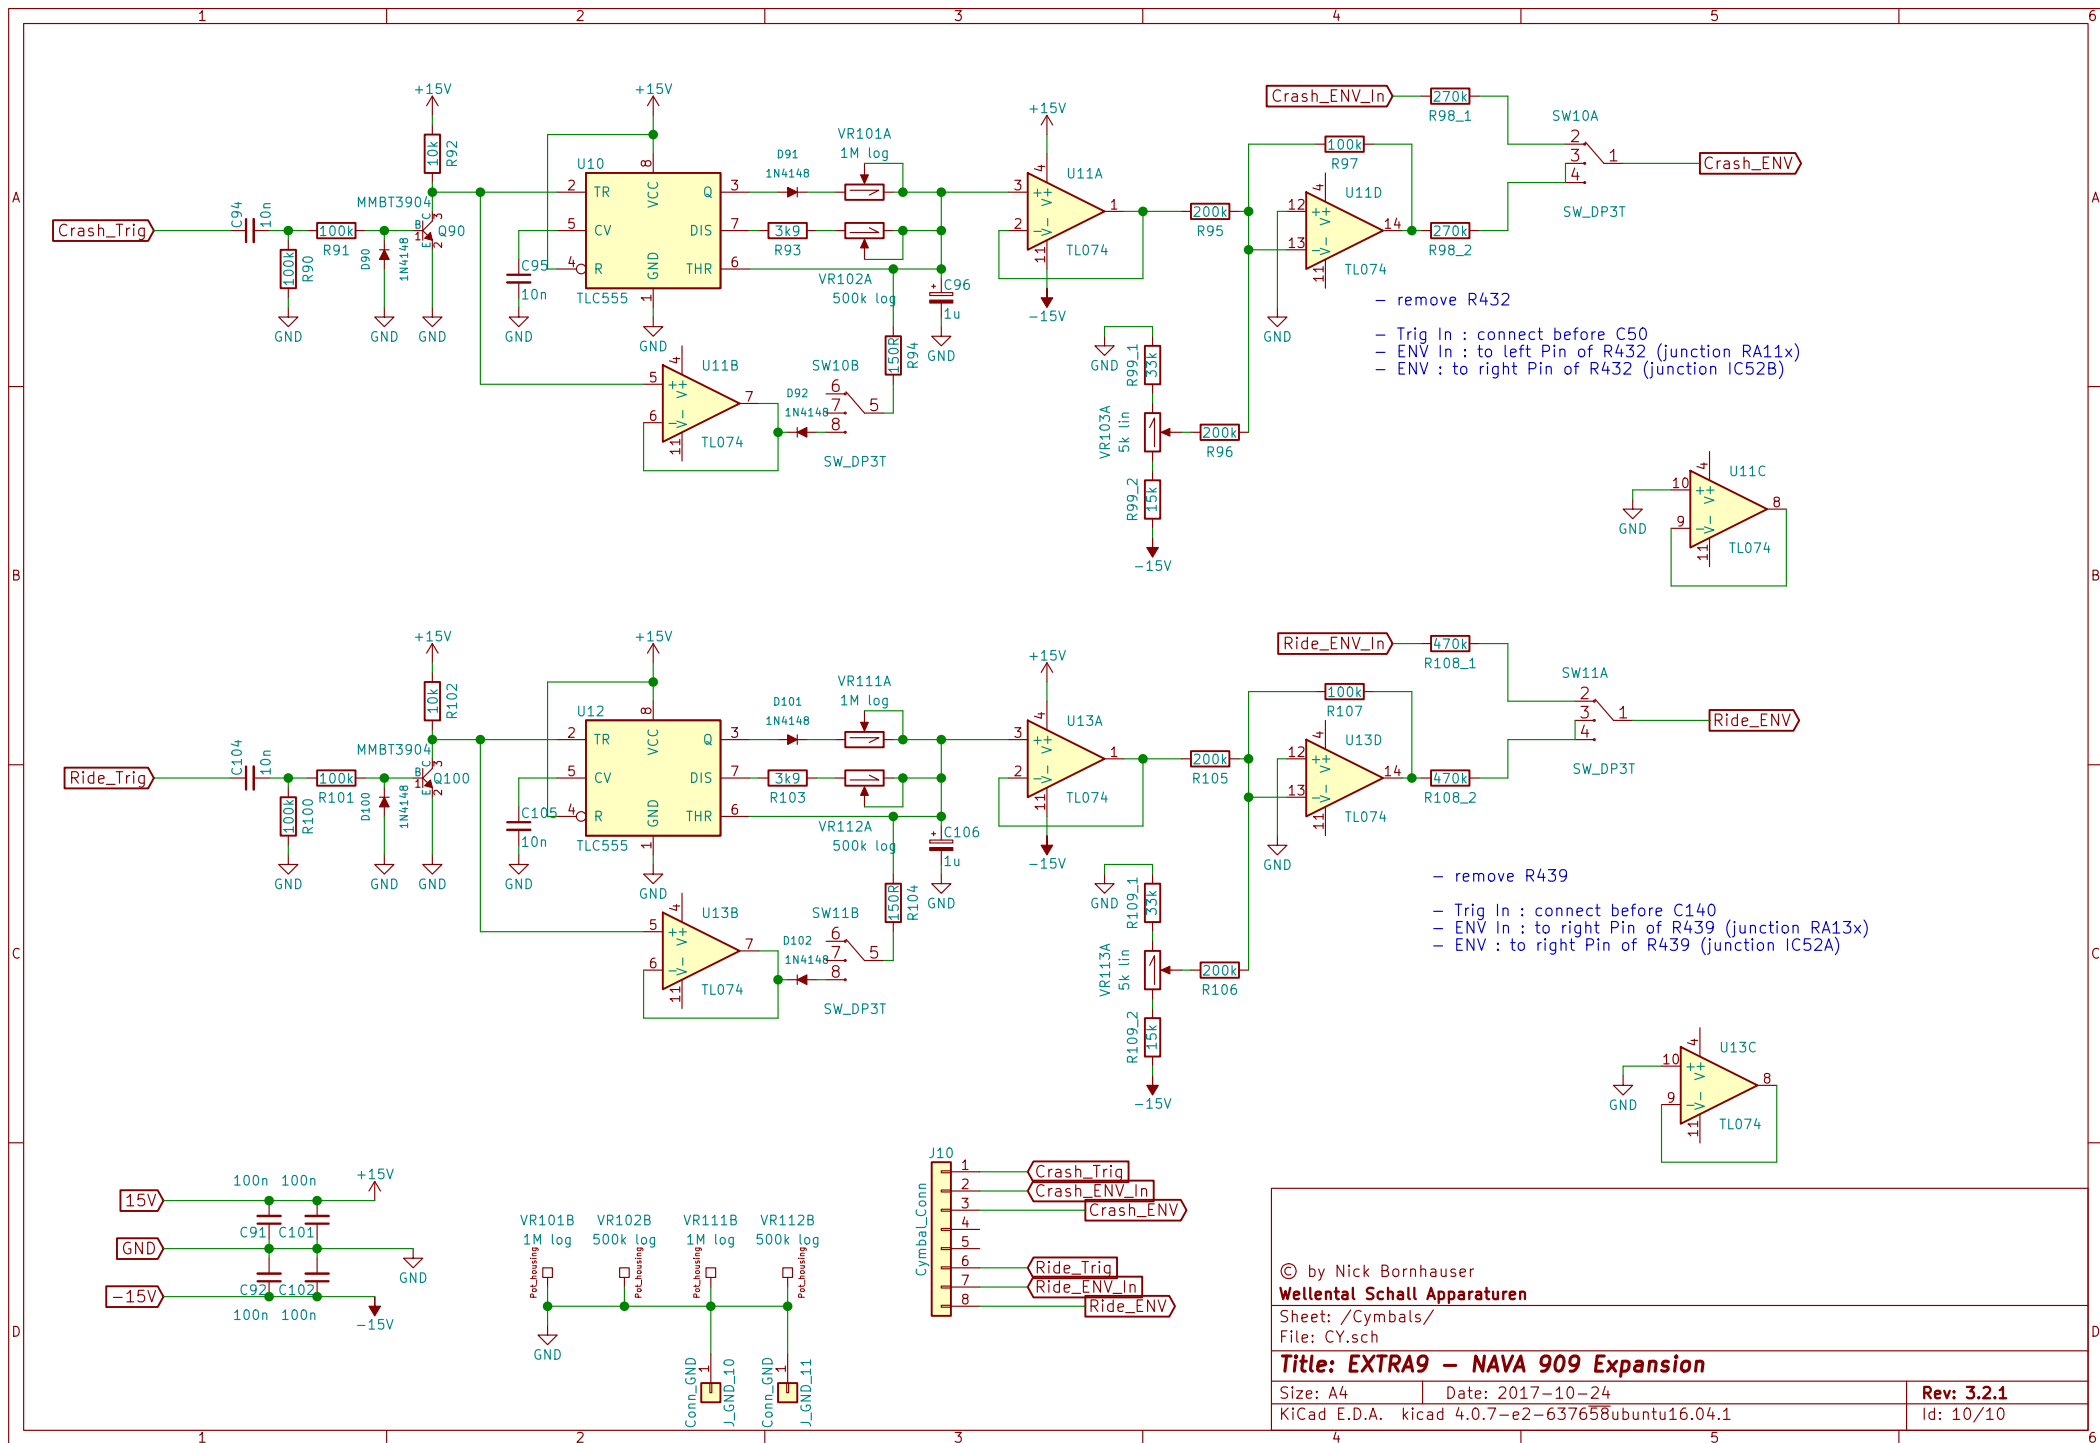

© by Nick Bornhauser
Wellental Schall Apparaturen

Sheet: /Cymbals/
File: CY.sch

Title: EXTRA9 – NAVA 909 Expansion

Size: A4 Date: 2017-10-24
KiCad E.D.A. kicad 4.0.7-e2-63765ubuntu16.04.1

Rev: 3.2.1
Id: 10/10