

Supplier's name or trade mark:	MEGAMAN GmbH
Supplier's address	Halskestraße 22-26, AircomParc A140880 RatingenGermany

Model identifier	SDS746v0sc827830840865
Equivalent Models	N/A

Technical Document

Useful luminous flux	980
On-mode Power (P _{on})	0 W
Beam angle in degrees for directional light sources (DLS)	N/A
Peak luminous intensity in cd for directional light sources (DLS)	N/A
Correlated Colour Temperature	2700/3000/4000/6500 K
Chromaticity coordinates (x,y)	0.38, 0.38
Colour Rendering Index (CRI)	Ra 80
Standby Power (P _{sb})	N/A
Networked Standby Power (P _{net})	N/A
R9 colour rendering index value for LED and OLED light sources	0
Survival factor for LED and OLED light sources	0.90
Lumen maintenance factor for LED and OLED light sources	0.96
Indicative lifetime L70B50 for LED and OLED light sources	50000
Displacement Factor (cos φ1)	0.8
Colour Consistency	SDCM ≤ 6
Luminance for HLLS	N/A
Flicker metric (P _{stLM})	1
Stroboscopic effect metric (SVM)	0.1
Excitation purity for CTLS	N/A
Weighted Energy Consumption	0 kWh/1000hrs
Energy Efficiency Class	C
Outer dimensions in mm	
Height	0
Width	0
Depth	0
Standards Compliance	CE, RoHS

CALCULATIONS - GENERAL RULE

Refer to Annex II of Energy Labelling (EU) 2019/2015

Energy efficiency classes and calculation method

The energy efficiency class of light sources shall be determined as set out in Table 1, on the basis of the total mains efficacy η_{TM} , which is calculated by dividing the declared useful luminous flux Φ_{use} (expressed in *lm*) by the declared on-mode power consumption P_{on} (expressed in *W*) and multiplying by the applicable factor FTM of Table 2, as follows:

$$\eta_{TM} = (\Phi_{use}/P_{on}) \times FTM \text{ (lm/W)}$$

Table 1

Energy efficiency classes of light sources

Energy efficiency class	Total mains efficacy η_{TM} (lm/W)
A	$210 \leq \eta_{TM}$
B	$185 \leq \eta_{TM} < 210$
C	$160 \leq \eta_{TM} < 185$
D	$135 \leq \eta_{TM} < 160$
E	$110 \leq \eta_{TM} < 135$
F	$85 \leq \eta_{TM} < 110$
G	$\eta_{TM} < 85$

Table 2

Factors FTM by light source type

Light source type	Factor FTM
-------------------	------------

Non-directional (NDLS) operating on mains (MLS)	1,000
Non-directional (NDLS) not operating on mains (NMLS)	0,926
Directional (DLS) operating on mains (MLS)	1,176
Directional (DLS) not operating on mains (NMLS)	1,089

ADDITIONAL PART

A list of compatible dimmers shall be provided on the website www.megaman.cc

MEGAMAN | WEEE - Green Room | LED, Energy-efficient & Eco-friendly Lighting, Restriction of Hazardous Substances

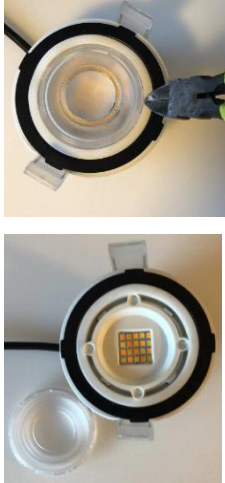
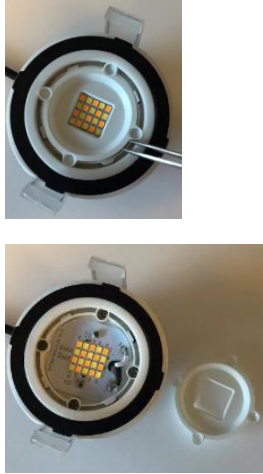
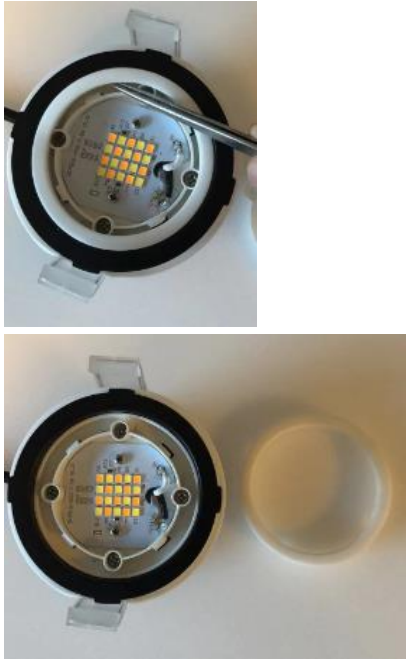
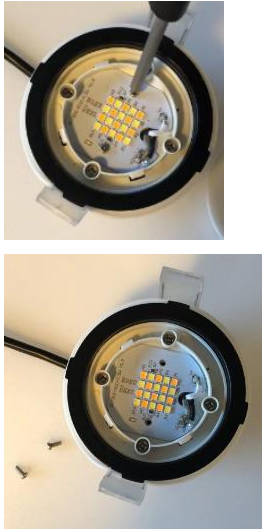
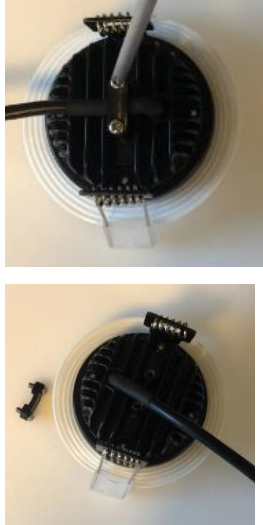
<https://www.megaman.cc/resources/green-room/weee>

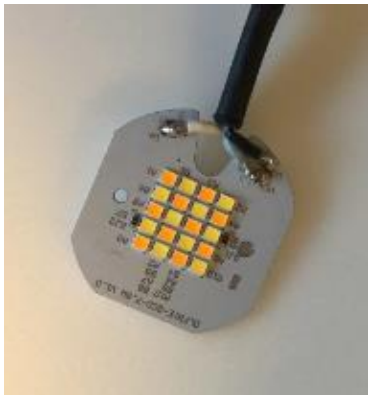


MEGAMAN GmbH
Halskestraße 22-26, AircomParc A1
40880 Ratingen
Germany



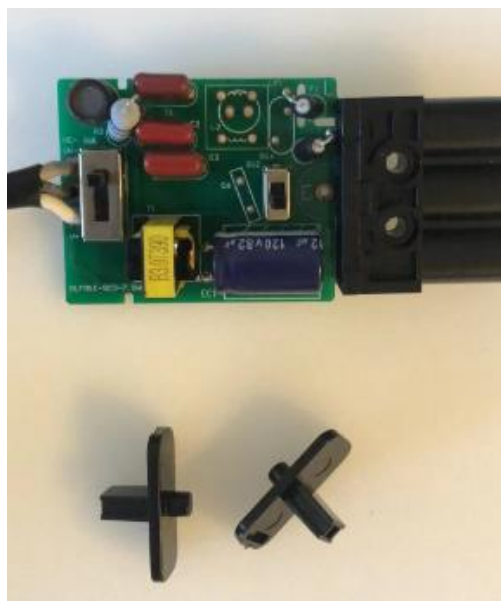
Applicable Light Source Model Identifier	Applicable Containing Product Model Number	Light source Input Current (mA)	Light source Rated Voltage (V)
SDS746v0sc827830840865	FDS74600v0-dm/ds/sc+LA8175	72	DC82

Light source: Removable

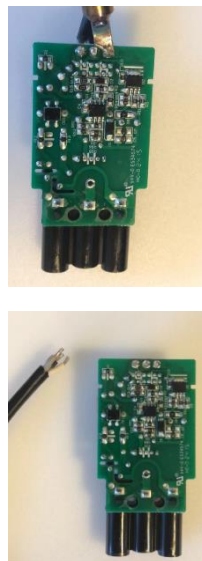
Step1: Remove the Bezel 	Step2: Pry open the lens 	Step3: Remove the blister cover 
Step4: Remove the seal ring 	Step5: Unscrew the light source plate 	Step 6: Unscrew the crimping buckle 

Step 7: Ejector light plate 	Step 8: Remove the connecting wire 	Step 9: light source 
Step 10: Press the buckle and disconnect the connection between the junction box and the drive box 	Step 11: Unscrew with a tool 	Step 12: Open the top cover 

Step 13: remove button



Step 14: remove the wire



Step 15: Driver picture

