


PRODUCT FEATURES

- Replaceable and Upgradeable light source and driver (MEGAMAN® XChange™ solution)
- Multi-CCT (3000K/4000K/6500K) by built-in switch
- Multi-lumen output selection (for D330 and D390 Version)
- Tool-less Plug-and-play modular design enhances flexibility
- All above features offer full aspect of flexibility of stock management
- Tool-less wiring thanks to push in terminal and connectors
- Loop in / loop out connection
- Homogenous light output with durable plastic cover avoiding yellowish deterioration
- Flicker Free $\leq 3\%$
- IP44 & IK03 rated
- Lighting Power factor > 0.9
- MEGAMAN® RENZO with microwave motion sensor can serve as a primary-secondary through wiring connection
- Emergency kit with 300lm* output energy backup lasting for 3 hours
- Extra-long lifetime up to 50,000 hours L80 B10 at Ta25° C

APPLICATIONS

- Living Rooms & Bathrooms
- Hotels
- Foyers
- Corridors
- Under Canopy
- Residential Application

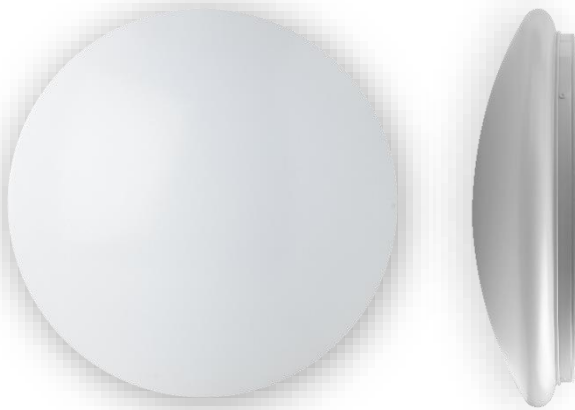

GENERAL INFORMATION

Input Voltage / Frequency	220-240 VAC / 50-60Hz Compatible with DC180-260V
Power Supply Unit	Drive on Board – MEGAMAN® XChange™ module (Replaceable)
Light Source	MEGAMAN® XChange™ module (Replaceable)
Energy efficiency	This product contains a light source of energy efficiency class <D>
Dimmability	No
CRI	≥ 80
Beam Angle	120°
Colour Consistency	SDCM ≤ 6
Lifetime	50 000hrs L80 B10 at 25°C
Number of Switching Cycles	> 100 000
IP	44
IK	03
Protection Class	II
Glow Wire	650°C
Photobiological Safety Group	RG 0
Flicker percentage	≤ 3% at 100Hz
Working Temperature	-30°C to +40°C Standard -20°C to +40°C with Motion Sensor Module 0°C to +35°C with Emergency Kit Module
Material & Colour	Polypropylene.Base Housing WH26, PS Diffuser
Installation	Surface Mounted; Wall Mounted
Approvals	EN60598-1, EN60598-2-1, EN62493, EN62471, EN60598-2-22, EN55015, EN61547, EN61000-3-2, EN61000-3-3

PRODUCT INFORMATION

100 lm/W Version

Model No.	MM Code	Power W	Luminous Flux lm	Luminous Efficacy lm / W	Current mA	PF (λ)
FCL76100v0-sc	-	10	930 [3000K] 1000 [4000K/6500K]	93 [3000K] 100 [4000K/6500K]	50	> 0.9
FCL76100v0-sc +LA10217	-	10	930 [3000K] 1000 [4000K/6500K]	93 [3000K] 100 [4000K/6500K]	50	> 0.7
FCL76100v0-sc +LA10218	-	10	930 [3000K] 1000 [4000K/6500K]	93 [3000K] 100 [4000K/6500K]	50	> 0.7
FCL76100v0-sc +LA10217+LA10218	-	10	930 [3000K] 1000 [4000K/6500K]	93 [3000K] 100 [4000K/6500K]	50	> 0.7
FCL76200v0-ds/sc	-	20/15/10	1860/1400/930 [3000K] 2000/1500/1000 [4000K/6500K]	93 [3000K] 100 [4000K/6500K]	95/70/50	> 0.9
FCL76200v0-ds/sc +LA10217	-	20/15/10	1860/1400/930 [3000K] 2000 /1500/1000 [4000K/6500K]	93 [3000K] 100 [4000K/6500K]	95/70/50	> 0.7
FCL76200v0-ds/sc	-	20/15/10	1860/1400/930 [3000K]	93 [3000K]	95/70/50	> 0.7

+LA10218			2000/1500/1000 [4000K/6500K]	100 [4000K/6500K]		
FCL76200v0-ds/sc	-	20/15/10	1860/1400/930 [3000K]	93 [3000K]	95/70/50	> 0.7
+LA10217+LA10218			2000/1500/1000 [4000K/6500K]	100 [4000K/6500K]		
FCL76300v0-ds/sc	-	20/15/10	1860/1400/930 [3000K]	93 [3000K]	95/70/50	> 0.9
			2000/1500/1000 [4000K/6500K]	100 [4000K/6500K]		
FCL76300v0-ds/sc	-	20/15/10	1860/1400/930 [3000K]	93 [3000K]	95/70/50	> 0.7
+LA10217			2000/1500/1000 [4000K/6500K]	100 [4000K/6500K]		
FCL76300v0-ds/sc	-	20/15/10	1860/1400/930 [3000K]	93 [3000K]	95/70/50	> 0.7
+LA10218			2000/1500/1000 [4000K/6500K]	100 [4000K/6500K]		
FCL76300v0-ds/sc	-	20/15/10	1860/1400/930 [3000K]	93 [3000K]	95/70/50	> 0.7
+LA10217+LA10218			2000/1500/1000 [4000K/6500K]	100 [4000K/6500K]		

120 lm/W Version

Model No.	MM Code	Power W	Luminous Flux lm	Luminous Efficacy lm / W	Current mA	PF (λ)
FCL76100v1-sc	712351/	10	1150 [3000K]	115 [3000K]	50	> 0.9
	MM12351		1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76100v1-sc	-	10	1150 [3000K]	115 [3000K]	50	> 0.7
+LA10217			1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76100v1-sc	-	10	1150 [3000K]	115 [3000K]	50	> 0.7
+LA10218			1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76100v1-sc	-	10	1150 [3000K]	115 [3000K]	50	> 0.7
+LA10217+LA10218			1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76200v1-ds/sc	712352/	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.9
	MM12352		2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76200v1-ds/sc	-	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.7
+LA10217			2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76200v1-ds/sc	-	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.7
+LA10218			2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76200v1-ds/sc	-	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.7
+LA10217+LA10218			2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76300v1-ds/sc	712353/	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.9
	MM12353		2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76300v1-ds/sc	-	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.7
+LA10217			2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76300v1-ds/sc	-	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.7
+LA10218			2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		
FCL76300v1-ds/sc	-	20/15/10	2300/1730/1150 [3000K]	115 [3000K]	95/70/50	> 0.7
+LA10217+LA10218			2400/1800/1200 [4000K/6500K]	120 [4000K/6500K]		



FCL76100v0-sc

FCL76100v1-sc



FCL76200v0-ds/sc

FCL76200v1-ds/sc



FCL76300v0-ds/sc

FCL76300v1-ds/sc

OPTIONAL ACCESSORIES

Model No.	MM Code	Description
XCD0130A0v00-sc+WB01	-	XChange Light Source Module XCD0130A0 125lm/w
XCD0130A0v01-sc+WB01	712354 / MM12354	XChange Light Source Module XCD0130A0 140lm/w
XCD0130AMv00-sc+WB01	-	XChange Easyfix Light Source Module XCD0130AM 140lm/w
XCD0130AMv01-sc+WB01	-	XChange Easyfix Light Source Module XCD0130AM 160lm/w
XCD0157A0v00-ds/sc+WB02	-	XChange Light Source Module XCD0157A0 140lm/w
XCD0157A0v01-ds/sc+WB02	712355 / MM12355	XChange Light Source Module XCD0157A0 160lm/w
XCD0157AMv00-ds/sc+WB02	-	XChange Easyfix Light Source Module XCD0157AM 140lm/w
XCD0157AMv01-ds/sc+WB02	-	XChange Easyfix Light Source Module XCD0157AM 160lm/w
LA10217	712278 / MM12278	Microwave Motion Sensor for RENZO Xchange / FONDA Xchange
LA10218	712279 / MM12279	Emergency Kit Module for RENZO Xchange / FONDA Xchange



LA10217



LA10218



XCD0130A0v01-sc+WB01



XCD0130AMv00-sc+WB01




XCD0157A0v00-ds-sc+WB02




XCD0157AMv00-ds-sc+WB02

MOTION SENSOR

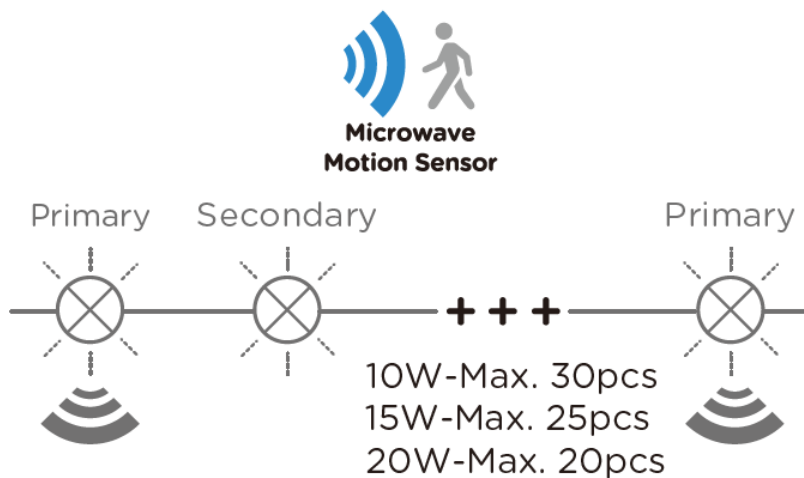


Maximum connection for microwave motion sensor primary-secondary looping is 30pcs, 25pcs and 20pcs for 10W, 20W and 30W respectively

Microwave sensor can sense movement within 3m radius, or within 6 m directly front-facing

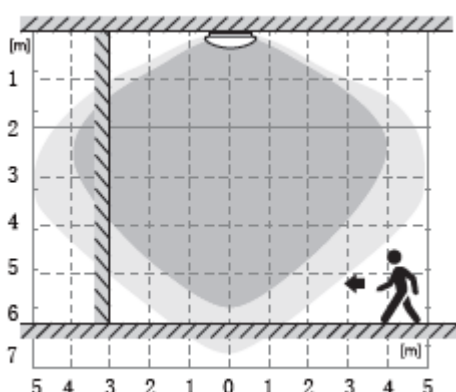

For ceiling mounted RENZO, microwave motion sensor can sense movement within around 3m radius horizontally, or 6m vertically beneath RENZO, and only lights up when movement sensed for energy saving.

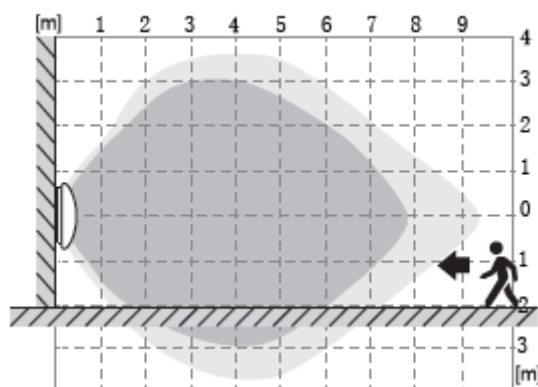

For wall mounted RENZO, microwave motion sensor can sense movement within around 3m radius vertically, or 6m front-facing horizontally, and only lights up when movement sensed for energy saving

EMERGENCY KIT

Model No.	MM Code	EM Power W	Luminous Flux lm	Color Temp. K	Self-test.
LA10218	712279 / MM12279	4	300	4000	No

BATTERY

Model No.	MM Code	Battery	Output Voltage v	Capacity mAh
LA11158	710555 / MM10555	LiFePO ₄	6.4	1500

LA10218 Installation Distance of Emergency Kit Module for RENZO Xchange / FONDA Xchange


Min 1lx

Mounting Height [m]		
2.5	4.3	10.3
2.8	4.4	10.8
3	4.5	11.0
4	4.8	12.1

Min 0.5lx

Mounting Height [m]		
2.5	4.5	10.4
2.8	4.8	11.5
3	4.9	12.5
4	5.3	14

WIRING

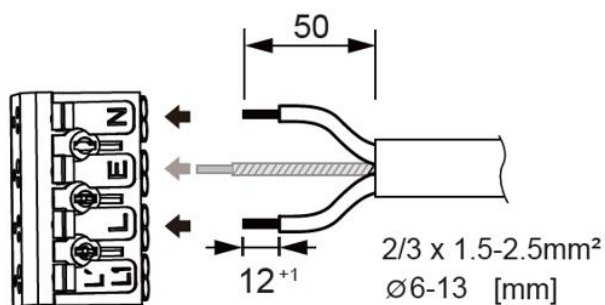

Model No.	Inrush Current	Inrush Duration	Max. no. of Luminaire Connection on MCB			
	A	µs	B10	B16	C10	C16
100 lm/W Version						
FCL76100v0-sc	5	19.6	79	84	85	99
FCL76100v0-sc+LA10217	3.2	32.8	72	77	78	90
FCL76100v0-sc+LA10218	19.4	90.4	32	52	54	72
FCL76100v0-sc+LA10217+LA10218	19.2	97.6	33	52	54	67
FCL76200v0-ds/sc	5.12	21.6	46	46	46	51
FCL76200v0-ds/sc+LA10217	4.96	20.8	44	44	44	49
FCL76200v0-ds/sc+LA10218	16.6	101.6	38	39	39	43
FCL76200v0-ds/sc+LA10217+LA10218	18.2	103.6	34	37	37	41
FCL76300v0-ds/sc	5.1	21.6	46	46	46	51
FCL76300v0-ds/sc+LA10217	5	20.8	44	44	44	49
FCL76300v0-ds/sc+LA10218	16.6	101.6	38	39	39	43
FCL76300v0-ds/sc+LA10217+LA10218	18.2	103.6	34	37	37	41
120 lm/W Version						
FCL76100v1-sc	5	19.6	79	84	85	99
FCL76100v1-sc+LA10217	3.2	32.8	72	77	78	90
FCL76100v1-sc+LA10218	19.4	90.4	32	52	54	72
FCL76100v1-sc+LA10217+LA10218	19.2	97.6	33	52	54	67
FCL76200v1-ds/sc	5.12	21.6	46	46	46	51
FCL76200v1-ds/sc+LA10217	4.96	20.8	44	44	44	49
FCL76200v1-ds/sc+LA10218	16.6	101.6	38	39	39	43
FCL76200v1-ds/sc+LA10217+LA10218	18.2	103.6	34	37	37	41
FCL76300v1-ds/sc	5.1	21.6	46	46	46	51
FCL76300v1-ds/sc+LA10217	5	20.8	44	44	44	49
FCL76300v1-ds/sc+LA10218	16.6	101.6	38	39	39	43
FCL76300v1-ds/sc+LA10217+LA10218	18.2	103.6	34	37	37	41

DIMENSIONS & WEIGHT


Model No.	D mm	H mm	Weight g
-----------	---------	---------	-------------

100 lm/W Version

FCL76100v0-sc	280	100	385
FCL76100v0-sc+LA10217	280	100	435
FCL76100v0-sc+LA10218	280	100	555
FCL76100v0-sc+LA10217+LA10218	280	100	605
FCL76200v0-ds/sc	330	110	520
FCL76200v0-ds/sc+LA10217	330	110	570
FCL76200v0-ds/sc+LA10218	330	110	690
FCL76200v0-ds/sc+LA10217+LA10218	330	110	740
FCL76300v0-ds/sc	390	115	660
FCL76300v0-ds/sc+LA10217	390	115	710
FCL76300v0-ds/sc+LA10218	390	115	830
FCL76300v0-ds/sc+LA10217+LA10218	390	115	880

120 lm/W Version

FCL76100v1-sc	280	100	385
FCL76100v1-sc+LA10217	280	100	435
FCL76100v1-sc+LA10218	280	100	555
FCL76100v1-sc+LA10217+LA10218	280	100	605
FCL76200v1-ds/sc	330	110	520
FCL76200v1-ds/sc+LA10217	330	110	570
FCL76200v1-ds/sc+LA10218	330	110	690
FCL76200v1-ds/sc+LA10217+LA10218	330	110	740
FCL76300v1-ds/sc	390	115	660
FCL76300v1-ds/sc+LA10217	390	115	710
FCL76300v1-ds/sc+LA10218	390	115	830
FCL76300v1-ds/sc+LA10217+LA10218	390	115	880

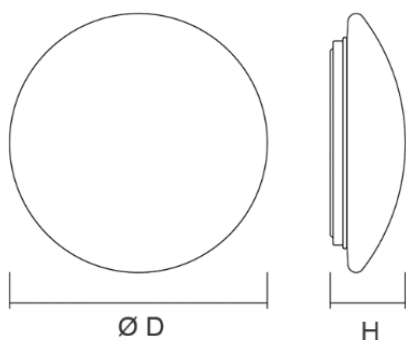

ADDITIONAL INFORMATION

Rated lifetime L70/B50 at 25 °C	50000h
Rated lifetime L80/B10 at 25 °C	50000h
Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq)	90%
Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq)	80%
Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq)	N/A
Failure rate at median useful life of 35,000 h at 25 °C ambient (tq)	10%
Failure rate at median useful life of 50,000 h at 25 °C ambient (tq)	10%
Flickering value Pst LM	1
Stroboscope effect value SVM	0.4
Luminous intensity	544cd max
Total harmonic distortion (THD)	20%
Energy efficiency class of the light source according to EU regulation 2019/2015	A
Containing product according to 2019/2020/EU	Replaceable LS and CG
Suitable for emergency lighting	Yes, Compatible with 180-260VDC
Constant light output (CLO)	Yes

DISCLAIMER

Subject to change without notice. Errors and omissions excepted. Always ensure you are using the most recent release.



Super Quick Simple and Cost-Effective Maintenance

Thanks to our All-in-One module design, there is no need to identify individual component faults. Simply replace the entire XChange™ LED module within 10 seconds, without the need for tools or rewiring. This approach can be more cost-effective over time.



Extended Lifespan

LED luminaires with replaceable MEGAMAN® XChange™ light sources module can have a longer overall lifespan because the XChange™ light source can be replaced without needing to replace the entire fixture.



Flexibility in Light Quality

Users can choose different settings with selectable colour temperature and lumen output. As well as different LED modules with varying efficacy(lm/w), optics and colour rendering indices (CRI) to suit their specific needs and preferences.



Cross-Platform Compatibility

MEGAMAN® XChange™ light module is designed to fit not only dedicated same fixtures but also luminaires in various series and generation across MEGAMAN®, offering versatile and seamless integration.



Sustainability

By replacing only the light source rather than the entire luminaire, minimize the waste created, making it a more environmentally friendly option.



Ease of Upgrade

As LED technology advances, you can easily upgrade to newer, more efficient XChange™ LED modules without changing the entire luminaire.



Reduced Downtime

In professional settings, replaceable light sources can minimize downtime since maintenance can be performed quickly and easily. This is particularly beneficial for property management projects.



Customization

Users can tailor the lighting to different applications and environments by selecting appropriate XChange™ LED modules.



Future-Proof Solution

With the growing emphasis on reparability in tenders, projects, and funding programs, replaceable light source LED luminaires are designed to meet these requirements. This ensures they remain compliant with evolving regulations and standards.