



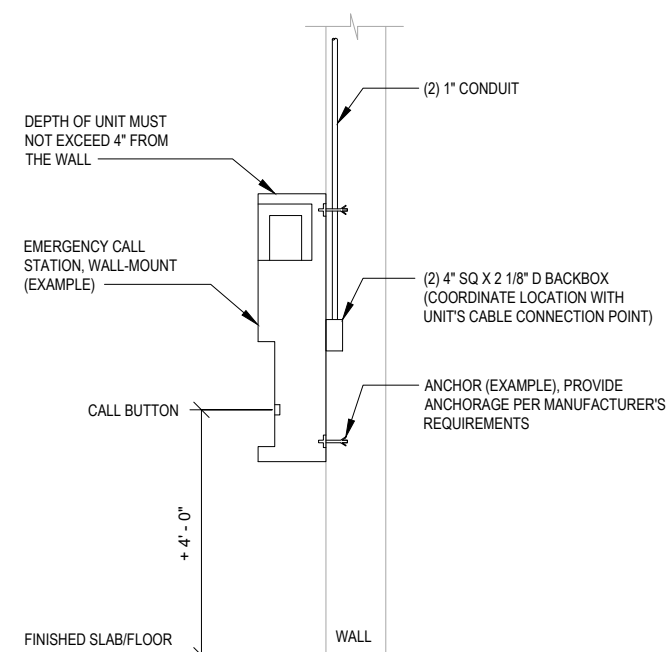

- NOTES:
1. INSTALL TO MANUFACTURER SPECIFICATIONS AND DIMENSIONS.
 2. DIMENSIONS SHOWN ARE IN COMPLIANCE WITH ADA REQUIREMENTS.
 3. REFER TO ARCHITECTURAL DRAWINGS FOR WALL TYPE BY LOCATION.
 4. COORDINATE WITH DIVISION 26 FOR 120VAC CONNECTION.

EMERGENCY CALL STATION - WALL MOUNTED


SCALE: NONE

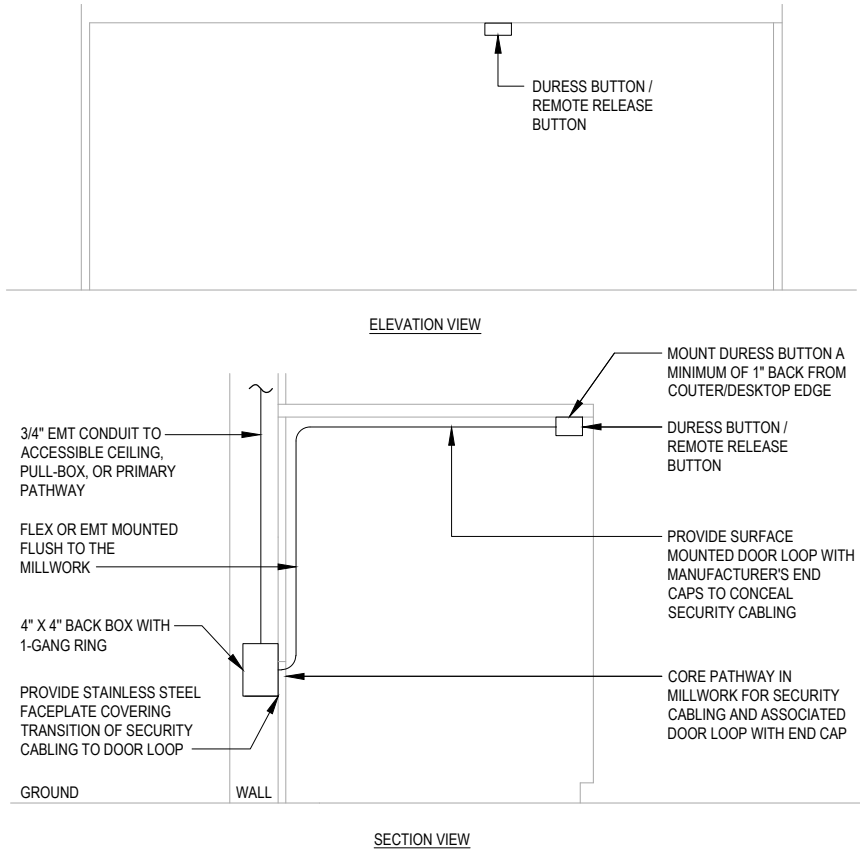

- NOTES:
1. PRIOR TO INSTALLATION, COORDINATE WITH THE OWNERS REPRESENTATIVE, ARCHITECT AND THE CASEWORK CONTRACTOR TO FIELD DETERMINE THE EXACT LOCATION OF THE BUTTON.
 2. PROVIDE SURFACE MOUNTED RACKWAY TO CONCEAL SECURITY CABLING TO BE SUPPORTED BY METAL P-CLAMPS.


DURESS BUTTON / REMOTE RELEASE BUTTON - DESK MOUNT, WALL CABLED

SCALE: NONE

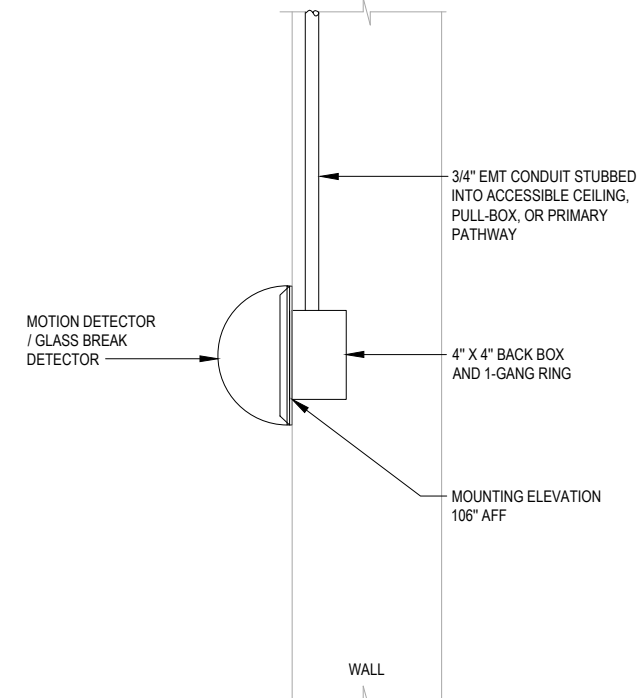


MOTION DETECTOR / GLASS BREAK DETECTOR - WALL-MT

SCALE: NONE

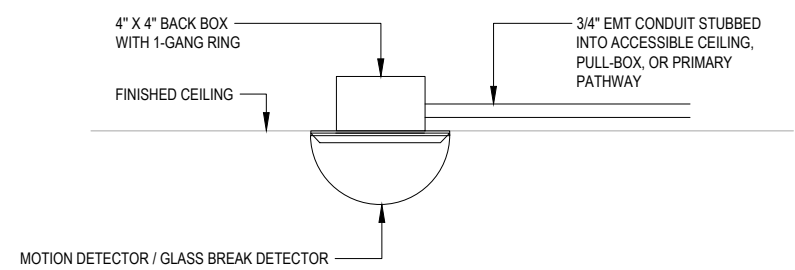

MOTION DETECTOR / GLASS BREAK DETECTOR - CEILING-MT

SCALE: NONE

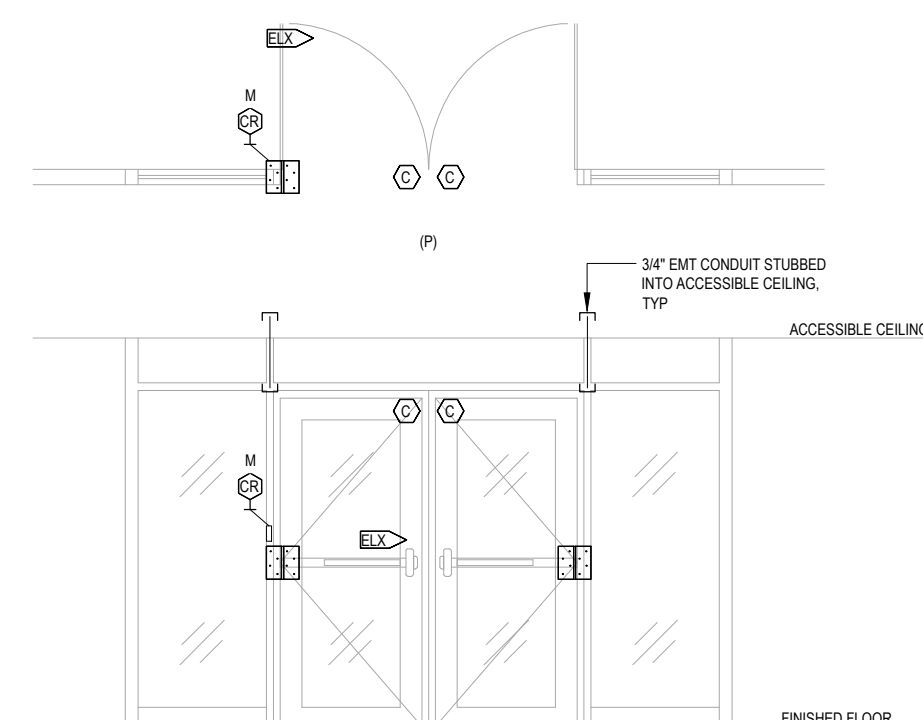


- THEORY OF OPERATION:
- NORMAL DOOR STATE IS CLOSED.
 - DOOR IS LOCKED ON THE NON-PROTECTED SIDE AND UNLOCKED ON THE PROTECTED SIDE.
 - TO OPEN DOOR FROM NON-PROTECTED SIDE, CARD MUST BE PRESENTED TO UNLOCK DOOR.
 - TO OPEN DOOR FROM PROTECTED SIDE, CARD MUST BE PRESENTED TO UNLOCK DOOR.
 - INTEGRAL REQUEST TO EXIT SWITCH BYPASSES ALARM ON EXIT.

- NOTES:
1. REFER TO ARCHITECTURAL DRAWINGS FOR CEILING TYPES.

DOUBLE DOOR - ELECTRIC LOCK, CARD READER

SCALE: NONE

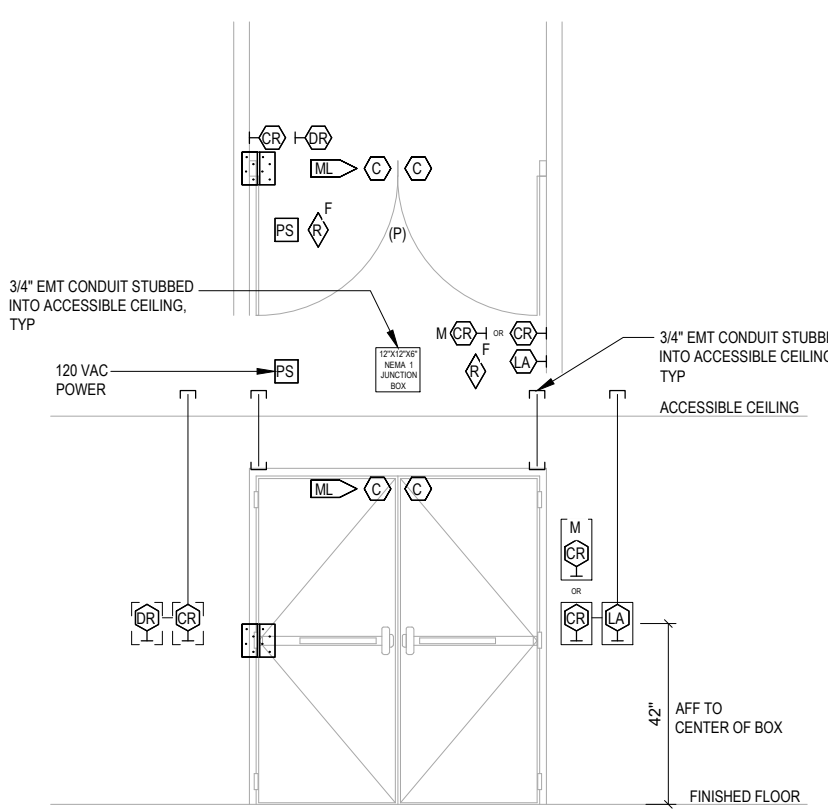


- THEORY OF OPERATION:
- DOOR IS LOCKED ON THE NON-PROTECTED AND PROTECTED SIDE DURING OFF HOURS.
 - TO OPEN DOOR FROM EITHER SIDE, CARD MUST BE PRESENTED TO SEND UNLOCK SIGNAL TO RELEASE MAGLOCK.
 - DURING LIFE SAFETY EVENT, POWER IS OUT TO MAGLOCKS ALLOWING FREE EGRESS.
 - MAGLOCK CAN ALSO BE RELEASED THROUGH ACTIVATION OF DOOR RELEASE BUTTON.

- NOTES:
1. REFER TO ARCHITECTURAL DRAWINGS FOR CEILING TYPES.
 2. USE INTERIOR MALLION READER FOR DOOR 38A. USE INTERIOR STANDARD WALL MOUNT READER FOR DOOR 379A.
 3. SHARE LOCAL ALARM WITH DOOR 380B. PROVIDE DEDICATED LOCAL ALARM WITH DOOR 379A.
 4. DR AND/OR GET 4" X 4" STANDARD BACKBOX WITH SINGLE RING.
 5. LA GETS A 3-GANG SUPER DEEP BACKBOX WITH 3-GANG RING.

DOUBLE DOOR - EXIT DEVICE, CARD-IN-CARD-OUT, MAGLOCK


SCALE: NONE

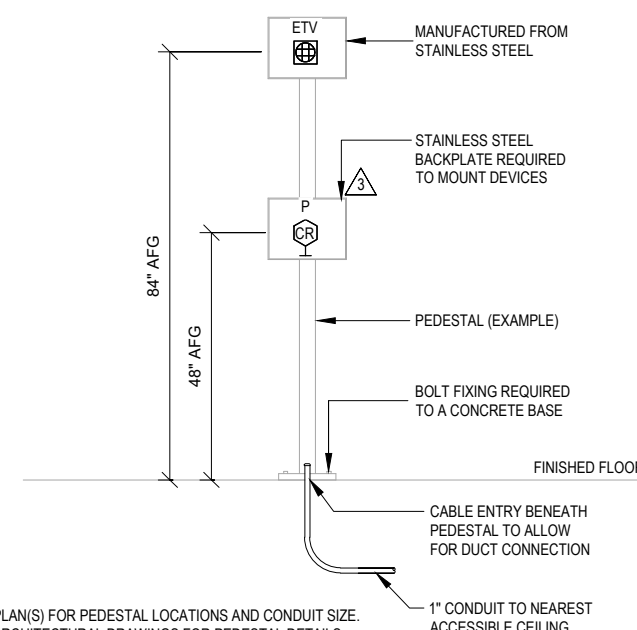

- NOTES:
1. REFER TO PLANS(S) FOR PEDESTAL LOCATIONS AND CONDUIT SIZE.
 2. REFER TO ARCHITECTURAL DRAWINGS FOR PEDESTAL DETAILS.
 3. COORDINATE DEVICE MOUNTING WITH THE PEDESTAL INSTALLATION.

FRONT VIEW


SCALE: NONE

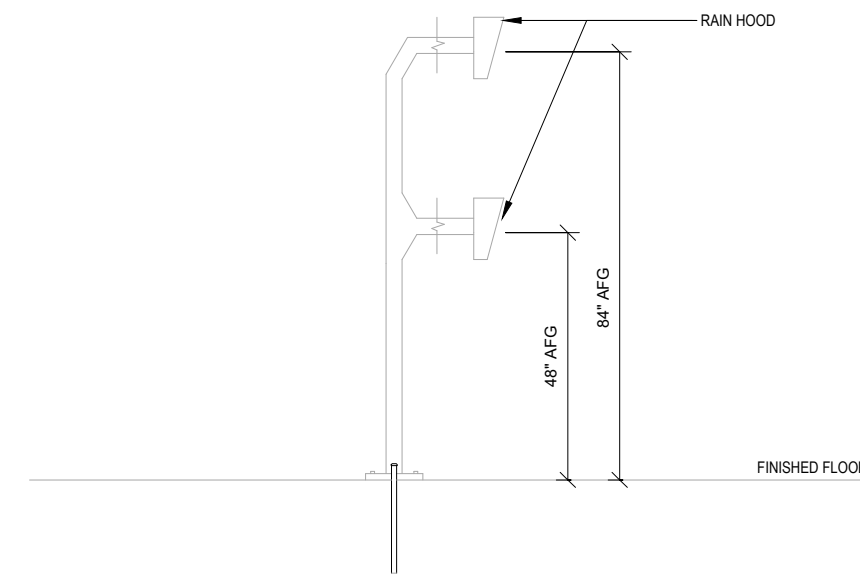

- NOTES:
1. REFER TO PLANS(S) FOR PEDESTAL LOCATIONS AND CONDUIT SIZE.
 2. REFER TO ARCHITECTURAL DRAWINGS FOR PEDESTAL DETAILS.
 3. COORDINATE DEVICE MOUNTING WITH THE PEDESTAL INSTALLATION.

SIDE VIEW

SCALE: NONE

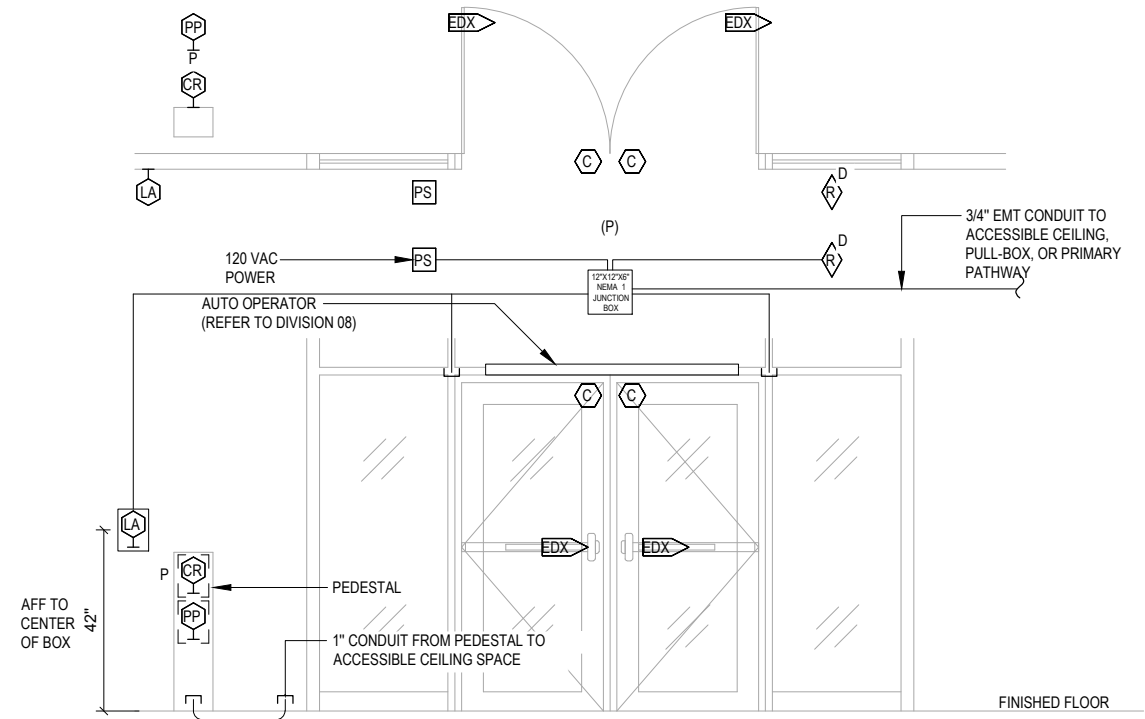


- THEORY OF OPERATION:
- DOOR IS UNLOCKED DURING BUSINESS HOURS AND LOCKED AFTER HOURS.
 - DOOR IS LOCKED ON THE NON-PROTECTED SIDE AND UNLOCKED ON THE PROTECTED SIDE.
 - TO OPEN DOOR FROM THE NON-PROTECTED SIDE AFTER HOURS, CARD MUST BE PRESENTED TO UNLOCK DOOR.
 - INTEGRAL REQUEST TO EXIT BYPASSES ALARM ON EXIT.
 - EXTERIOR ADA ACTUATOR IS INTERLOCKED WITH DOOR LOCKS AND DISABLED WHEN LOCKED.
 - INTERIOR ADA ACTUATOR BYPASSES ALARM CONTACT AND OPERATES DOOR.
 - REFER TO WIRING SCHEMATIC FOR INTEGRATION TO OPERATOR.

- NOTES:
1. REFER TO ARCHITECTURAL DRAWINGS FOR CEILING TYPES.
 2. REFER TO ARCHITECTURAL DRAWINGS FOR PEDESTAL DETAILS.
 3. COORDINATE CARD READER AND PUSH PLATE WITH ARCHITECTURAL DRAWINGS. PUSH PLATE IS SHOWN FOR REFERENCE.
 4. LA GETS A 3-GANG SUPER DEEP BACKBOX WITH 3-GANG RING.

DOUBLE DOOR - AUTO-OPERATOR, CARD READER - LOCAL ALARM


SCALE: NONE

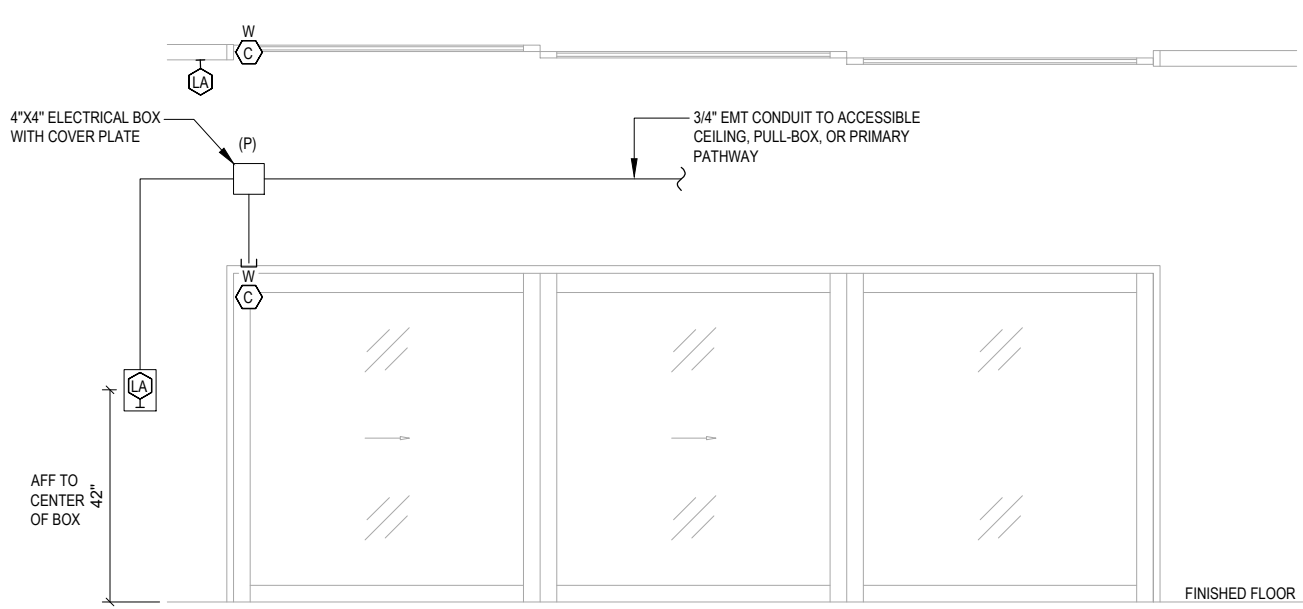

- THEORY OF OPERATION:
- DOOR IS MONITORED ON A PROGRAMMED SCHEDULE FOR OPEN/CLOSED STATUS.
- NOTES:
1. REFER TO ARCHITECTURAL DRAWINGS FOR CEILING TYPES.
 2. COORDINATE WITH DIVISION 8 CONTRACTOR TO ENSURE A SECURELY FASTENED AND AESTHETICALLY SUFFICIENT ALARM CONTACT INSTALLATION.
 3. LA GETS A 3-GANG SUPER DEEP BACKBOX WITH 3-GANG RING.

SLIDING PARTITION - MONITORED - LOCAL ALARM


SCALE: NONE

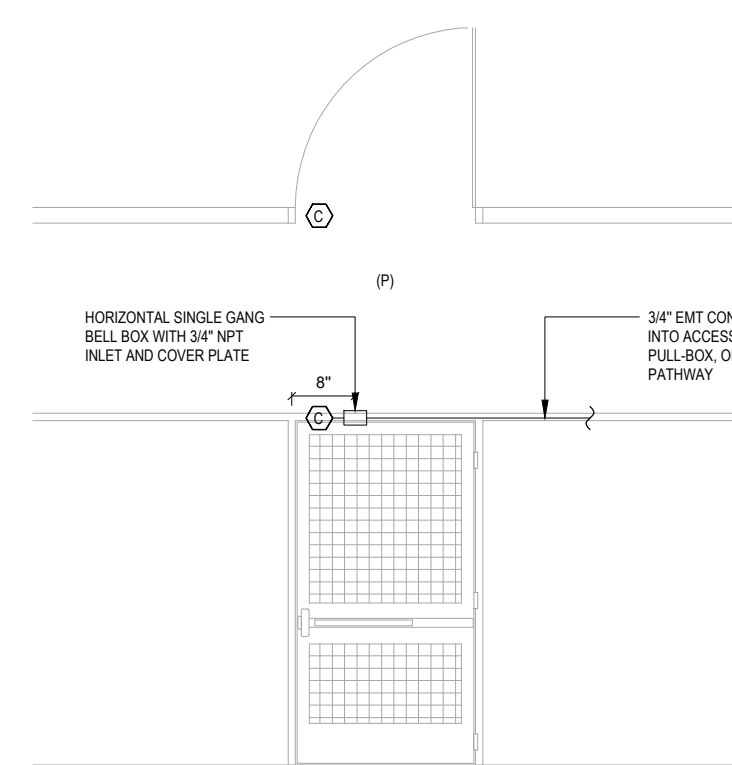

- THEORY OF OPERATION:
- NORMAL GATE STATE IS CLOSED AND LOCKED.
 - GATE IS MONITORED FOR ENTRANCE AND EXIT.

GATE - MONITORED

SCALE: NONE

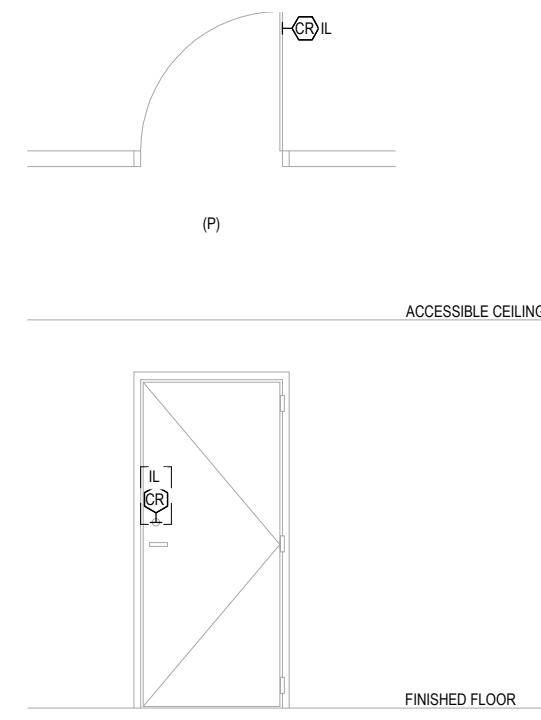

- THEORY OF OPERATION:
- NORMAL DOOR STATE IS CLOSED.
 - DOOR IS LOCKED ON THE NON-PROTECTED SIDE AND UNLOCKED ON THE PROTECTED SIDE.
 - TO OPEN DOOR FROM NON-PROTECTED SIDE, CARD MUST BE PRESENTED TO UNLOCK DOOR.
 - WIRELESS INTEGRATED READER LOCKSET IS EQUIPPED WITH OCCUPANCY INDICATOR AND PRIVACY THUMB TURN.
 - PROGRAM INTEGRATED DOOR POSITION SWITCH AND REQUEST TO EXIT FOR ALARM MONITORING.

- NOTES:
1. REFER TO ARCHITECTURAL DRAWINGS FOR CEILING TYPES.

SINGLE DOOR - INTEGRATED LOCK ASSEMBLY, WIRELESS CARD READER

SCALE: NONE



STAMP



DBI STAMP

REV	DATE	DESCRIPTION
1	04/10/2024	ASSEMBLY & ISSUED FOR PERMIT
2	04/10/2024	ISSUED FOR CONSTRUCTION
3	04/10/2024	ISSUED FOR CONSTRUCTION
4	04/10/2024	DYNAMIC SECURITY PLANS

ST. IGNATIUS COLLEGE PREPARATORY

2001 37th Ave, San Francisco, CA 94116

DETAILS - SECURITY

NONE

T6.11