SHEET NOTES

1. ALL "EOL" RESISTORS (WETHER BURG/INTRUSION OR ACS) ARE TO BE PLACED DIRECTLY AT THE FIELD DEVICE AND AS FAR FROM THE HEADEND EQUIPMENT AS POSSIBLE.
2. ALL "(FROM ACP)" WIRING REFERENCES ARE PRE-TWISTED TWO CONDUCTOR INTERCONNECTING JUMPERS ORIGINATING FROM ACS/ACP RELAY OUTPUTS, THAT WILL FORWARD ALARM SIGNALS INTO THE INTRUSION SYSTEM ZONE/POINT INPUTS.

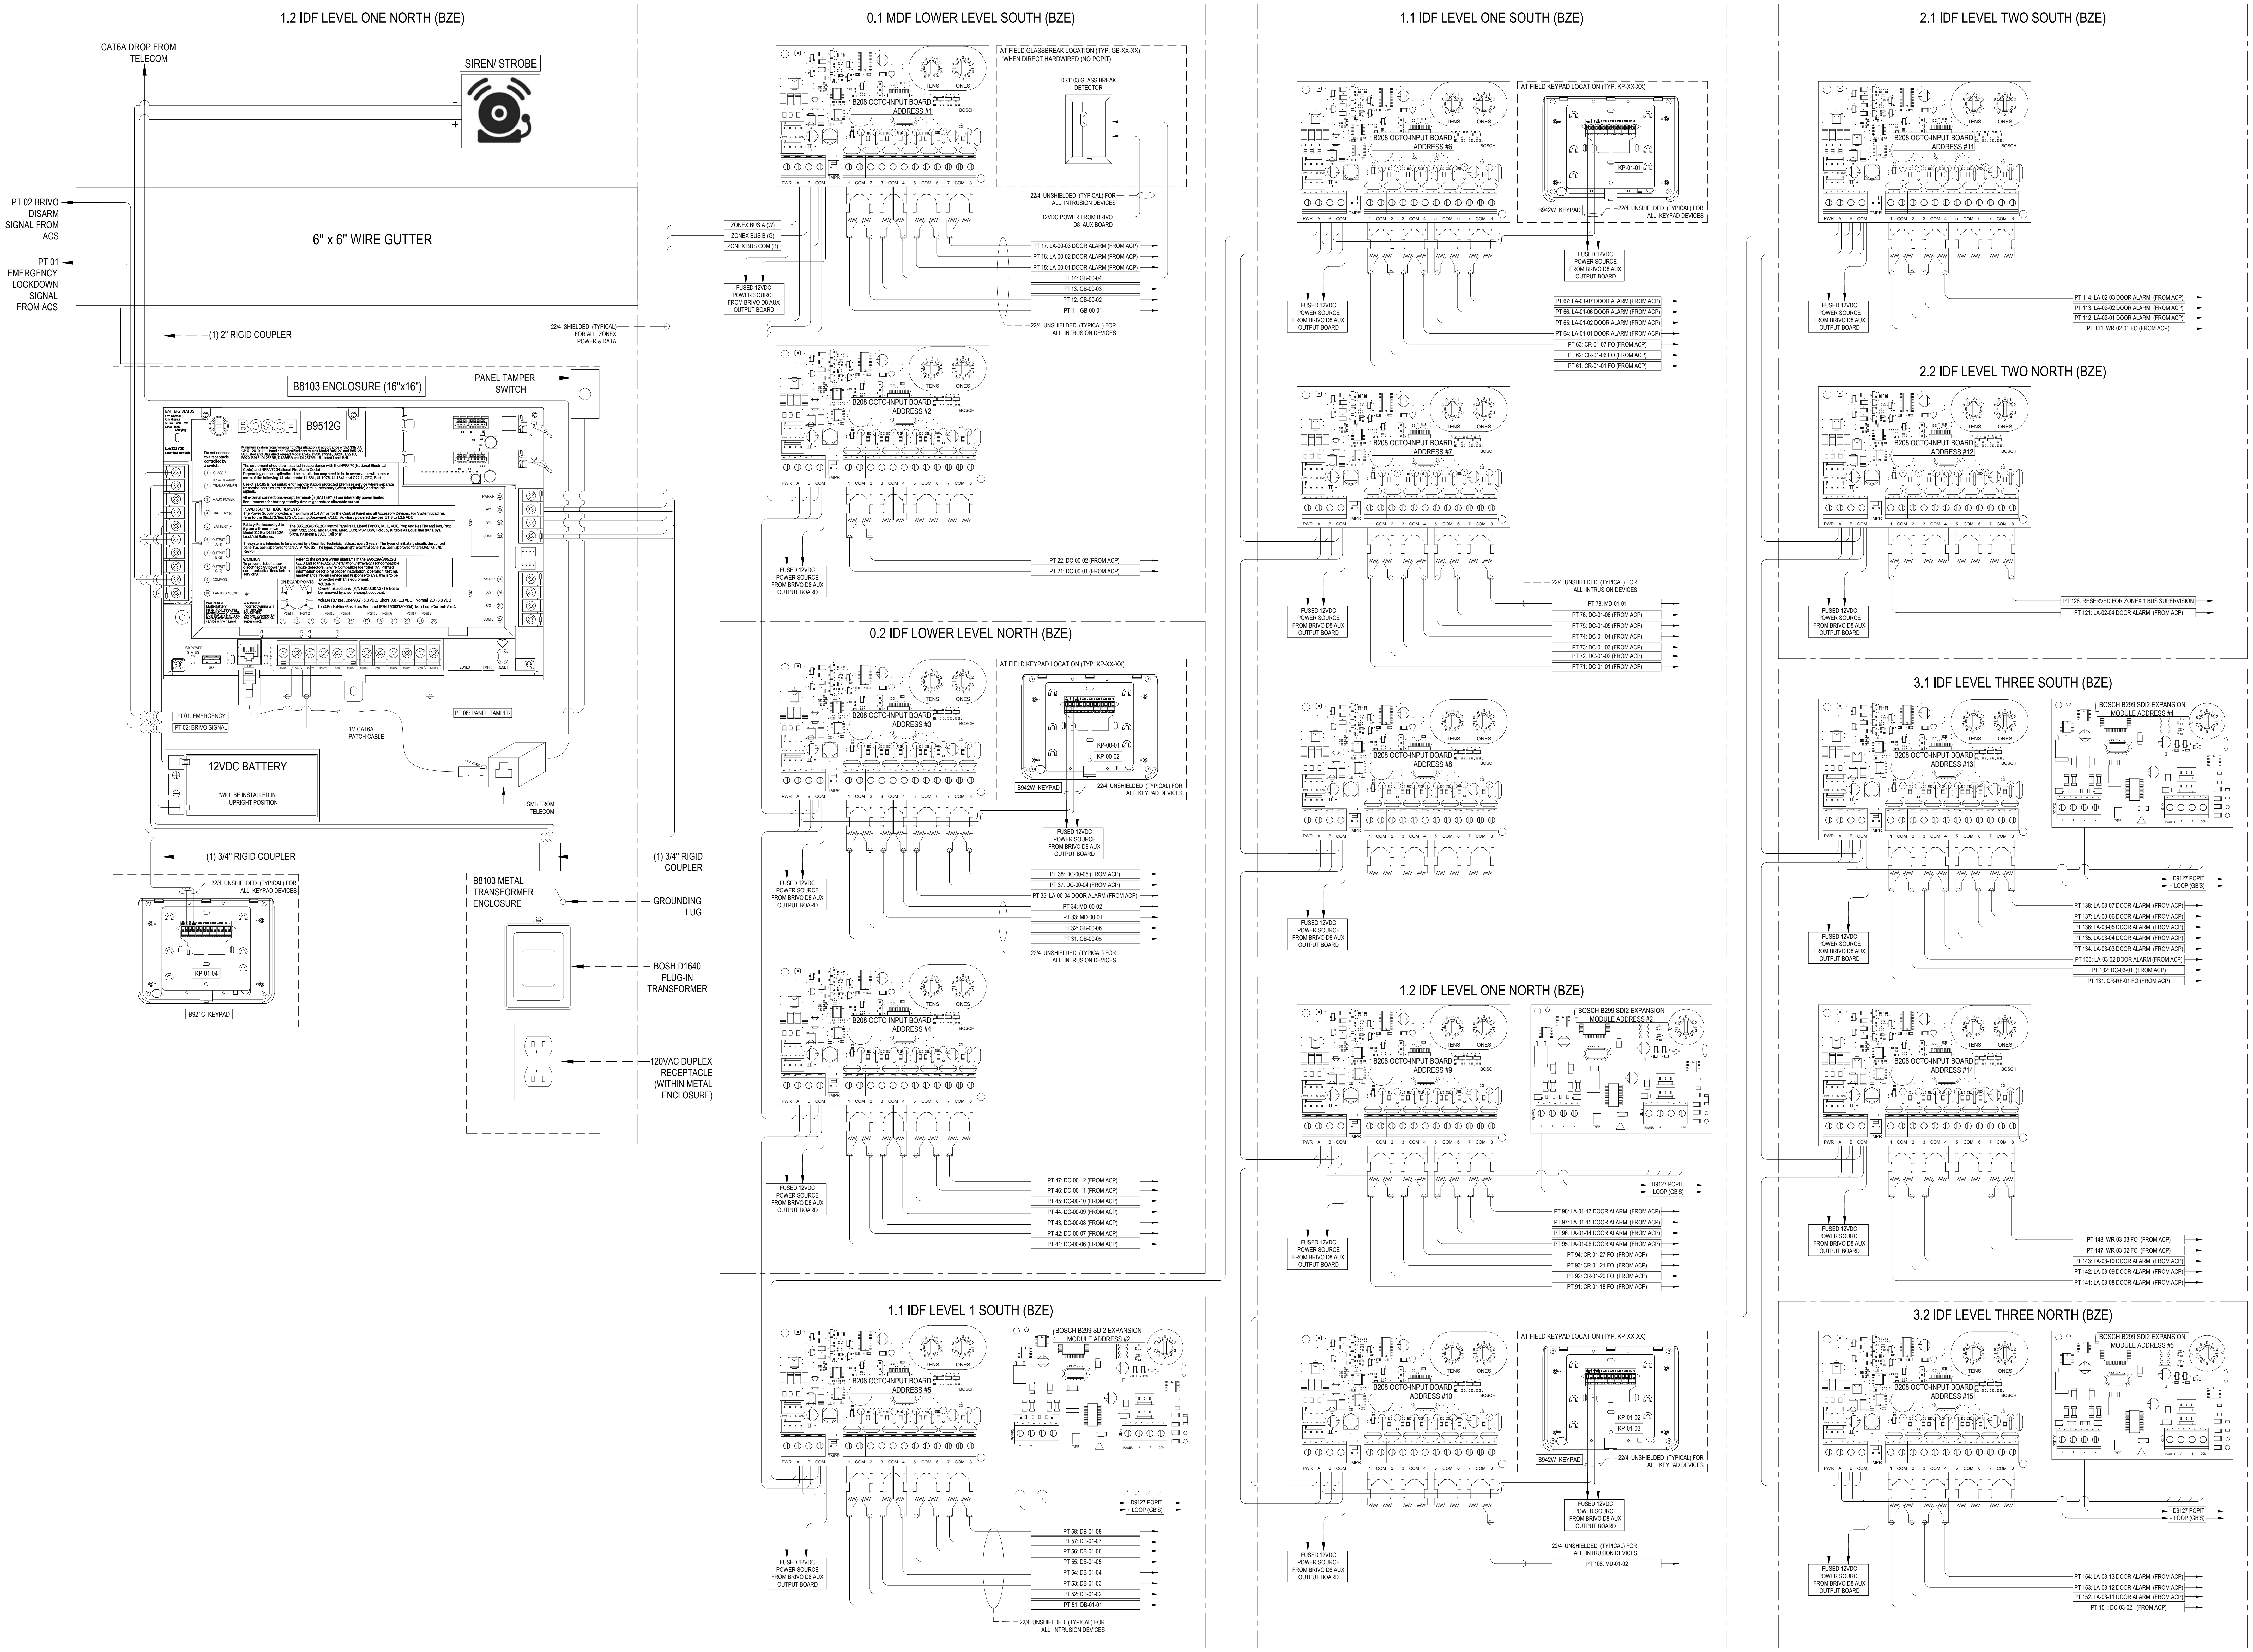
1.2 IDF LEVEL ONE NORTH (BZE)
CAT6A DROP FROM TELECOM
SIREN/ STROBE
PT 02 BRIVO DISARM SIGNAL FROM ACS
PT 01 EMERGENCY LOCKDOWN SIGNAL FROM ACS
6" x 6" WIRE GUTTER
(1) 2" RIGID COUPLER
B8103 ENCLOSURE (16"x16")
PANEL TAMPER SWITCH
BOSCH
B9512G
PT 01: EMERGENCY
PT 02: BRIVO SIGNAL
PT 08: PANEL TAMPER
1M CAT6A PATCH CABLE
12VDC BATTERY
*WILL BE INSTALLED IN UPRIGHT POSITION
SMB FROM TELECOM
(1) 3/4" RIGID COUPLER
22/4 UNSHIELDED (TYPICAL) FOR ALL KEYPAD DEVICES
KP-21-04
B921C KEYPAD
B8103 METAL TRANSFORMER ENCLOSURE
(1) 3/4" RIGID COUPLER
GROUNDING LUG
BOSH D1640 PLUG-IN TRANSFORMER
120VAC DUPLEX RECEPTACLE (WITHIN METAL ENCLOSURE)
22/4 SHIELDED (TYPICAL) FOR ALL ZONEX POWER & DATA
0.1 MDF LOWER LEVEL SOUTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #1
TENS
ONES
BOSCH
AT FIELD GLASSBREAK LOCATION (TYP. GB-XX-XX) *WHEN DIRECT HARDWIRED (NO POPIT)
DS1103 GLASS BREAK DETECTOR
22/4 UNSHIELDED (TYPICAL) FOR ALL INTRUSION DEVICES
12VDC POWER FROM BRIVO D8 AUX BOARD
ZONEX BUS A (W)
ZONEX BUS B (G)
ZONEX BUS COM (B)
FUSED 12VDC POWER SOURCE FROM BRIVO D8 AUX OUTPUT BOARD
PT 17: LA-00-03 DOOR ALARM (FROM ACP)
PT 16: LA-00-02 DOOR ALARM (FROM ACP)
PT 15: LA-00-01 DOOR ALARM (FROM ACP)
PT 14: GB-00-04
PT 13: GB-00-03
PT 12: GB-00-02
PT 11: GB-00-01
B208 OCTO-INPUT BOARD ADDRESS #2
PT 22: DC-00-02 (FROM ACP)
PT 21: DC-00-01 (FROM ACP)
0.2 IDF LOWER LEVEL NORTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #3
AT FIELD KEYPAD LOCATION (TYP. KP-XX-XX)
KP-00-01
KP-00-02
B942W KEYPAD
22/4 UNSHIELDED (TYPICAL) FOR ALL KEYPAD DEVICES
PT 38: DC-00-05 (FROM ACP)
PT 37: DC-00-04 (FROM ACP)
PT 35: LA-00-04 DOOR ALARM (FROM ACP)
PT 34: MD-00-02
PT 33: MD-00-01
PT 32: GB-00-06
PT 31: GB-00-05
B208 OCTO-INPUT BOARD ADDRESS #4
PT 47: DC-00-12 (FROM ACP)
PT 46: DC-00-11 (FROM ACP)
PT 45: DC-00-10 (FROM ACP)
PT 44: DC-00-09 (FROM ACP)
PT 43: DC-00-08 (FROM ACP)
PT 42: DC-00-07 (FROM ACP)
PT 41: DC-00-06 (FROM ACP)
1.1 IDF LEVEL 1 SOUTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #5
BOSCH B299 SDI2 EXPANSION MODULE ADDRESS #2
POPEX
TMPR
SDI2
POWER
A
B
COM
- D9127 POPIT
+ LOOP (GB'S)
PT 58: DB-01-08
PT 57: DB-01-07
PT 56: DB-01-06
PT 55: DB-01-05
PT 54: DB-01-04
PT 53: DB-01-03
PT 52: DB-01-02
PT 51: DB-01-01
1.1 IDF LEVEL ONE SOUTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #6
KP-01-01
PT 67: LA-01-07 DOOR ALARM (FROM ACP)
PT 66: LA-01-06 DOOR ALARM (FROM ACP)
PT 65: LA-01-02 DOOR ALARM (FROM ACP)
PT 64: LA-01-01 DOOR ALARM (FROM ACP)
PT 63: CR-01-07 FO (FROM ACP)
PT 62: CR-01-06 FO (FROM ACP)
PT 61: CR-01-01 FO (FROM ACP)
B208 OCTO-INPUT BOARD ADDRESS #7
PT 78: MD-01-01
PT 76: DC-01-06 (FROM ACP)
PT 75: DC-01-05 (FROM ACP)
PT 74: DC-01-04 (FROM ACP)
PT 73: DC-01-03 (FROM ACP)
PT 72: DC-01-02 (FROM ACP)
PT 71: DC-01-01 (FROM ACP)
B208 OCTO-INPUT BOARD ADDRESS #8
1.2 IDF LEVEL ONE NORTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #9
BOSCH B299 SDI2 EXPANSION MODULE ADDRESS #3
PT 98: LA-01-17 DOOR ALARM (FROM ACP)
PT 97: LA-01-15 DOOR ALARM (FROM ACP)
PT 96: LA-01-14 DOOR ALARM (FROM ACP)
PT 95: LA-01-08 DOOR ALARM (FROM ACP)
PT 94: CR-01-27 FO (FROM ACP)
PT 93: CR-01-21 FO (FROM ACP)
PT 92: CR-01-20 FO (FROM ACP)
PT 91: CR-01-18 FO (FROM ACP)
B208 OCTO-INPUT BOARD ADDRESS #10
KP-01-02
KP-01-03
PT 108: MD-01-02
2.1 IDF LEVEL TWO SOUTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #11
PT 114: LA-02-03 DOOR ALARM (FROM ACP)
PT 113: LA-02-02 DOOR ALARM (FROM ACP)
PT 112: LA-02-01 DOOR ALARM (FROM ACP)
PT 111: WR-02-01 FO (FROM ACP)
2.2 IDF LEVEL TWO NORTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #12
PT 128: RESERVED FOR ZONEX 1 BUS SUPERVISION
PT 121: LA-02-04 DOOR ALARM (FROM ACP)
3.1 IDF LEVEL THREE SOUTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #13
BOSCH B299 SDI2 EXPANSION MODULE ADDRESS #4
PT 138: LA-03-07 DOOR ALARM (FROM ACP)
PT 137: LA-03-06 DOOR ALARM (FROM ACP)
PT 136: LA-03-05 DOOR ALARM (FROM ACP)
PT 135: LA-03-04 DOOR ALARM (FROM ACP)
PT 134: LA-03-03 DOOR ALARM (FROM ACP)
PT 133: LA-03-02 DOOR ALARM (FROM ACP)
PT 132: DC-03-01 (FROM ACP)
PT 131: CR-RF-01 FO (FROM ACP)
B208 OCTO-INPUT BOARD ADDRESS #14
PT 148: WR-03-03 FO (FROM ACP)
PT 147: WR-03-02 FO (FROM ACP)
PT 143: LA-03-10 DOOR ALARM (FROM ACP)
PT 142: LA-03-09 DOOR ALARM (FROM ACP)
PT 141: LA-03-08 DOOR ALARM (FROM ACP)
3.2 IDF LEVEL THREE NORTH (BZE)
B208 OCTO-INPUT BOARD ADDRESS #15
BOSCH B299 SDI2 EXPANSION MODULE ADDRESS #5
PT 154: LA-03-13 DOOR ALARM (FROM ACP)
PT 153: LA-03-12 DOOR ALARM (FROM ACP)
PT 152: LA-03-11 DOOR ALARM (FROM ACP)
PT 151: DC-03-02 (FROM ACP)

7/1/2026 4:26:04 PM

STAMP

CONSULTANT LOGO

TEECOM
50 California Street
Suite 1500
San Francisco, CA
94111
(510) 337 2800
www.teecom.com

DBI STAMP

REV	DATE	DESCRIPTION
	08/15/2026	DYNAMIC SECURITY PLANS

ST. IGNATIUS COLLEGE PREPARATORY

2001 37th Ave, San Francisco, CA 94116

INTRUSION SYSTEM POINT TO POINT DIAGRAM

T6.18