




Ulf Skutnabba, twitter: [@skutis77](#)


Sheet: /
File: insectx.kicad_sch

Title: Insector X - P0-056A

Size: A3 Date: 2022-12-06
KiCad E.D.A. 8.0.9

Rev:
Id: 1/6

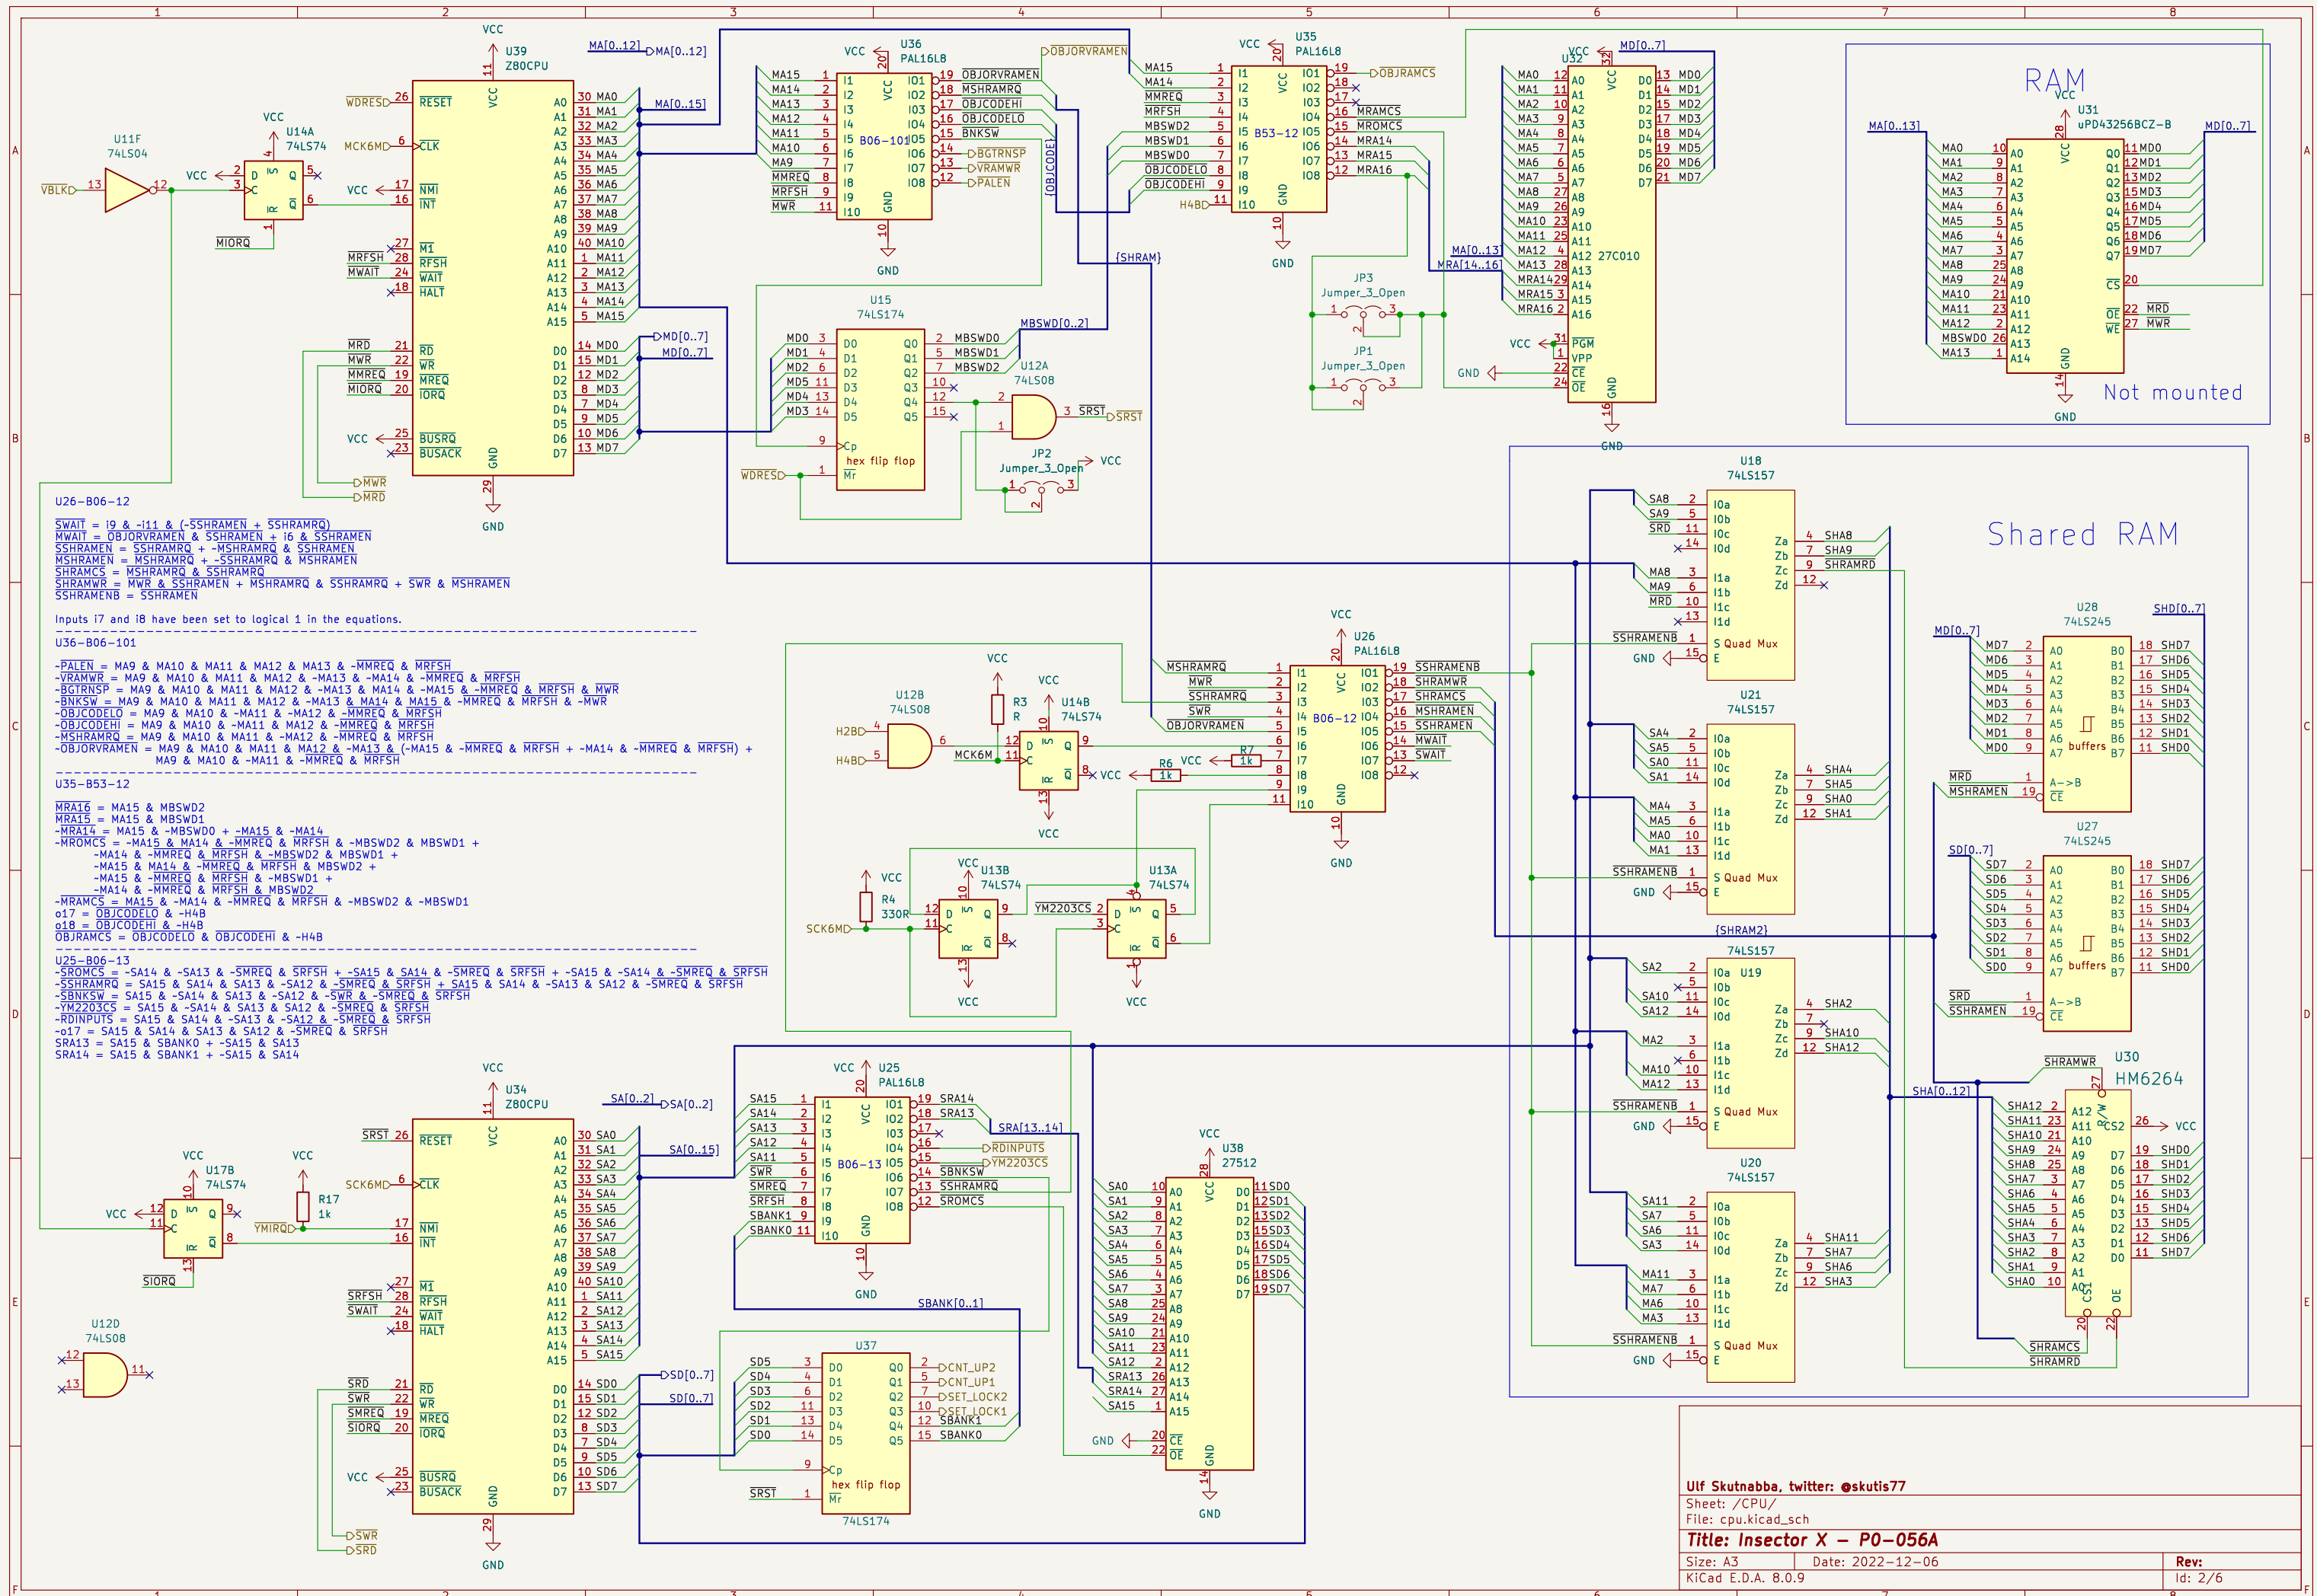

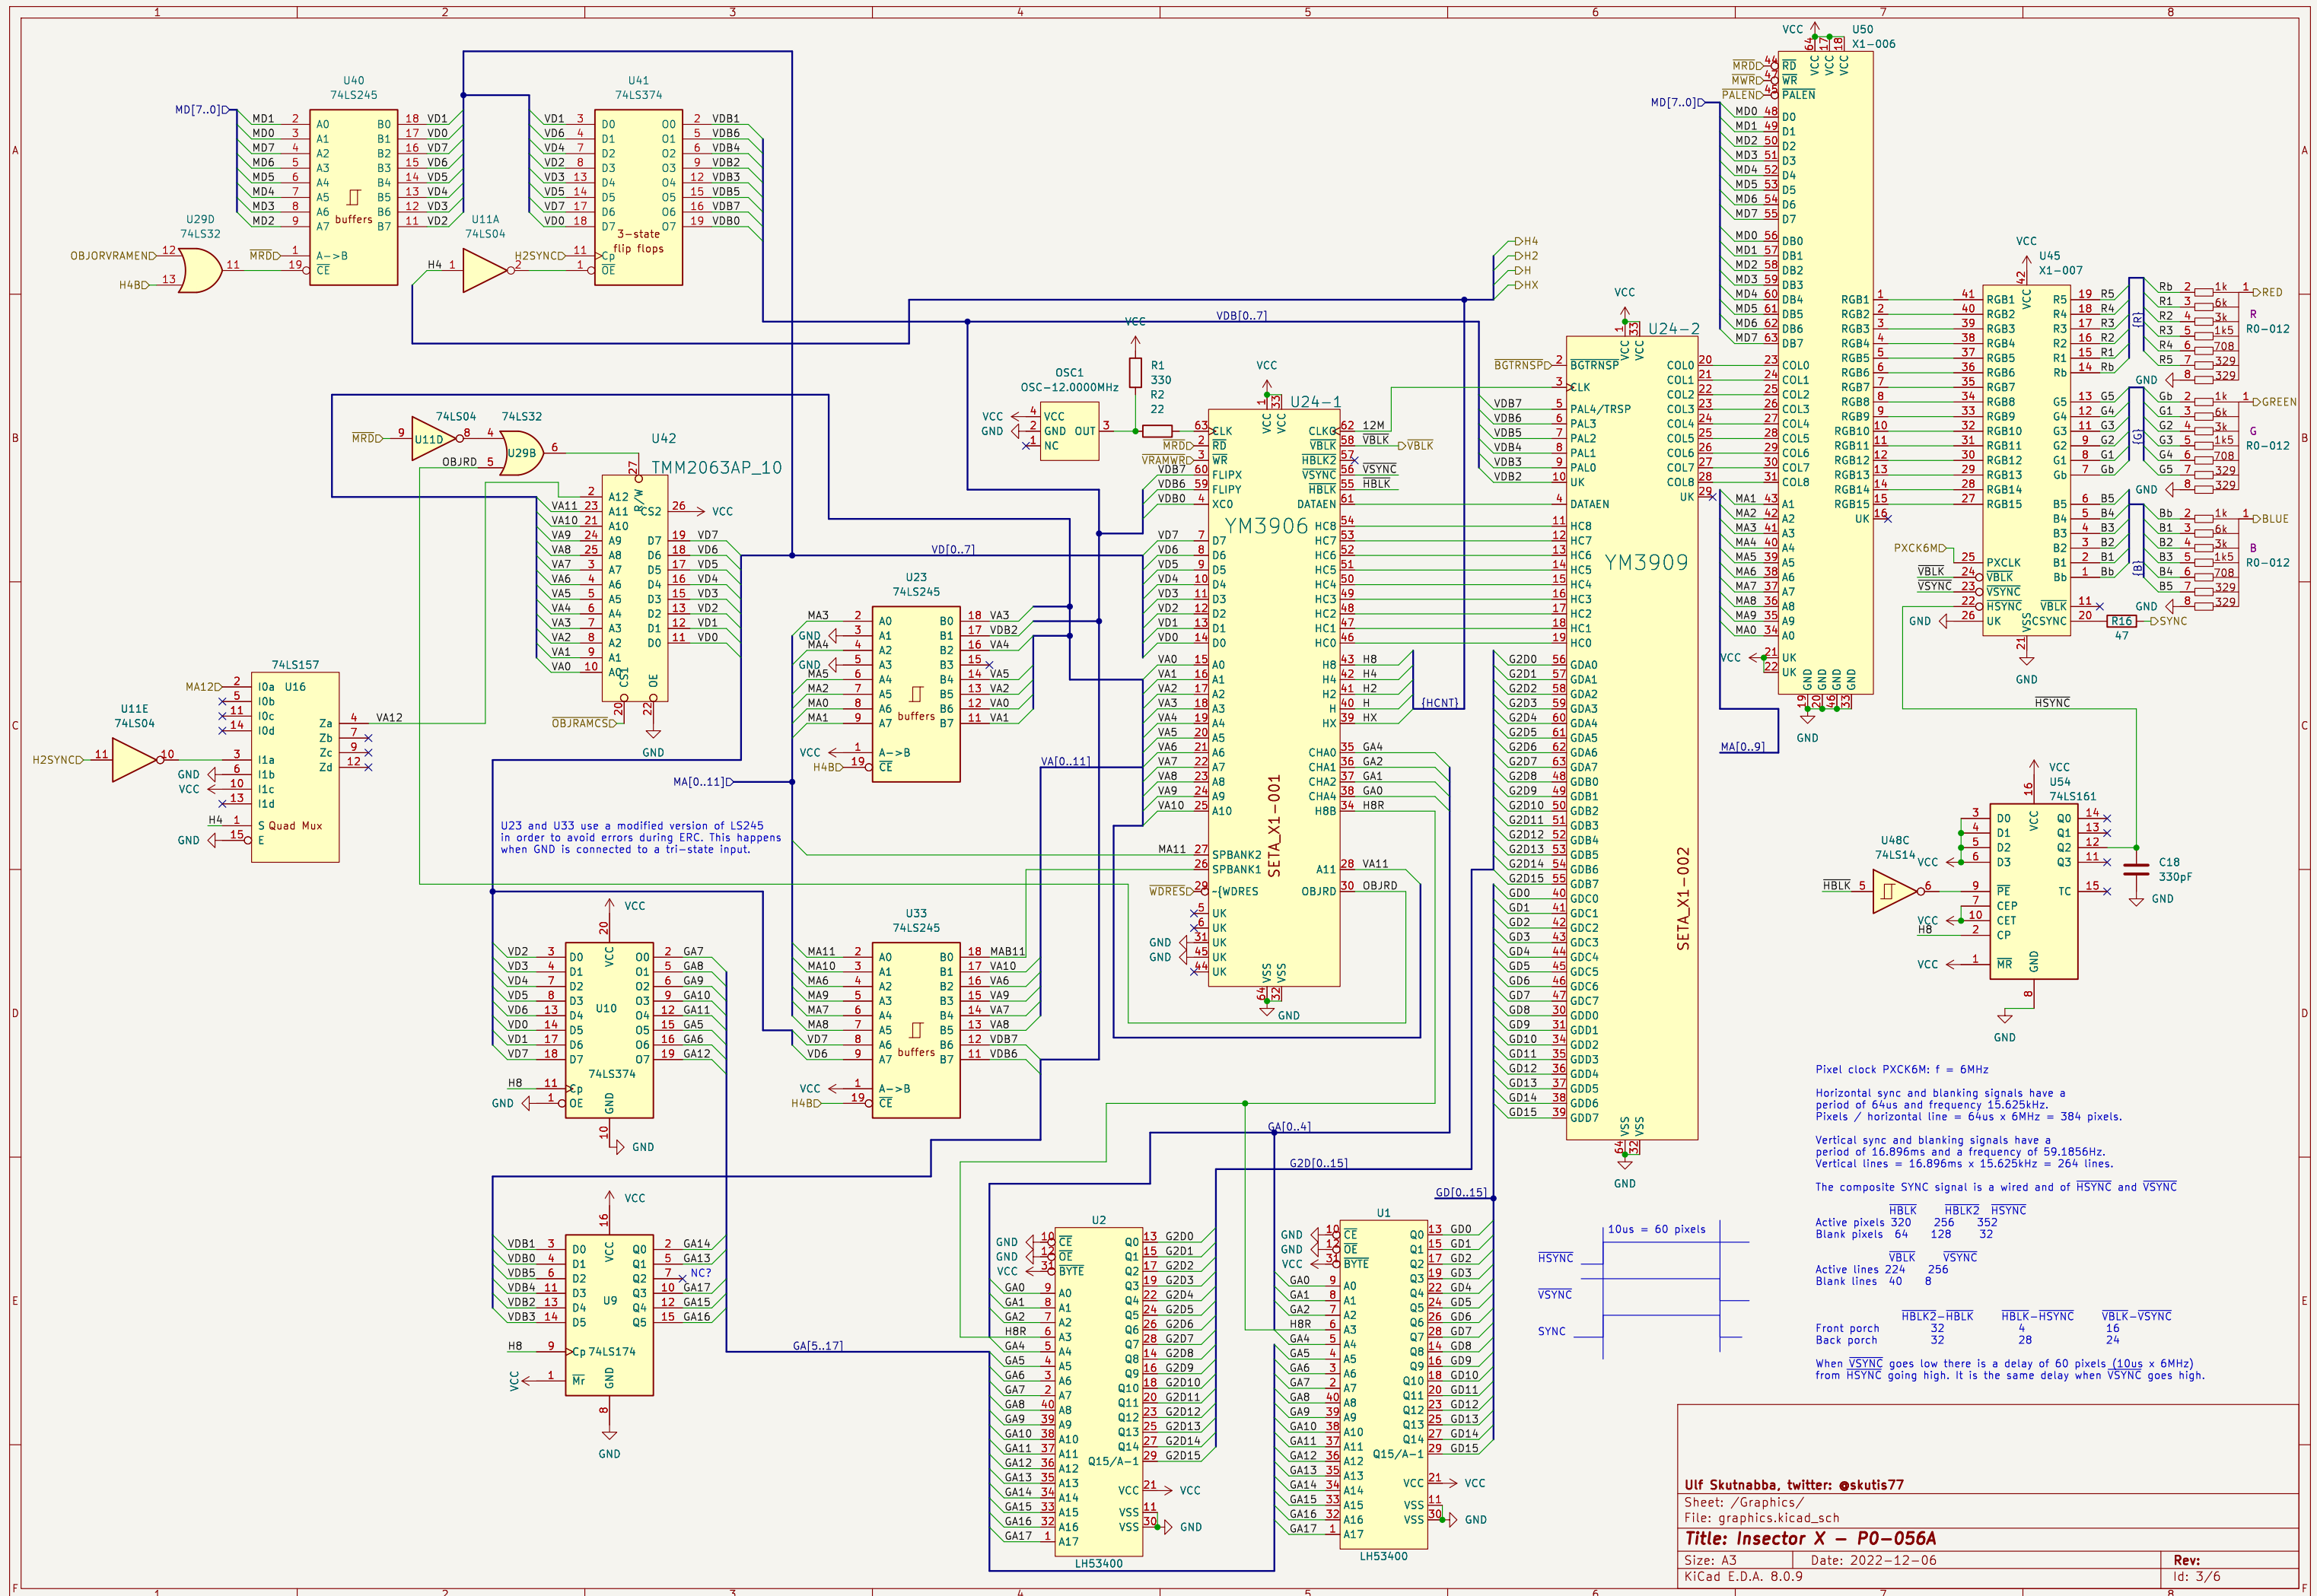

Pixel clock PXCK6M: $f = 6\text{MHz}$

Horizontal sync and blanking signals have a period of 64us and frequency 15.625kHz.
Pixels / horizontal line = $64\text{us} \times 6\text{MHz} = 384$ pixels.

Vertical sync and blanking signals have a period of 16.896ms and a frequency of 59.1856Hz.
Vertical lines = $16.896\text{ms} \times 15.625\text{kHz} = 264$ lines.

The composite SYNC signal is a wired and of HSYNC and VSYNC

	HBK1	HBK2	HSYNC
Active pixels	320	256	352
Blank pixels	64	128	32

	VBLK	VSYNC
Active lines	224	256
Blank lines	40	8

	HBK2-HBK1	HBK-HSYNC	VBLK-VSYNC
Front porch	32	4	16
Back porch	32	28	24

When VSYNC goes low there is a delay of 60 pixels ($10\text{us} \times 6\text{MHz}$) from HSYNC going high. It is the same delay when VSYNC goes high.


Ulf Skutnabba, twitter: @skutis77

Sheet: /Graphics/
File: graphics.kicad_sch

Title: Insector X - P0-056A

Size: A3
Date: 2022-12-06
KiCad E.D.A. 8.0.9

Rev:
Id: 3/6

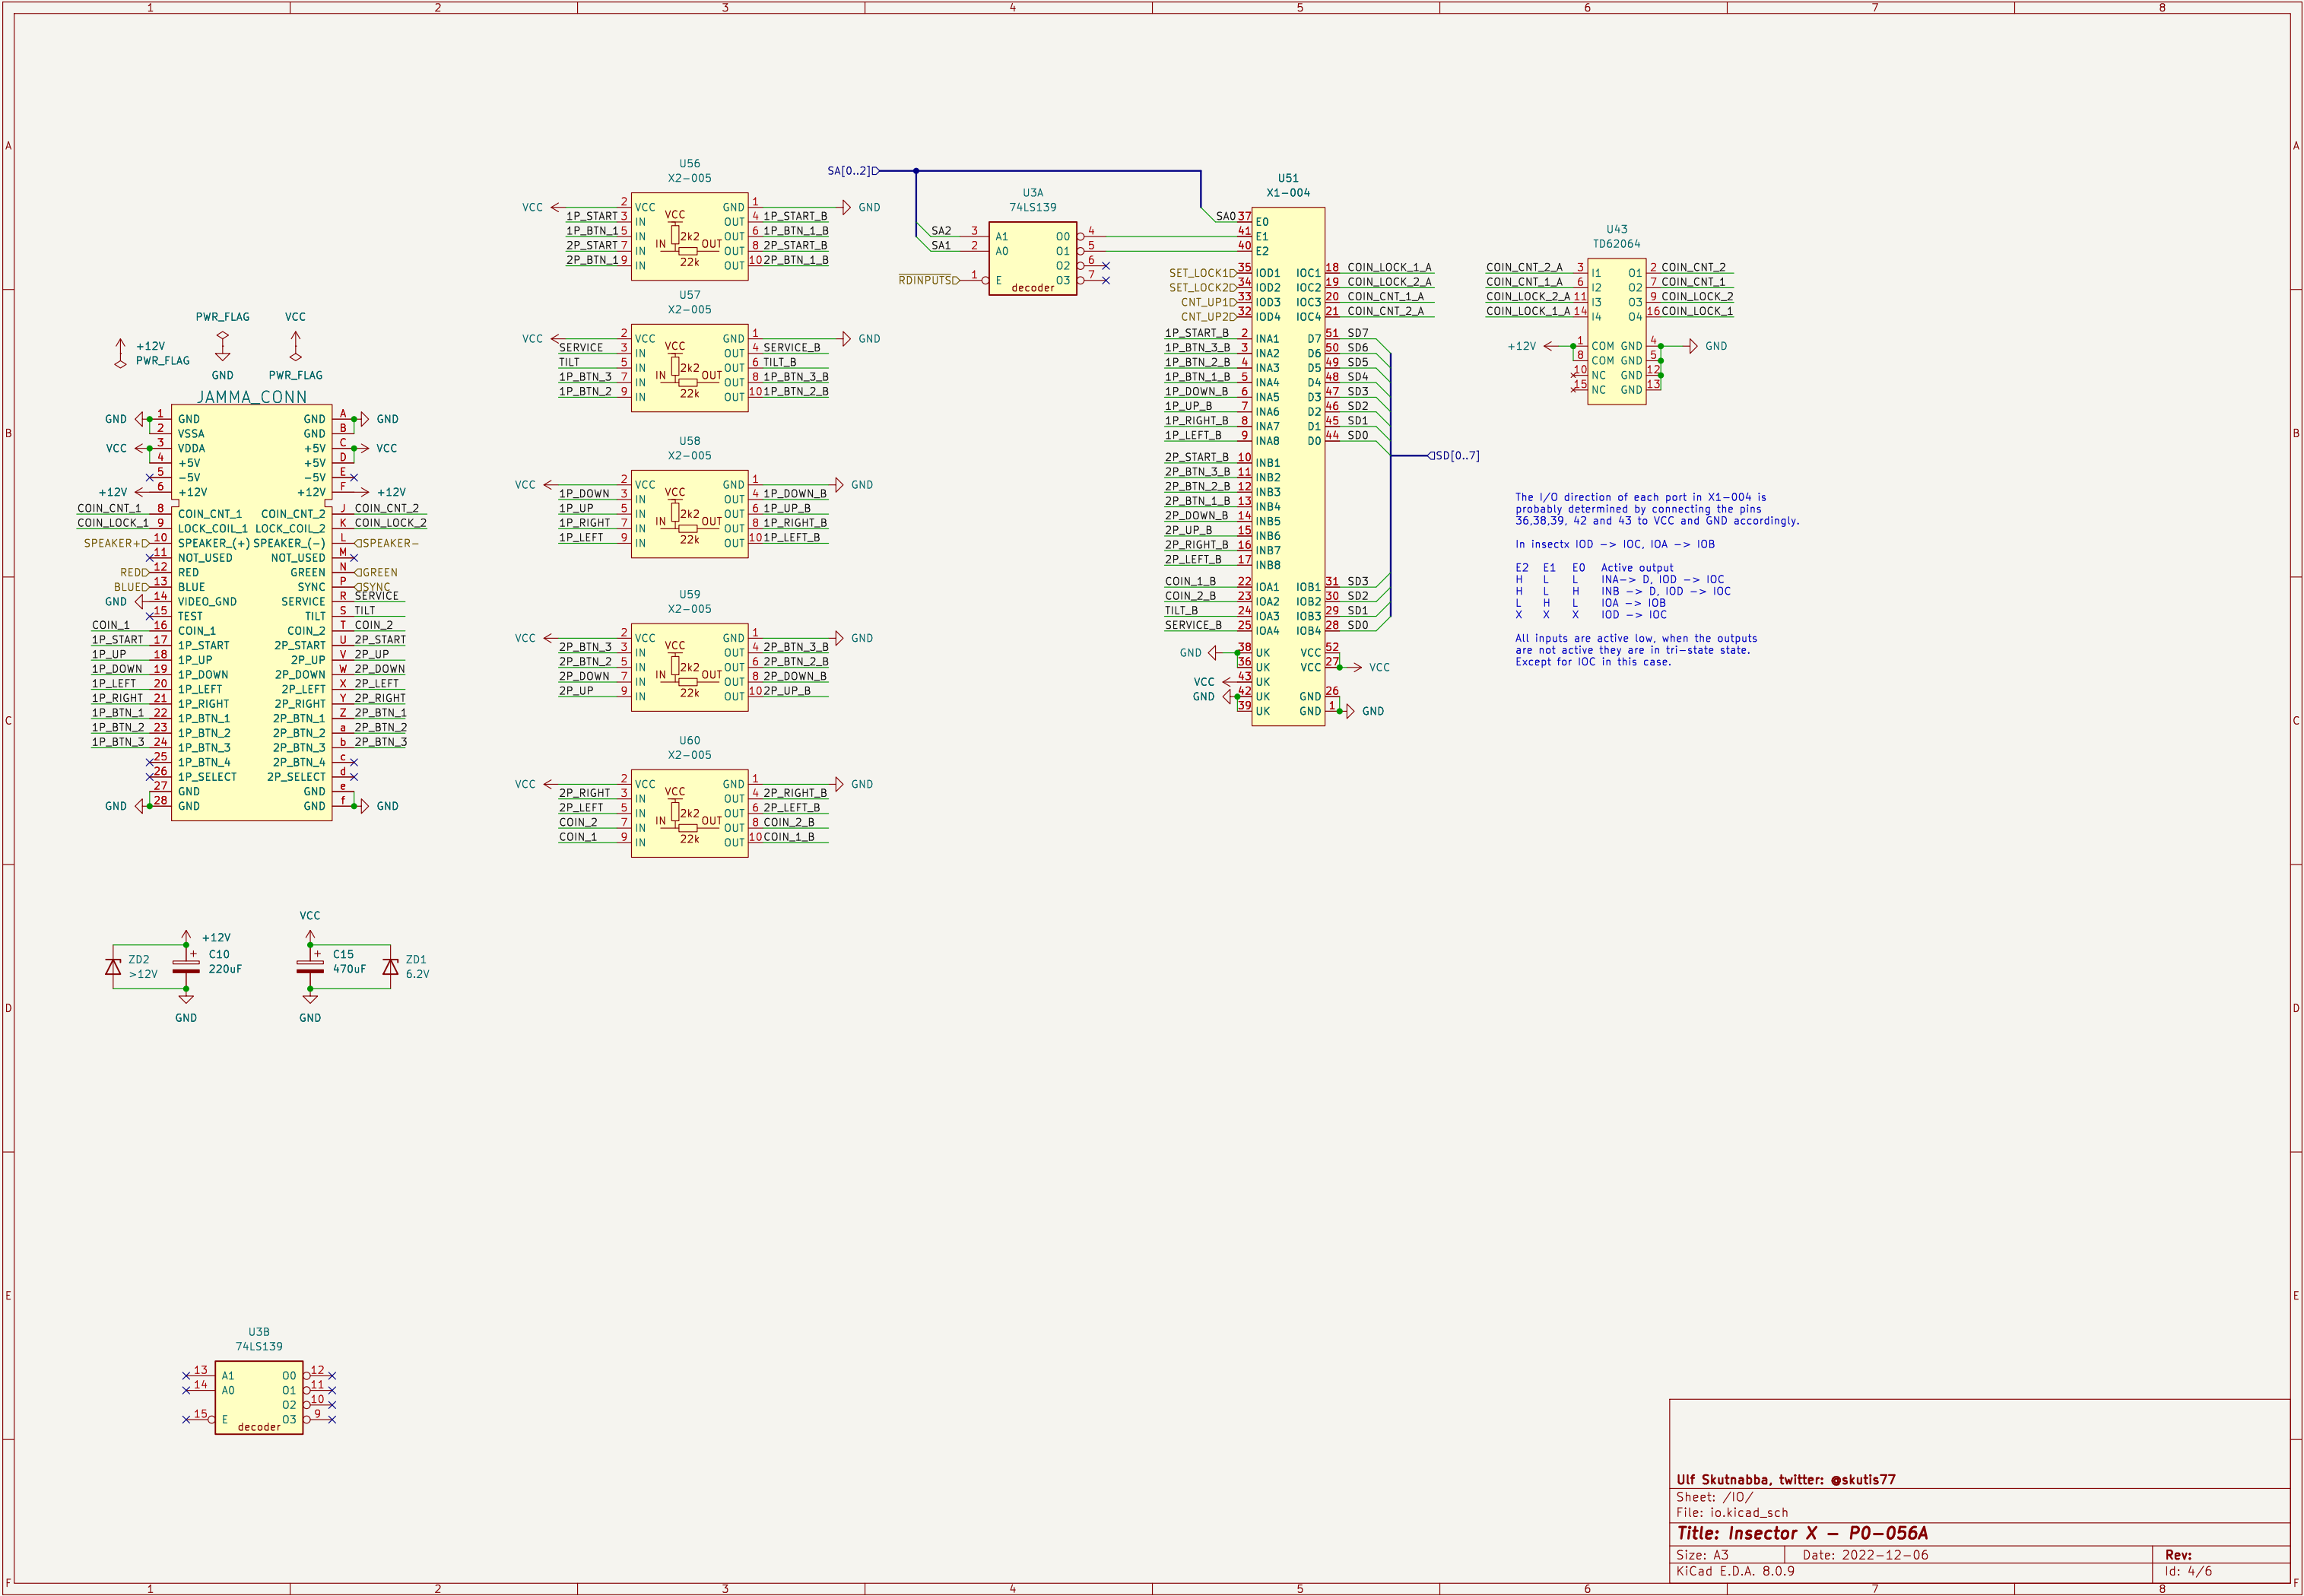

Ulf Skutnabba, twitter: @skutis77

Sheet: /10/
File: io.kicad_sch


Title: Insector X - P0-056A

Size: A3
KiCad E.D.A. 8.0.9

Date: 2022-12-06

Rev:

Id: 4/6

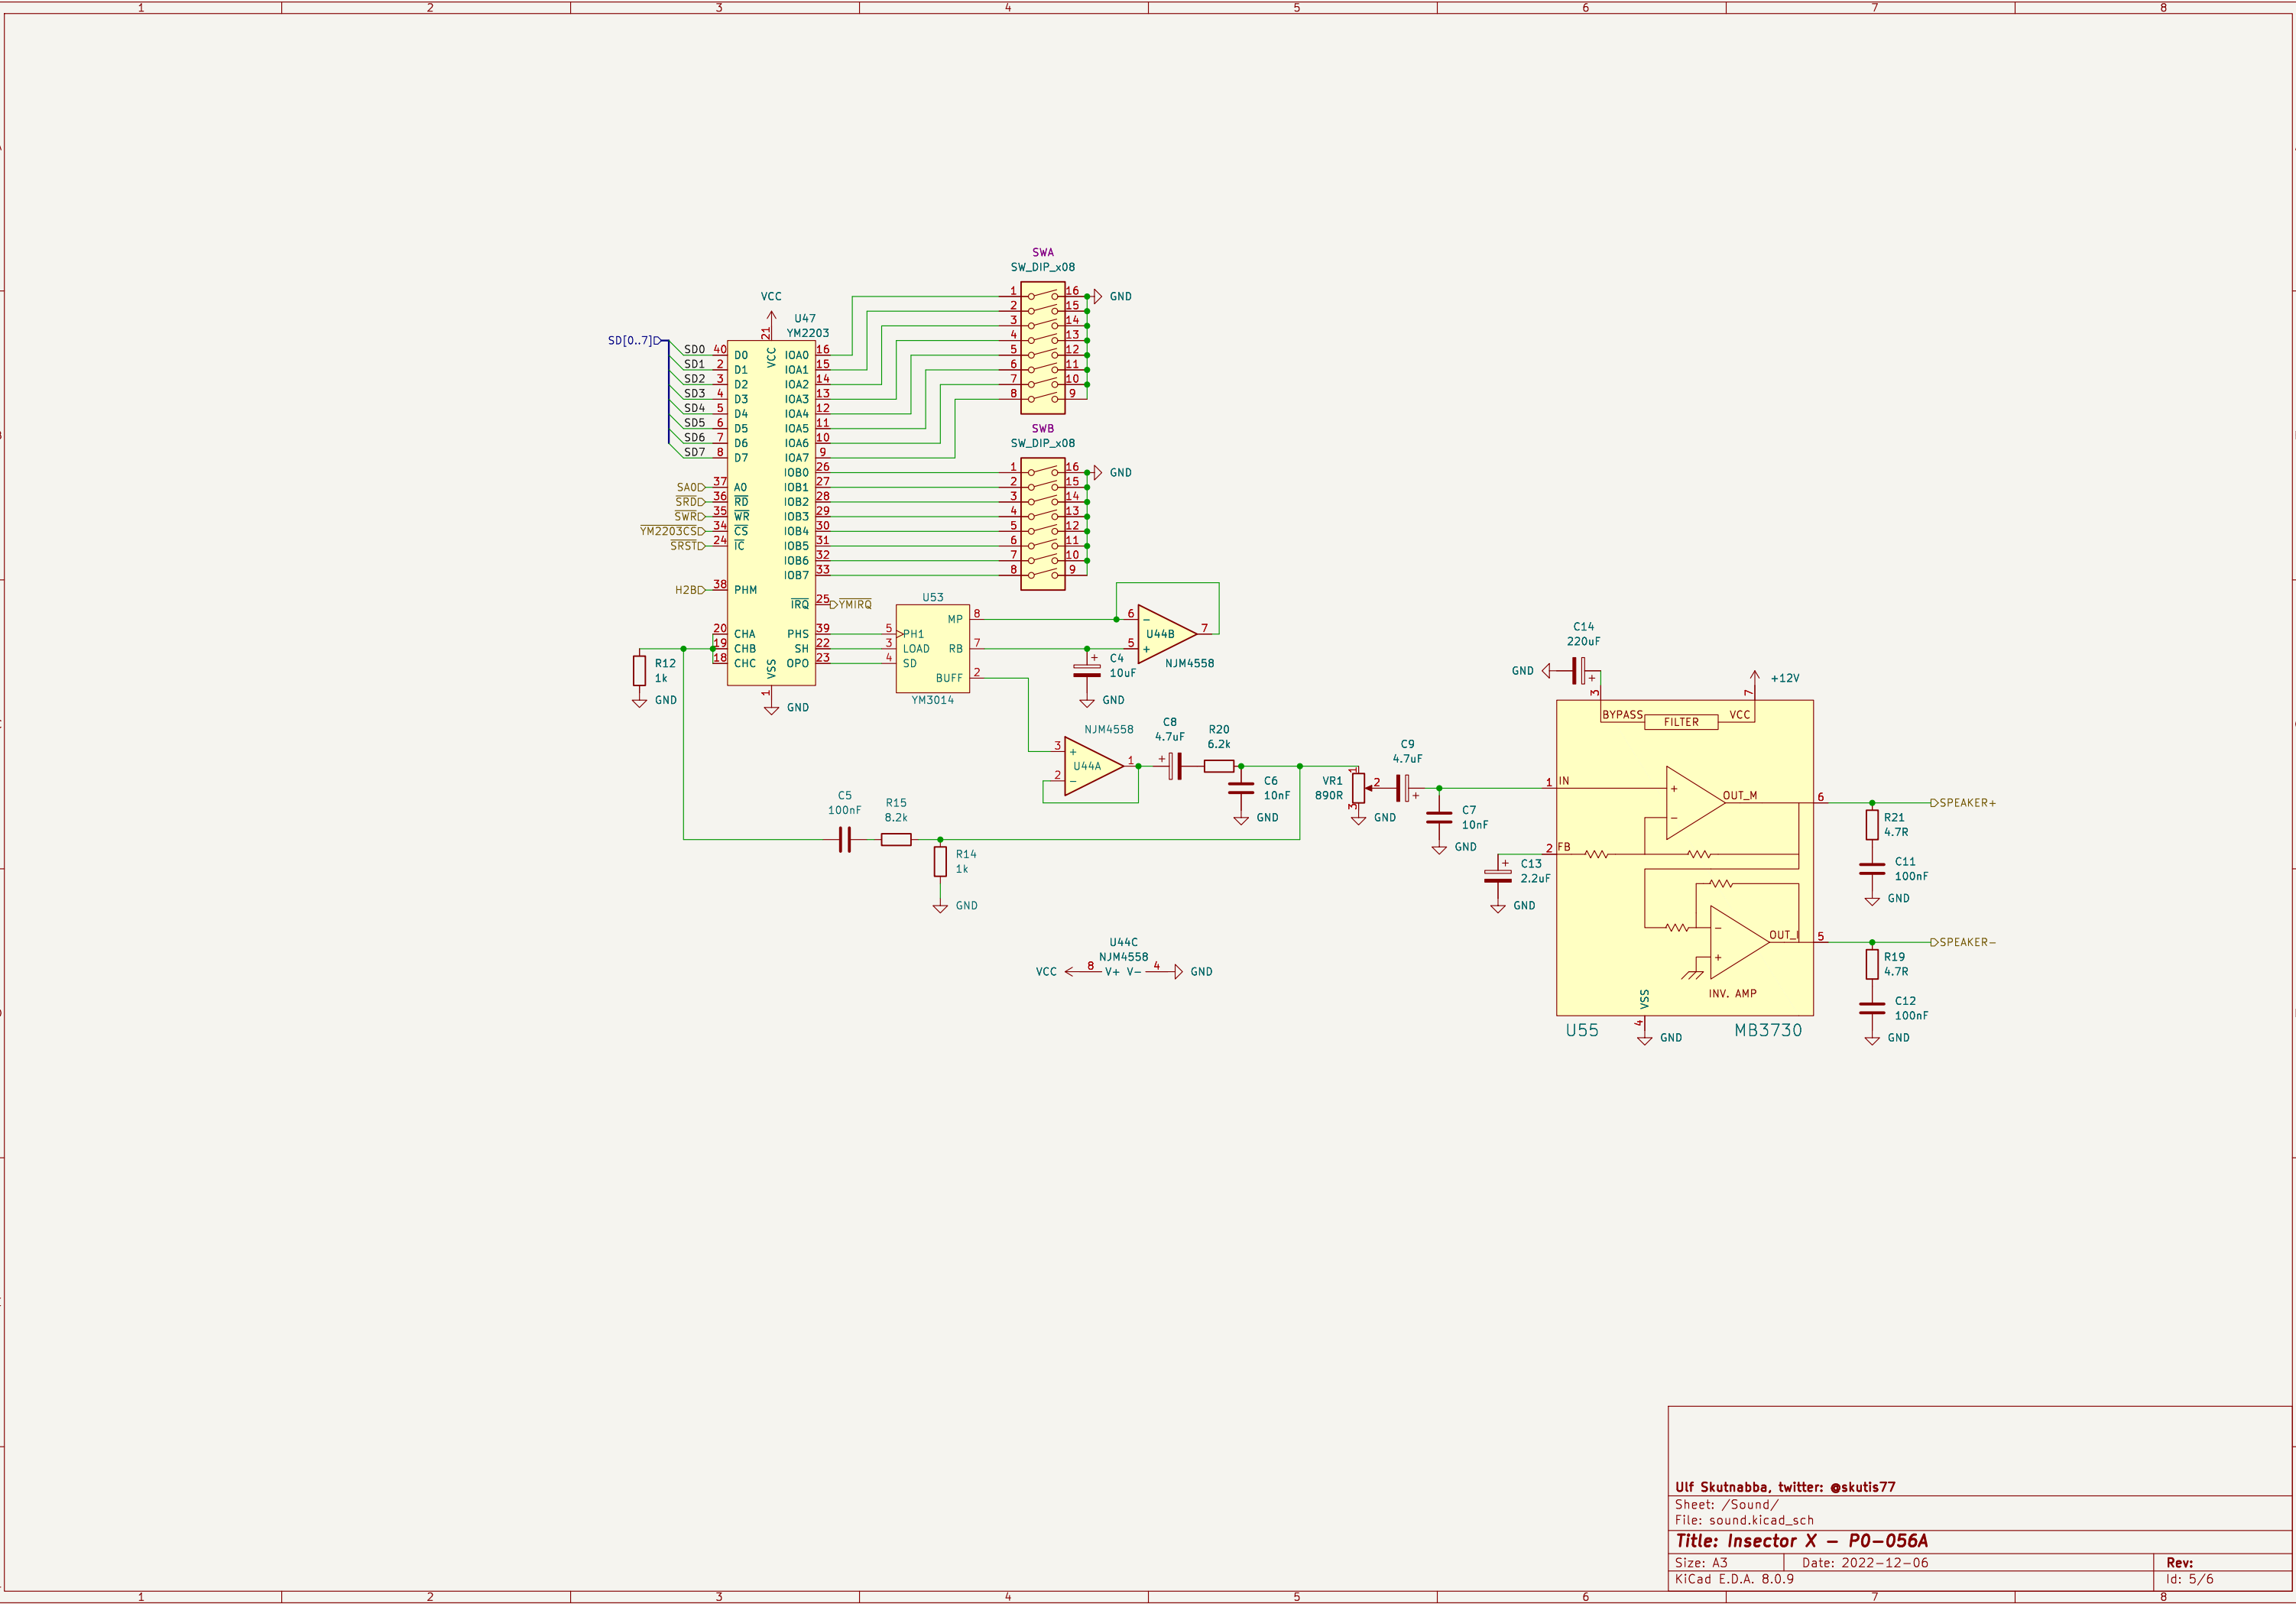

Ulf Skutnabba, twitter: @skutis77

Sheet: /Sound/
File: sound.kicad_sch

Title: Insector X - P0-056A

Size: A3 Date: 2022-12-06

KiCad E.D.A. 8.0.9

Rev:

Id: 5/6

