



## E1DA #9038SG3/#9038D firmware updating.

Warning: You need Windows 7/8/10, 32b either 64b PC, make sure if 9038SG3 works stable with that PC and particular USB cable. Do not interrupt power of PC either 9038SG3 during the re-flash process, do not shake or touch USB cable as well, otherwise the probability of brick your DAC is >0%!

- 1) install the audio driver first CT7601\_20180717\_3732\_WHQL by start ct7601\_setup.exe
- 2) install the FW tool driver Comtrue-inc\_Firmware\_Update\_Device\_2fc6 by start dpinst64.exe or dpinst32.exe depend on your Windows 64 either 32 bits. **Don't worry if there is no digital signature! That driver isn't critical and may be needed only if 9038SG3/D was flashed wrong.**

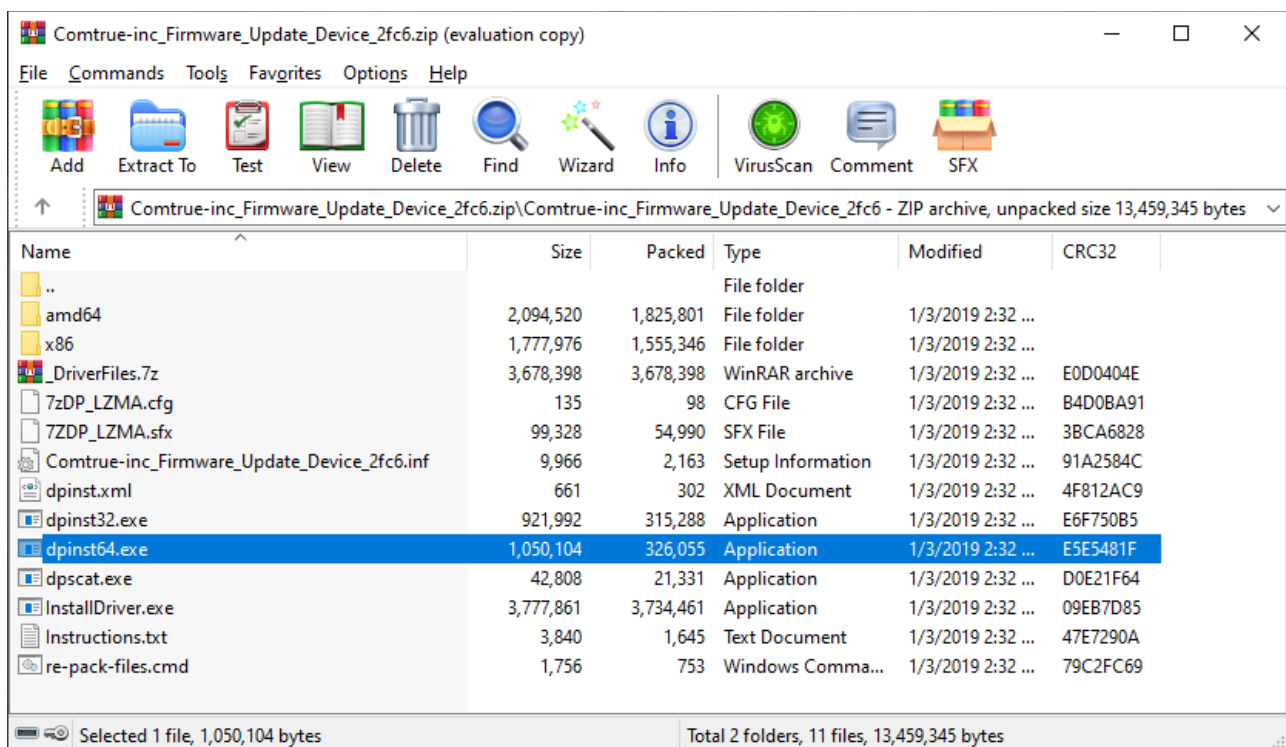

- 3) plug 9038SG3 in the USB and start CT7601\_ISP\_Tool.exe
- 4) Off the check "Detect Device" and change the PID for 6013, set the check "Detect Device" On again. You should see the indicator of the available device is green.

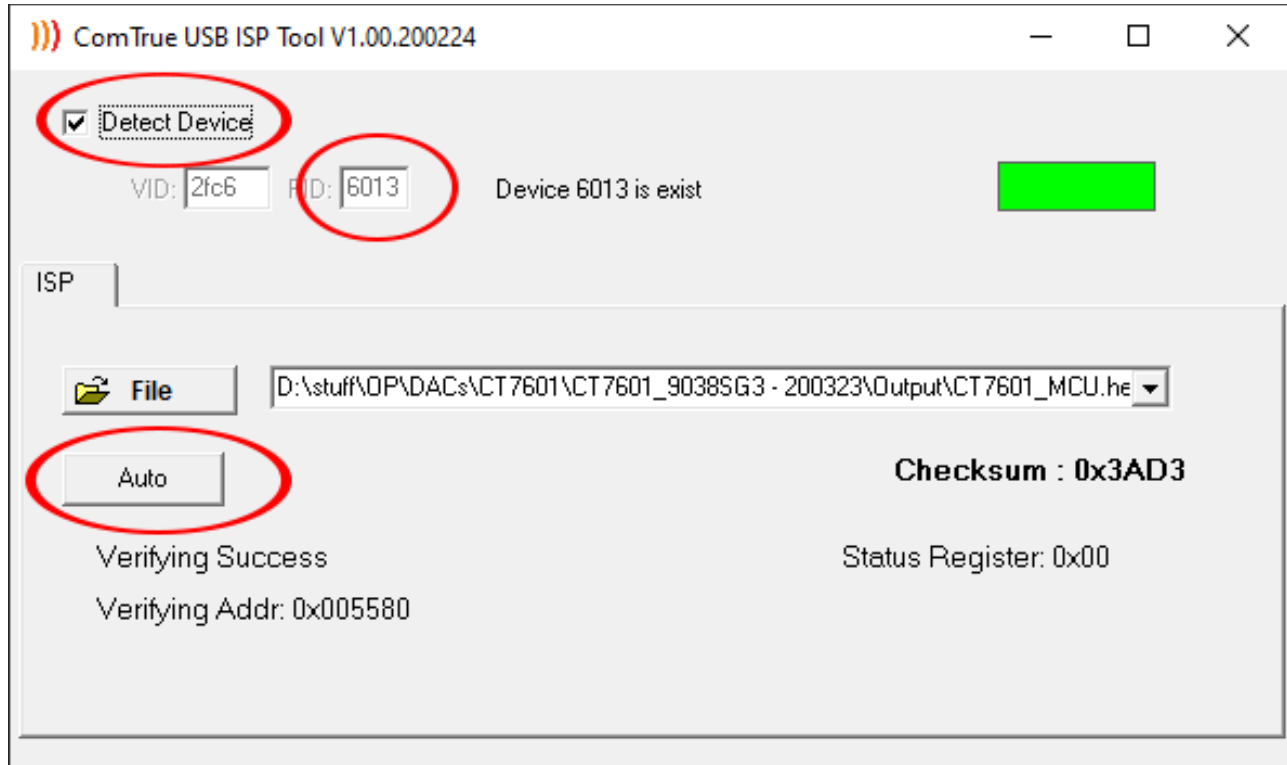

- 5) click on the "File" button to choose the FW file, and click "Auto" button. After the re-flashing process finished you'll see the msg "Verifying Success". 9038SG3 FW is updated.