
Adding Board Support for ESP32 in Arduino IDE

1. Install and Open latest version of and go to **File > Preferences**.
2. Copy and paste the following URL in the **"Additional Board Manager URLs"** field.

https://dl.espressif.com/dl/package_esp32_index.json

3. Press OK and exit from the Preferences Menu.
4. Now navigate to **Tools > Board > Boards Manager** as shown in the figure below

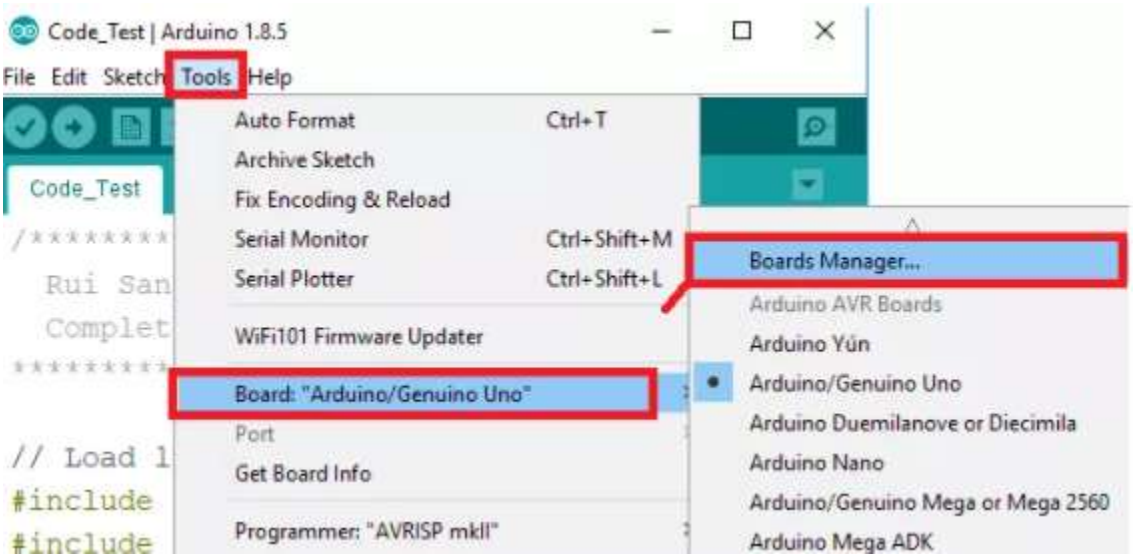

5. Let the Boards Manager initialize and then type "**ESP32"** in the search bar.
6. The ESP32 Board Support will appear in the option below as shown.



7. Choose the install button to and let it install. ESP32 Board Support will then be added to your list of supported boards.
8. Before uploading, you need to select **"ESP32 Dev Module"** from the list of available boards in **Tools > Boards**.
9. You will then be able to upload code to an ESP32 Development Kit.

10. Now open the shared firmware files and select **“first-babak_with_timestamp.ino”** file and open it.
11. Select **“ESP32 Dev Module”** from list of boards and then proceed to connect your ESP32 Development Kit to the system via USB – Micro-USB Cable.
12. The ESP32 Development Kit will appear on one of the COM Ports on the system. Select the correct COM Port from **“Tools > Port”** menu and proceed to press the upload button on the Arduino.
13. The program will compile and then be uploaded onto the ESP32 Development Kit.
14. Open Serial Monitor by pressing **“Ctrl+Shift+M”** combination for debugging information.
15. Make sure to connect all the sensors on the mentioned pins before powering the ESP32 Development Kit.