
Board Input Output Information


1. 2 – Pin header for Power **input**.
    a. First pin (left) is GND
    b. Second pin (right) is VIN (36VDC)
2. The motor is rated at 36VDC / 1.2A current meaning we will need at least 36V / 2.5A Power Source



3. 2 – Pin header for Pump **output**.
    a. First pin (left) is VOUT (12V to power the pump)
    b. Second pin (right) is GND
4. The pump output is used for connecting an external pump to the board

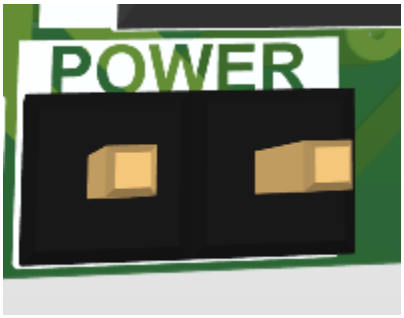

5. 6 – Pin header for Motor **output**.
    a. Pin 1 (leftmost) is Motor Coil A1
    b. Pin 2 is Motor Coil A2
    c. Pin 3 is Motor Coil B1
    d. Pin 4 is Motor Coil B2
    e. Pin 5 is OPEN (left open for connecting a 6-pin Stepper if needed)
    f. Pin 6 (rightmost) is OPEN (left open for connecting a 6-pin Stepper if needed)
6. The Motor Output is used for connecting the stepper motor to the board.

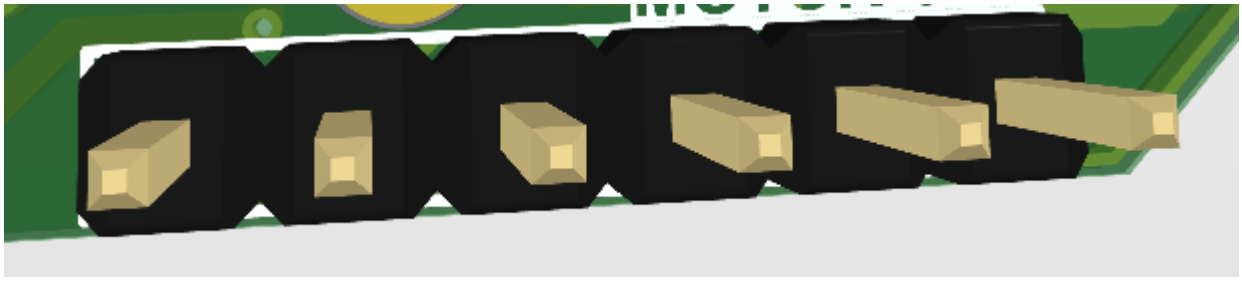

7. 4 – Pin header (2X2) for Motor **output**.
    a. Pin 1 is (bottom right) is VCC (5V).
    b. Pin 2 is (bottom left) is UART (Receiver).
    c. Pin 3 is (top right) is UART (Transmitter).
    d. Pin 4 is (top left) is GND.



8. 2 x RJ-45 Ethernet (EtherCAT) Connectors for **Input/Output**

