Setup & Firmware Uploading Guide
Smart Speaker

Assembly Guide

1. **Connect the Speaker connecting cable to the speaker**
   carefully solder the Black wire to the Speaker terminals marked (-Ve) and Red wire to speaker terminal marked (+Ve). As shown in figure: 3

   After soldering the wires connect the speaker connector as shown in figure 2 to the Speaker connector J9 as shown in Figure 1

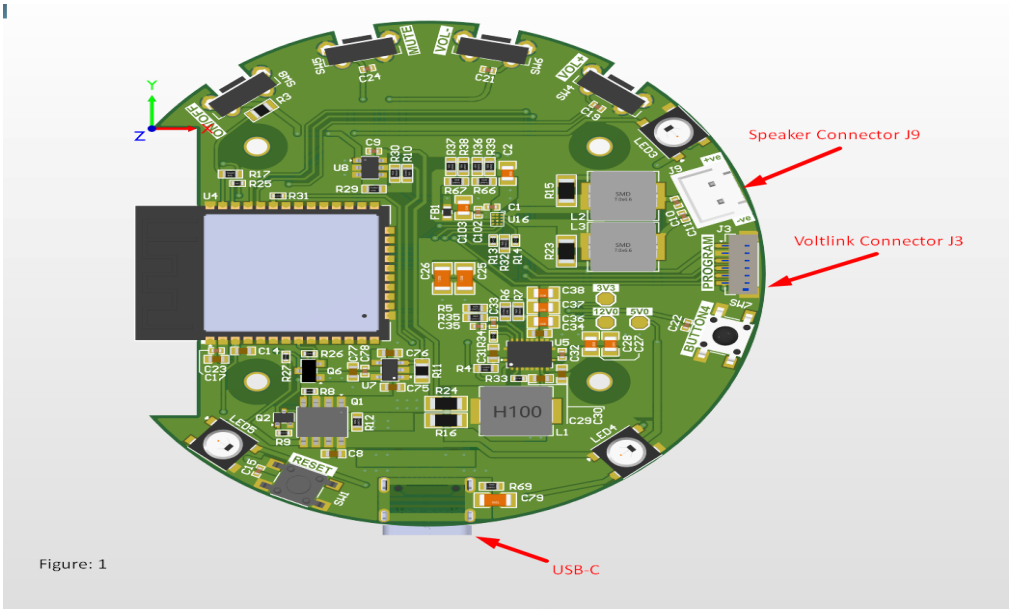


Figure: 1


Figure 2

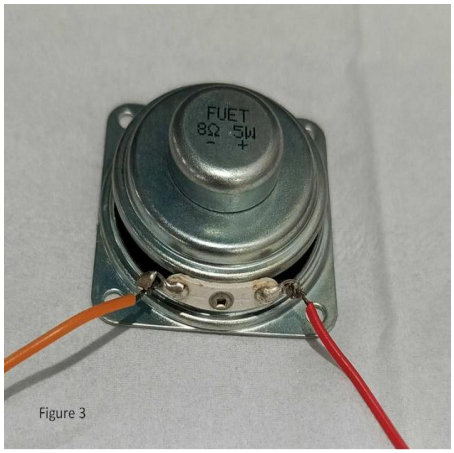


Figure 3

2. **Prepare the Board for programming by connecting it to Voltlink programmer as shown in Figure 4**

   Use the connection cable provided with the Voltlink adapter to connect with the Voltlink connector marked J3 in the Board

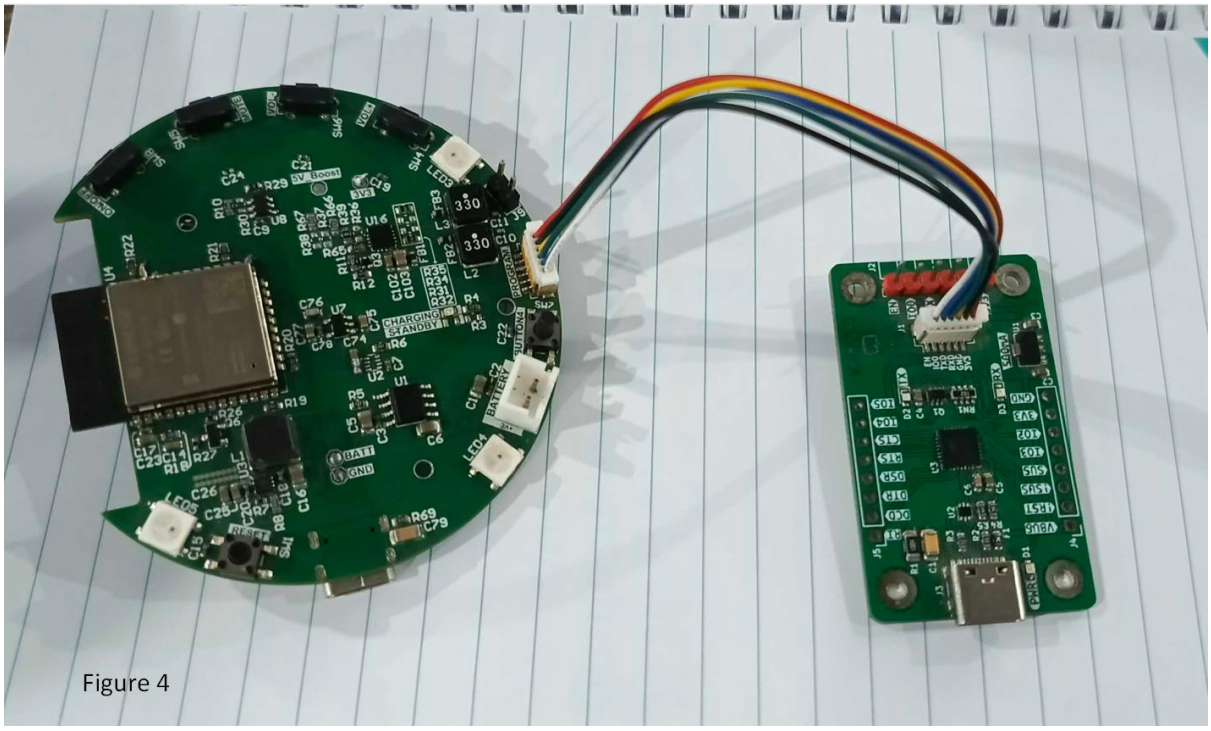


Figure 4

Set up the firmware upload and development environment:

Step 1. Set up Arduino IDE

Arduino IDE can be downloaded from the Arduino website:
https://www.arduino.cc/en/Main/Software


When the installation is finished, open Arduino IDE. Go to “File” -> “Preferences”.

And paste the following URL into the “Additional Boards Manager URLs” field:
https://raw.githubusercontent.com/espressif/arduino-esp32/gh-pages/package_esp32_index.json


Step 2. Set up Arduino IDE for ESP32

Next, go to “Tools” -> “Board” -> “Boards Manager”: and search for ESP32 install the one by “Espressif systems” as shown in image below

The “Boards Manager” requires several seconds to refresh all hardware files

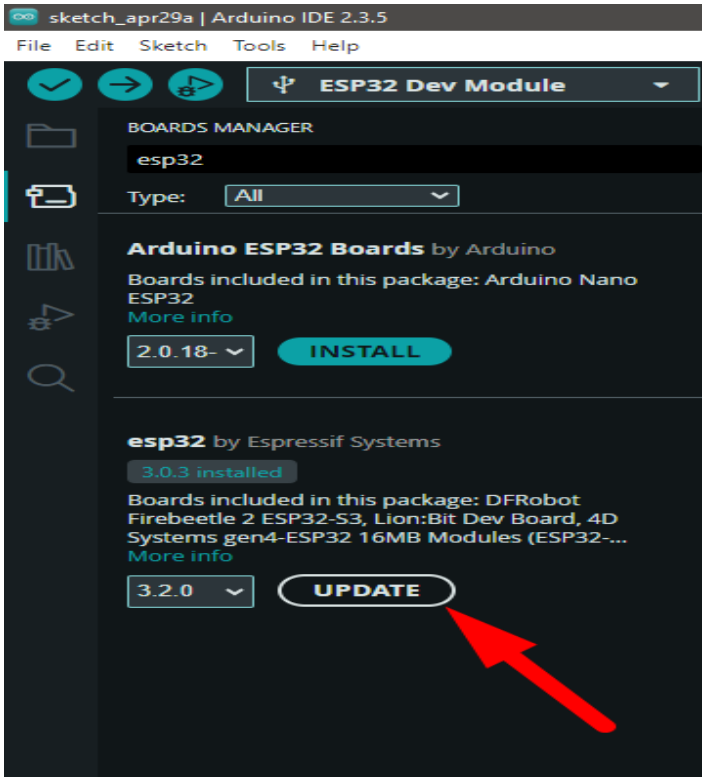


Now, go to “Tools” -> “Board” -> “esp32” ->Select ESP 32 Dev Module

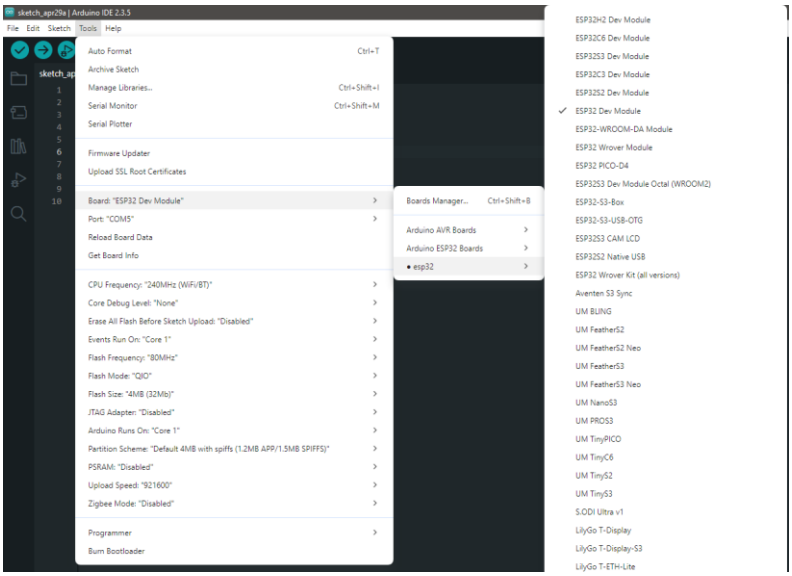


Step 3. Install the Serial port:

Make sure the Voltlink-board is connected to computer via Type-C USB.
After connected, the USB driver will be automatically installed. If there is any driver issue of connecting board, please go to [CP210x USB to UART Bridge VCP Drivers - Silicon Labs] for USB driver.
Check the COM Port number in Device Manager for Windows OS user:

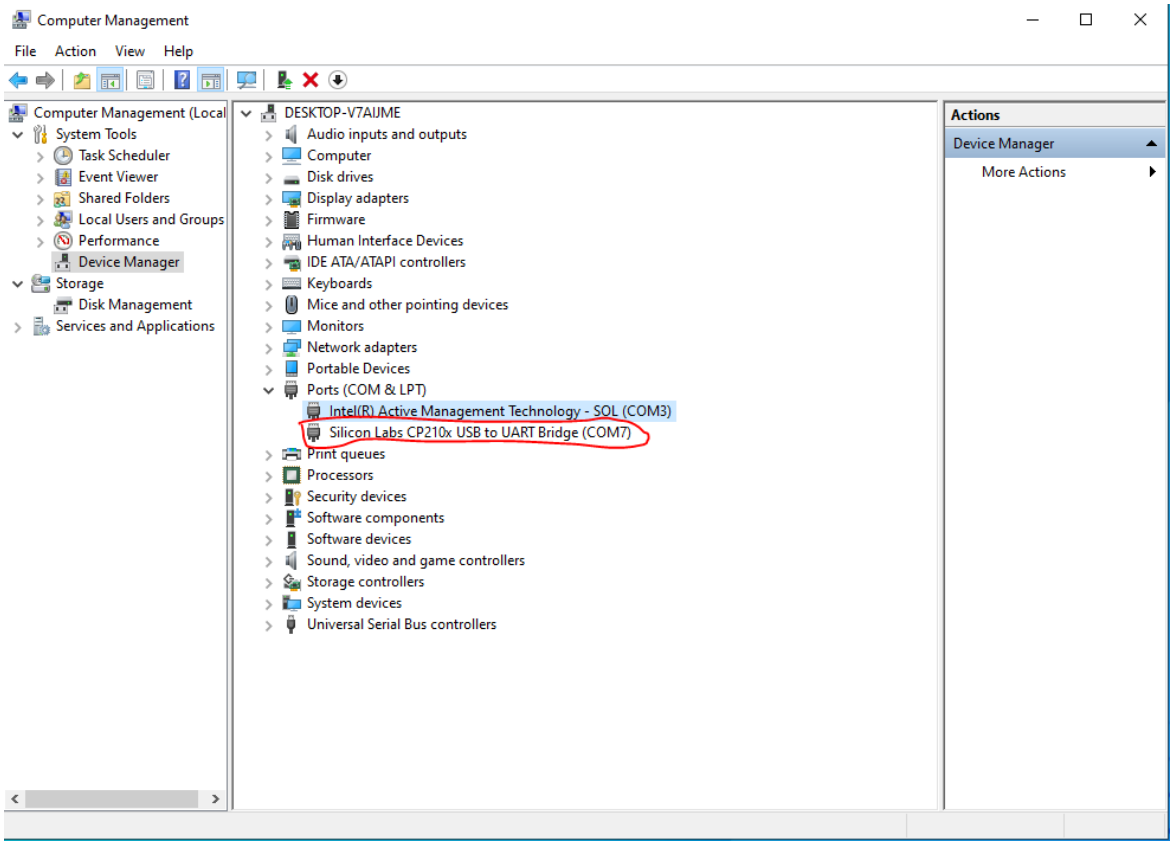

Now open the latest provided firmware

Next go to “Tools” -> “Port” and select the correct COM port.

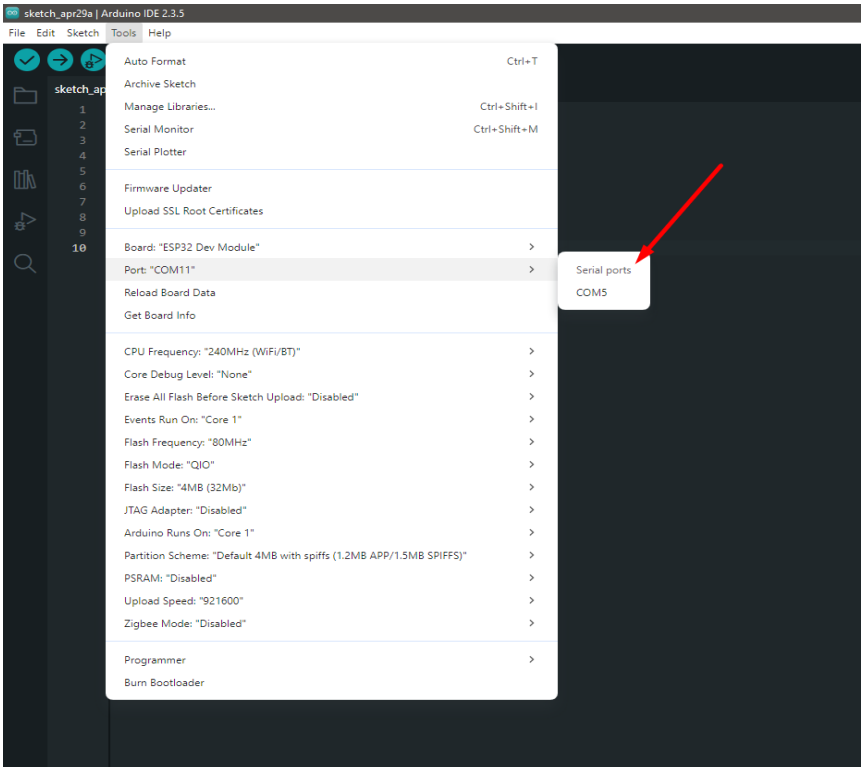

After selecting the correct COM port upload the code by pressing the upload button as mentioned below

