
NEMA11 / RP2040 CORE

MCU / controller interfaces

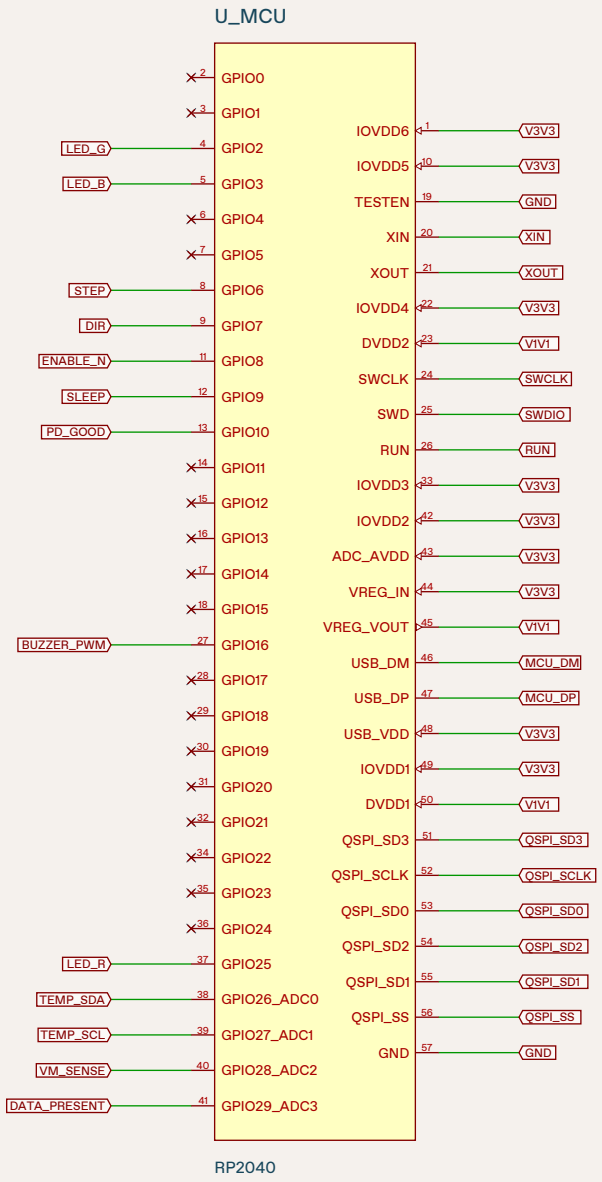


Named nets continue to the controller; NC crosses are intentionally unused GPIO.

SUBSYSTEM REVIEW ONLY - external controller and final PCB incomplete

NEMA11 / RP2040 CORE

Flash / clock / USB / debug


QSPI flash and ROM BOOT pads

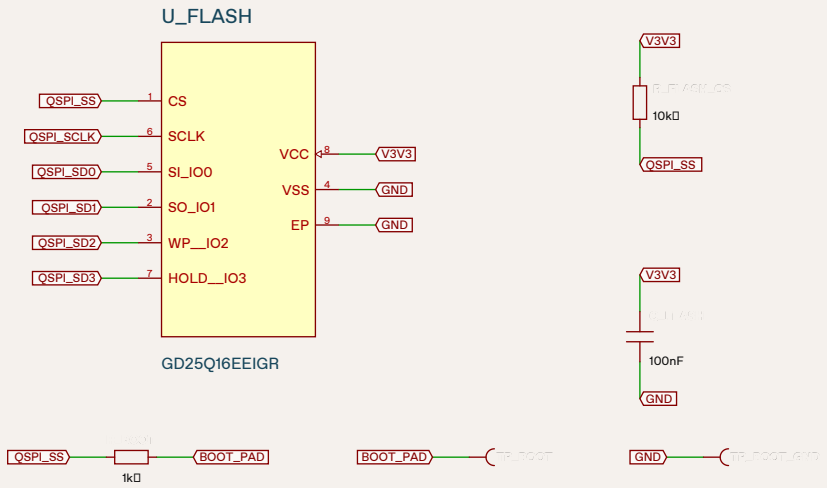

SWD / RUN / bare test pads



12 MHz oscillator

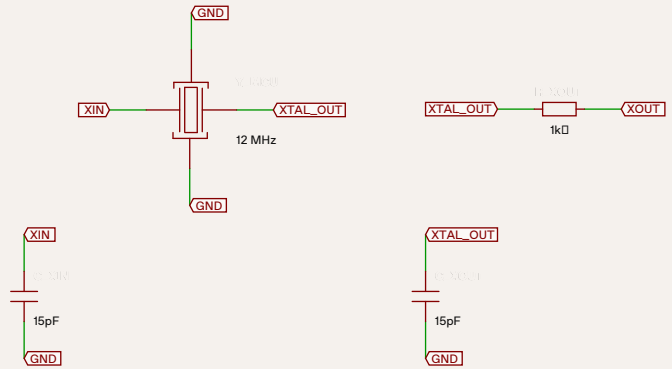


USB series termination - connector / ESD external




Two 15 pF loads assume about 2.5 pF stray for CL=10 pF.

SUBSYSTEM REVIEW ONLY - external controller and final PCB incomplete


3.3 V IOVDD - one 100 nF capacitor per physical supply pin

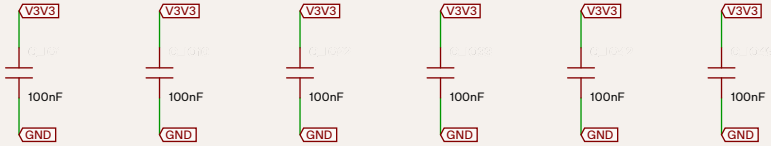

3.3 V USB / ADC / regulator input

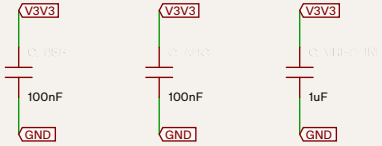

1.1 V core / regulator output

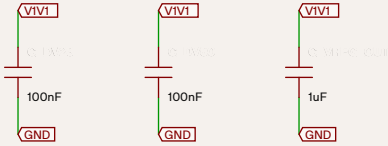

VREG_OUT and DVDD are 1.1 V. Regulated 3.3 V comes from the surrounding controller.