CURRENT PCB — MOTOR BOLT PATTERN

11HS12-0674S | Native tscircuit PCB | Dimensions in mm

DESIGN REVIEW ONLY — NOT FABRICATION READY

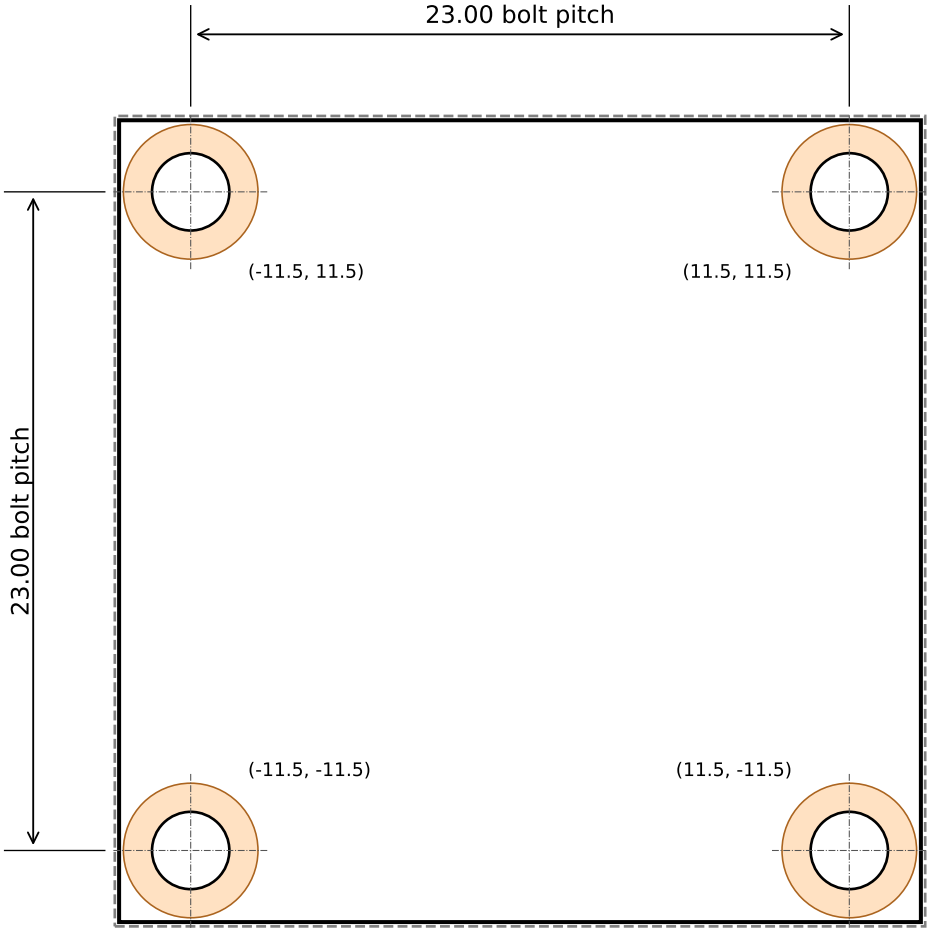

4 × Ø2.70 THROUGH — PROVISIONAL

Head exclusion R2.35 on every copper layer

- Hole centres: X/Y = ±11.50 about PCB and motor centre.
- Axes match four existing rear bolt heads in unchanged OEM STEP.
- OEM rear head Ø4 nominal; design head envelope Ø4.5 + 0.1 radial.
- Ø2.70 drill reserves clearance for shank up to 2.5; thread unverified.
- Front M2.5 callout does not specify the rear motor case bolts.
- Rear bolt length, engagement, torque and insulation remain open.
- No custom carrier. No invented motor rear threads or rear shaft.
- Component placement/routing must clear the changed holes.
- Current native DRC: 121 errors. Prior CAM/BOM/CPL are superseded.

Current native PCB SHA-256:
`83b632ac816aeac1dc2577a92ccc89640ddf23d10eb0fedf09493aa2de511b83`

Nominal geometry review. Hardware tolerances and complete assembly are not qualified.