


NEMA14_RP2040

Topassembly / magenta dots: native physical pin1
Manual motorheader; verify supplier placement preview

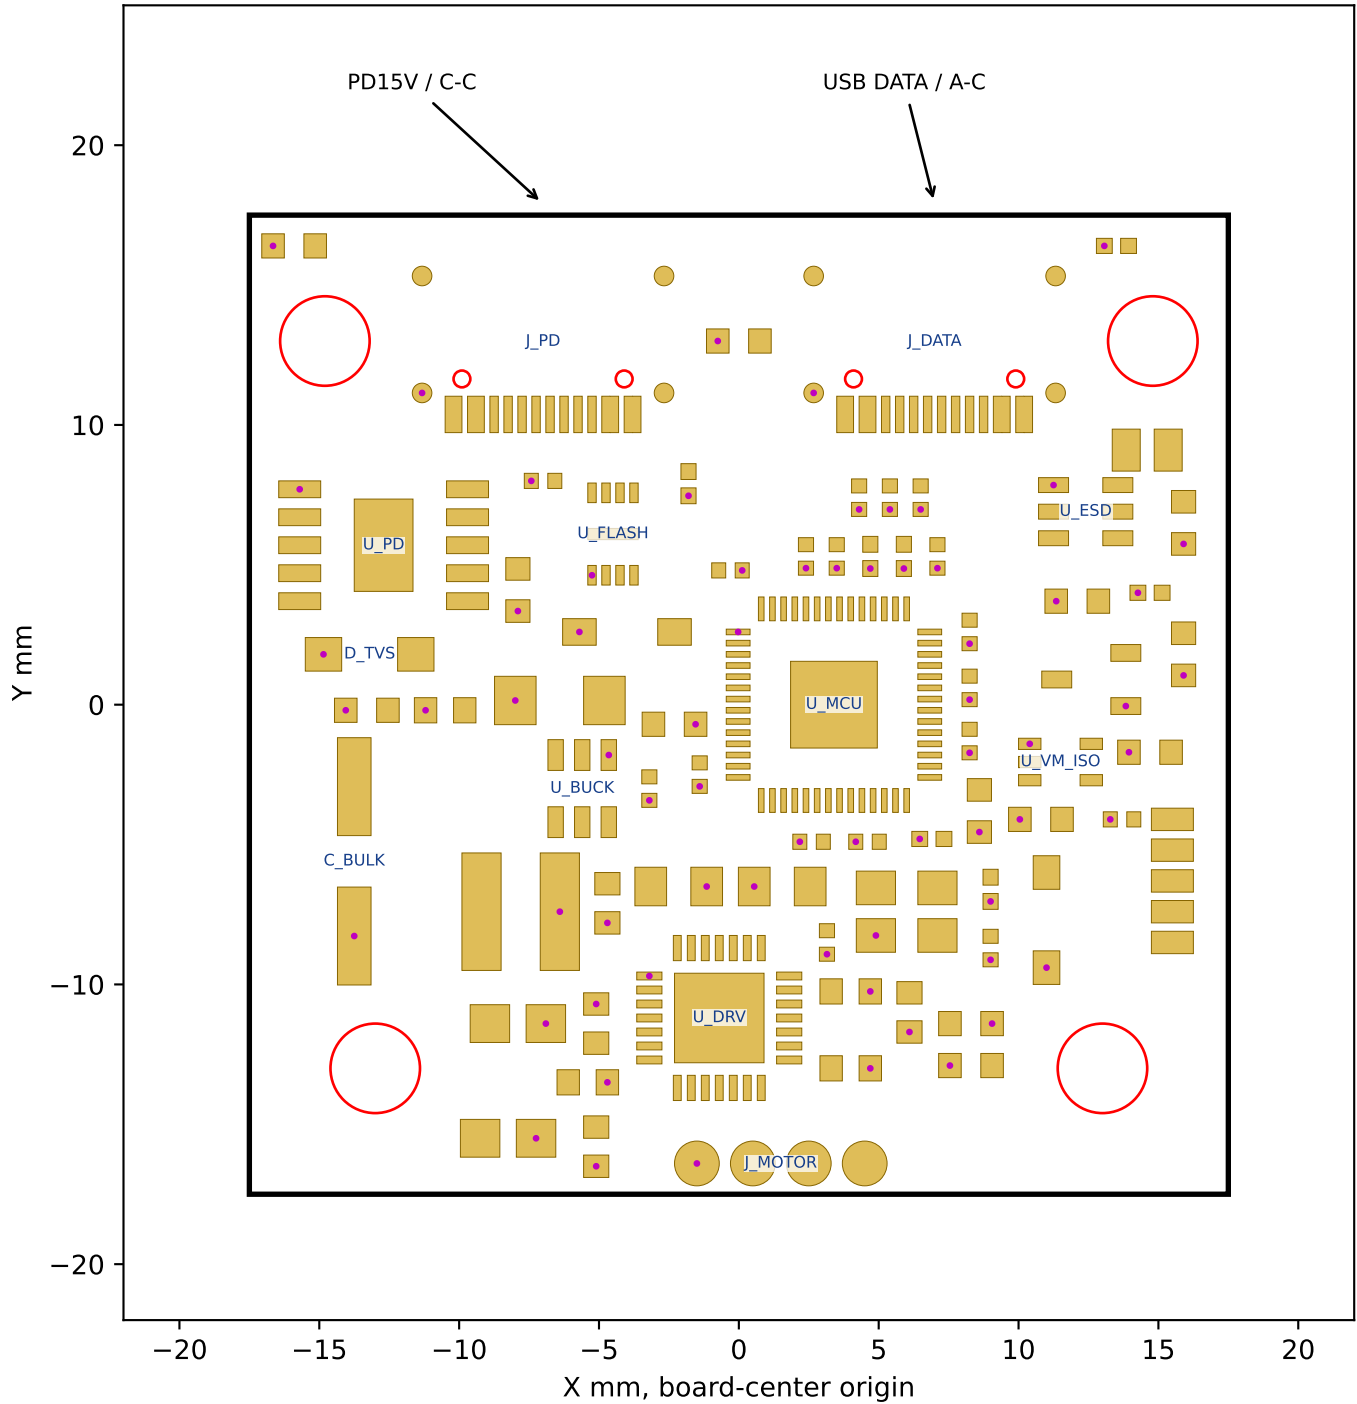

Motor: 1 BlackA+ / 2 GreenA- / 3 RedB+ / 4 BlueB-
PCB NPTH lower26mm / upper29.6mm pitch; front motor26mm pattern is separate.
Cap+ and every diode/IC orientation must match native pads/netlist and supplierpreview.
Filled/capped via list: via_process.csv. See fabrication-notes and mechanical-fit.
SHA256 18a2bde55e821ed2649d1cccc17b7e0e05d2fcf746bf1a2455880a9a368f53d1

NEMA14_RP2040 - fitted placement reference
Native source convention; supplier pickup/rotation approval pending

Ref	Exact MPN	Native center mm	Rotation	JLCPCB
U_PD	CH224K	-12.700,5.700	270	C970725
R_PD	ERJPA3F1001V	-13.300,-0.200	0	C441922
C_PD	CL10A105KB8NNNC	-10.500,-0.200	0	C15849
R_PG	0603WAF1002T5E	-7.900,4.100	90	C25804
U_MCU	RP2040	3.400,0.000	0	C2040
C_IO1	CL05B104KO5NNNC	-0.300,4.800	180	C1525
C_IO10	CL05B104KO5NNNC	-1.400,-2.500	90	C1525
C_IO22	CL05B104KO5NNNC	2.600,-4.900	0	C1525
C_IO33	CL05B104KO5NNNC	8.250,-1.300	90	C1525
C_IO42	CL05B104KO5NNNC	8.250,2.600	90	C1525
C_IO49	CL05B104KO5NNNC	3.500,5.300	90	C1525
C_DV23	CL05B104KO5NNNC	4.600,-4.900	0	C1525
C_DV50	CL05B104KO5NNNC	2.400,5.300	90	C1525
C_USB	CL05B104KO5NNNC	4.300,7.400	90	C1525
C_ADC	CL05B104KO5NNNC	7.100,5.300	90	C1525
C_VREG_IN	CL05A105KA5NQNC	6.500,7.400	90	C52923
C_VREG_OUT	CL05A105KA5NQNC	5.400,7.400	90	C52923
U_FLASH	GD25Q16EEIGR	-4.500,6.100	0	C2986331
C_FLASH	CL05B104KO5NNNC	-7.000,8.000	0	C1525
R_FLASH_CS	0402WGF1002TCE	-1.800,7.900	90	C25744
R_BOOT	0402WGF1001TCE	14.700,4.000	0	C11702
Y_MCU	ABM8-272-T3	6.000,-7.400	0	C20625731
R_XOUT	0402WGF1001TCE	9.000,-6.600	90	C11702
C_XIN	0402CG150J500NT	3.150,-8.500	90	C1548
C_XOUT	0402CG150J500NT	9.000,-8.700	90	C1548
R_RUN	0402WGF1002TCE	6.900,-4.800	0	C25744
R_DM	0402WGF270JTCE	5.900,5.300	90	C25100
R_DP	0402WGF270JTCE	4.700,5.300	90	C25100
R_CC1	0603WAF5101T5E	15.900,6.500	90	C23186
R_USB_SENSE_H	0603WAF1002T5E	12.100,3.700	0	C25804
R_USB_SENSE_L	0603WAF1002T5E	15.900,1.800	90	C25804
Q_DATA	MMBT3904-7-F	12.600,0.900	0	C94514
R_VM_H	0603WAF1003T5E	-15.900,16.400	0	C25803
R_VM_L	0603WAF1002T5E	14.700,-1.700	0	C25804

NEMA14_RP2040 - fitted placement reference
Native source convention; supplier pickup/rotation approval pending

Ref	Exact MPN	Native center mm	Rotation	JLPCB
U_VM_ISO	SN74CBTLV1G125DCKR	11.500,-2.050	0	C131992
R_VM_EN	0603WAF1002T5E	8.600,-3.800	90	C25804
R_VM_BLEED	0603WAF1002T5E	10.800,-4.100	0	C25804
C_VM_ISO	CL05B104KO5NNNC	8.250,0.600	90	C1525
C_VM_SENSE	CL05B103KB5NNNC	13.700,-4.100	0	C15195
U_BUCK	AP63203WU-7	-5.600,-3.000	180	C780769
L_BUCK	SRN4018-4R7M	-7.800,-7.400	180	C780206
C_BOOTSTRAP	CL05B104KO5NNNC	-3.200,-3.000	90	C1525
C_BUCK_IN	CL31A106KBHNNNE	-6.400,0.150	0	C13585
C_BUCK_OUT1	CL21A226MAQNNNE	-7.900,-11.400	180	C45783
C_BUCK_OUT2	CL21A226MAQNNNE	-8.250,-15.500	180	C45783
D_PD	B5819W SL	-4.000,2.600	0	C8598
D_DATA	B5819W SL	11.000,-7.700	90	C8598
U_DRV	A4988SETTR-T	-0.700,-11.200	270	C38437
C_CP	CC0603KRX7R9BB104	-5.100,-11.400	270	C14663
C_VCP	CC0603KRX7R9BB104	-5.400,-13.500	180	C14663
C_VREG	CL10B224KA8NNNC	-5.100,-15.800	90	C21120
C_DRV_LOGIC	CC0603KRX7R9BB104	4.000,-13.000	180	C14663
C_VM	CC0603KRX7R9BB104	-4.700,-7.100	90	C14663
C_VM2	CC0603KRX7R9BB104	4.000,-10.250	180	C14663
C_BULK	EEFPPV101XAP	-13.750,-5.600	90	C178585
R_SA	FRL0805FR240TS	1.550,-6.500	0	C2930216
R_SB	FRL0805FR240TS	-2.150,-6.500	180	C2930216
R_REF_H	0603WAF3901T5E	8.300,-12.900	0	C23018
R_REF_L	ERJPA3F1001V	8.300,-11.400	180	C441922
C_REF	CL10B103KB8NNNC	6.100,-11.000	90	C1589
R_ENABLE	0603WAF1002T5E	-2.300,-0.700	180	C25804
U_ESD	USBLC6-2SC6	12.400,6.900	270	C2687116
D_TVS	SMF18A	-13.200,1.800	180	C19077512
R_CC2	0402WGF5101TCE	13.500,16.400	0	C25905
R_SLEEP	0603WAF1002T5E	0.000,13.000	0	C25804
J_MOTOR	B4B-PH-K-S(LF)(SN)	1.500,-16.400	0	C131334
J_PD	TYPE-C-31-M-12	-7.000,12.975	180	C165948
J_DATA	TYPE-C-31-M-12	7.000,12.975	180	C165948