


NEMA14_CH32X035G8U6

Topassembly / magenta dots: native physical pin1
Manual motorheader; verify supplier placement preview

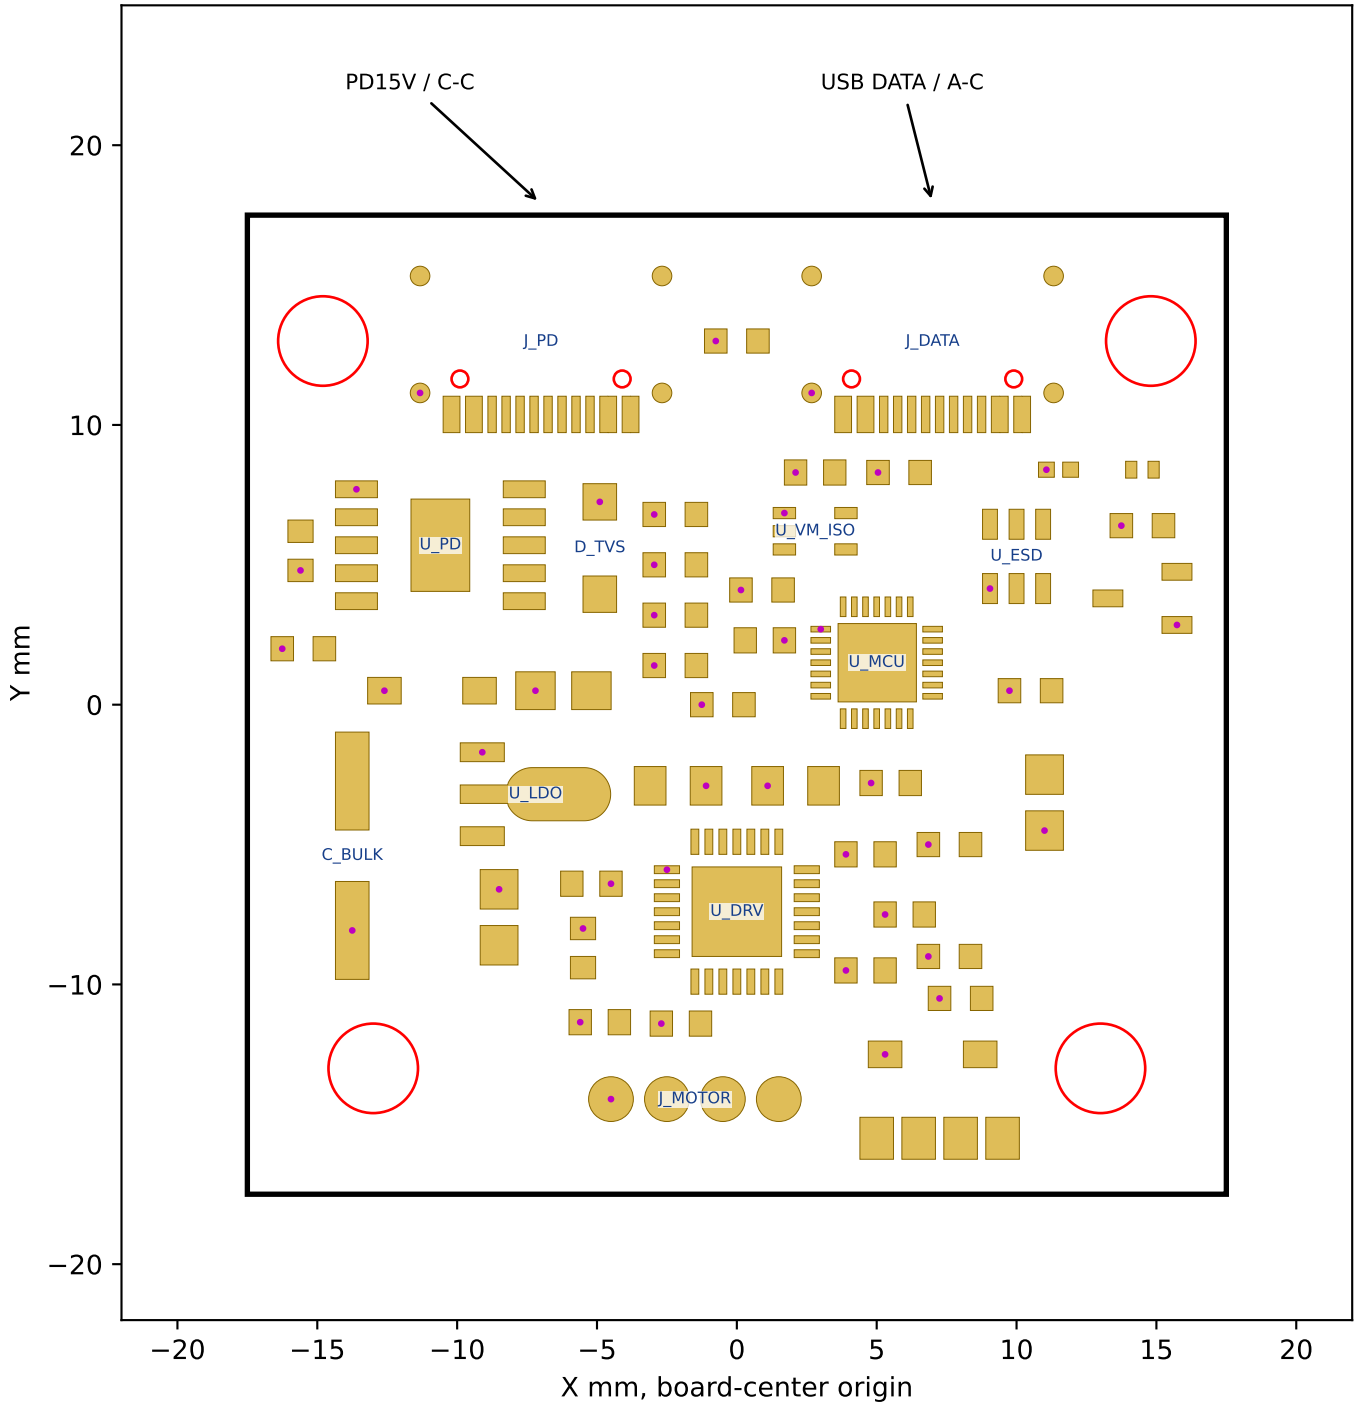

Motor: 1 BlackA+ / 2 GreenA- / 3 RedB+ / 4 BlueB-
PCB NPTH lower26mm / upper29.6mm pitch; front motor26mm pattern is separate.
Cap+ and every diode/IC orientation must match native pads/netlist and supplierpreview.
Filled/capped via list: via_process.csv. See fabrication-notes and mechanical-fit.
SHA256 8e0d954cef6d148962e09312a51246b1288ce60ac6c326b6c2865c7ef297fb1a

NEMA14_CH32X035G8U6 - fitted placement reference
Native source convention; supplier pickup/rotation approval pending

Ref	Exact MPN	Native center mm	Rotation	JLCPCB
U_PD	CH224K	-10.600,5.700	270	C970725
R_PD	ERJPA3F1001V	-15.500,2.000	0	C441922
C_PD	CL10A105KB8NNNC	-15.600,5.500	90	C15849
R_PG	0603WAF1002T5E	-2.200,3.200	0	C25804
U_MCU	CH32X035G8U6	4.999,1.500	270	C7437027
C_MCU	CC0603KRX7R9BB104	1.000,2.300	180	C14663
C_LOGIC	CL21A475KBQNNNE	11.000,-3.500	90	C98192
R_CC1	0603WAF5101T5E	5.800,8.300	0	C23186
R_USB_SENSE_H	0603WAF1002T5E	14.500,6.400	0	C25804
R_USB_SENSE_L	0603WAF1002T5E	0.900,4.100	0	C25804
Q_DATA	MMBT3904-7-F	14.500,3.800	0	C94514
R_VM_H	0603WAF1003T5E	-2.200,5.000	0	C25803
R_VM_L	0603WAF1002T5E	-2.200,6.800	0	C25804
U_VM_ISO	SN74CBTLV1G125DCKR	2.800,6.200	0	C131992
R_VM_EN	0603WAF1002T5E	-2.200,1.400	0	C25804
R_VM_BLEED	0603WAF1002T5E	-0.500,0.000	0	C25804
C_VM_ISO	CC0603KRX7R9BB104	2.800,8.300	0	C14663
C_VM_SENSE	CL10B103KB8NNNC	5.500,-2.800	0	C1589
U_LDO	HT7533-1	-7.200,-3.200	180	C14289
D_PD	B5819W SL	-10.900,0.500	0	C8598
D_DATA	B5819W SL	7.000,-12.500	0	C8598
C_LDO_IN	CL21B105KBFNNE	-6.200,0.500	0	C28323
C_LDO_OUT	CL21A475KBQNNNE	-8.500,-7.600	270	C98192
C_DRV_LOGIC	CC0603KRX7R9BB104	4.600,-9.500	0	C14663
C_VM	CC0603KRX7R9BB104	-5.200,-6.400	180	C14663
C_VM2	CC0603KRX7R9BB104	4.600,-5.350	0	C14663
C_BULK	EEEFPV101XAP	-13.750,-5.400	90	C178585
R_SA	FRL0805FR240TS	2.100,-2.900	0	C2930216
R_SB	FRL0805FR240TS	-2.100,-2.900	180	C2930216
R_REF_H	0603WAF3901T5E	7.600,-9.000	0	C23018
R_REF_L	ERJPA3F1001V	7.600,-5.000	0	C441922
C_REF	CL10B103KB8NNNC	6.000,-7.500	0	C1589
R_ENABLE	0603WAF1002T5E	8.000,-10.500	0	C25804
R_SLEEP	0603WAF1002T5E	10.500,0.500	0	C25804

NEMA14_CH32X035G8U6 - fitted placement reference
Native source convention; supplier pickup/rotation approval pending

Ref	Exact MPN	Native center mm	Rotation	JLPCB
U_ESD	USBLC6-2SC6	10.000,5.300	0	C2687116
D_TV5	SMF18A	-4.900,5.600	90	C19077512
R_USB_BOOT	0402WGF4701TCE	11.500,8.400	0	C25900
R_CC2	0603WAF5101T5E	0.000,13.000	0	C23186
J_PD	TYPE-C-31-M-12	-7.000,12.975	180	C165948
J_DATA	TYPE-C-31-M-12	7.000,12.975	180	C165948
U_DRV	A4988SETTR-T	0.000,-7.400	270	C38437
C_CP	CC0603KRX7R9BB104	-5.500,-8.700	270	C14663
C_VCP	CC0603KRX7R9BB104	-4.900,-11.350	0	C14663
C_VREG	CL10B224KA8NNNC	-2.000,-11.400	0	C21120
J_MOTOR	B4B-PH-K-S(LF)(SN)	-1.500,-14.100	0	C131334