


Wiring: 48 V IntelligentDC loudspeakers




Note

Refer to your loudspeaker's operating instructions for information about loudspeaker connector pin outs; available cables, cable accessories, and bulk cable; and custom cable assembly.

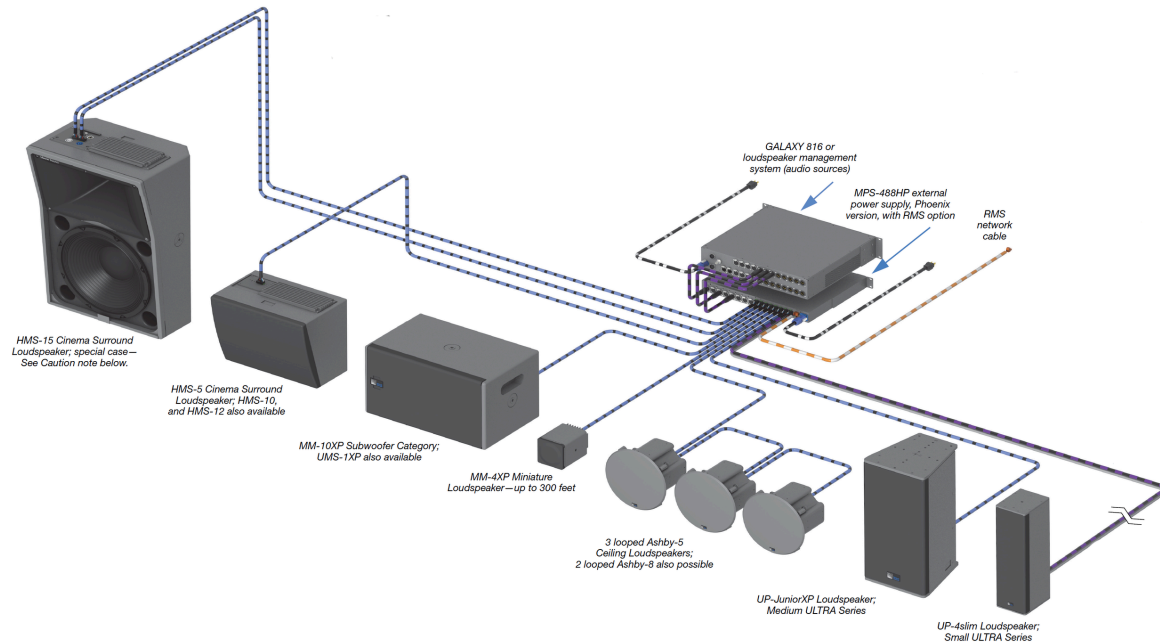


Tip

To achieve longer runs for loudspeaker cables, use two separate cables: a large gauge, two-conductor cable for DC power (shown in grey), and a three-conductor cable for balanced audio (shown in purple/black), both attached to a single Phoenix connector on each cable end.



*Phoenix connector,
composite cable*



*Phoenix connector,
separate cables*



Warning

When powering HMS-15 loudspeakers, two separate composite cables connected to an MPS-488HP channel output pair (1-2, 3-4, 5-6, or 7-8) are required. Identical audio signals can be sent to the two inputs with no additional gain and no adverse effects. However, do not use a single cable to deliver power to the HMS-15's two input connectors. Never, in any manner, combine the power sources from two MPS-488HP channel outputs, either at the power supply (origination) or the loudspeaker (destination). Refer to [Operating Instructions – HMS](#).

Table 1. Cable legend

Sleeve color		Color type
Light grey		48 V DC power: DC (–), DC (+)
Purple/black		Balanced audio, line level: audio shield, audio (–), audio (+)

Sleeve color		Color type
Blue/black		48 V DC power and balanced audio (composite): DC (–), DC (+), audio shield, audio (–), audio (+)
Orange/white		RMS remote monitoring system: twisted pair
Black/white		100-250 V AC, 50/60 Hz: line, line/neutral, earth (for MPS-488HP and GALAXY 816)

Table 2. Maximum Lengths for 48 V DC power cables


Cable gauge		MM-4XP, MM-4XPD, MM-4XPV	All other XP and HMS loudspeakers
American	20 AWG	175 ft	87 ft
	18 AWG	300 ft	150 ft
	16 AWG	475 ft	237 ft
	14 AWG	750 ft	375 ft
	12 AWG	1200 ft	600 ft
European	0.75 mm ²	55 m	27 m
	1.00 mm ²	90 m	45 m
	1.50 mm ²	175 m	87 m
	2.50 mm ²	365 m	157 m

Table 3. Available loudspeaker / power supply connectors

Model	Phoenix 5-pin	EN3 5-pin	ECO-M 7-pin
UPJ-1XP, UPJunior-XP, UPM-1XP, UPM-2XP, UMS-1XP	✓	✓	✓
UP-4XP, MM-10XP, MPS-488HP	✓	✓	
ASHBY-5C, ASHBY-8C, HMS-5, HMS-10, HMS-12, HMS-15, MPS-482HP, UP-4slim	✓		
MM-4XP, MM-4XPD, MM-4XPV		✓	

**Note**

Loudspeakers equipped with an EN3 connector include a 10-foot EN3-to-pigtail cable that can be spliced to a junction box (as shown below) near the loudspeaker that receives a longer cable from the MPS-488HP power supply. Loudspeakers equipped with a Phoenix or ECO-M connector include an appropriate cable mount connector for constructing loudspeaker cables.



Meyer Sound Laboratories, Inc. +1 510 486.1166
 2832 San Pablo Avenue meyersound.com/contact
 Berkeley, CA 94702 meyersound.com

**Wiring: 48 V IntelligentDC
 loudspeakers**
 Copyright © 2026
 All Rights Reserved