



YOUR SMART HOME CHOICE

# PRODUCT BROCHURE

产品手册

深圳松诺技术有限公司

Shenzhen Sonoff Technologies Co.,Ltd

地址 Address

深圳市龙岗区坂田街道大发埔社区布龙路 663 号 A 栋三层、六层

3F & 6F, Bldg A, No. 663, Bulong Rd, Dafapu Community, Bantian St, Longgang Dist, Shenzhen, GD, China

官网 Web

<https://sonoff.tech>

电话 Tel

+86-755-27955416



## About SONOFF

Shenzhen Sonoff Technologies Co.,Ltd located in Shenzhen, China, is a top-ranking smart home automation manufacturer specializing in R&D, design, production and marketing.

SONOFF is an independent brand integrating software and hardware, the products are known for quality and innovation. The main technologies SONOFF products based on are Wi-Fi, ZigBee and other mainstream communication protocols, and different communication protocols can be configured according to customer needs and using scenarios.

### Our Vision: Making life easier

Our Commission: SONOFF is fully committed to fulfilling home automation for a simple and smart life.

---

深圳松诺科技有限公司,坐落于中国创新之都——深圳,是一家领先的智能家居自动化产品制造商。我们专注于智能家居领域的创新与卓越,业务涵盖产品的研发、设计、生产以及市场营销等多个环节。

作为一家拥有独立品牌的企业,SONOFF 以其卓越的产品品质和前沿的技术创新而广受赞誉。我们的产品线全面覆盖了基于 Wi-Fi、ZigBee 等主流通信协议的智能家居解决方案,并能够根据客户的个性化需求以及多样化的使用场景,灵活配置通信协议,以满足不同市场的需求。

我们的愿景：让生活更便捷

我们的使命：SONOFF 致力于实现智能家居自动化,打造简单智能的生活。

# II Company Timeline


ITEAD Studio was founded  
Open source hardware  
development  
Operate iteadstudio.com

SONOFF brand  
SHENZHEN SONOFF  
TECHNOLOGIES CO., LTD.

CE/FCC/RoHS/UL/ETL  
Invest US\$3M in R&D  
laboratory  
The National High and New  
Technology Enterprise

B2B order system b2b.itead.cc  
SONOFF Joined Matter  
New office 5000 m<sup>2</sup>,  
Crowdfunding campaign on  
Kickstarter

SONOFF Matter Products  
13,300 m<sup>2</sup> Warehouse

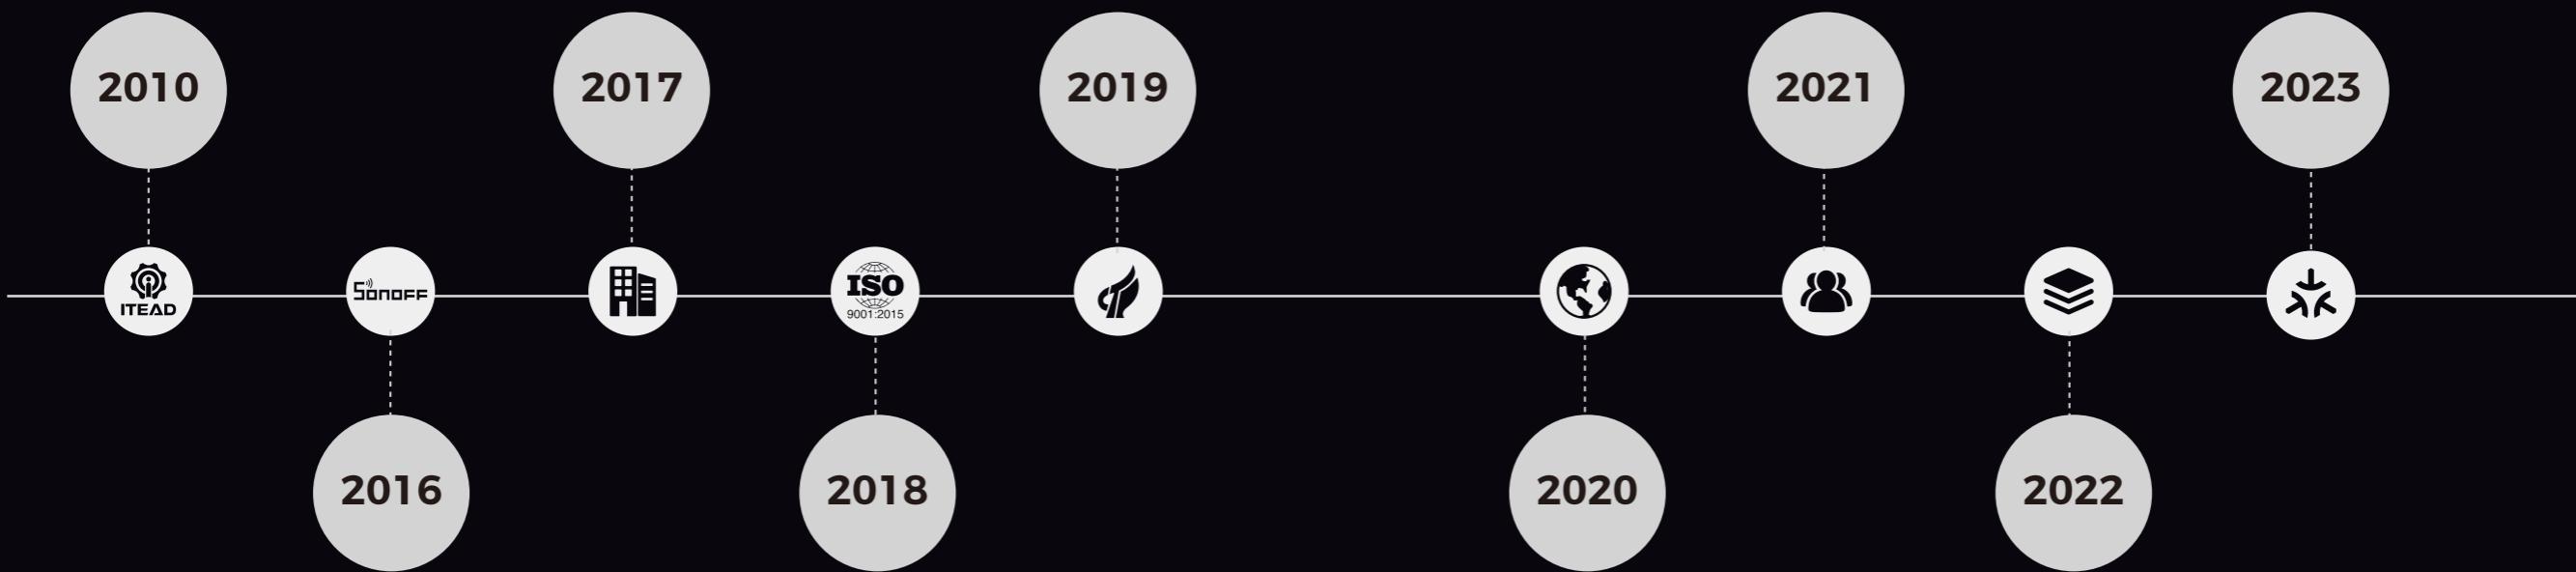

ITEAD - smart home hardware  
SONOFF - smart on and off  
BASIC - the First "Smart DIY Switch"

Web: sonoff.tech  
Awarded ISO9001:2015  
Partner with HUAWEI

TUV/ANATEL/NOM/VOC  
50+ distributors around the world  
Smaller DIY device MINI

SONOFF Ecosystem  
100+ patents

# AUTHORITATIVE CERTIFICATE



Ecosystem  
SONOFF 生态系统

**5000m<sup>2</sup>**

Headquarters  
5000m<sup>2</sup> 办公区域

**13300m<sup>2</sup>**

Warehouse  
13300m<sup>2</sup> 仓库

**50+**

Global Distribution Network  
全球分销网络

**BASIC**

The First "Smart DIY Switch"  
BASIC - 首发智能DIY开关

**30+**

Customer Service Personnel  
30+ 客服团队

**90+**

Marketing Employees  
90+ 营销团队

**100+**

R&D Engineers  
100+ 研发团队

**15M**

Global Users  
1500万全球用户

**150+**

Countries and Areas  
150+ 国家及地区

**300+**

SKU / Smart Devices  
300+ SKU / 产品

**20M**

Annual Capacity  
2000万+ 年产量



**100+**  
Patents



ISO9001:2015




Certificate of High and New Technology



TÜV Certified Compliance

# SONOFF smart devices support to work with the following AIoT ecosystems


works with alexa

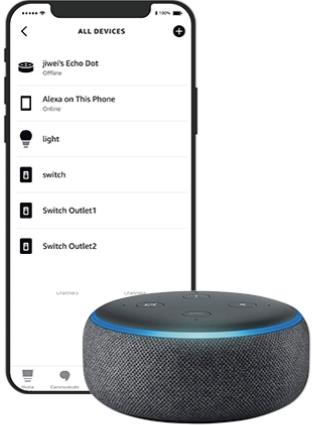

works with Google Home



works with Alice

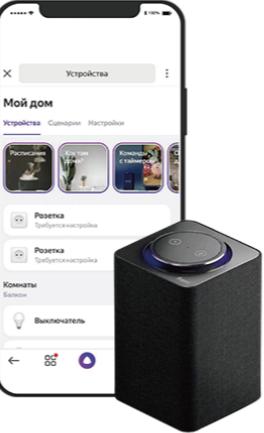

SONOFF智能家居设备支持以下AIoT生态系统协同工作

works with HUAWEI HiLink



works with mijia




works with DuerOS



works with SmartThings



Hey Siri

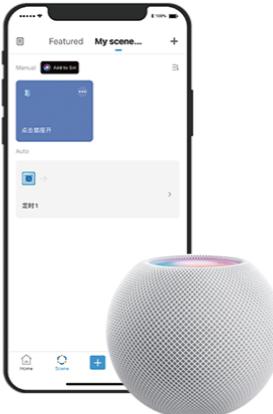

works with IFTTT



works with AliGenie



works with Midea Meiju



# SONOFF Smart Device Work with eWeLink APP

SONOFF智能设备通过易微联APP使用

# CATALOGS


## 目 录




Remote Control  
远程控制




Share Control  
分享控制



Timer Schedule  
定时器



Power on State  
上电状态设置




History Operation Record  
历史操作记录




Sync Status  
同步状态



LAN Control  
局域网控制



Voice Control  
语音控制



EN Multi-language Operation  
多语言设置



Smart Scene  
智能场景



Inching Mode  
点动功能




Camera Feature  
添加摄像头



Interlocking  
互锁模式



Group Control  
群组控制

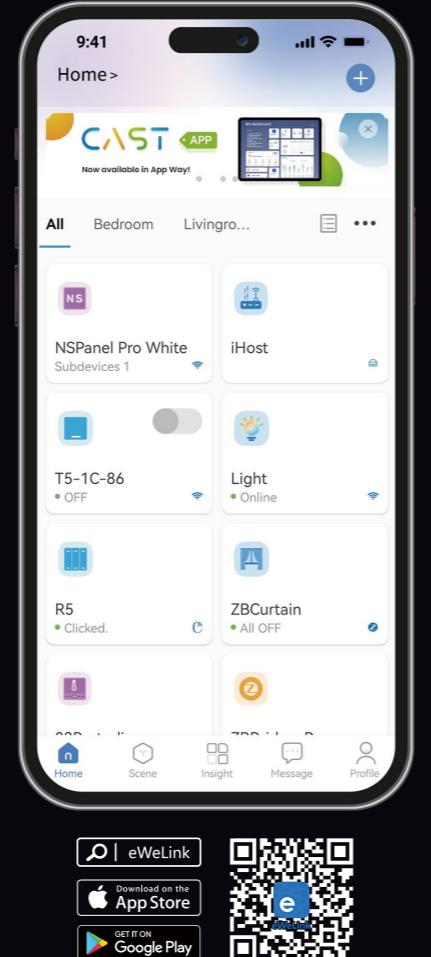

**DIY SMART SWITCHES**  
DIY开关系列

— 01 - 22



**SMART PLUGS**  
插座系列

— 23 - 32



**SMART WALL SWITCHES**  
墙壁开关系列

— 33 - 40



**CENTRAL CONTROL PANEL**  
中控屏系列

— 41 - 44



**GATEWAY & SENSORS**  
网关与传感器系列

— 45 - 56



**SMART LIGHTING**  
照明系列

— 57 - 68



**SECURITY CAMERAS**  
摄像头系列

— 69 - 74



**HOME APPLIANCES**  
生活电器系列

— 75 - 80




**ACCESSORIES**  
配件系列


— 81 - 94

# DIY SMART SWITCHES

## DIY开关系列

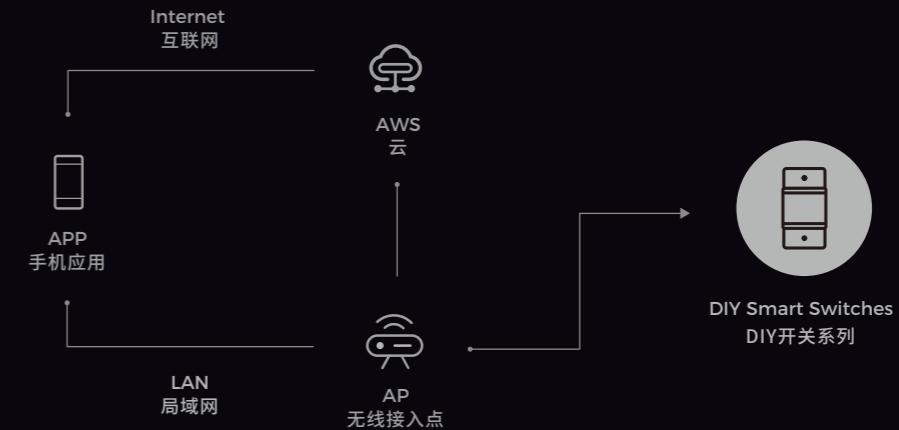

# BASICR2

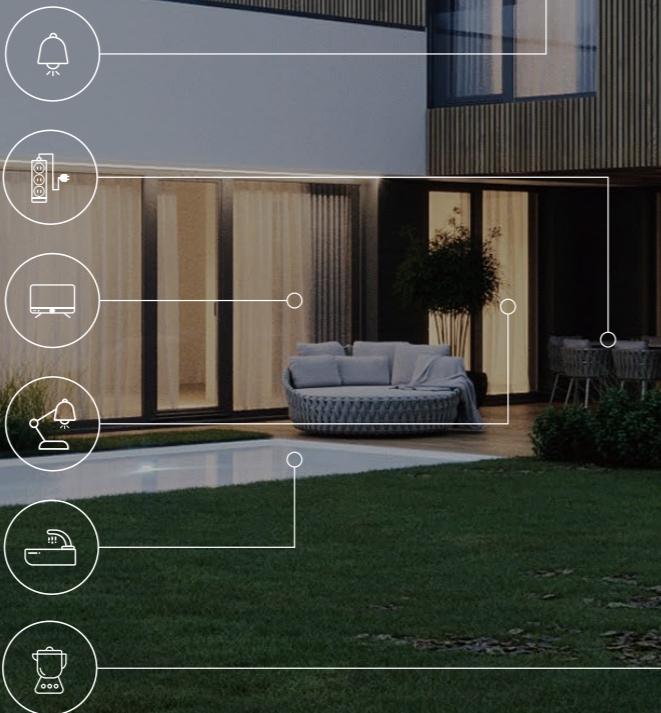

5 HARDWARE UPDATE  
硬件更新迭代

26 SOFTWARE UPDATE  
软件更新迭代

7 Million CUMULATIVE SALES HAVE EXCEEDED  
累计销售已超七百万



## BASICR2

Wi-Fi Smart Switch  
Wi-Fi智能开关模块



Remote Control  
远程控制



Voice Control  
语音控制



Timer Schedule  
智能定时/延时

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	10A
Gang 通道:	1-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	88x39x24mm
Net weight 净重:	50g
Certification 产品认证:	ETL/CE/FCC/RoHS



## RFR2

Wi-Fi Smart Switch with RF Control  
Wi-Fi智能开关模块(RF遥控)



Remote Control  
远程控制



Voice Control  
语音控制



RF Control  
RF 控制

Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 10A  
Gang 通道: 1-Gang  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 88x39x24mm  
Net weight 净重: 52g  
Certification 产品认证: ETL/CE/FCC/RoHS



## BASICR4

Wi-Fi Smart Switch  
Wi-Fi智能开关模块



Remote Control  
远程控制



Voice Control  
语音控制



Timer Schedule  
智能定时/延时

Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 10A  
Gang 通道: 1-Gang  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 88x39x24mm  
Net weight 净重: 45.8g  
Certification 产品认证: ISED/FCC/RoHS/ETL/CE/SRRC



ZBMINIL2

## ZBMINI Extreme

Zigbee Smart Switch (No Neutral Required)  
ZigBee智能开关模块(迷你)



Remote Control  
远程控制



Voice Control  
语音控制



No Neutral Wire Required  
无需零线

Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 6A  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC V0  
Size 尺寸: 39.5x32x18.4mm  
Net weight 净重: 22g  
Certification 产品认证: CE/FCC/TUV/RoHS/ISED



ZBMINIR2

## ZBMINI Extreme

Zigbee Smart Switch (Neutral Wire Required)  
ZigBee 智能开关模块(迷你)



Remote Control  
远程控制



Voice Control  
语音控制



Timer Schedule  
智能定时/延时

Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 10A  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC V0  
Size 尺寸: 39.5x33x16.8mm  
Net weight 净重: 26.7g  
Certification 产品认证: CE/FCC/ISED/RoHS

## DIY SMART SWITCHES

DIY开关系列



MINIR4M



MINIR4

### MINI Extreme

Wi-Fi Smart Switch

WiFi智能开关模块



Remote Control 语音控制 Timer Schedule  
远程控制 语音控制 智能定时/延时

Rating 额定参数: 100-240V~, 50/60Hz

Max.Load 最大负载: 10A

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC V0

Size 尺寸: 39.5x33x16.8mm

Net weight 净重: 26.7g

Certification 产品认证: CE/FCC/RoHS/TUV/ISED/SRRC/Matter

### MINI Extreme

Wi-Fi Smart Switch

WiFi智能开关



Remote Control 语音控制 Single/Countdown Timing  
远程控制 语音控制 智能定时/延时

Rating 额定参数: 100-240V~, 50/60Hz

Max.Load 最大负载: 10A

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC V0

Size 尺寸: 39.5x33x16.8mm

Net weight 净重: 26.7g

Certification 产品认证: CE/FCC/RoHS/SRRC/TUV/ISED



### S-MATE Extreme

eWeLink-Remote Switch Mate

S-MATE开关伴侣



eWeLink-Remote  
易微联轻智能

Input 输入: 3V ==

Battery model 电池型号: CR2477(3V)

Wireless standard 无线标准: 2.4G

Casing material 外壳材质: ABS

Size 尺寸: 40.3x37.4x18.3mm

Net weight 净重: 26.8g

Certification 产品认证: CE/FCC/ISED/RoHS



S-MATE2

# DIY SMART SWITCHES

DIY开关系列



## MINIR2

Wi-Fi Smart Switch with DIY Mode

Wi-Fi智能开关模块(迷你)



Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 10A  
Gang 通道: 1-Gang  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 42.6x42.6x20mm  
Net weight 净重: 35g  
Certification 产品认证: CE/FCC/RoHS

## ZBMINI

ZigBee Smart Switch

ZigBee智能开关模块(迷你)



Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 10A  
Gang 通道: 1-Gang  
Wireless standard 无线标准: ZigBee IEEE 802.15.4  
Casing material 外壳材质: PC V0  
Size 尺寸: 42.6x42.6x20mm  
Net weight 净重: 36g  
Certification 产品认证: CE/FCC/RoHS

## DUALR3

2-gang Wi-Fi Smart Switch

Wi-Fi智能开关模块(双通道)



Motor Mode  
电机模式



Voice Control  
语音控制



Power Monitoring  
电量监测

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

2400W/240V~10A/Gang

3600W/240V~15A/Total

Motor Load 电机负载:

10-240W/1A

Gang 通道:

2-Gang

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:

54x49x24mm

Net weight 净重:

58g

Certification 产品认证:

TUV/CE/FCC/RoHS

## DUALR3 Lite

2-gang Wi-Fi Smart Switch

Wi-Fi智能开关模块(双通道)



Motor Mode  
电机模式



Voice Control  
语音控制

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

2400W/240V~10A/Gang

3600W/240V~15A/Total

Motor Load 电机负载:

10-240W/1A

Gang 通道:

2-Gang

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:


54x49x24mm

Net weight 净重:

58g

Certification 产品认证:

TUV/CE/FCC/RoHS





## TH Origin/TH Elite

Smart Temperature and Humidity Monitoring Switch

Wi-Fi智能开关模块(温湿度监测)



Voice Control  
语音控制



Single/Countdown Timing  
智能定时/延时



Temperature/Humidity Monitoring  
温度和湿度监测

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

THR316,THR316D:16A THR320,THR320D:20A

Dry Contact Output 干接点输出:

5-30V,1A Max

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:

THR316,THR320:98x54x27.5mm

THR316D,THR320D:98x54x31mm

Net weight 净重:

THR316,THR320:100g

THR316D,THR320D:120g

Compatible Sensors 兼容传感器设备:

THS01,MS01,WTS01,RL560

Certification 产品认证:

TUV/CE/WWA/FCC/RoHS/SRRC



**THR316/THR320**



**THR316D/THR320D**

\* You can connect SONOFF RL560 seneor extension cable to the sensor to monitor the humidity level in an ideal position.

\* 使用传感器时, 可通过接入传感器延长线(RL560), 将传感器放在所需要的位置。



## POW Origin/POW Elite

Smart Power Meter Switch

Wi-Fi智开关模块(电量监测)



Remote Control  
远程控制



Voice Control  
语音控制



Power Monitoring  
电量监测



Single/Countdown Timing  
智能定时/延时



POWR316



POWR316D/POWR320D

Rating 额定参数:	100-240V~, 50/60Hz	Rating 额定参数:	100-240V~, 50/60Hz 2W
Max.Load 最大负载:	POWR316, POWR316D: 16A POWR320D: 20A	Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz	Antenna interface type 天线接口类型:	SMA
Casing material 外壳材质:	PC V0	Transformer interface type 互感器接口类型:	RJ9
Size 尺寸:	POWR316:98x54x27.5mm POWR316D, POWR320D:98x54x31mm	Transformer current detection range 互感器电流检测范围:	0-100A
Net weight 净重:	POWR316: 100g POWR316D POWR320D: 120g	Net weight 净重:	120g (Accessories not included)
Certification 产品认证:	TUV/CE/FCC/RoHS/SRRC/WWA/CFH	Product dimension 产品尺寸:	98x54x31mm



## POW Ring

Smart Power Meter Switch

智能电量检测开关(互感型)



Energy monitoring  
能源监控



Overload protection  
过载保护



Smart timer  
定时例程



History record  
历史记录



POWCT

Rating 额定参数:	100-240V~, 50/60Hz 2W	Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Antenna interface type 天线接口类型:	SMA	Transformer interface type 互感器接口类型:	RJ9
Transformer current detection range 互感器电流检测范围:	0-100A	Net weight 净重:	120g (Accessories not included)
Net weight 净重:	120g (Accessories not included)	Product dimension 产品尺寸:	98x54x31mm
Casing material 外壳材质:	PC	Certification 产品认证:	CE/FCC/RoHS

**POWR3****Wi-Fi Smart Switch with Energy Monitoring**

Wi-Fi智能开关模块(电量监测)

Remote Control  
远程控制Voice Control  
语音控制Power Monitoring  
电量监测Overload protection  
过载保护

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	25A
Gang 通道:	1-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	162x122x45.5mm
Net weight 净重:	490g
Certification 产品认证:	CE/FCC/RoHS

**4CHPROR3****4-gang Wi-Fi Smart Switch with RF Control**

Wi-Fi智能开关模块(四通道+RF遥控)

Remote Control  
远程控制Voice Control  
语音控制RF Control  
RF 控制Interlock Mode  
互锁模式

Rating 额定参数:	100-240V ~50/60Hz (DC: 9-23V)
Max.Load 最大负载:	10A/Gang, 40A/Total
Gang 通道:	4-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	145x90x34mm
Net weight 净重:	241g
Certification 产品认证:	CE/FCC/RoHS

**4CHR3****4-gang Wi-Fi Smart Switch**

Wi-Fi智能开关模块(四通道)

Remote Control  
远程控制Voice Control  
语音控制

Rating 额定参数:	100-240V ~50/60Hz
Max.Load 最大负载:	10A/Gang, 16A/Total
Gang 通道:	4-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	145x90x34mm
Net weight 净重:	228g
Certification 产品认证:	CE/FCC/RoHS

\*Matching accessories(Refer to the accessory series for details):

RM433R2, RM433R2-BASE, 433 RF Controller

\*搭配配件(详情见配件系列): RM433R2, RM433R2-BASE, 433 RF Controller

# DIY SMART SWITCHES

DIY开关系列



## Micro

USB Smart Adapter  
USB智能适配器



Remote Control  
远程控制  
Voice Control  
语音控制

Input 输入: 5V ---  
Output 输出: 5V --- 2A  
Max.Load 最大负载: 12W  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Interface type 接口类型: Micro-USB  
Casing material 外壳材质: PC V0  
Size 尺寸: 31X26.5X33mm  
Net weight 净重: 17g  
Certification 产品认证: CE/FCC/RoHS

## ZBMicro

Zigbee USB Smart Adaptor  
ZigBee USB 智能适配器



Remote Control  
远程控制  
Voice Control  
语音控制

Rating 额定参数: 5-22V --- 4.6A MAX  
Rated Power 额定功率: 36W MAX (Use QC 3.0 Adaptor)  
Wireless standard 无线标准: Zigbee 3.0  
Interface type 接口类型: USB Type-A  
Data transfer 数据传输: USB 2.0  
Casing material 外壳材质: PC  
Size 尺寸: 33x31x26.5mm  
Net weight 净重: 17.6g  
Certification 产品认证: CE/FCC/ISED/RoHS

## SPM-Main

Smart Stackable Power Meter  
智能堆叠式电表



Local Power Monitoring  
本地电量统计  
LAN Control  
局域网功能  
Ethernet Connection  
支持以太网

Rating 额定参数: 100-240V~, 50/60Hz  
Max. Current 最大电流: 50mA  
Micro SD card : Support (8GB-32GB)  
Ethernet (SPM-Main) : Support  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 142.5X90X66.5mm  
Net weight 净重: 214g  
Certification 产品认证: CE/FCC/RoHS

## SPM-4Relay

Smart Stackable Power Meter  
智能堆叠式电表



Remote Control  
远程控制  
Power Monitoring  
电量监测  
Overload protection  
过载保护

Rating 额定参数: 100-240V~, 50/60Hz  
Max.Load 最大负载: 20A/Gang  
Gang 通道: 4-Gang  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 250X90X66.5mm  
Net weight 净重: 584g  
Certification 产品认证: CE/FCC/RoHS

## DIY SMART SWITCHES

DIY开关系列



### iFan04-L/iFan04-H

Wi-Fi Smart Ceiling Fan with Light Controller

Wi-Fi智能风扇灯控制器



Input 输入:	100-240V~, 50/60Hz 5A
Output 输出:	100-240V~, 50/60Hz (Light:3A Fan:2A Max)
Light 灯负载:	iFan04-L(Tungsten lamp: 360W/120V Max LED: 150W/120V Max) iFan04-H(Tungsten lamp: 690W/230V Max LED:300W/230V Max)
Gang 通道:	2-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	116X55X26mm
Net weight 净重:	125g
Certification 产品认证:	CE/FCC/RoHS

\*Matching accessories(Refer to the accessory series for details): RM433R2,RM433R2-BASE

\*搭配配件(详情见配件系列):RM433R2, RM433R2-BASE



### SGC100/SGC200/SGC300

Smart Garage Door Controller

智能车库门控制器




Rating 额定参数:	5V == 1A
Power supply interface type 电源接口类型:	Type-C
Network interface type 以太网接口类型:	RJ45
Connector interface type 连接器接口类型:	PHSD-2.0 (3Pin)
Door sensor installation distance 门磁安装距离:	<40mm
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC+ABS
Size 尺寸:	75x75x23mm
Net weight 净重:	SGC100:67g/SGC200:70g/SGC300:73g
Certification 产品认证:	CE/FCC/ISED/RoHS



# SMART PLUGS

## 插座系列

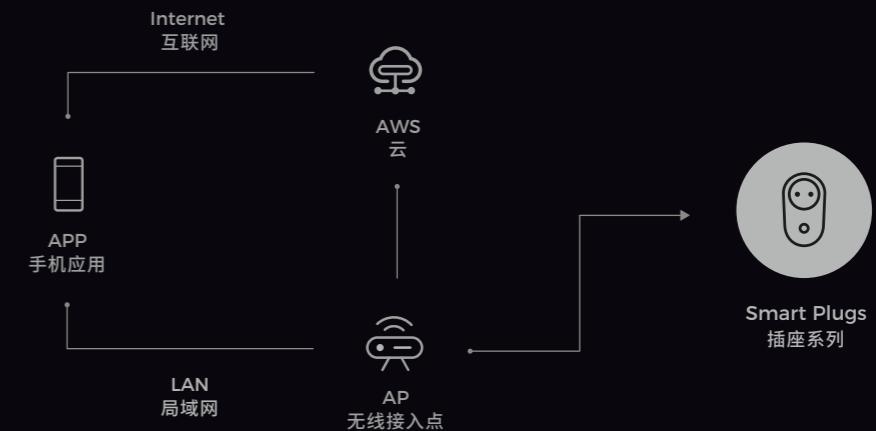

## SMART PLUGS

插座系列



### S26R2

Wi-Fi Smart Plug

Wi-Fi智能插座



Remote Control  
远程控制



Voice Control  
语音控制

Rating 额定参数:

S26R2TPF/S26R2TPE/S26R2TPN/S26R2TPJ/S26R2TPH/  
S26R2TPL/S26R2TPL-H:250V~, 50/60Hz  
S26R2TPI:250V~, 50Hz

Max.Load 最大负载:

S26R2TPF:4000W/16A S26R2TPE:3680W/16A  
S26R2TPI:3750W/15A S26R2TPN:4000W/16A  
S26R2TPJ:4000W/16A S26R2TPH:4000W/16A  
S26R2TPL:2500W/10A S26R2TPL-H:4000W/16A


Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC V0

Size 尺寸: 97.5X56X35mm

Net weight 净重: 85~107g

Certification 产品认证: CE/FCC/RoHS

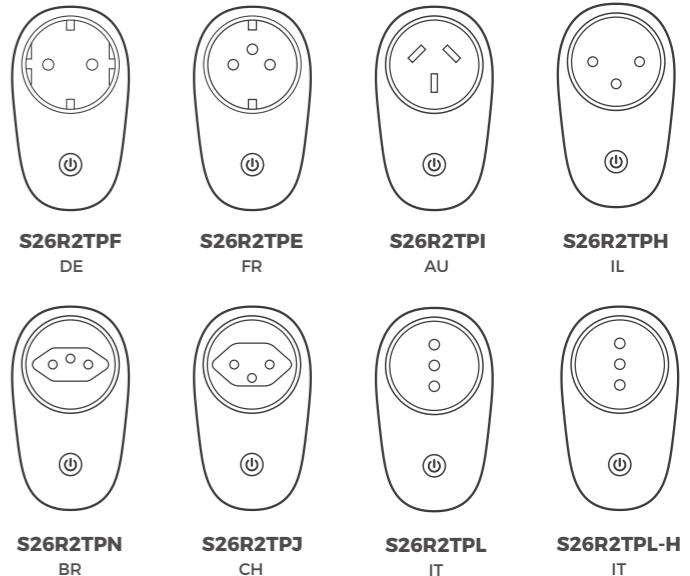

## SMART PLUGS

插座系列



### S26R2ZB

ZigBee Smart Plug

ZigBee智能插座



Remote Control  
远程控制



Voice Control  
语音控制

Rating 额定参数: 250V~, 50/60Hz  
Max.Load 最大负载: S26R2ZBTPF:4000W/16A  
S26R2ZBTPE:3680(230V)/16A

Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质: PC V0

Size 尺寸: 97.5X56X35mm

Net weight 净重: 120~130g

Certification 产品认证: CE/RoHS



S26R2ZBTPE

FR



S26R2ZBTPF

DE



S60TPG



S60TPF

### S60TPG/S60TPF

Wi-Fi Smart Plug

Wi-Fi智能插座



Remote Control  
远程控制



Voice Control  
语音控制



Timer Schedule  
智能定时/延时



Power Monitoring  
电量监测

Rating 额定参数: 250V~, 50/60Hz  
Max.Load 最大负载: S60TPG:13A S60TPF:16A

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC V0

Size 尺寸: S60TPG:58x58x42mm S60TPF:50x50x61.5mm

Net weight 净重: S60TPG:86g S60TPF:79g

Certification 产品认证: CE/RoHS

## SMART PLUGS

插座系列



### S40

Wi-Fi Smart Plug

Wi-Fi智能插座



Remote Control 语音控制 Power Monitoring  
远程控制 语音控制 电量监测

Rating 额定参数: Type A:100V ~, 50/60Hz  
Type B:120V ~, 60Hz

Max.Load 最大负载: 15A

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC V0

Size 尺寸: 76x40x32mm

Net weight 净重: Type A:68g Type B:74g

Certification 产品认证: Type A: TELEC/PSE/RoHS  
Type B: ETL/FCC/RoHS

### S40 Lite

Wi-Fi Smart Plug

Wi-Fi智能插座



Remote Control  
远程控制



Voice Control  
语音控制



eWeLink-Remote  
易微联轻智能

### S40 Lite

ZigBee Smart Plug

ZigBee智能插座



Remote Control  
远程控制



Voice Control  
语音控制



Single/Countdown Timing  
智能定时/延时

Rating 额定参数:

Type A:100V ~, 50/60Hz  
Type B:120V ~, 60Hz

Max.Load 最大负载:

15A

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:

76x40x32mm

Net weight 净重:

Type A:68g Type B:74g

Certification 产品认证:

Type A: TELEC/PSE/RoHS  
Type B: ETL/FCC/RoHS

Rating 额定参数:

Type A:100V ~, 50/60Hz  
Type B:120V ~, 60Hz

Max.Load 最大负载:

15A

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

PC V0

Size 尺寸:

76x40x32mm

Net weight 净重:

Type A:68g Type B:74g

Certification 产品认证:

Type A: TELEC/PSE/RoHS  
Type B: ETL/FCC/RoHS



Type A



Type B

## SMART PLUGS

插座系列



### S31

Wi-Fi Smart Plug with Power Monitoring

Wi-Fi智能插座(电量监测)



Remote Control  
远程控制

Power Monitoring  
电量监测

Rating 额定参数: 120V~, 50/60Hz  
Max.Load 最大负载: 15A  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 76x40x33mm  
Net weight 净重: 79g  
Certification 产品认证: ETL/FCC/RoHS

### S31 Lite

Wi-Fi Smart Plug

Wi-Fi智能插座



Remote Control  
远程控制

Voice Control  
语音控制

Rating 额定参数: 120V~, 50/60Hz  
Max.Load 最大负载: 15A  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 76x40x33mm  
Net weight 净重: 79g  
Certification 产品认证: ETL/FCC/RoHS



### S31 Lite zb

ZigBee Smart Plug

ZigBee智能插座



Remote Control  
远程控制


Voice Control  
语音控制

Rating 额定参数: 120V~, 50/60Hz  
Max.Load 最大负载: 15A  
Wireless standard 无线标准: Zigbee IEEE 802.15.4  
Casing material 外壳材质: PC V0  
Size 尺寸: 76x40x33mm  
Net weight 净重: 79g  
Certification 产品认证: ETL/FCC/RoHS



## SMART WALL SWITCHES

墙壁开关系列

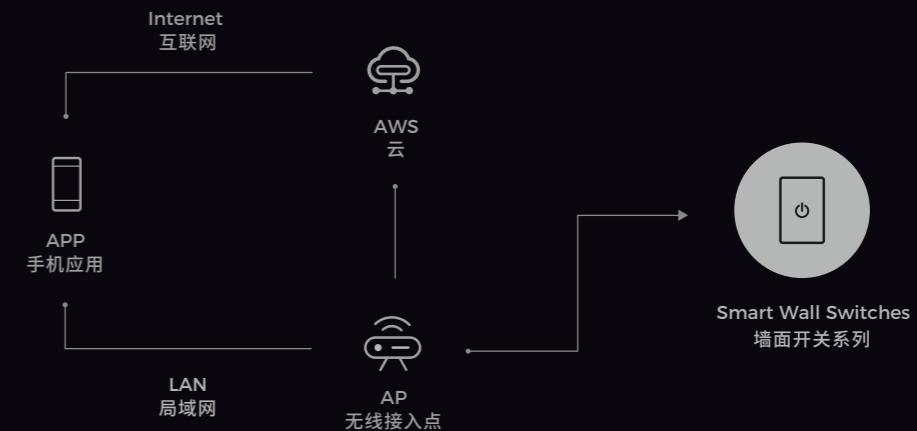

## SMART WALL SWITCHES

墙壁开关系列



### TX Ultimate

Smart Touch Wall Switch

智能触摸墙壁开关



Remote Control  
远程控制



Voice Control  
语音控制



Touch Vibration  
振感触摸



Light Effects  
彩色氛围灯



86 Type



120 Type

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

1C:5A 2C:5A/Gang 3C:5A/Gang 4C:4A/Gang

Gang 通道:

1-Gang/2-Gang/3-Gang/4-Gang

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC+CRS

Size 尺寸:

86 Type:86x86x39mm

120 Type:120x74x39mm

Net weight 净重:

86 Type(1C:164g 2C:168.5g 3C:174g 4C:181g)

Certification 产品认证:

120 Type(1C:196.6g 2C:202g 3C:207.6g 4C:210g)

86 Type: CE/SRRC/RoHS



120 Type:CE/FCC/RoHS/ISED



\* Star covers and cartoon covers need to be purchased separately.

# SMART WALL SWITCHES

墙壁开关系列

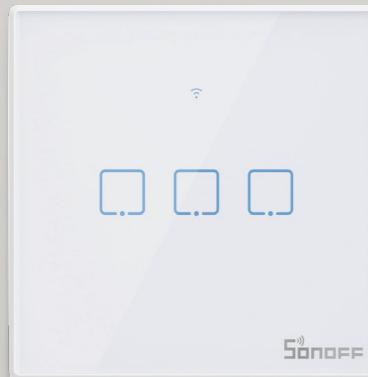

## TX

### Wi-Fi Smart Wall Switch EU Type

Wi-Fi智能墙壁触摸开关（欧规）



Remote Control  
远程控制



RF Control  
RF 控制



Touch Control  
触摸控制

Rating 额定参数:

Max.Load 最大负载: 100-240V~, 50/60Hz

Gang 通道: 1C:2A 2C:2A/Gang 3C:1A/Gang

Support 433MHz RF Control: 1-Gang/2-Gang/3-Gang

Wireless standard 无线标准: T1/T2/T3 Only

Casing material 外壳材质: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Size 尺寸: PC+Tempered glass panel

Net weight 净重: 86x86x35mm

Color 颜色: 120~129g

Certification 产品认证: White(T0/T1/T2) Black(T3)

FCC/RoHS

Rating 额定参数:

Max.Load 最大负载: 100-240V~, 50/60Hz

Gang 通道: 2A/Gang

Support 433MHz RF Control: 1-Gang/2-Gang/3-Gang

Wireless standard 无线标准: T2/T3 Only

Casing material 外壳材质: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Size 尺寸: PC+Tempered glass panel

Net weight 净重: 120x74x38mm

Color 颜色: 147~165g

Certification 产品认证: White(T0/T2) Black(T3)

CE/FCC/RoHS

# SMART WALL SWITCHES

墙壁开关系列



## SwitchMan M5

Smart Wall Switch

智能墙壁开关



Remote Control  
远程控制



Voice Control  
语音控制



eWeLink-Remote  
易微联轻智能

Rating 额定参数:

Max.Load 最大负载:

Gang 通道:

Wireless standard 无线标准:

Casing material 外壳材质:

Size 尺寸:

Net weight 净重:

Color 颜色:

Certification 产品认证:

100-240V~, 50/60Hz

1C:10A 2C:5A/Gang 3C:2A/Gang

1-Gang/2-Gang/3-Gang

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

PC V0

80 Type:86x71x41.5mm

86 Type:86x86x41.5mm

120 Type:120x74x41.5mm

80 Type(1C:127g 2C:134g 3C:137g)

86 Type(1C:147g 2C:154g 3C:156g)

120 Type(1C:166g 2C:174g 3C:176g)

Dim Gray(羌色)

80 Type: CE/UKCA/RoHS

86 Type: CE/UKCA/CQC/SRRC/RoHS

120 Type: CE/UKCA/FCC/RoHS

## SwitchMan M5

Smart Wall Switch

智能墙壁开关



Remote Control  
远程控制



Voice Control  
语音控制



Single/Countdown Timing  
智能定时/延时

Rating 额定参数:

Max.Load 最大负载:

Gang 通道:

Wireless standard 无线标准:

Casing material 外壳材质:

Size 尺寸:

Net weight 净重:

Color 颜色:

Certification 产品认证:

100-240V~, 50/60Hz

1C:10A 2C:5A/Gang 3C:2A/Gang

1-Gang/2-Gang/3-Gang

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

PC V0+CRS

80 Type:86x71x41.5mm

86 Type:86x86x41.5mm

120 Type:120x74x41.5mm

80 Type(1C:127g 2C:134g 3C:137g)

86 Type(1C:147g 2C:154g 3C:156g)

120 Type(1C:166g 2C:174g 3C:176g)

White(白色)


80 Type: CE/RoHS

86 Type: CE/CQC/RoHS

120 Type: CE/FCC/ISED/RoHS

## CENTRAL CONTROL PANEL

中控屏系列

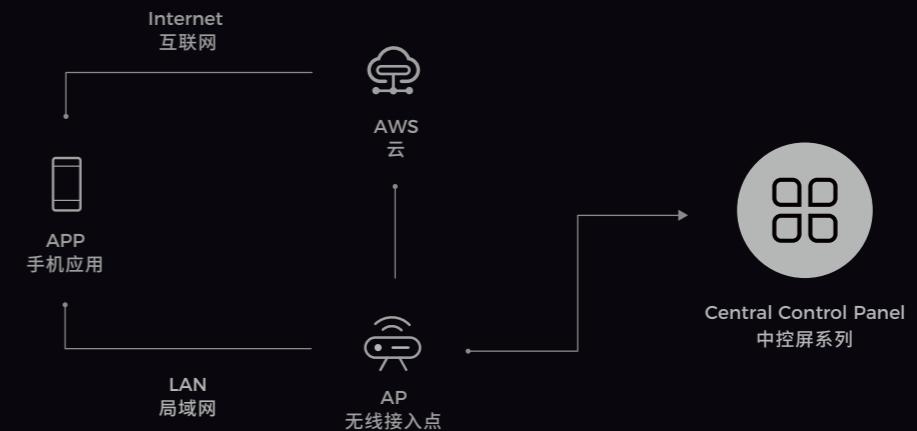

## CENTRAL CONTROL PANEL

中控屏系列



## NSPanel

### Smart Scene Wall Switch

智能场景墙面开关



Remote Control

远程控制



Voice Control

语音控制



Thermostat

温控器



Touch Control

触摸控制

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

2A/Gang

LED load LED灯负载:

150W/110V/Gang 300W/220V/Gang

Gang 通道:

2-Gang

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC V0+CRS+Tempered glass panel(PC V0+冷轧钢+钢化玻璃)

Size 尺寸: NSPanel-EU/EUW:86x86x41.7mm

NSPanel-US/USW:120x74x41.7mm

Net weight 净重:

NSPanel-EU/EUW:180g

NSPanel-US/USW:209g

Color 颜色:

Dim Gray(羌色) White(白色)

Certification 产品认证:

NSPanel-EU/EUW: CE/3C/SRRC/RoHS

NSPanel-US/USW: CE/FCC/RoHS



NSPanel-EU



NSPanel-EUW



NSPanel -US



NSPanel -USW



NSPanel86PB/NSPanel86PW



NSPanel120PB/NSPanel120PW  
( Coming Soon )

## NSPanel Pro



### Smart Home Control Panel

智能控制面板



Remote Control

远程控制



Voice Control

语音控制



Thermostat

温控器



Touch Control

触摸控制

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

5W MAX; 150mA

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz, Zigbee 3.0 IEEE 802.15.4

Screen size 屏幕规格: 86 Type:3.95", 120 Type:4.7" (Capacitive touch panel)

Screen resolution 屏幕分辨率: 86 Type:480x480 120 Type:750x1334

Casing material 外壳材质: PC V0+CRS+Tempered glass panel(PC V0+冷轧钢+钢化玻璃)

Size 尺寸: 86 Type:86x86x39.5mm 120 Type:122.5x74.5x39.5mm


Net weight 净重: 86 Type:180g 120 Type:214.8g

Color 颜色: Dim Gray(羌色) White(白色)

Certification 产品认证: CE/FCC/RoHS

## GATEWAY & SENSORS

网关与传感器系列

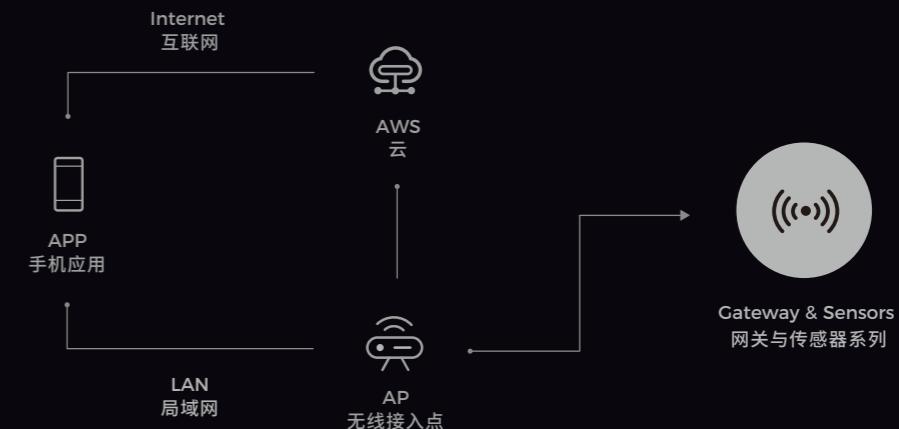

是非成败转头空，青山依旧

## GATEWAY & SENSORS

网关与传感器系列



### iHost

Smart Home Hub

智能家居网关



Local, Fast & Reliable automations  
本地, 灵敏, 可靠的自动化



Device data stays local & private  
本地 & 私密化的数据存储



Compatible with many device types  
兼容多种设备类型



Open API and Add-on integration  
开放 API 与 Add-on

Rating 额定参数:

Power interface 电源接口类型: 5V == 2A

Ethernet interface 网络接口类型: Type-C

Storage expansion method 扩展储存方式: RJ45

CPU 处理器: TF card (TF card supports up to 256GB)

NPU 神经网络处理器: AlBridge: RV1109 Dual-Core 1.5GHz AlBridge-26: RV1126 Quad-Core 1.5GHz

RAM 运行内存: AlBridge: 1.2Tops INT8/INT16 AlBridge-26: 2.0Tops INT8/INT16

Storage 存储: AlBridge: DDR4 2GB AlBridge-26: DDR4 4GB

Wireless standard 无线标准: eMMC 8GB

Casing material 外壳材质: Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0 IEEE 802.15.4

Size 尺寸: ABS

Net weight 净重: 120X135.5X41mm

Certification 产品认证: 208g

CE/FCC/ISED/RoHS



### ZBBridge Ultra

Zigbee Bridge

Zigbee网关



Matter Bridge  
Matter Bridge



Voice Control  
语音控制



Smart Home Security  
智能安防



Push Notification  
消息推送



### ZBBridge-U

Rating 额定参数:

Power supply interface type 电源接口类型: Type-C

Network interface type 以太网接口类型: RJ45 (10/100Mbps)

CPU 处理器: Dual-Core 1.5GHz

RAM 运行内存: DDR4 1GB

Storage 存储: eMMC 8GB

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质: PC+ABS

Size 尺寸: 82x82x28mm

Net weight 净重: 92.5g

Certification 产品认证: CE/FCC/ISED/RoHS



### Zigbee 3.0 USB Dongle Plus

Rating 额定参数:	5V == 100mA Max
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	Aluminum alloy 铝合金
Size 尺寸:	75x25.5x13.5mm
Net weight 净重:	30g
Certification 产品认证:	CE/FCC/RoHS



**ZBDongle-E**

**Matching accessories  
(Refer to the accessory series for details)**



**USB Male to female extension cable**

### ZB Bridge-P



#### Zigbee 网关

Rating 额定参数:	5V == 1A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC V0
Size 尺寸:	62x62x20mm
Net weight 净重:	39.5g
Certification 产品认证:	CE/FCC/RoHS



## GATEWAY & SENSORS

网关与传感器系列



### SNZB-01P

#### Zigbee Wireless Switch

Zigbee无线开关

Battery model 电池型号: CR2477 (3V)  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC V0  
Size 尺寸: 45x45x17.7mm  
Net weight 净重: 25.6g  
Certification 产品认证: CE/FCC/ISED/RoHS



### SNZB-04P

#### Zigbee Door/Window Sensor

Zigbee无线门窗传感器

Battery model 电池型号: CR2477 (3V)  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC+ABS  
Size 尺寸: Transmitter:50.5x32x21.9mm  
Magnet:27x12x12.4mm  
Net weight 净重: 33g  
Certification 产品认证: CE/FCC/ISED/RoHS



### SNZB-02P

#### Zigbee Temperature and Humidity Sensor

Zigbee温湿度传感器

Battery model 电池型号: CR2477 (3V)  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC V0  
Size 尺寸: 45x45x17.7mm  
Net weight 净重: 25.6g  
Certification 产品认证: CE/FCC/ISED/RoHS



### SNZB-06P

#### Zigbee Human Presence Sensor

Zigbee人体存在传感器

Rating 额定参数: 5V == 1A  
Interface type 接口类型: Type-C  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC+ABS  
Size 尺寸: 44.2x44.2x59mm  
Net weight 净重: 31g  
Certification 产品认证: CE/FCC/ISED/RoHS




### SNZB-03P

#### Zigbee Motion Sensor

Zigbee运动传感器

Battery model 电池型号: CR2477 (3V)  
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质: PC+ABS  
Size 尺寸: 44.2x44.2x59mm  
Net weight 净重: 54g  
Certification 产品认证: CE/FCC/ISED/RoHS

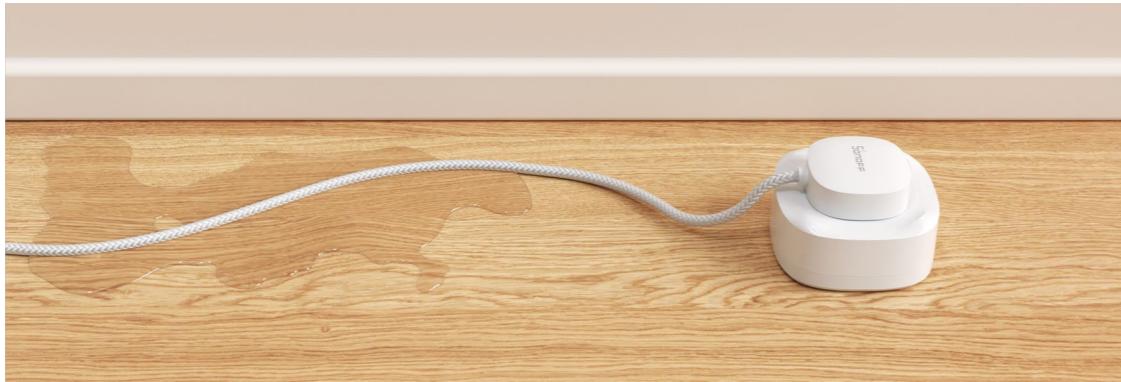

## SNZB-05P

Zigbee Water Leak Sensor  
Zigbee无线水浸传感器



5-year Battery Life  
续航 5 年



IP Rating  
防护等级



Extended Detection Support  
支持延长探测

Battery model 电池型号：CR2477 (3V)  
Wireless standard 无线标准：Zigbee 3.0 IEEE 802.15.4  
IP rating 防护等级：IP67  
Casing material 外壳材质：PC+ABS  
Size 尺寸：48x48x21.6mm  
Net weight 净重：45g  
Certification 产品认证：CE/FCC/ISED/RoHS

## WLDC200

Water Leak Detection Cable  
水浸线

Casing material 外壳材质：PC+ABS  
Length 长度：2m (6.5ft)  
Net weight 净重：32g



## SNZB-02D

Zigbee LCD Smart Temperature Humidity Sensor  
Zigbee 液晶智能温湿度传感器



High Precision  
高精度



APP Monitoring  
APP 监控



°C / °F Unit Switching  
°C / °F 单位切换



Data Storage & Export  
数据存储 & 导出

Battery model 电池型号：CR2450 (3V)  
Temperature tolerance 温度误差范围：±0.2 (°C/°F)  
Humidity tolerance 湿度误差范围：±2%RH  
Wireless standard 无线标准：Zigbee 3.0 IEEE 802.15.4  
Casing material 外壳材质：PC+LCD  
Size 尺寸：59.5x62.5x18.5mm  
Net weight 净重：69.5g  
Certification 产品认证：CE/FCC/ISED/RoHS





### RF BridgeR2

#### 433MHz RF Bridge

##### 433多功能网关

Rating 额定参数: 5V == 1A  
Wireless standard 无线标准: Wi-Fi:IEEE 802.11 b/g/n & 433MHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 62x62x20mm  
Net weight 净重: 37.5g  
Certification 产品认证: CE/FCC/RoHS



### PIR3-RF

#### Motion Sensor

##### 运动传感器

Battery model 电池型号: CR2450 (3V)  
Wireless standard 无线标准: 433MHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 40x35x28mm  
Net weight 净重: 15g  
Certification 产品认证: CE/FCC/RoHS



### DW2-RF

#### RF Wireless Door/Window Sensor

##### 无线门窗传感器

Battery model 电池型号: AAA(1.5)x2  
Wireless standard 无线标准: 433MHz  
Casing material 外壳材质: PC V0  
Size 尺寸: Transmitter:70x31x19mm  
Magnet:42x14x16mm  
Net weight 净重: 27g  
Certification 产品认证: CE/FCC/RoHS



### DW2 Wi-Fi


#### Wi-Fi Wireless Door/Window Sensor

##### Wi-Fi无线门窗传感器

Battery model 电池型号: AAA(1.5)x2  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: Transmitter:70x31x19mm  
Magnet:42x14x16mm  
Net weight 净重: 28g  
Certification 产品认证: CE/FCC/RoHS

# SMART LIGHTING

照明系列

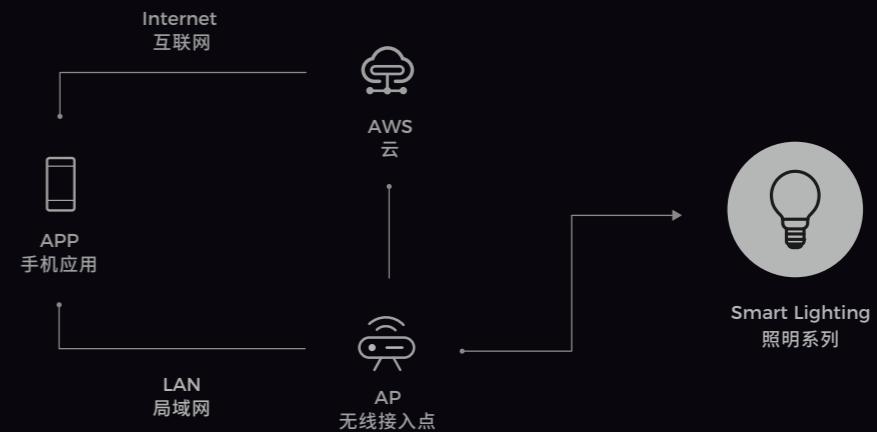

**L3-5M****RGB Smart LED Strip Lights**

Wi-Fi智能彩光灯带



**Remote Control**  
远程控制



**Voice Control**  
语音控制



**Music Reactive Mode**  
光随乐动



**Flexible & Self-adhesive**  
随意贴

Voltage 工作电压:	5V ==
Input 输入 (Controller):	5V ==
Output 输出 (Controller):	5V == 2A
Max.Load 最大负载 (Controller):	10W
Luminous Flux 光通量:	150Lm
IP Rating 防护等级:	IP20
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth:5.0 BLE
Casing material 外壳材质 (Controller):	PC V0
LED Light Strips Length 灯带长度:	5M
Net weight 净重:	138.1g
Certification 产品认证:	CE/FCC/RoHS

**L3-5M-P****RGBIC Smart LED Strip Lights**

Wi-Fi智能幻彩灯带



**Remote Control**  
远程控制



**Voice Control**  
语音控制



**Music Reactive Mode**  
光随乐动



**Flexible & Self-adhesive**  
随意贴

Voltage 工作电压:	5V ==
Input 输入 (Controller):	5V ==
Output 输出 (Controller):	5V == 2A
Max.Load 最大负载 (Controller):	10W
Luminous Flux 光通量:	160Lm
IP Rating 防护等级:	IP54
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth:5.0 BLE
Casing material 外壳材质 (Controller):	PC V0
LED Light Strips Length 灯带长度:	5M
Net weight 净重:	283.7g
Certification 产品认证:	CE/FCC/RoHS

# SMART LIGHTING

照明系列



L2-C



## L2-2M/L2-5M

Wi-Fi Smart LED RGB Light Strip

Wi-Fi智能彩光灯带



Voice Control  
语音控制



Music Reactive Mode  
光随乐动



Waterproof  
防水



Flexible & Self-adhesive  
随意贴

Voltage 工作电压:

12V == 2A

Input 输入 (Controller):

12V == 2A

Input 输入(Power Adapter): 100-240V~, 50/60Hz 0.6A Max

Max.Load 最大负载 (Controller): 36W

Luminous Flux 光通量: ≥300Lm

IP Rating 防护等级: IP65

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth:5.0 BLE

Light Strip material 灯带材质 : FPCB

LED Light Strips Length 灯带长度: 2M/5M

Net weight 净重: L2-2M:434.2g L2-5M:546.2g

Certification 产品认证: CE/FCC/RoHS

## L2 Lite-5M-EU/L2 Lite-5M-US

Wi-Fi Smart LED RGB Light Strip

Wi-Fi智能彩光灯带



Voice Control  
语音控制



Music Reactive Mode  
光随乐动



Flexible & Self-adhesive  
随意贴

Voltage 工作电压:

12V == 2A

Input 输入 (Controller):

12V == 2A

Input 输入(Power Adapter): 100-240V~, 50/60Hz 0.6A Max

Max.Load 最大负载 (Controller): 36W

Luminous Flux 光通量: ≥300Lm

IP Rating 防护等级: IP20

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth:5.0 BLE

Light Strip material 灯带材质 : FPCB

LED Light Strips Length 灯带长度: 5M

Net weight 净重: L2 Lite-5M-EU:272.5g L2 Lite-5M-US:265.3g

Certification 产品认证: CE/FCC/RoHS



### B02-F-A19

Wi-Fi Smart LED Filament Bulb (Creamy White)  
Wi-Fi 智能LED灯丝灯（奶白）




Voltage 工作电压:	120V~, 60Hz
Screw Base 接口标准:	E26
CCT 色温:	2700K-5000K
Watt 功率 :	7.5W
Luminous Flux 光通量:	720Lm
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质 :	Glass lampshade+Aluminum (玻璃灯罩+铝材)
Size 尺寸:	60x60x110mm
Net weight 净重:	38g
Certification 产品认证:	CE/FCC/RoHS



### B02-F-A60

Wi-Fi Smart LED Filament Bulb (Cyan)  
Wi-Fi 智能LED灯丝灯（青光）

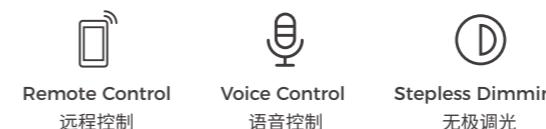

Voltage 工作电压:	220~240 AC 50/60 Hz
Screw Base 接口标准:	E27
CCT 色温:	2700K-5000K
Watt 功率 :	7W
Luminous Flux 光通量:	700Lm
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质 :	Glass lampshade+Aluminum (玻璃灯罩+铝材)
Size 尺寸:	60x60x104mm
Net weight 净重:	35g
Certification 产品认证:	CE/FCC/RoHS



### B02-F-ST64

Wi-Fi Smart LED Filament Bulb (Amber)  
Wi-Fi 智能LED灯丝灯（琥珀）



Voltage 工作电压:	220~240 AC 50/60 Hz
Screw Base 接口标准:	E27
CCT 色温:	1800K-5000K
Watt 功率 :	7W
Luminous Flux 光通量:	600Lm
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质 :	Glass lampshade+Aluminum (玻璃灯罩+铝材)
Size 尺寸:	60x60x138mm
Net weight 净重:	50g
Certification 产品认证:	CE/FCC/RoHS

**B02-BL-A60****Wi-Fi Smart LED Bulb**

Wi-Fi 智能LED双色球泡灯


**Remote Control**  
远程控制

**Voice Control**  
语音控制

**Stepless Dimming**  
无极调光

Voltage 工作电压: 120V~, 50Hz

Screw Base 接口标准: E27

CCT 色温: 2700K-6500K

Watt 功率: 9W

Luminous Flux 光通量: 806Lm

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC lampshade+Thermal insulation lamp body+Aluminum  
(PC灯罩+导热绝缘灯体+铝材)

Size 尺寸: 60x60x112mm

Net weight 净重: 40g

Certification 产品认证: CE/RoHS

**B05-BL-A60/A19****Wi-Fi Smart RGB LED Bulb**

Wi-Fi 智能五彩LED球泡灯


**Remote Control**  
远程控制

**Voice Control**  
语音控制

**Stepless Dimming**  
无极调光

**eWeLink-Remote**  
易微联轻智能

Voltage 工作电压: A19:120V~, 60Hz A60:220-240V~, 50Hz

Screw Base 接口标准: A19:E26 A60:E27

CCT 色温: 2700K-6500K

Watt 功率: 9W

Luminous Flux 光通量: 806Lm

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC lampshade+Thermal insulation lamp body+Aluminum  
(PC灯罩+导热绝缘灯体+铝材)

Size 尺寸: 60x60x112mm

Net weight 净重: 40g

Certification 产品认证: A19:UL/FCC/RoHS A60:CE/RoHS



# SMART LIGHTING

照明系列



Bright

Dark

D1

Wi-Fi Smart Dimmer Switch

Wi-Fi 智能调光器

Remote Control  
远程控制

RF Control  
RF 控制

Stepless Dimming  
无极调光

Voltage 工作电压: 100-240V~, 50/60Hz  
Light Load 灯负载: 200W/Incandescent Bulb  
150W/Dimmable LED  
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Casing material 外壳材质: PC V0  
Size 尺寸: 62x47x32.5mm  
Net weight 净重: 55g  
Certification 产品认证: CE/FCC/RoHS



D1

Matching accessories  
(Refer to the accessory series for details)


搭配配件 (详情见配件系列)

RM433R2

8-key 433MHz Remote Controller  
433MHz 无线遥控器 (8键)

RM433R2-BASE


433MHz Remote Controller Base  
433MHz 无线遥控器底座

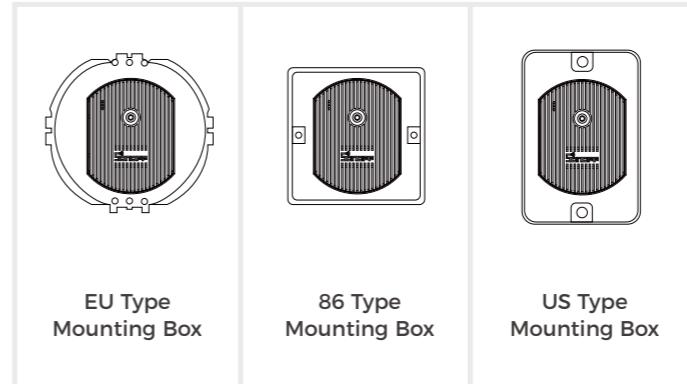

RM433R2-BASE

## SECURITY CAMERAS

摄像头系列

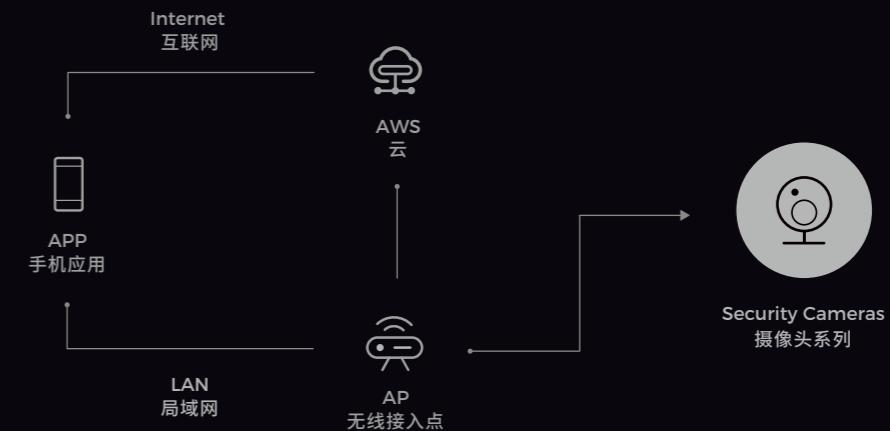

## SECURITY CAMERAS

摄像头系列



### CAM Slim Gen2

Wi-Fi Smart Security Camera

Wi-Fi智能监控摄像头



Two-way Audio  
双向对话



IR Night Vision  
红外夜视



FHD  
1080P Live View  
1080P 高清图像



Motion detection  
移动侦测



Support cloud storage  
支持云存储

Input 输入: 5V == 1A

Interface type 接口类型: Type-C

Resolution 分辨率: 1920x1080

Lens Aperture 光圈: F2.0

Storage location 存储方式: Cloud storage and TF card (Max.128GB for TF card)

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: PC+ABS

Size 尺寸: 48x46x86.5mm

Net weight 净重: 65g (Accessories not included)

Certification 产品认证: CE/FCC/RoHS



CAM-S2

## SECURITY CAMERAS

摄像头系列



### CAM Slim

Smart Home Security Camera

Wi-Fi智能监控摄像头



Two-way Audio  
双向对话



IR Night Vision  
红外夜视

FHD

1080P Live View  
1080P 高清图像



Motion detection  
移动侦测



Support cloud storage  
支持云存储

Input 输入: 5V == 1.2A

Interface type 接口类型: Type-C

Resolution 分辨率: 1080P

Lens Aperture 光圈: F2.3

Storage location 存储方式: Cloud storage and TF card (Max.256GB for TF card)

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: ABS VO

Size 尺寸: 91X53X44.5mm

Net weight 净重: 116g

Certification 产品认证: CE/FCC/RoHS



(Type-E/F)  
**5V USB Power Adapter**  
5VUSB适配器 (欧规)



(Type-A/B)  
**5V USB Power Adapter**  
5VUSB适配器 (美规)



(Type-I)  
**5V USB Power Adapter**  
5VUSB适配器 (澳规)



(Type-G)  
**5V USB Power Adapter**  
5VUSB适配器 (英规)



### GK-200MP2-B

Wi-Fi Wireless IP Security Camera

Wi-Fi智能云台监控摄像头



Two-way Audio  
双向对话



IR Night Vision  
红外夜视

FHD

1080P Live View  
1080P 高清图像



TPC-UK



TPB-US



TPI-AU



TPF-DE

Input 输入: 5V == 1.2A

Resolution 分辨率: 1080P

Lens Aperture 光圈: F1.2

Storage 扩展卡: TF Card (Max 128GB)

Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质: ABS


Size 尺寸: Fold:109X109X80mm UnFold:109X109X120mm

Net weight 净重: 221g

Certification 产品认证: CE/FCC/RoHS

# HOME APPLIANCES

生活电器系列

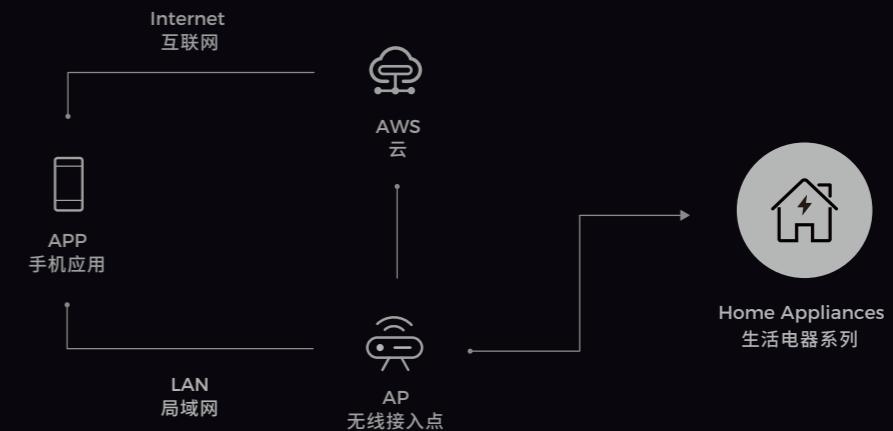

## HOME APPLIANCES

生活电器系列



### TRVZB

Thermostatic Radiator Valve

智能温控阀



Remote Control  
远程控制



Timing Schedule  
智能定时/延时



Precise Temperature Control  
精确的温度控制



Child Safety Lock  
童锁



Input 输入:	4.5V == (3x1.5V AA Batteries)
Battery model 电池型号:	1.5V LR6 Alkaline AA Battery
Threaded connection 螺纹接口:	M30x1.5mm
Temperature setting range 温度设定范围:	4°C-35°C
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC
Size 尺寸:	59.4x59.4x95mm
Net weight 净重:	157g
Certification 产品认证:	CE/RoHS



### SWV-NH/SWV-BSP

Zigbee Smart Water Valve

Zigbee智能水阀



APP control  
APP 控制



Timed watering  
定时浇水



Cyclic irrigation  
循环灌溉



Water consumption statistics  
用水量统计

Rating 额定参数:	6V == (4x1.5V AA Batteries)
Communication distance 通信距离:	130M (open space)
Waterproof 防水等级:	IP55
Working Pressure 工作水压:	0.06~0.8 MPa
Watering Temperatur 工作水温:	5~40°C
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC+ABS
Size 尺寸:	152x100x46mm
Net weight 净重:	278g
Certification 产品认证:	CE/FCC/ISED





## ZBCurtain

Zigbee Smart Curtain Motor

Zigbee 智能窗帘电机



Remote Control  
远程控制



Voice Control  
语音控制



Timing Schedule  
智能定时/延时

Input 输入:

5V == 1A

Max. power 最大功率:

5W

Battery model 电池型号:

103450 (1034550 x 2 3.7V)

Interface type 接口类型:

Type-C

Applicable curtain length 适用窗帘长度:

<3.5m

Curtain weight requirement 搭载窗帘重量:

<8KG

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

ABS

Size 尺寸:

Main-motor:114x78x29mm

Net weight 净重:

Vice-motor:114x58x28mm

Certification 产品认证:

821g

CE/FCC/RoHS



## Curtain Remote

Curtain Remote Controller

窗帘遥控器

Power supply 电源: 3V == button cellx1

Battery model 电池型号: CR2032

## Solar Panel

Solar Panel

太阳能板


Output 输出: 6V == 400mA

Max. power 最大功率: 2.4W

### About Charge

1.Charged by USB Type-C and proper adapter  
用USB Type-C线连接适配器充电

2.Charged by solar panel  
太阳能板充电

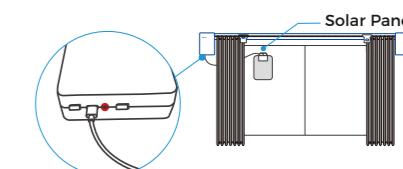

\* 本设备不包括适配器和太阳能板, 请另行购买。

The adapter and the solar panel are not included in the product, please purchase them separately.

## **ACCESSORIES**

配件系列



Accessories  
配件系列

## ACCESSORIES

配件系列

### WTS01

#### Waterproof Temperature Sensor

防水温度传感器

Compatible Products 兼容产品: TH Origin/ TH Elite

Interface/Connector types 接口/连接器类型: RJ9 4P4C

Temp. Measuring 测量温度范围: -10°C ~+85°C

Working Temperature 工作温度: -40°C~+115°C

Cable length 电线长度: 1.5M

Casing material 外壳材质: PVC

Net weight 净重: 36.3g



### THS01

#### Temp. & Hum. Sensor

温湿度传感器

Compatible Products 兼容产品: TH Origin/ TH Elite

Temp. Measuring 测量温度范围: -40°C~+85°C

Working humidity 工作湿度: 0~100RH%

Cable length 电线长度: 0.5M

Casing material 外壳材质: ABS V0

Net weight 净重: 21.7g



### RL560

#### Sensor Extension Cable

RJ9接口传感器延长线


Compatible Products 兼容产品: TH Origin/ TH Elite

Interface/Connector types 接口/连接器类型: RJ9 4P4C

Cable length 电线长度: 5M

Casing material 外壳材质: PVC V0

Net weight 净重: 75.0g

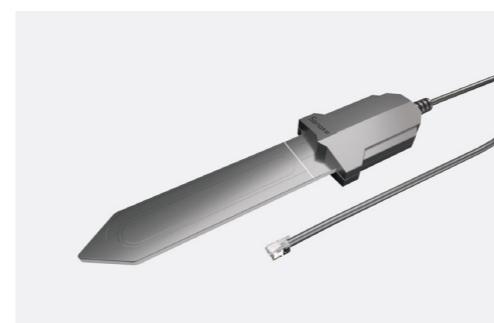

### MS01

#### Soil Moisture Sensor

土壤湿度传感器

Compatible Products 兼容产品: TH Origin/ TH Elite

Working Temperature 工作温度: 0°C~60°C

Working humidity 工作湿度: 0~100RH%

Cable length 电线长度: 0.5M

Casing material 外壳材质: PC V0

Net weight 净重: 28.9g

**T2EU1C/2C/3C-RF****Stick-on Switch (Remote Controller)**


随意贴开关（遥控器）



Battery model 电池型号:	CR2032 (3V)X2
Control distance 操控距离:	>50M(Open space)
Gang 通道:	1-Gang/2-Gang/3-Gang
Wireless standard 无线标准:	433MHz
Casing material 外壳材质:	PC+Tempered glass panel (PC+钢化玻璃)
Size 尺寸:	86x86x9mm
Net weight 净重:	80g



T2EU1C-RF



T2EU2C-RF



T2EU3C-RF



R5



R5W

**SwitchMan R5****SONOFF SwitchMan Scene Controller**

松诺场景遥控器R5 (6键)



Battery model 电池型号:	CR2032 (3V)X2
Control distance 操控距离:	Max. 90M (Open space)
Numbers of button 按键数量:	6
Casing material 外壳材质:	PC V0+Tempered glass panel (PC V0+钢化玻璃)
Size 尺寸:	86x86x13.5mm
Net weight 净重:	91g
Color 颜色:	Dim Gray(羌色) White(白色)

Button sticker  
按键图标贴纸



## Waterproof box R2

### Waterproof Box

防水盒

Compatible Products 兼容产品: TH Elite/TH Origin/POW Elite/POW Origin/BASIC Series/DUALR2/  
POWR2/NSPanel Pro/M5 Series/TX Series/NSPanel Series

Casing material 外壳材质:

PC V0

Size 尺寸:

152.5x100x48mm

Net weight 净重:

204.3g

Color 颜色: Transparent tawny



## Switch Frame

### SONOFF Switch Frame 2-Gang/3-Gang/4-Gang

松诺墙壁2位/3位/4位连体框开关连体框

Casing material 外壳材质: PC V0

Size 尺寸:

2-Gang:157x86x14.8mm

3-Gang:228x86x14.8mm

4-Gang:299x86x14.8mm

Net weight 净重:

2-Gang:44.4g

3-Gang:56.6g

4-Gang:72.2g

Color 颜色:

Dim Gray(羌色) White(白色)



\*The Switch Frame is optional to install M5-80 only and the mounting box.

\*开关连体框可选,仅适用于M5-80和暗盒安装。

**DR****DIN Rail Tray**

导轨固定器

Compatible Products 兼容产品: BASICR2/RF/BASICR3/RFR3/DUALR2/POWR2/TH10/TH16

Casing material 外壳材质: ABS V0

Size 尺寸: 122x54x14mm

Net weight 净重: 21.4g

**USB Male to female extension cable****USB Male to female extension cable**

USB延长线

Net weight 净重: 59.3g

**Motion Sensor-BASE****Motion Sensor-BASE**

运动传感器-万向座

Compatible Products 兼容产品: PIR3-RF, SNZB-03

Casing material 外壳材质: PC V0

Size 尺寸: 43x38x45mm

Net weight 净重: 13.3g

**StandB/W****Enclosure Stand**

底座

Casing material 外壳材质: PC V0

Size 尺寸: 121x88.5x67.5mm

Net weight 净重: 108.5g

Color 颜色: Dim Gray(羌色) White(白色)

**NFC-Tag**

NFC Card Size 卡片尺寸: 85.5x54mm

Tag Size 标签尺寸: 18x18mm

Net weight 净重: 8.2g

**Waterproof Case-IP66****IP66 Waterproof Case**

IP66防水盒

Compatible Products 兼容产品: BASICR2/RF/BASICR3/RFR3/DUALR2/POWR2/

TH10/TH16

Casing material 外壳材质: ABS V0

Size 尺寸: 135x72x52mm

Net weight 净重: 107.8g



## 5V USB Power Adapter (Type-E/F)

5VUSB适配器 (欧规)

Input 输入: 100-240V~, 50/60Hz 0.35A Max  
 Output 输出: 5V == 2A 10.0W  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 40.5x34.5x21mm  
 Net weight 净重: 43.1g



## 5V USB Power Adapter (Type-I)

5VUSB适配器 (澳规)

Input 输入: 100-240V~, 50/60Hz 0.3A Max  
 Output 输出: 5V == 2A 10.0W  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 47x35.5x24mm  
 Net weight 净重: 40.0g



## 5V USB Power Adapter (Type-A/B)

5VUSB适配器 (美规)

Input 输入: 100-240V~, 50/60Hz 0.35A Max  
 Output 输出: 5V == 2A 10.0W  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 40.5x34.5x21mm  
 Net weight 净重: 36.5g



## 5V USB Power Adapter (Type-G)

5VUSB适配器 (英规)

Input 输入: 100-240V~, 50/60Hz 0.3A Max  
 Output 输出: 5V == 2A 10.0W  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 48x44x22.5mm  
 Net weight 净重: 43.6g



## TPG-UK

**AC Adapter (UK)** 电源适配器(英规)

Input 输入: 100-240V~, 50/60Hz 0.3A Max  
 Output 输出: 5V == 1200mA  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 61x50x46mm  
 Cable length 电线长度: 1.2M  
 Net weight 净重: 92.3g



## TPI-AU

**AC Adapter (AU)** 电源适配器(澳规)

Input 输入: 100-240V~, 50/60Hz 0.3A Max  
 Output 输出: 5V == 1200mA  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 61x39.8x47mm  
 Cable length 电线长度: 1.2M  
 Net weight 净重: 84.8g



## TPB-US

**AC Adapter (US)** 电源适配器(美规)

Input 输入: 100-240V~, 50/60Hz 0.3A Max  
 Output 输出: 5V == 1200mA  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 61x26x44mm  
 Cable length 电线长度: 1.2M  
 Net weight 净重: 79.0g



## TPF-DE

**AC Adapter (DE)** 电源适配器(德规)

Input 输入: 100-240V~, 50/60Hz 0.3A Max  
 Output 输出: 5V == 1200mA  
 Casing material 外壳材质: PC V0  
 Size 尺寸: 61x26x56mm  
 Cable length 电线长度: 1.2M  
 Net weight 净重: 83.0g



## RM433R2

### 8-key 433MHz Remote Controller

433MHz无线遥控器(8键)

Compatible Products 兼容产品: RF/RFR3/4CHPROR3/iFan03/SlampherR2 / TX Series\*(T2/T3)/RF Bridge D1\*(On the way...)

Battery model 电池型号: CR2450 (3V)X2

Wireless standard 无线标准: 433MHz

Casing material 外壳材质: PC V0

Size 尺寸: 87x45x12mm

Net weight 净重: 47.0g

## RM433R2-BASE

### 433MHz Remote Controller Base

433MHz无线遥控器底座

Compatible Products 兼容产品: RM433R2

Temp.Measuring 配件: 3M Tapes/Screws

Casing material 外壳材质: PC V0

Size 尺寸: 86x86x15mm

Net weight 净重: 52.2g



**211**

### Din Rail Wire Connectors

211 导轨按压接线端子

Rated voltage 额定电压: 250V

Rated current 额定电流: 32A

Contact material 接触点材质: Red copper

Insulation material 绝缘材质: PA

Package size 包装尺寸: 190x132x23mm



**D1-1**

### Wire Splicing Connectors

D1-1 拼接电线连接器


Rated voltage 额定电压: 250V

Rated current 额定电流: 32A

Contact material 接触点材质: Red copper

Insulation material 绝缘材质: PC

Package size 包装尺寸: 165x87x17mm

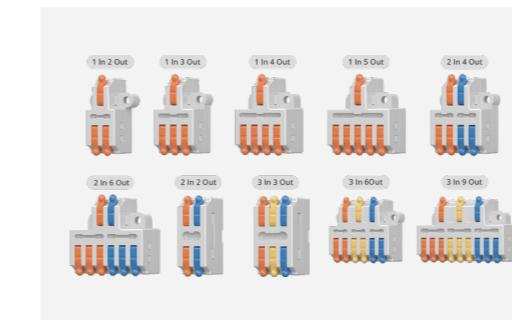

**D1-2**

### Quick Wire Connectors

D1-2 快速接线端子

Rated voltage 额定电压: 250V

Rated current 额定电流: 32A

Contact material 接触点材质: Red copper

Insulation material 绝缘材质: PC

Package size 包装尺寸: 210x112x30mm



## 433 RF Controller

### 4-key 433MHz Remote Controller

433MHz无线遥控器(4键)

Battery model 电池型号: CR2032

Wireless standard 无线标准: 433MHz

Casing material 外壳材质: ABS V0

Size 尺寸: 55x30x14mm

Net weight 净重: 24.8g

# SONOFF ECOSYSTEM

## Innovative Product

### DIY SMART SWITCHES



### CENTRAL CONTROL PANEL



### SMART WALL SWITCHES



### GATEWAY & SENSORS



### SECURITY CAMERAS



### SMART LIGHTING



### SMART PLUGS



### HOME APPLIANCES



### ACCESSORIES



## Software



eWeLink APP  
Android/iOS



eWeLink Web



eWeLink Cast



In-Vehicle  
Infotainment

## Wireless Communication



## Cloud Solution



Global Cloud



Open API



Developer SDK



GDPR.EU



SaaS



PaaS



Private Deployment

## Third-Party Application



works with Alexa



works with Google Home



works with SmartThings



works with IFTTT



works with Alice



Works with Apple Home



works with AliGenie



works with iFLYOS



works with DuerOS



works with mijia



works with HUAWEI HiLink

## Open-Source Compatible Application



Home Assistant



HomeSeer



OpenHAB



ioBroker



Zigbee2MQTT



Domoticz



Jeedom

## Third-Party Integrated Products



works with YEELIGHT 易来



PHILIPS connect to Philips Hue



works with Midea Meiju

