
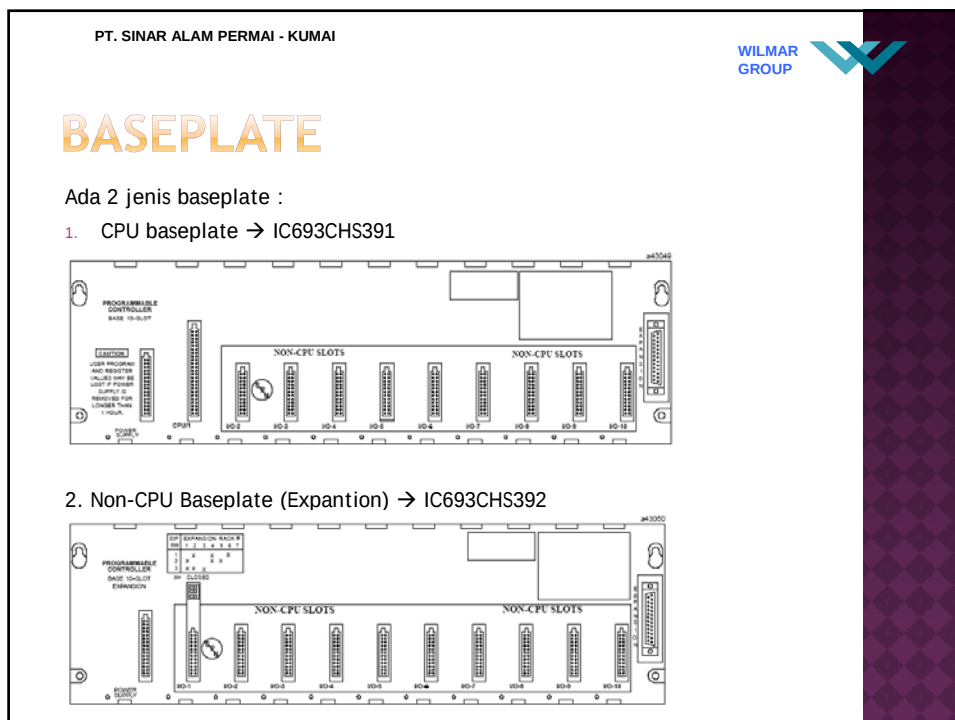


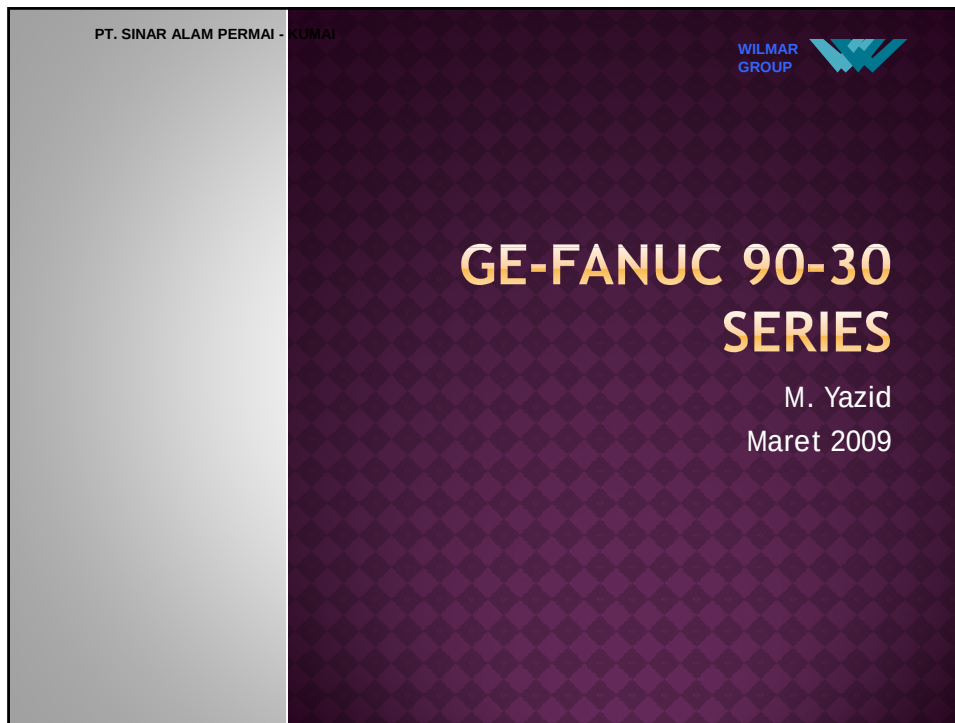


PT. SINAR ALAM PERMAI - KUMAI


WILMAR
GROUP

BASEPLATE

- Ada dip switch untuk pengaturan posisinya.

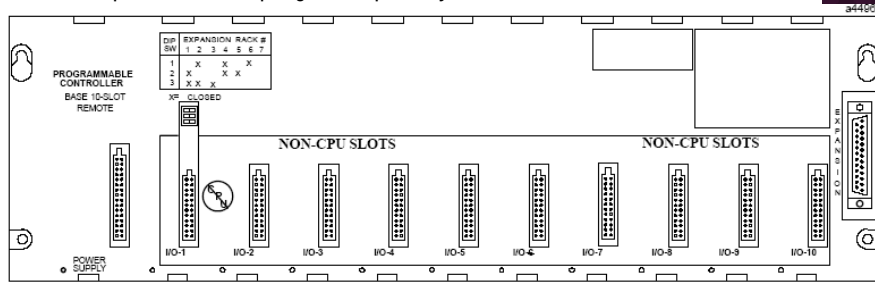

- Kabel ekspansi

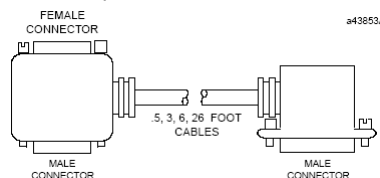


Catalog Number	Length	Figure
IC693CBL300	3 feet (1 meter), continuous shield	A
IC693CBL301	6 feet (2 meters), continuous shield	A
IC693CBL302	50 feet (15 meters), continuous shield with built in terminator (this is not a Wye cable)	B
IC693CBL312	0.5 feet (.15 meters), continuous shield	A
IC693CBL313	25 feet (8 meters), continuous shield	A

PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP

KONFIGURASI

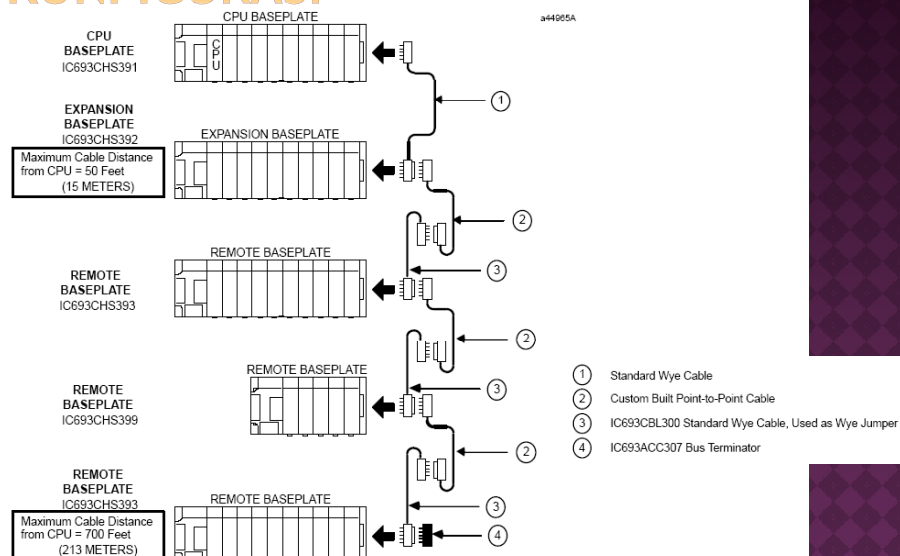

PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP

KONFIGURASI

Series 90-30 Baseplates		
Catalog Number	Type	Size (Slots)
IC693CPU311	Embedded CPU	5
IC693CPU313	Embedded CPU	5
IC693CPU323	Embedded CPU	10
IC693CHS397	Modular CPU	5
IC693CHS391	Modular CPU	10
IC693CHS398	Expansion	5
IC693CHS392	Expansion	10
IC693CHS399	Remote	5
IC693CHS393	Remote	10

PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP

POWER SUPPLY

◎ IC693PWR321

Catalog Number	Load Capacity	Nominal Input	Output Capacities (Voltage/Power †)		
IC693PWR321	30 Watts	100 to 240 VAC or 125 VDC	+5 VDC 15 watts	+24 VDC Isolated 20 watts	+24 VDC Relay 15 watts
IC693PWR330	30 Watts	100 to 240 VAC or 125 VDC	+5 VDC 30 watts	+24 VDC Isolated 20 watts	+24 VDC Relay 15 watts
IC693PWR322	30 Watts	24 or 48 VDC	+5 VDC 15 watts	+24 VDC Isolated 20 watts	+24 VDC Relay 15 watts
IC693PWR328	30 Watts	48 VDC	+5 VDC 15 watts	+24 VDC Isolated 20 watts	+24 VDC Relay 15 watts
IC693PWR331	30 Watts	24 VDC	+5 VDC 30 watts	+24 VDC Isolated 20 watts	+24 VDC Relay 15 watts
IC693PWR332	30 Watts	12 VDC	+5 VDC 30 watts	+24 VDC Isolated 20 watts	+24 VDC Relay 15 watts


† Total of all outputs combined cannot exceed 30 watts.

PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP

POWER SUPPLY

IC693PWR321

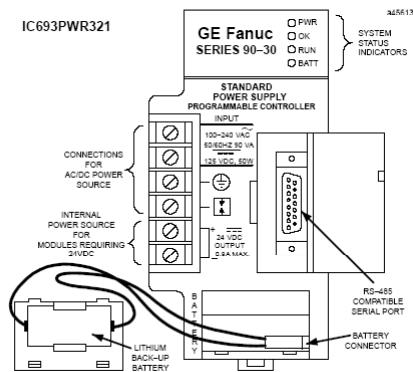

PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP

POWER SUPPLY

IC693PWR321

PWR

The top green LED, labeled **PWR**, provides an indication of the operating state of the power supply. The LED is *ON* when the power supply has a correct source of power and is operating properly, and *OFF* when a power supply fault occurs or power is not applied.

OK

The second green LED, labeled **OK**, is steady *ON* if the PLC is operating properly, and *OFF* if a problem is detected by the PLC.

RUN

The third green LED, labeled **RUN**, is steady *ON* when the PLC is in the RUN mode.

BATT

The bottom red LED, labeled **BATT**, will be *ON* if the memory backup battery voltage is too low to maintain the memory under a loss of power condition; otherwise it remains *OFF*. If this LED is *ON*, the Lithium battery must be replaced before removing power from the rack, or PLC memory may be lost.

PT. SINAR ALAM PERMAI - KUMAI


WILMAR
GROUP

DIGITAL INPUT

● IC693MDL645

Untuk :

- Indikasi : motor on/off, valve open/close, level switch, proximity switch, dll

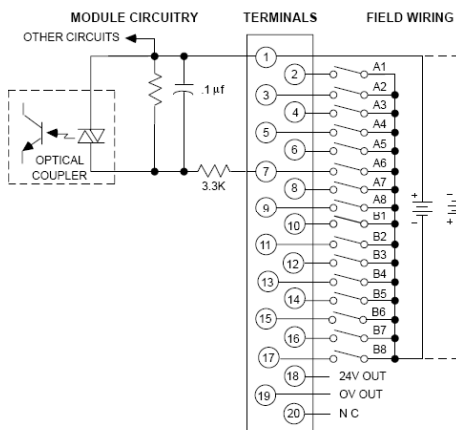


PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP

DIGITAL INPUT

● IC693MDL645

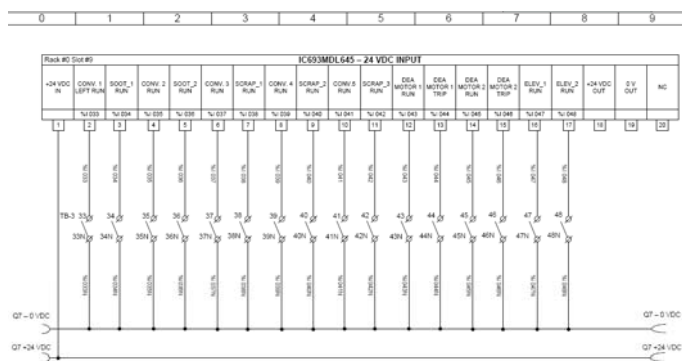

 PT. SINAR ALAM PERMAI KUMAI Jl. Indragiri 01/02 Bogor (Jawa) Telp. 0251-8750000 Fax. 0251-8750000 E-MAIL: info@pt.sinaralampermaikumi.com	PROJECT: PLC AND INVERTER FOR BOILER TAKUMA N750 SA		DATE	DESIGNED BY	DRAWN BY	CHECKED BY					
			MARCH 2009	MY	MY	CWT					
	CLIENT: PT. SAP. KUMAI	TITLE: RACK NO SLOT 9: IC693MDL645-DIGITAL INPUT	DWS								
			SAPK-02-03-2008								
		0	1	2	3	4	5	6	7	8	9

PT. SINAR ALAM PERMAI - KUMAI


WILMAR
GROUP

DIGITAL OUTPUT

IC693MDL740

Untuk :

- Command/perintah : start/stop motor, open/close valve aktuator, dll

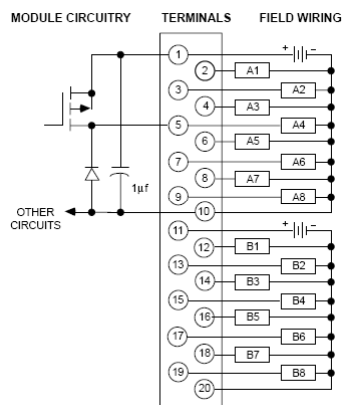


PT. SINAR ALAM PERMAI - KUMAI

WILMAR
GROUP


DIGITAL OUTPUT

IC693MDL740

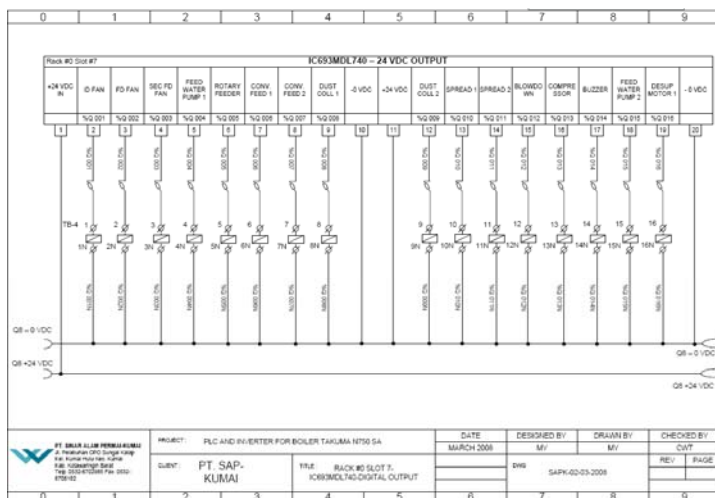

ANALOG INPUT

● **IC693ALG223**

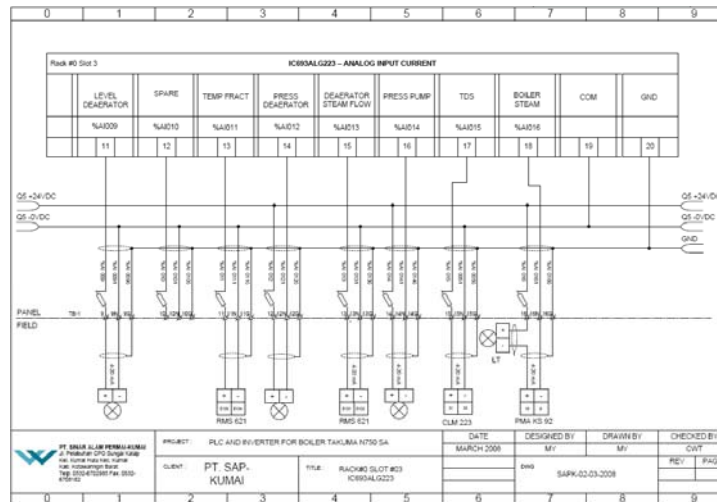


ANALOG OUTPUT

● **IC693ALG392**


Untuk :

- Command analog : control valve, inverter speed

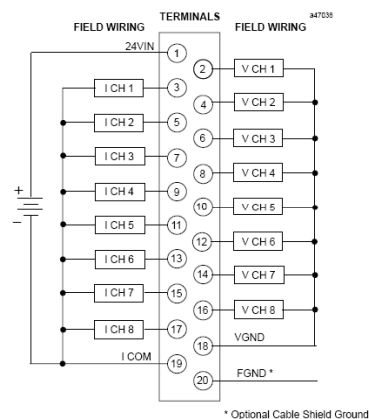

ANALOG OUTPUT

● **IC693ALG392**

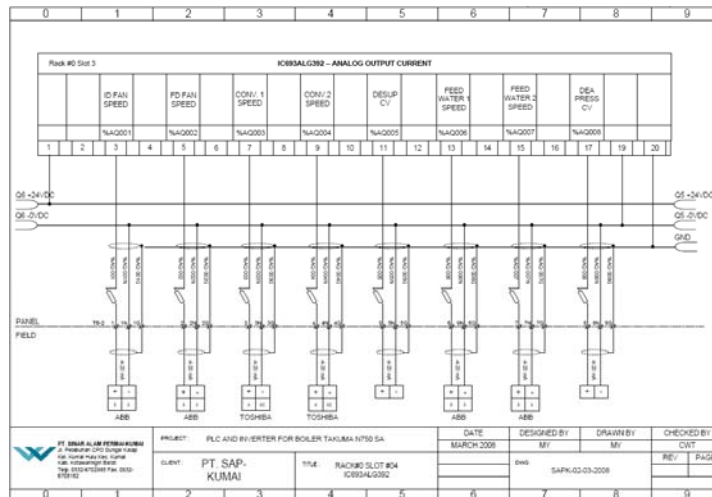

TROUBLESHOOTING

- Module Input/Output

