- **Control Inputs V_{IH}/V_{IL} Levels are Referenced to V_{CCA} Voltage**
- **Fully Configurable Dual-Rail Design Allows Each Port to Operate Over the Full 1.2-V to 3.6-V Power-Supply Range**
- **I/Os Are 4.6-V Tolerant**
- **I_{off} Supports Partial-Power-Down Mode Operation**

D, DB, DGV, OR PW PACKAGE
(TOP VIEW)



RGY PACKAGE
(TOP VIEW)

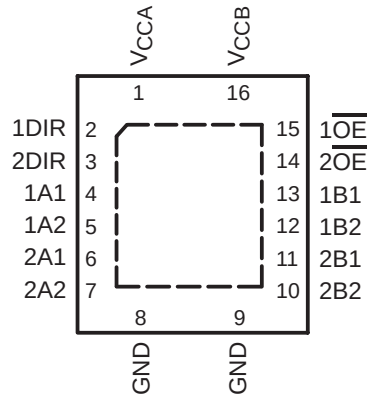

description/ordering information

This 4-bit noninverting bus transceiver uses two separate configurable power-supply rails. The A port is designed to track V_{CCA}. V_{CCA} accepts any supply voltage from 1.2 V to 3.6 V. The B port is designed to track V_{CCB}. V_{CCB} accepts any supply voltage from 1.2 V to 3.6 V. This allows for universal low-voltage bidirectional translation between any of the 1.2-V, 1.5-V, 1.8-V, 2.5-V, and 3.3-V voltage nodes.

The SN74AVC4T245 is designed for asynchronous communication between data buses. The device transmits data from the A bus to the B bus or from the B bus to the A bus, depending on the logic level at the direction-control (DIR) input. The output-enable ($\overline{OE}$) input can be used to disable the outputs so the buses are effectively isolated.

The SN74AVC4T245 is designed so that the control pins (1DIR, 2DIR, $1\overline{OE}$, and $2\overline{OE}$) are supplied by V_{CCA}.

This device is fully specified for partial-power-down applications using I_{off}. The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

ORDERING INFORMATION

T_A	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
−40°C to 85°C	QFN − RGY	Tape and reel	SN74AVC4T245RGYR	
	SOIC − D	Tube	SN74AVC4T245D	
		Tape and reel	SN74AVC4T245DR	
	SSOP − DB	Tape and reel	SN74AVC4T245DBR	
	TSSOP − PW	Tube	SN74AVC4T245PW	
		Tape and reel	SN74AVC4T245PWR	
	TVSOP − DGV	Tape and reel	SN74AVC4T245DGVR	

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

PRODUCT PREVIEW

description/ordering information (continued)

The V_{CC} isolation feature ensures that if either V_{CC} input is at GND, then both ports are in the high-impedance state.

To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

FUNCTION TABLE
(each 4-bit section)

INPUTS		OPERATION
$\overline{OE}$	DIR	
L	L	B data to A bus
L	H	A data to B bus
H	X	Isolation

logic diagram (positive logic)

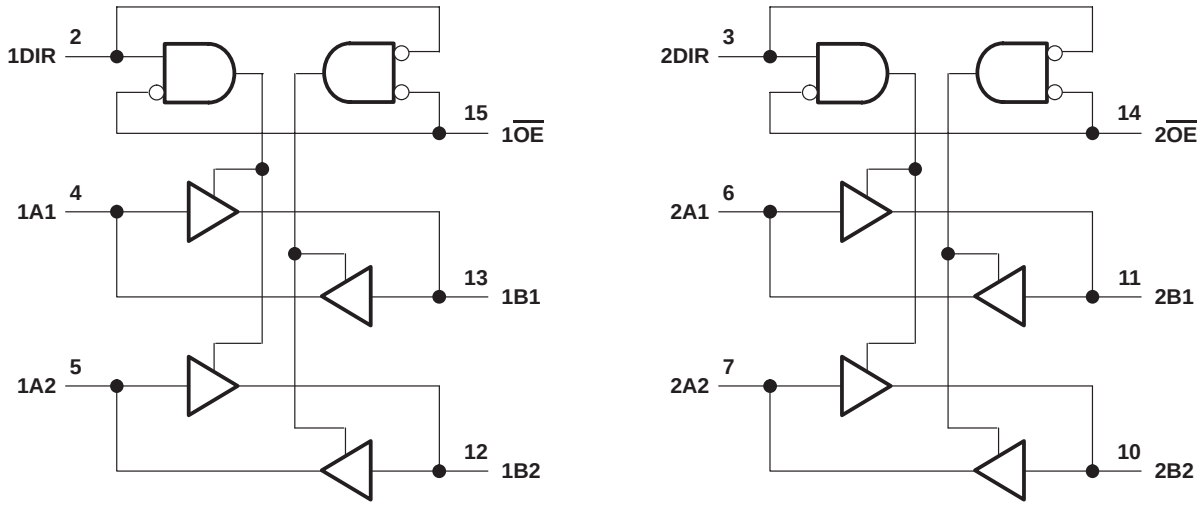

PRODUCT PREVIEW

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V_{CCA} and V_{CCB}	−0.5 V to 4.6 V
Input voltage range, V_I (see Note 1): I/O ports (A port)	−0.5 V to 4.6 V
I/O ports (B port)	−0.5 V to 4.6 V
Control inputs	−0.5 V to 4.6 V
Voltage range applied to any output in the high-impedance or power-off state, V_O (see Note 1): (A port)	−0.5 V to 4.6 V
(B port)	−0.5 V to 4.6 V
Voltage range applied to any output in the high or low state, V_O (see Notes 1 and 2): (A port)	−0.5 V to V_{CCA} + 0.5 V
(B port)	−0.5 V to V_{CCB} + 0.5 V
Input clamp current, I_{IK} (V_I < 0)	−50 mA
Output clamp current, I_{OK} (V_O < 0)	−50 mA
Continuous output current, I_O	±50 mA
Continuous current through V_{CCA}, V_{CCB}, or GND	±100 mA
Package thermal impedance, θ_{JA} (see Note 3): D package	73°C/W
(see Note 3): DB package	82°C/W
(see Note 3): DGV package	120°C/W
(see Note 3): PW package	108°C/W
(see Note 4): RGY package	39°C/W
Storage temperature range, T_{stg}	−65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input voltage and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
2. The output positive-voltage rating may be exceeded up to 4.6 V maximum if the output current rating is observed.
3. The package thermal impedance is calculated in accordance with JESD 51-7.
4. The package thermal impedance is calculated in accordance with JESD 51-5.

recommended operating conditions (see Notes 5 through 7)

			V_{CCI}	V_{CCO}	MIN	MAX	UNIT
V_{CCA}	Supply voltage				1.2	3.6	V
V_{CCB}	Supply voltage				1.2	3.6	V
V_{IH}	High-level input voltage	Data inputs (see Note 8)	1.2 V to 1.95 V		$V_{CCI} \times 0.65$		V
			1.95 V to 2.7 V		1.6		
			2.7 V to 3.6 V		2		
V_{IL}	Low-level input voltage	Data inputs (see Note 8)	1.2 V to 1.95 V			$V_{CCI} \times 0.35$	V
			1.95 V to 2.7 V			0.7	
			2.7 V to 3.6 V			0.8	
V_{IH}	High-level input voltage	DIR (Referenced to V_{CCA}) (see Note 9)	1.2 V to 1.95 V		$V_{CCA} \times 0.65$		V
			1.95 V to 2.7 V		1.6		
			2.7 V to 3.6 V		2		
V_{IL}	Low-level input voltage	DIR (Referenced to V_{CCA}) (see Note 9)	1.2 V to 1.95 V			$V_{CCA} \times 0.35$	V
			1.95 V to 2.7 V			0.7	
			2.7 V to 3.6 V			0.8	
V_I	Input voltage				0	3.6	V
V_O	Output voltage	Active state			0	V_{CCO}	V
		3-state			0	3.6	
I_{OH}	High-level output current			1.2 V		−3	mA
				1.4 V to 1.6 V		−6	
				1.65 V to 1.95 V		−8	
				2.3 V to 2.7 V		−9	
				3 V to 3.6 V		−12	
I_{OL}	Low-level output current			1.2 V		3	mA
				1.4 V to 1.6 V		6	
				1.65 V to 1.95 V		8	
				2.3 V to 2.7 V		9	
				3 V to 3.6 V		12	
$\Delta t/\Delta v$	Input transition rise or fall rate					5	ns/V
T_A	Operating free-air temperature				−40	85	°C

NOTES: 5. V_{CCI} is the V_{CC} associated with the data input port.
6. V_{CCO} is the V_{CC} associated with the output port.
7. All unused data inputs of the device must be held at V_{CCI} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.
8. For V_{CCI} values not specified in the data sheet, $V_{IH(min)} = V_{CCI} \times 0.7$ V, $V_{IL(max)} = V_{CCI} \times 0.3$ V.
9. For V_{CCI} values not specified in the data sheet, $V_{IH(min)} = V_{CCA} \times 0.7$ V, $V_{IL(max)} = V_{CCA} \times 0.3$ V.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted) (see Notes 10 and 11)

PARAMETER		TEST CONDITIONS		V_{CCA}	V_{CCB}	T_A = 25°C			−40°C to 85°C		UNIT
						MIN	TYP	MAX	MIN	MAX	
V_{OH}		I_{OH} = −100 μA	$V_I = V_{IH}$	1.2 V to 3.6 V	1.2 V to 3.6 V				V_{CCO}−0.2 V		V
		I_{OH} = −3 mA		1.2 V	1.2 V		0.95				
		I_{OH} = −6 mA		1.4 V	1.4 V				1.05		
		I_{OH} = −8 mA		1.65 V	1.65 V				1.2		
		I_{OH} = −9 mA		2.3 V	2.3 V				1.75		
		I_{OH} = −12 mA		3 V	3 V				2.3		
V_{OL}		I_{OL} = 100 μA	$V_I = V_{IL}$	1.2 V to 3.6 V	1.2 V to 3.6 V					0.2	V
		I_{OL} = 3 mA		1.2 V	1.2 V		0.25				
		I_{OL} = 6 mA		1.4 V	1.4 V					0.35	
		I_{OL} = 8 mA		1.65 V	1.65 V					0.45	
		I_{OL} = 9 mA		2.3 V	2.3 V					0.55	
		I_{OL} = 12 mA		3 V	3 V					0.7	
I_I	DIR input	$V_I = V_{CCA}$ or GND		1.2 V to 3.6 V	1.2 V to 3.6 V		±0.025	±0.25		±1	μA
I_{off}	A or B port	V_I or V_O = 0 to 3.6 V		0 V	0 to 3.6 V		±0.1	±1		±5	μA
				0 to 3.6 V	0 V		±0.1	±1		±5	
I_{OZ}†	A or B port	$V_O = V_{CCO}$ or GND, $V_I = V_{CCI}$ or GND	$\overline{OE} = V_{IH}$	3.6 V	3.6 V		±0.5	±2.5		±5	μA
I_{CCA}		$V_I = V_{CCI}$ or GND	I_O = 0	1.2 V to 3.6 V	1.2 V to 3.6 V						μA
				0 V	3.6 V						
				3.6 V	0 V						
I_{CCB}		$V_I = V_{CCI}$ or GND	I_O = 0	1.2 V to 3.6 V	1.2 V to 3.6 V						μA
				0 V	3.6 V						
				3.6 V	0 V						
$I_{CCA} + I_{CCB}$		$V_I = V_{CCI}$ or GND	I_O = 0	1.2 V to 3.6 V	1.2 V to 3.6 V						μA
C_i	Control inputs	V_I = 3.3 V or GND		3.3 V	3.3 V						pF
C_{io}	A or B ports	V_O = 3.3 V or GND		3.3 V	3.3 V						pF

NOTES: 10. V_{CCO} is the V_{CC} associated with the output port.
11. V_{CCI} is the V_{CC} associated with the input port.

PRODUCT PREVIEW

switching characteristics over recommended operating free-air temperature range, V_{CCA} = 1.2 V (see Figure 11)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CCB} = 1.2 V	V_{CCB} = 1.5 V	V_{CCB} = 1.8 V	V_{CCB} = 2.5 V	V_{CCB} = 3.3 V	UNIT
			TYP	TYP	TYP	TYP	TYP	
t_{PLH}	A	B						ns
t_{PHL}								
t_{PLH}	B	A						ns
t_{PHL}								
t_{PZH}	$\overline{OE}$	A						ns
t_{PZL}								
t_{PZH}	$\overline{OE}$	B						ns
t_{PZL}								
t_{PHZ}	$\overline{OE}$	A						ns
t_{PLZ}								
t_{PHZ}	$\overline{OE}$	B						ns
t_{PLZ}								

switching characteristics over recommended operating free-air temperature range, V_{CCA} = 1.5 V ± 0.1 V (see Figure 11)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CCB} = 1.2 V	V_{CCB} = 1.5 V ± 0.1 V		V_{CCB} = 1.8 V ± 0.15 V		V_{CCB} = 2.5 V ± 0.2 V		V_{CCB} = 3.3 V ± 0.3 V		UNIT
			TYP	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	B										ns
t_{PHL}												
t_{PLH}	B	A										ns
t_{PHL}												
t_{PZH}	$\overline{OE}$	A										ns
t_{PZL}												
t_{PZH}	$\overline{OE}$	B										ns
t_{PZL}												
t_{PHZ}	$\overline{OE}$	A										ns
t_{PLZ}												
t_{PHZ}	$\overline{OE}$	B										ns
t_{PLZ}												

PRODUCT PREVIEW

switching characteristics over recommended operating free-air temperature range, V_{CCA} = 1.8 V ± 0.15 V (see Figure 11)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CCB} = 1.2 V	V_{CCB} = 1.5 V ± 0.1 V		V_{CCB} = 1.8 V ± 0.15 V		V_{CCB} = 2.5 V ± 0.2 V		V_{CCB} = 3.3 V ± 0.3 V		UNIT
			TYP	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	B										ns
t_{PHL}												
t_{PLH}	B	A										ns
t_{PHL}												
t_{PZH}	$\overline{OE}$	A										ns
t_{PZL}												
t_{PZH}	$\overline{OE}$	B										ns
t_{PZL}												
t_{PHZ}	$\overline{OE}$	A										ns
t_{PLZ}												
t_{PHZ}	$\overline{OE}$	B										ns
t_{PLZ}												

switching characteristics over recommended operating free-air temperature range, V_{CCA} = 2.5 V ± 0.2 V (see Figure 11)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CCB} = 1.2 V	V_{CCB} = 1.5 V ± 0.1 V		V_{CCB} = 1.8 V ± 0.15 V		V_{CCB} = 2.5 V ± 0.2 V		V_{CCB} = 3.3 V ± 0.3 V		UNIT
			TYP	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	B										ns
t_{PHL}												
t_{PLH}	B	A										ns
t_{PHL}												
t_{PZH}	$\overline{OE}$	A										ns
t_{PZL}												
t_{PZH}	$\overline{OE}$	B										ns
t_{PZL}												
t_{PHZ}	$\overline{OE}$	A										ns
t_{PLZ}												
t_{PHZ}	$\overline{OE}$	B										ns
t_{PLZ}												

PRODUCT PREVIEW

switching characteristics over recommended operating free-air temperature range, V_{CCA} = 3.3 V ± 0.3 V (see Figure 11)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CCB} = 1.2 V	V_{CCB} = 1.5 V ± 0.1 V		V_{CCB} = 1.8 V ± 0.15 V		V_{CCB} = 2.5 V ± 0.2 V		V_{CCB} = 3.3 V ± 0.3 V		UNIT
			TYP	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	B										ns
t_{PHL}												
t_{PLH}	B	A										ns
t_{PHL}												
t_{PZH}	$\overline{OE}$	A										ns
t_{PZL}												
t_{PZH}	$\overline{OE}$	B										ns
t_{PZL}												
t_{PHZ}	$\overline{OE}$	A										ns
t_{PLZ}												
t_{PHZ}	$\overline{OE}$	B										ns
t_{PLZ}												

operating characteristics, T_A = 25°C

PARAMETER			TEST CONDITIONS	V_{CCA} = V_{CCB} = 1.2 V	V_{CCA} = V_{CCB} = 1.5 V	V_{CCA} = V_{CCB} = 1.8 V	V_{CCA} = V_{CCB} = 2.5 V	V_{CCA} = V_{CCB} = 3.3 V	UNIT
				TYP	TYP	TYP	TYP	TYP	
C_{pdA}†	A to B	Outputs Enabled	C_L = 0, f = 10 MHz, t_r = t_f = 1 ns						pF
		Outputs Disabled							
	B to A	Outputs Enabled							
		Outputs Disabled							
C_{pdB}†	A to B	Outputs Enabled	C_L = 0, f = 10 MHz, t_r = t_f = 1 ns						pF
		Outputs Disabled							
	B to A	Outputs Enabled							
		Outputs Disabled							

† Power-dissipation capacitance per transceiver

power-up considerations

A proper power-up sequence always should be followed to avoid excessive supply current, bus contention, oscillations, or other anomalies. To guard against such power-up problems, take the following precautions:

1. Connect ground before any supply voltage is applied.
2. Power up V_{CCA}.
3. V_{CCB} can be ramped up along with or after V_{CCA}.

typical total static power consumption (I_{CCA} + I_{CCB})

V_{CCB}	V_{CCA}						UNIT
	0 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	
0 V							μA
1.2 V							
1.5 V							
1.8 V							
2.5 V							
3.3 V							

TABLE 1

PRODUCT PREVIEW

TYPICAL CHARACTERISTICS

TYPICAL PROPAGATION DELAY (A to B) vs LOAD CAPACITANCE, $T_A = 25°C$, $V_{CCA} = 1.2$ V

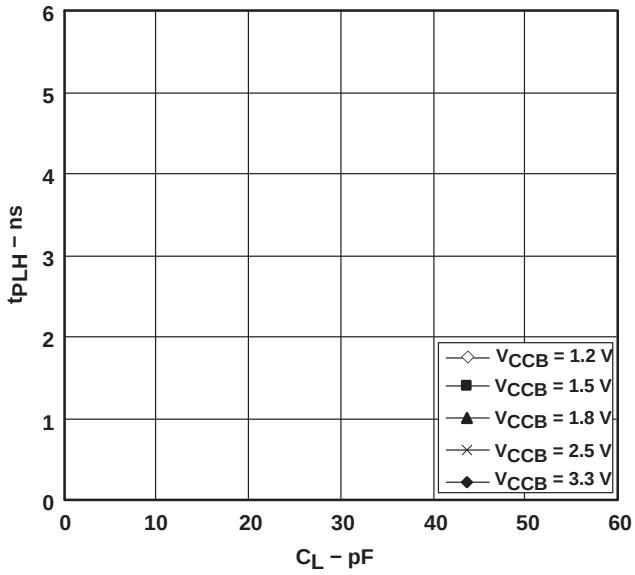

Figure 1

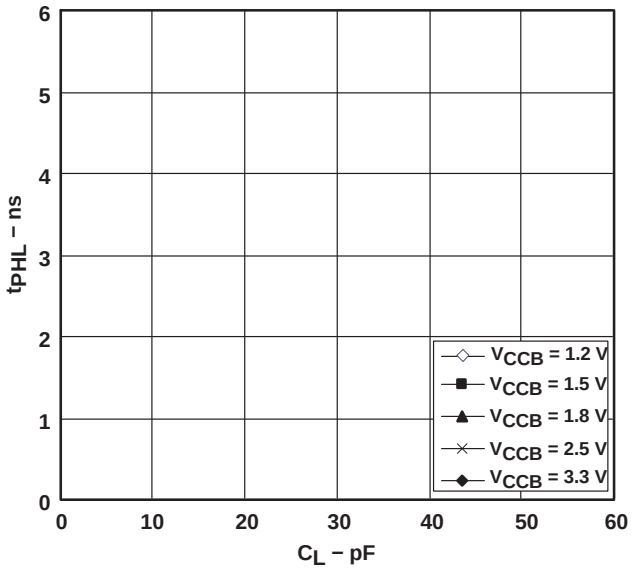

Figure 2

TYPICAL PROPAGATION DELAY (A to B) vs LOAD CAPACITANCE, $T_A = 25°C$, $V_{CCA} = 1.5$ V

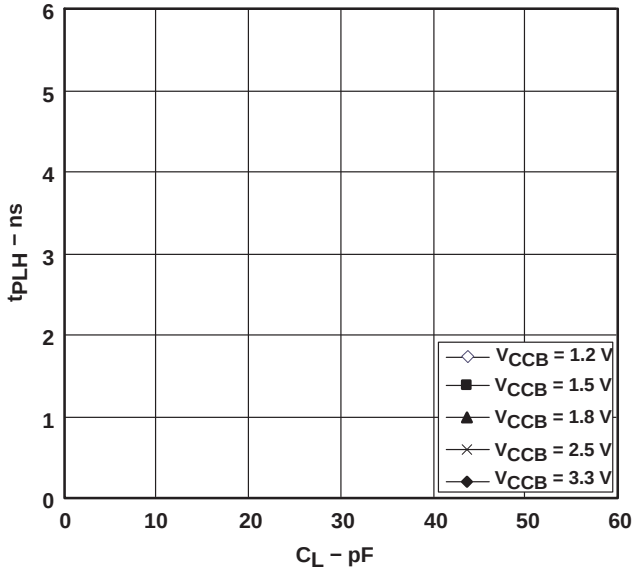

Figure 3

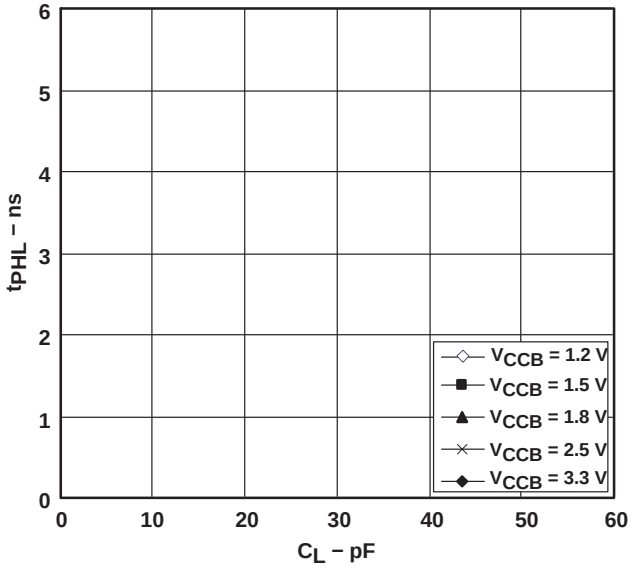

Figure 4

TYPICAL PROPAGATION DELAY (A to B) vs LOAD CAPACITANCE,
T_A = 25°C, V_{CCA} = 1.8 V

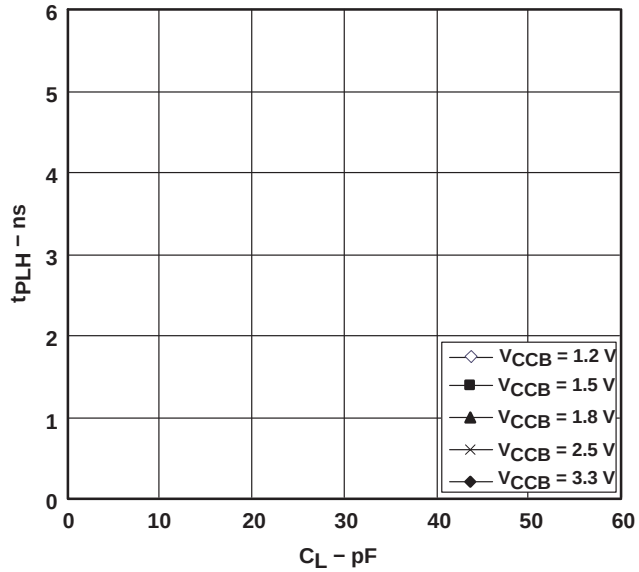

Figure 5

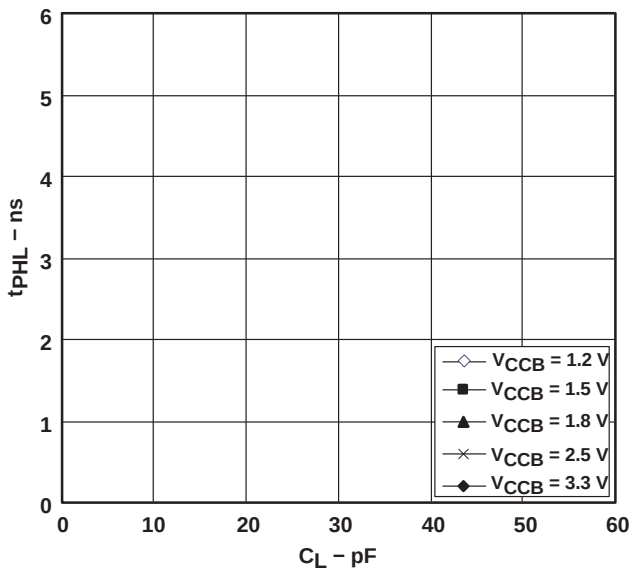

Figure 6

TYPICAL PROPAGATION DELAY (A to B) vs LOAD CAPACITANCE,
T_A = 25°C, V_{CCA} = 2.5 V

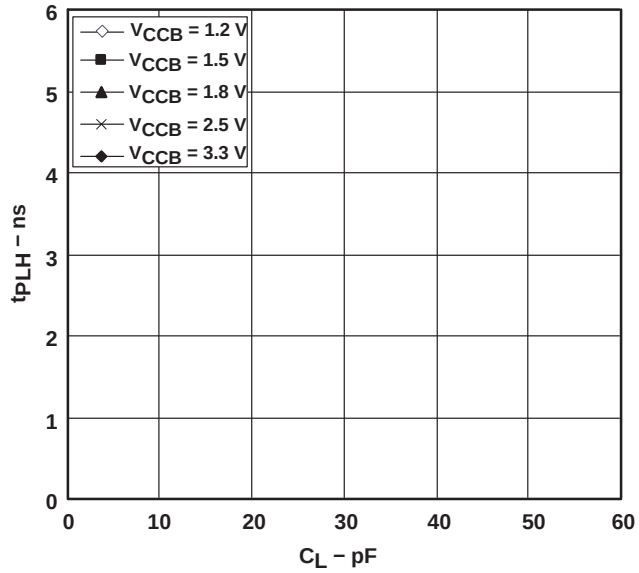

Figure 7

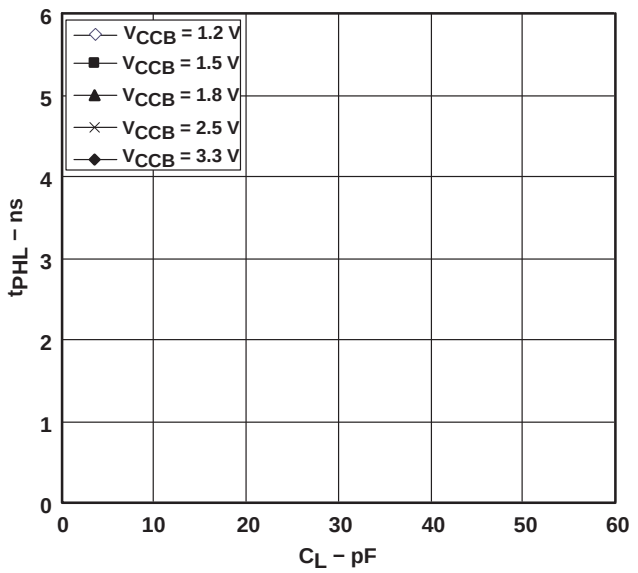

Figure 8

PRODUCT PREVIEW

TYPICAL PROPAGATION DELAY (A to B) vs LOAD CAPACITANCE,
T_A = 25°C, V_{CCA} = 3.3 V

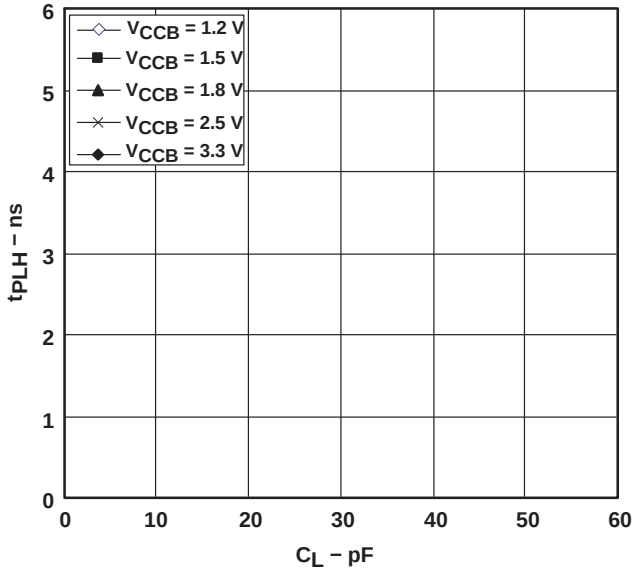

Figure 9

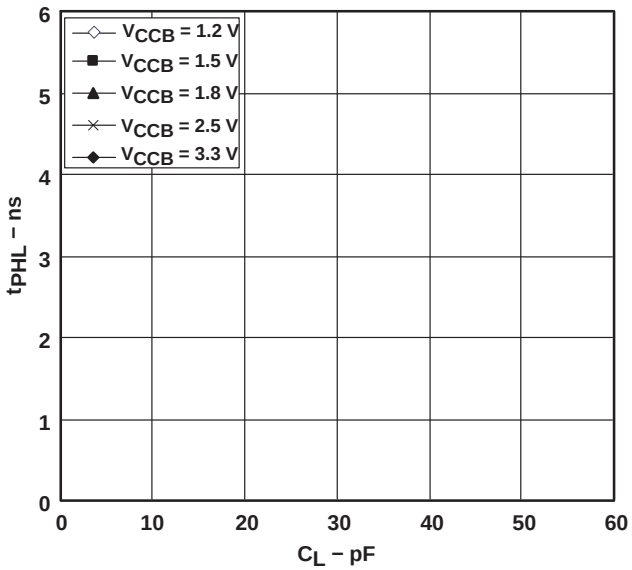

Figure 10

PRODUCT PREVIEW

PARAMETER MEASUREMENT INFORMATION

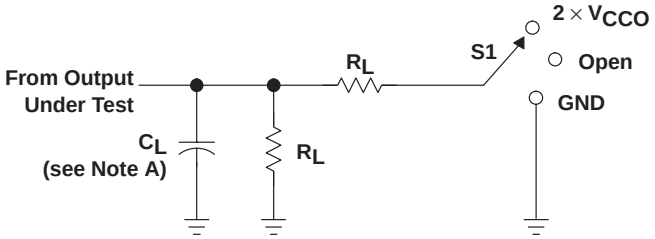

LOAD CIRCUIT

TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	$2 \times V_{CCO}$
t_{PHZ}/t_{PZH}	GND

V_{CCO}	C_L	R_L	V_{TP}
1.2 V	15 pF	2 kΩ	0.1 V
1.5 V ± 0.1 V	15 pF	2 kΩ	0.1 V
1.8 V ± 0.15 V	15 pF	2 kΩ	0.15 V
2.5 V ± 0.2 V	15 pF	2 kΩ	0.15 V
3.3 V ± 0.3 V	15 pF	2 kΩ	0.3 V

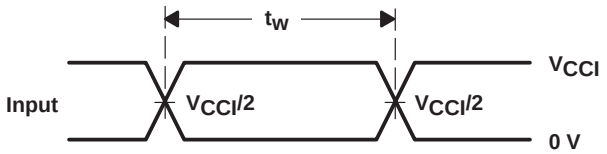

VOLTAGE WAVEFORMS
PULSE DURATION

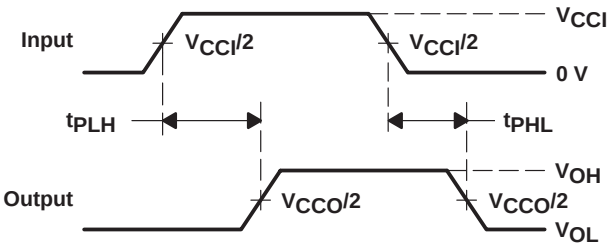

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES

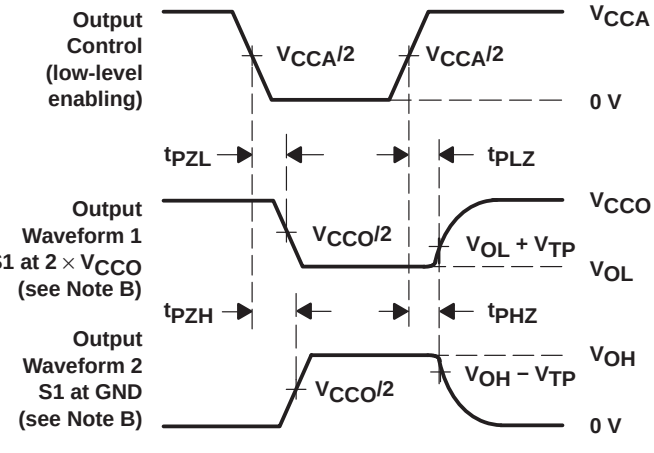

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES

NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, dv/dt ≥ 1 V/ns, dv/dt ≥1 V/ns.
D. The outputs are measured one at a time, with one transition per measurement.
E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
F. t_{PZL} and t_{PZH} are the same as t_{en}.
G. t_{PLH} and t_{PHL} are the same as t_{pd}.
H. V_{CCI} is the V_{CC} associated with the input port.
I. V_{CCO} is the V_{CC} associated with the output port.

Figure 11. Load Circuit and Voltage Waveforms

DGV (R-PDSO-G)** **PLASTIC SMALL-OUTLINE**

24 PINS SHOWN

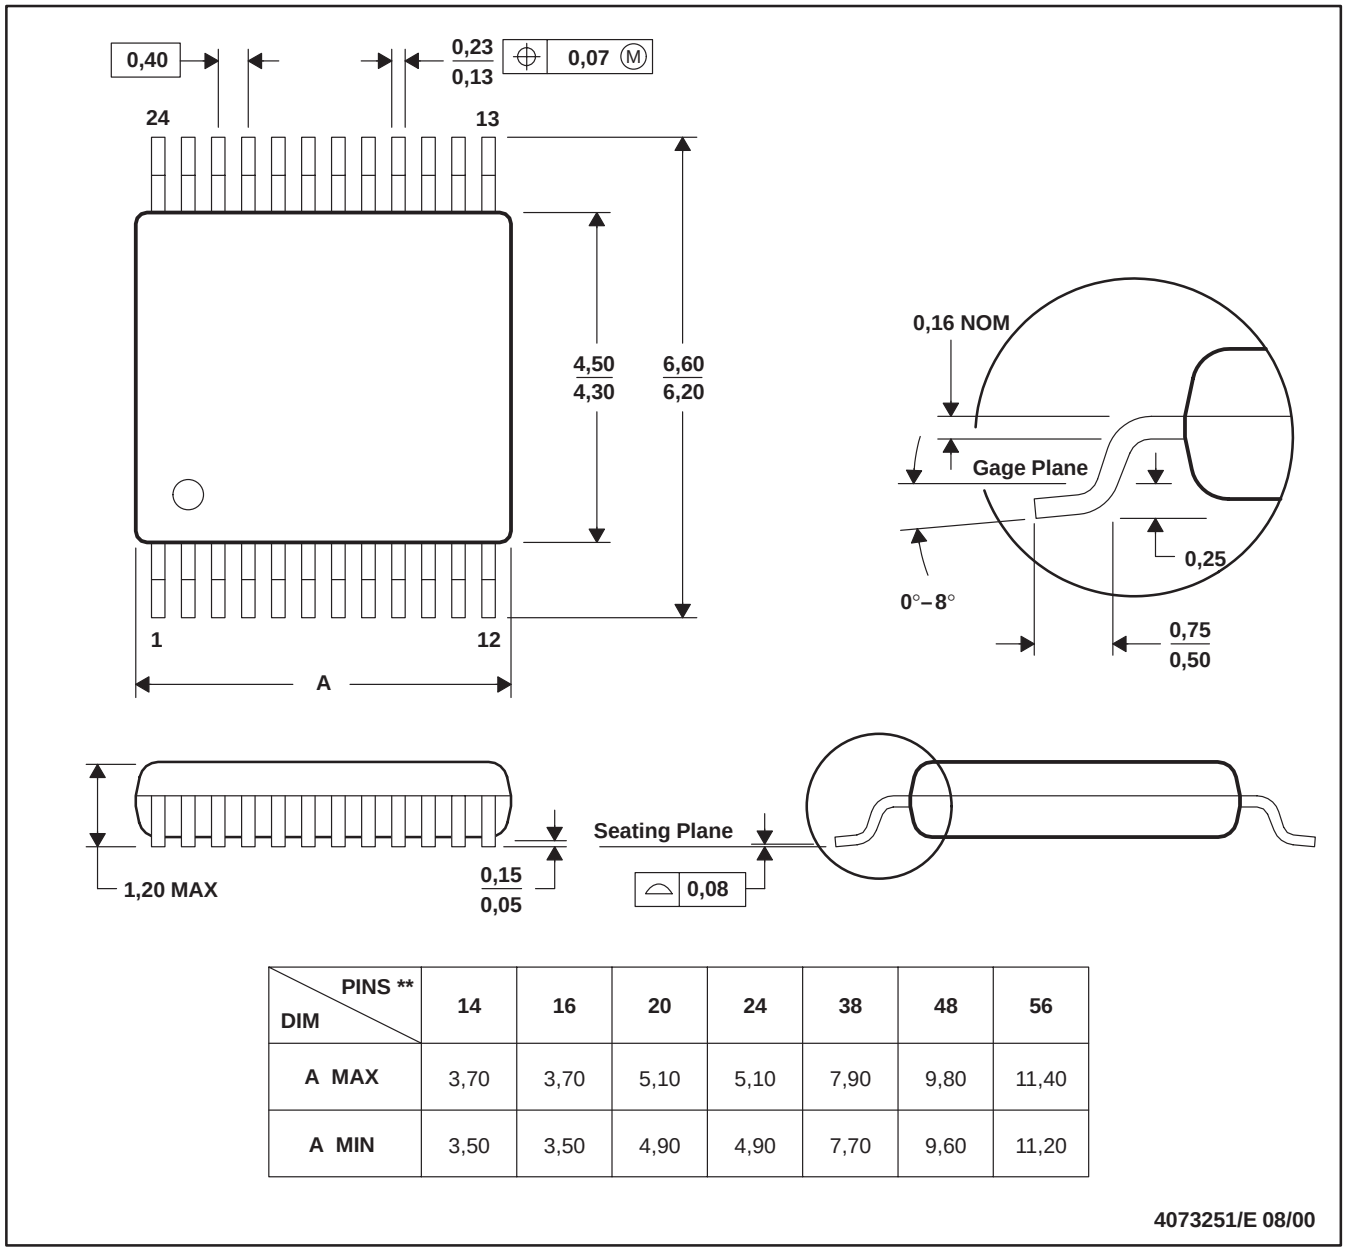

DIM \ PINS **	14	16	20	24	38	48	56
A MAX	3,70	3,70	5,10	5,10	7,90	9,80	11,40
A MIN	3,50	3,50	4,90	4,90	7,70	9,60	11,20

4073251/E 08/00

NOTES: A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.
D. Falls within JEDEC: 24/48 Pins – MO-153
14/16/20/56 Pins – MO-194

D (R–PDSO–G16) PLASTIC SMALL–OUTLINE PACKAGE

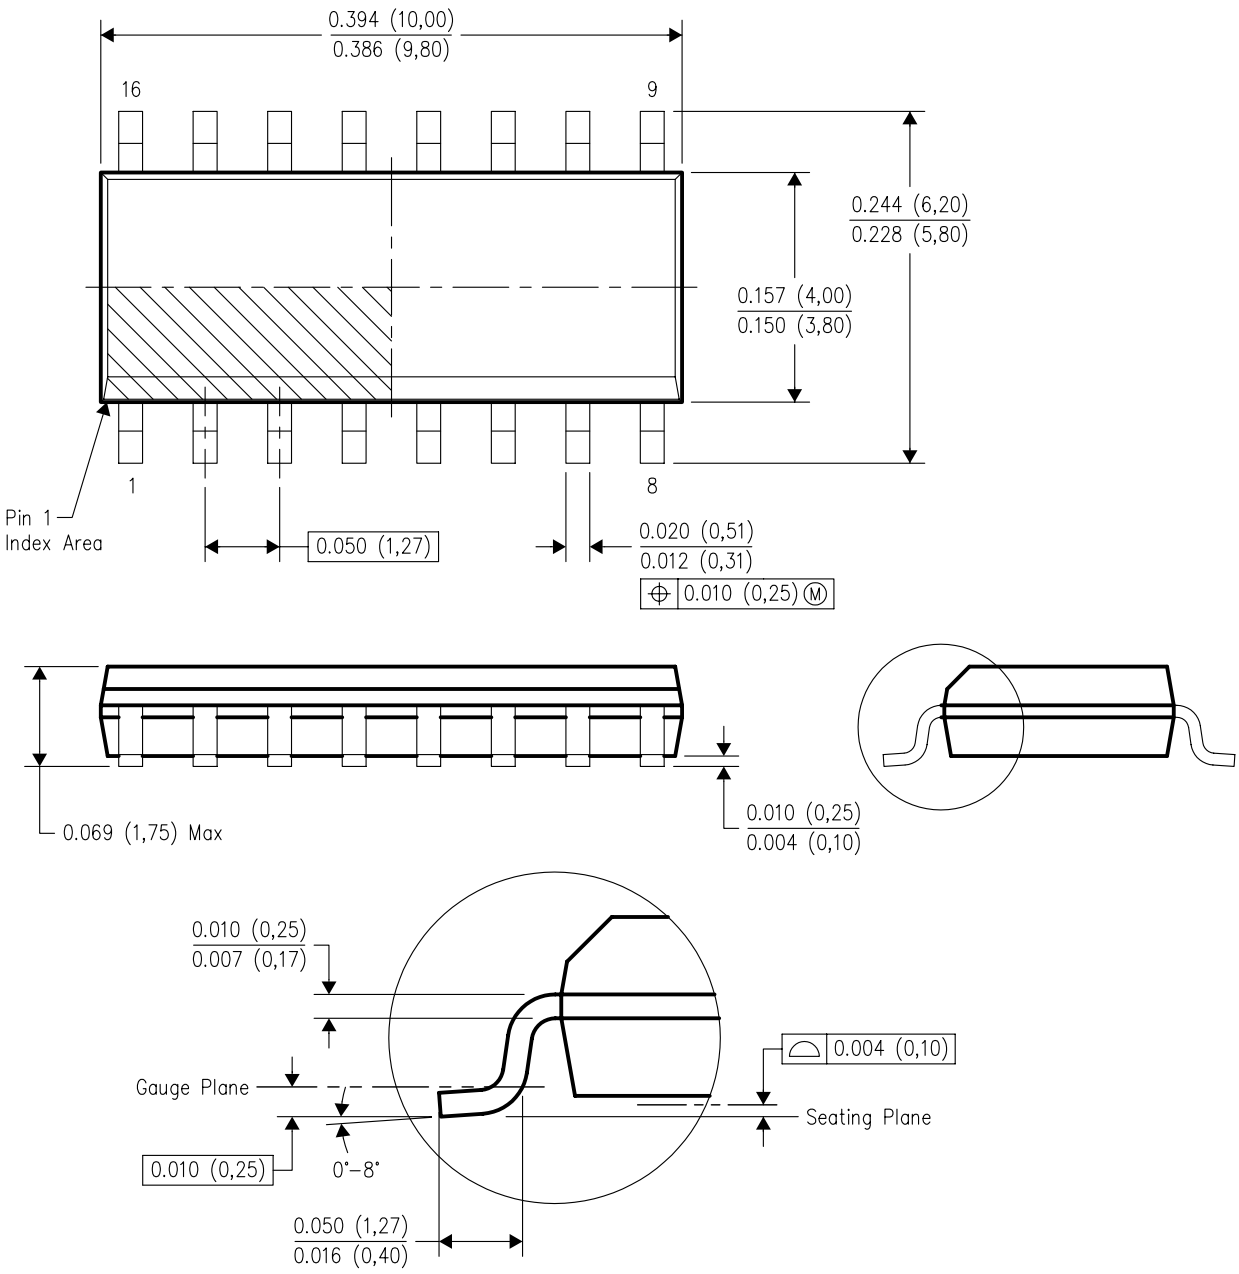

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
D. Falls within JEDEC MS–012 variation AC.

RGY (R–PQFP–N16) PLASTIC QUAD FLATPACK

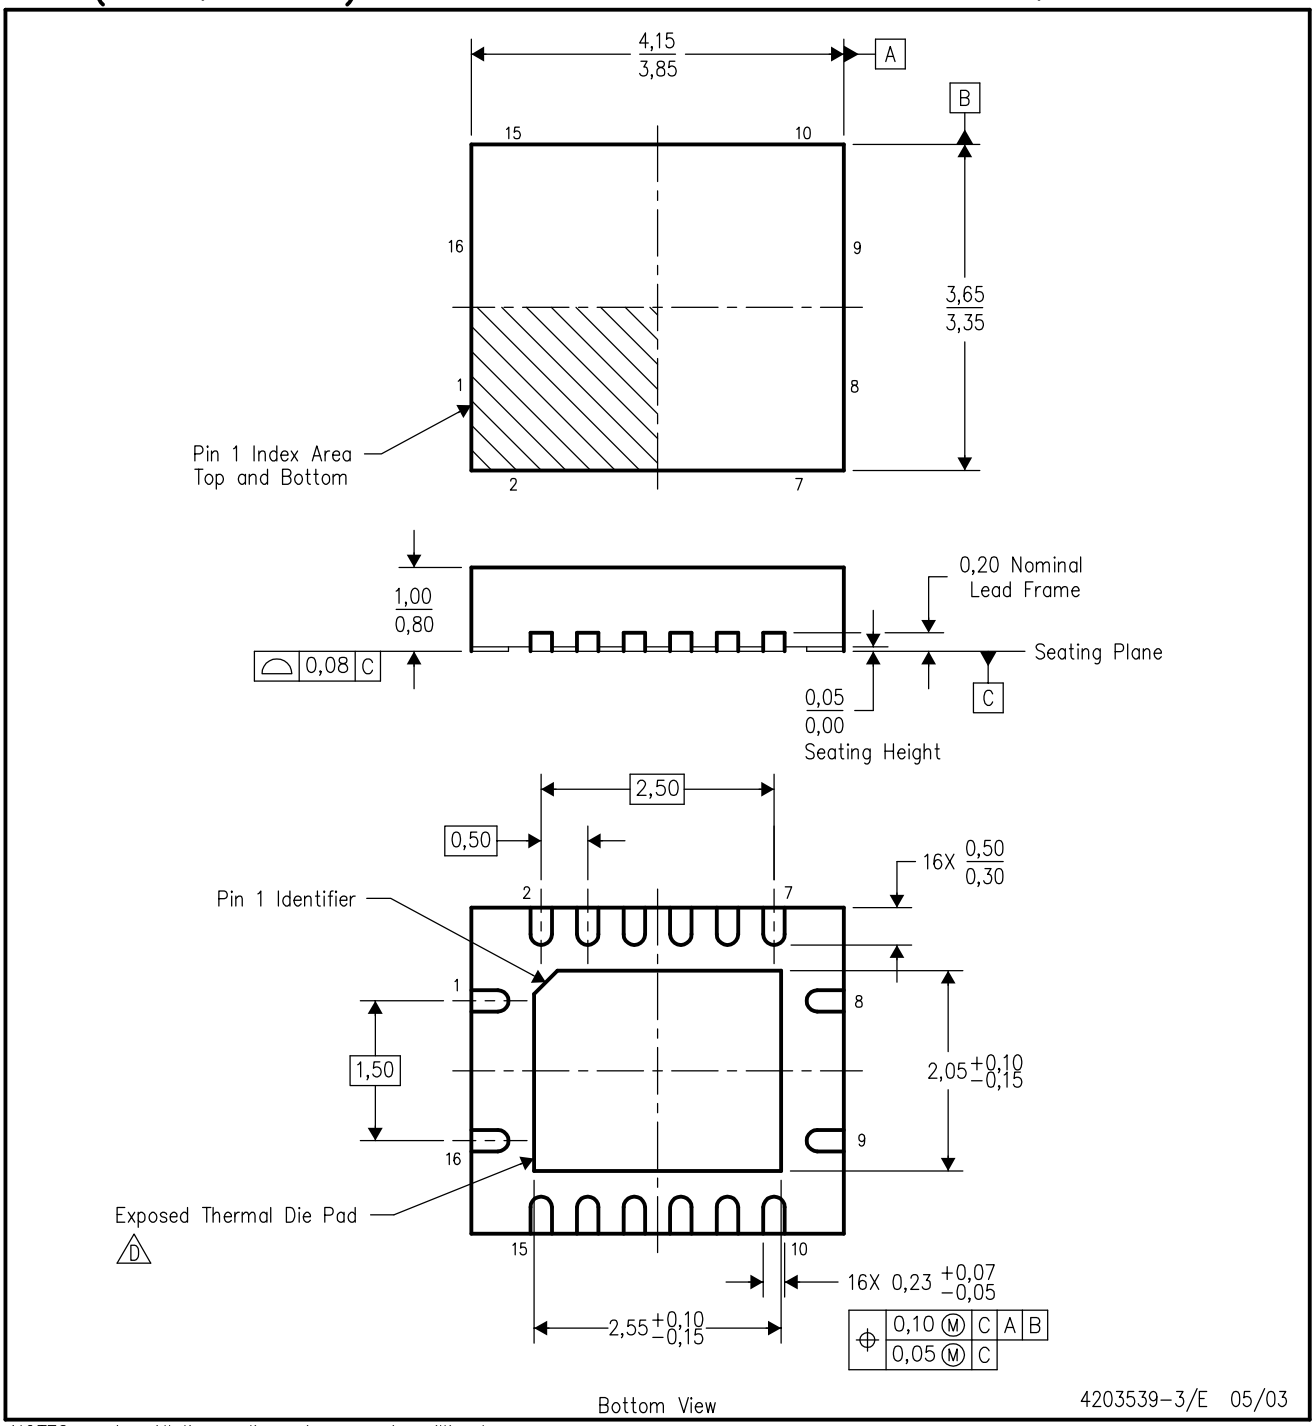

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. QFN (Quad Flatpack No–Lead) package configuration.
D. The package thermal performance may be enhanced by bonding the thermal die pad to an external thermal plane. This pad is electrically and thermally connected to the backside of the die and possibly selected ground leads.
E. Package complies to JEDEC MO–241 variation BB.

MSSO002E – JANUARY 1995 – REVISED DECEMBER 2001

DB (R-PDSO-G)** **PLASTIC SMALL-OUTLINE**

28 PINS SHOWN

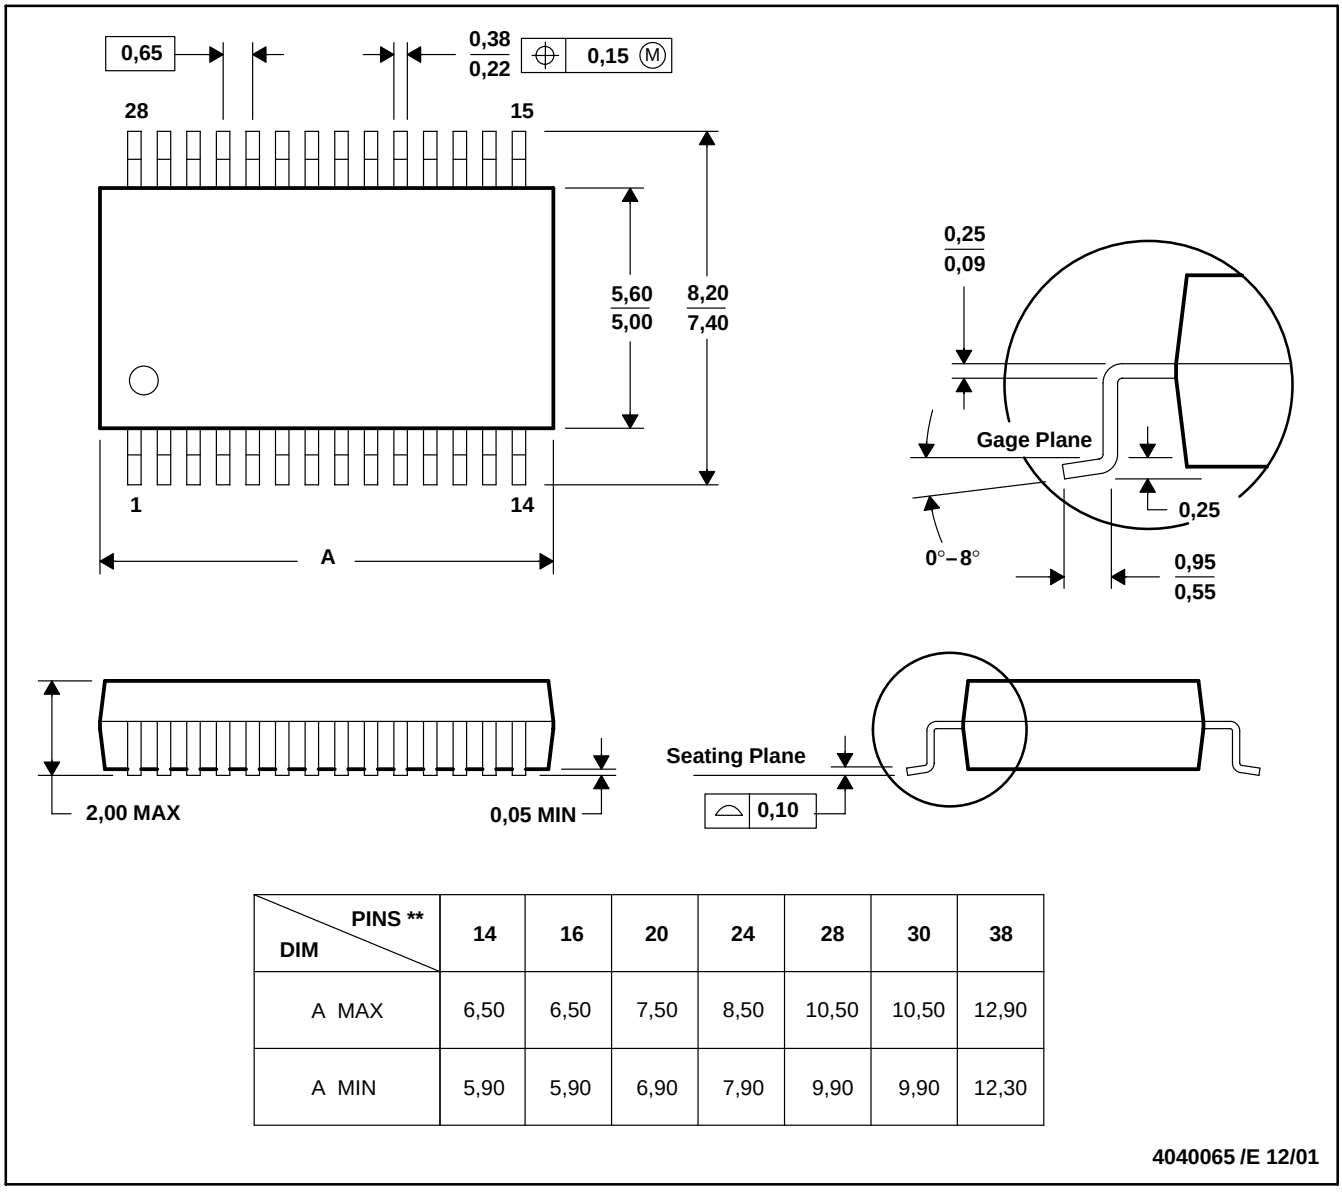

DIM \ PINS **	14	16	20	24	28	30	38
A MAX	6,50	6,50	7,50	8,50	10,50	10,50	12,90
A MIN	5,90	5,90	6,90	7,90	9,90	9,90	12,30

4040065 /E 12/01

NOTES: A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
D. Falls within JEDEC MO-150

PW (R-PDSO-G)** **PLASTIC SMALL-OUTLINE PACKAGE**

14 PINS SHOWN

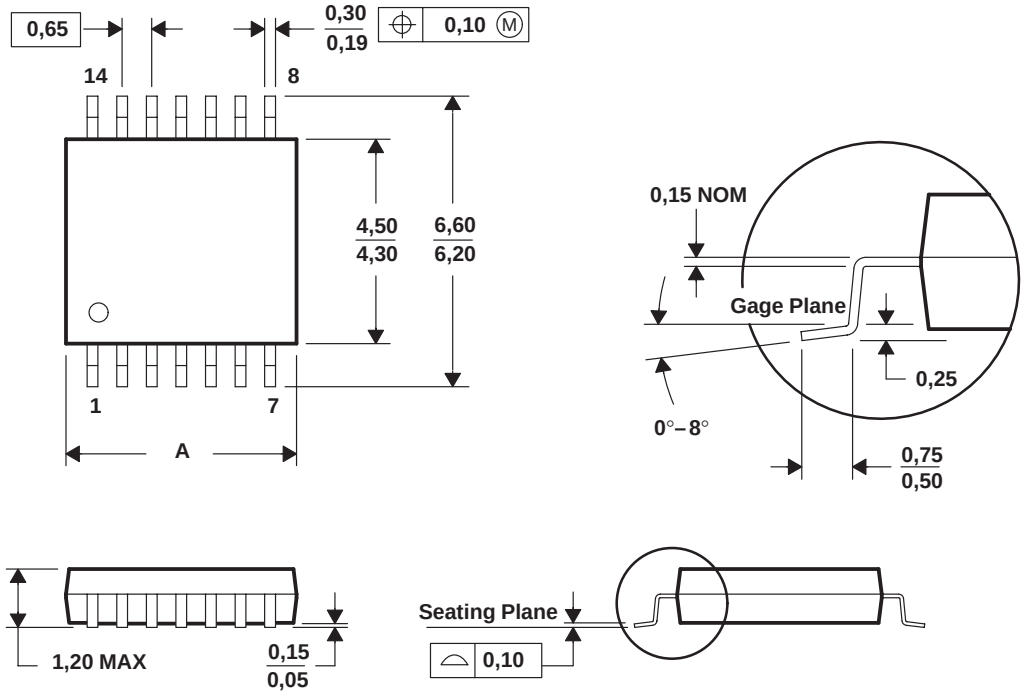

DIM \ PINS **	8	14	16	20	24	28
A MAX	3,10	5,10	5,10	6,60	7,90	9,80
A MIN	2,90	4,90	4,90	6,40	7,70	9,60

4040064/F 01/97

NOTES: A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265