


MSM8996 Superset: 3xDL, 2xDL, RF Block Diagram – Dual Main Antennas

1 - NA/ROW 3DL - 1,2,3,4,5,7,8,12,17,13,20,25,26,27,28,29,30,38,39,40,41 W - 1,2,4,5,8 C - N/A T - 34,39 4xGSM 2DL - B1+B3,B1+B8,B1+B19,B1+B20,B1+B26,B3+B3 NC,B3+B5,B3+B7,B3+B5,B3+B20,B3+B28,B3+B38,B4+B4 NC,B4+B28,B7+B7 NC,B7+B20,B7+B28,B28+B28 NC,B40+B40 NC,B41+B41 NC, 3DL - B1+B3+B28,B1+B5+B7,B1+B7+B20,B3+B3+B5,B3+B3+B7 NC,B3+B3+B20 NC,B3+B5+B7,B3+B7+B7 C,B3+B7+B7 NC,B3+B7+B20,B3+B7+B26,B3+B7+B28,B7+B7+B28 NC,B7+B20+B38,B41+B41 NC,B7+B20+B38,B41+B41 NC

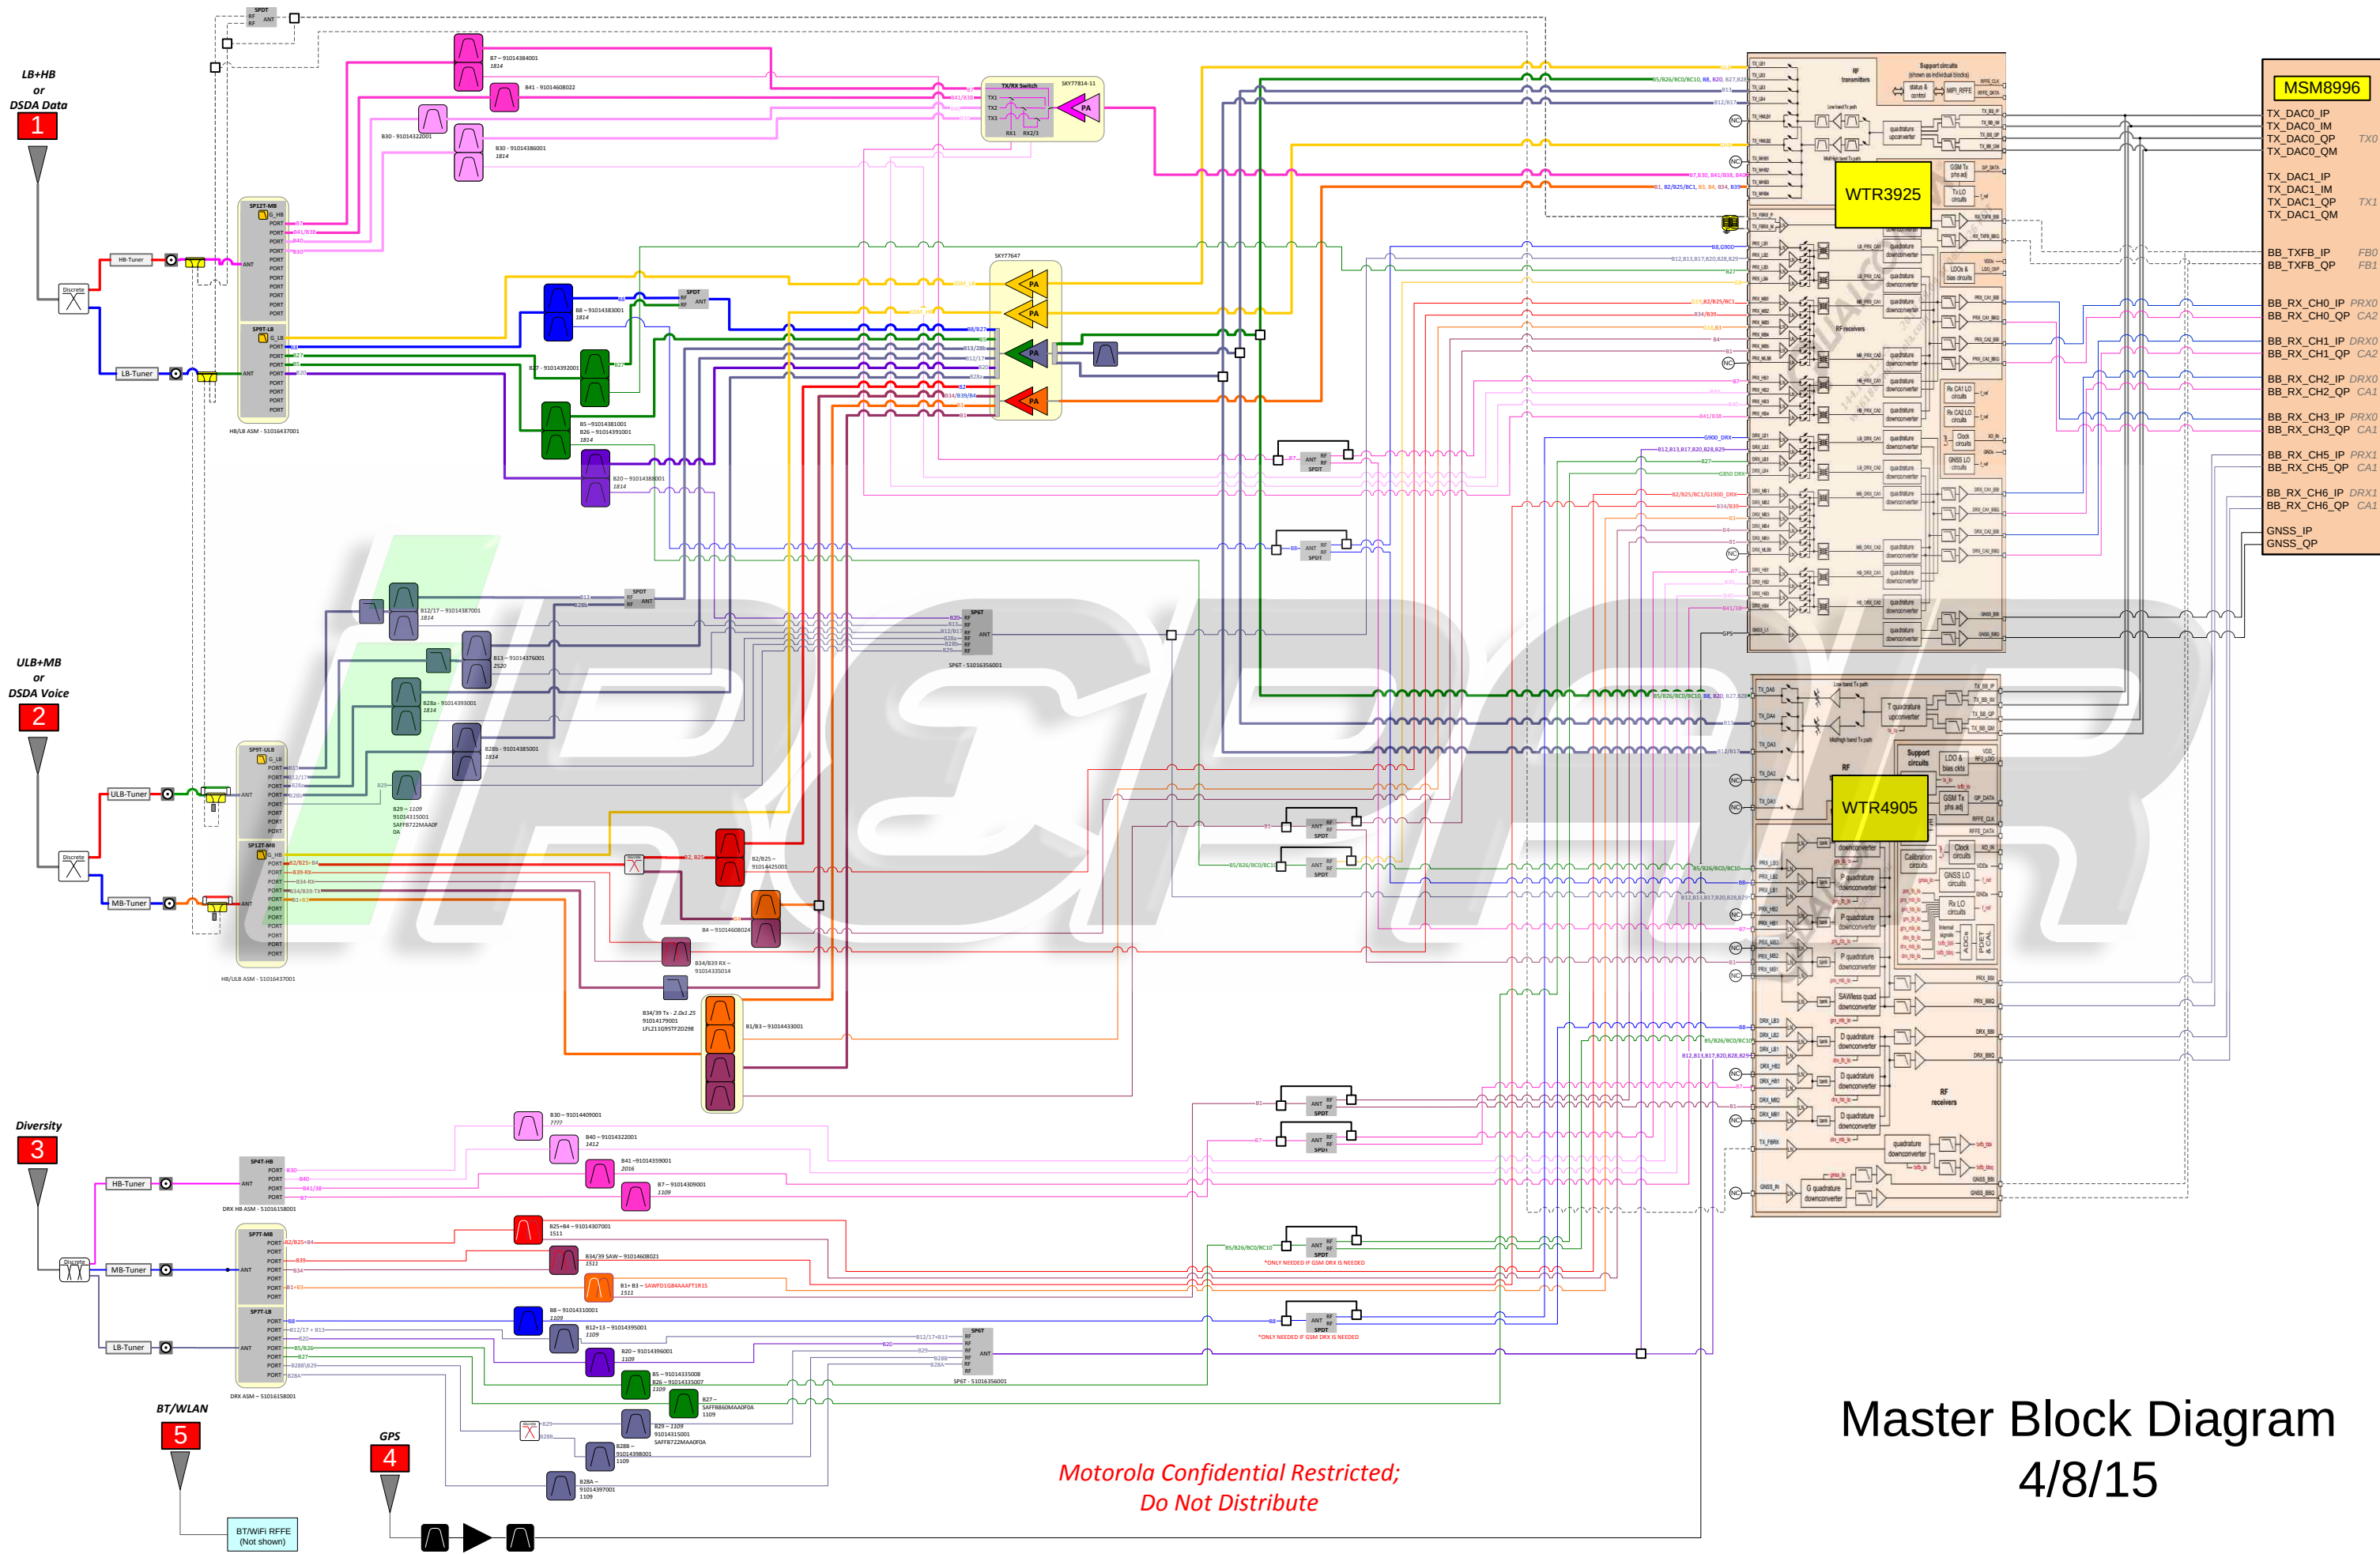

Motorola Confidential Restricted;
Do Not Distribute

Master Block Diagram
4/8/15

WTR3925/3905 Port Mapping

RF PORT	GSM	CDMA	WCDMA	FDD-LTE	TDD-LTE	TD-SCDMA
	QB	0, 1, 10	1,2,4,5,6,8,9,19	1,2,3,4,5,6,7,8,9,12,13,17,19, 20,25,26,27,28,29,30,38,39,4 0,41	38,39,40,41	34,39
TX_LB1	GLB					
TX_LB2		0,10	5,8	5,8,20,26,27,28		
TX_LB3				13		
TX_LB4				12,17		
TX_HMLB1						
TX_HMLB2	GHB					
TX_HMB1						
TX_HMB2				30	38,40,41	
TX_HMB3		1	1,2,4	1,2,3,4,25		34,39
TX_HMB4				7		
PRX_LB1	G900		8	8		
PRX_LB2						
PRX_LB3				27		
PRX_LB4	G850					
PRX_MB1	G1900	1	2	25		
PRX_MB2						34,39
PRX_MB3	G1800			3		
PRX_MB4			4	4		
PRX_MB5			1	1		
PRX_MLB6				12,13,17,20,28,29		
PRX_HB1				7		
PRX_HB2				30		
PRX_HB3					40	
PRX_HB4					41,38	
DRX_LB1	G900					
DRX_LB2						
DRX_LB3						
DRX_LB4	G850					
DRX_MB1	G1900	1	2	25		
DRX_MB2						34,39
DRX_MB3				3		
DRX_MB4			4	4		
DRX_MB5			1	1		
DRX_MLB6				12,13,17,20,28		
DRX_HB1				7		
DRX_HB2				30		
DRX_HB3					40	
DRX_HB4					41,38	

WTR4905/4605 Port Mapping

RF PORT	GSM	CDMA	WCDMA	FDD-LTE	TDD-LTE	TD-SCDMA
	QB	0, 1, 10	1,2,4,5,6,8,9,19	1,2,3,4,5,6,7,8,9,12,13,17,19,20,25,26,27,28,29,30,38,39,40,41	38,39,40,41	34,39
TX_DA1	GLB GHB	0,10	5,8	5,8,20,26,27,28		
TX_DA2				13		
TX_DA3				12,17		
TX_DA4						
TX_DA5						
PRX_LB1	CHINA_DCS			12,13,17,20,28,29		
PRX_LB2			8	8		
PRX_LB3		0,10	5	26		
PRX_MB1						
PRX_MB2			1	1		
PRX_MB3	G1800					
PRX_HB1				7		
PRX_HB2						
PRX_LB4						
DRX_LB1				12,13,17,28		
DRX_LB2		0,10	5	26		
DRX_LB3			8	8		
DRX_MB1						
DRX_MB2			1	1		
DRX_HB1				7		
DRX_HB2						