


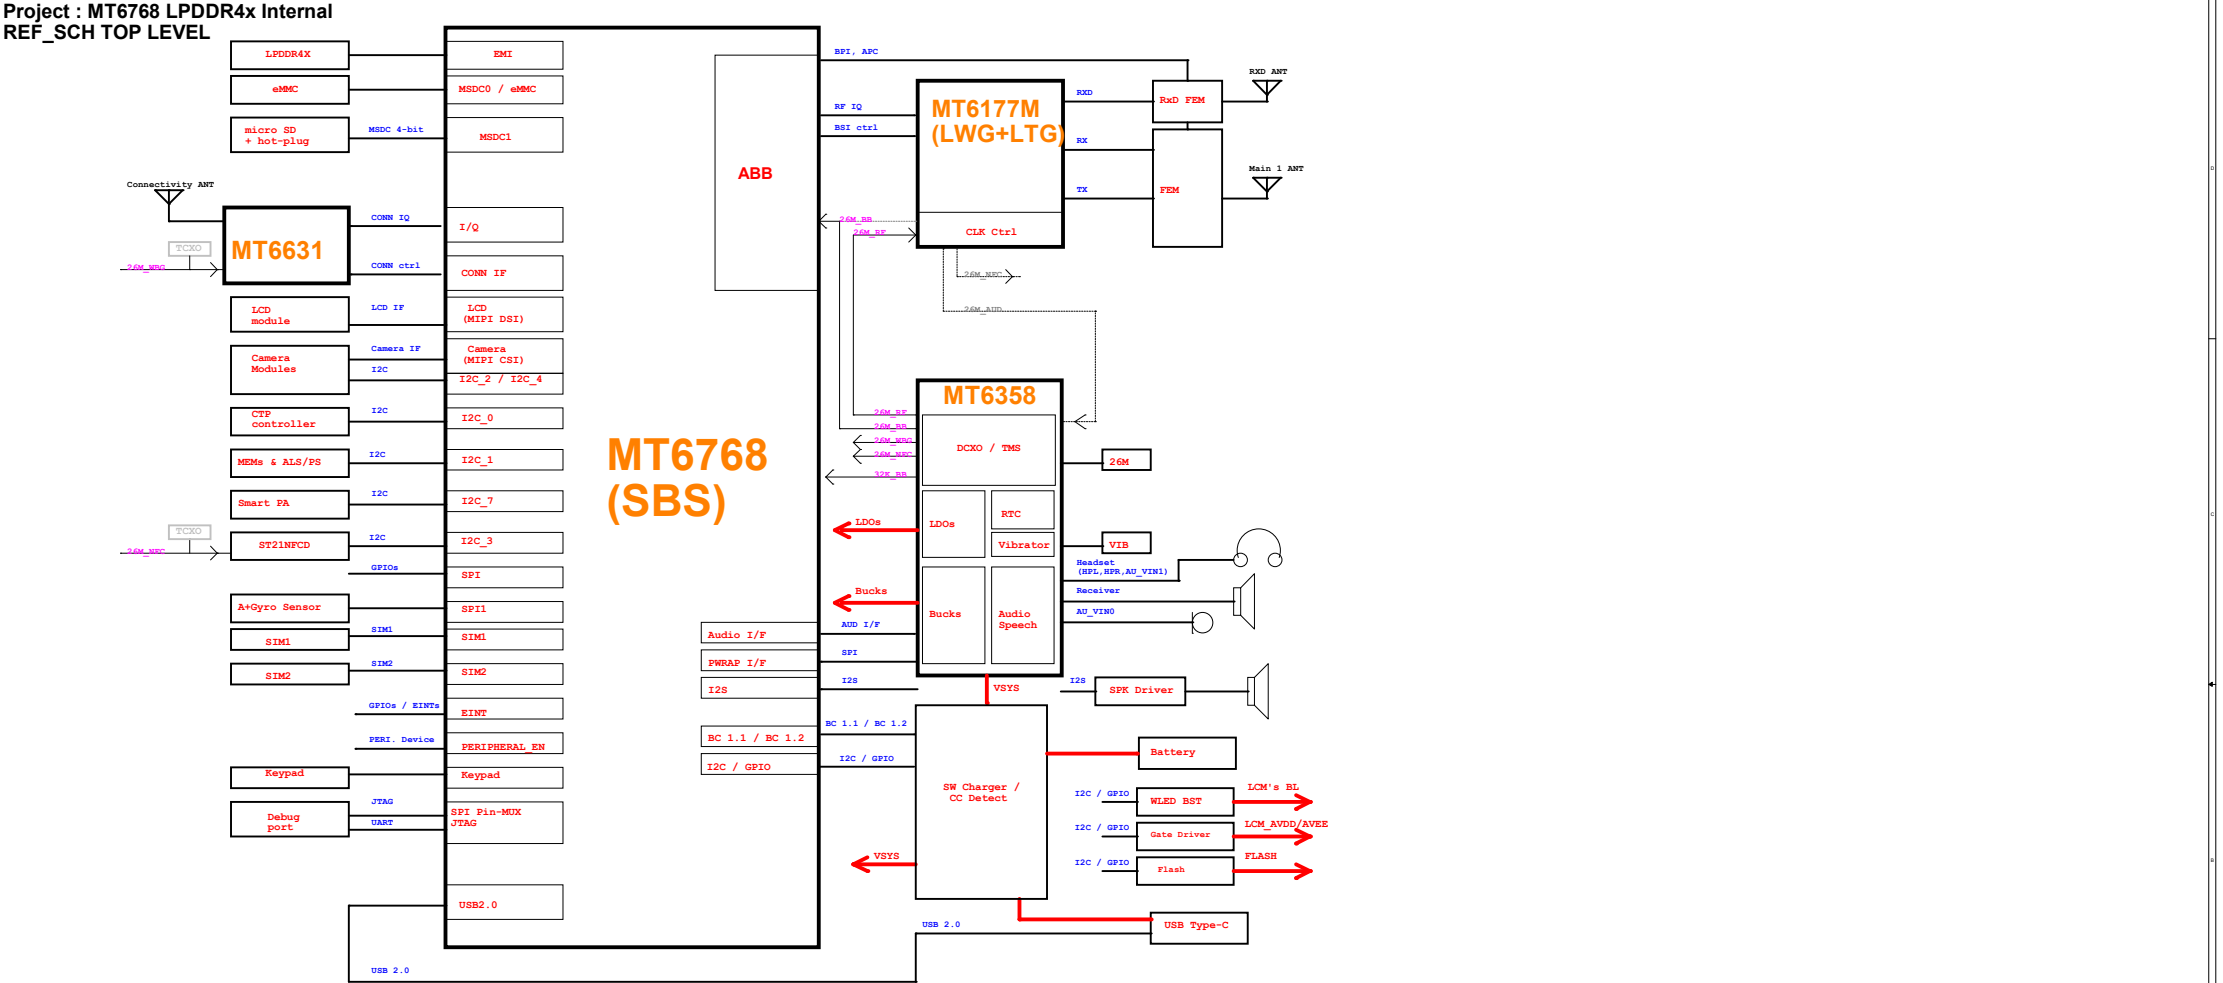

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev V1
Date: Monday, May 25, 2020		Sheet 1 of 31


I2C	Sub SYS	Function	Part Number	I2C Spec.	Budget Timing	I2C Slave Address / Write / Read (7-bit mode)	
I2C-0	AP	Cap Touch controller	GT1151	400 Kbps	Yes.	0x5D	Write:0xBA / Read:0xBB
		LCM Gate Drive	RT4801HWSC	400 Kbps	Yes.		
I2C-1 (I3C)	AP Sensor Hub	Magnetic Sensor	AK09918C	400 Kbps	Yes.	0x0C	Write:0x18 / Read:0x19
		Ambient Light Sensor	CM36558	400 Kbps	Yes.	0x51	Write:0xA2 / Read:0xA3
		Proximity Sensor					
		Pressure Sensor	BMP280	400 Kbps	Yes.	0x77	Write:0xEE / Read:0xEF
I2C-2 (I3C)	AP	Rear Camera	IMX519	400 Kbps		0x1A	Write:0x34 / Read:0x35
			EEPROM	400 Kbps		0x50	Write:0xA0 / Read:0xA1
			AF driver	400 Kbps		0x0C	Write:0x18 / Read:0x19
			SSK2P7	400 Kbps		0x2D	Write:0x5A / Read:0x5B
		Dual cam (B+b) - Main1	EEPROM	400 Kbps		0x50	Write:0xA0 / Read:0xA1
			AF driver	400 Kbps		0x0C	Write:0x18 / Read:0x19
I2C-3	AP	NFC	ST21NFCD	400 Kbps	Yes.	0x08	Write:0x10 / Read:0x11
		Dual cam (B+b) - Main2	OV8856	400 Kbps		0x10	Write:0x20 / Read:0x21
			EEPROM=NA				
			AF driver=NA				
I2C-4 (I3C)	AP	Front Camera	SSK2T7	400 Kbps		0x2D	Write:0x5A / Read:0x5B
			EEPROM	400 Kbps		0x52	Write:0xA4 / Read:0xA5
			AF driver=NA				
I2C-5	AP	Reserved					
I2C-6	AP SSPM	Reserved					
I2C-7	AP	Audio Smart PA	MT6660	400 Kbps	Yes.	0x34	Write:0x68 / Read:0x69
		SW Charger	SW Charger	400 Kbps	Yes.		
		CC Detect	RT1715WSC	400 Kbps	Yes.		
		Flash LED 5V Boost	RT4505	400 Kbps	Yes.		

Note : I2C Spec. : Standard mode (100 kbps) and Fast mode (400 kbps), Fast mode Plus (1 Mbps) and High-speed mode (3.4 Mbps)

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev v1
Date: Monday, May 25, 2020		Sheet 2 of 31

Date	Category	Item
2018.12.14 (V0.1)	Page 04	V0.1 Release
2019.01.11 (V0.2)	Page 12	Add CAM_PDN3(GPIO110) HW pin for Note 12-4: HW pin for DDR type feature in bootstrap Delete R1007 and R1012 ext. pull for LP4X eMCP
	Page 13	Add CAM_PDN3(GPIO110)'s Note : No ext. pull for DDR type feature in bootstrap
	Page 69	Add CAM_PDN3(GPIO110)'s Note : No ext. pull for DDR type feature in bootstrap
	Page 21	Add C2106 for VBIF28 cap
	Page 22	Delete R2202

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size C	Project J15_MB_V1	Rev v1
Date: Monday, May 25, 2020		Sheet 3 of 31

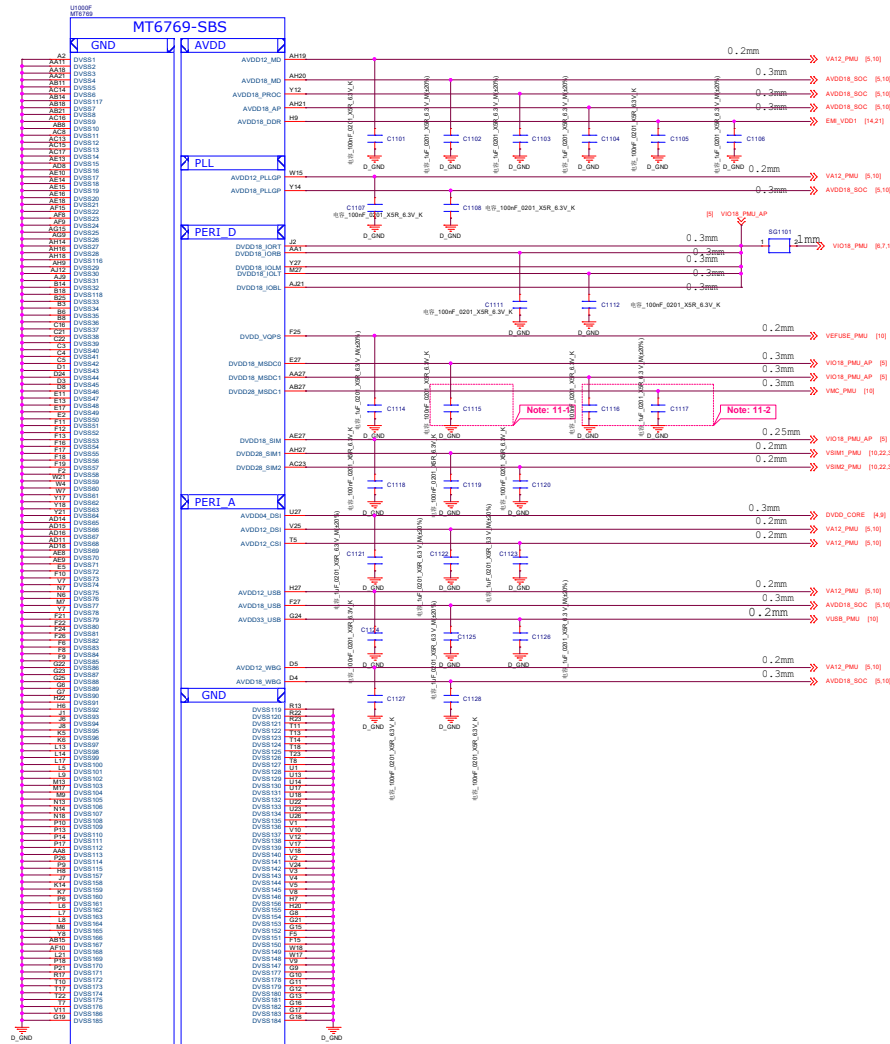

Schematic design notice of "11_BB_POWER_IO" page:

Note 11-1: C1115 closed DVDD18_MSDC0 150mil

Note 11-2: C1116 closed DVDD18_MSDC1 150mil
C1117 closed DVDD28_MSDC1 150mil

AVDD12 : 单个点走8mil, 两路分支各16mil, 总路径20mil

VIO18_FMU_AP: 总路径40mil

AVDD18_SOC: 总路径20mil

华勤通讯 Huaqin Telecom Technology Com., Ltd

Title 01_Block_Diagram


Size D

Project J15_MB_V1

Rev v1

Date: Monday, May 25, 2020

Sheet 5 of 31

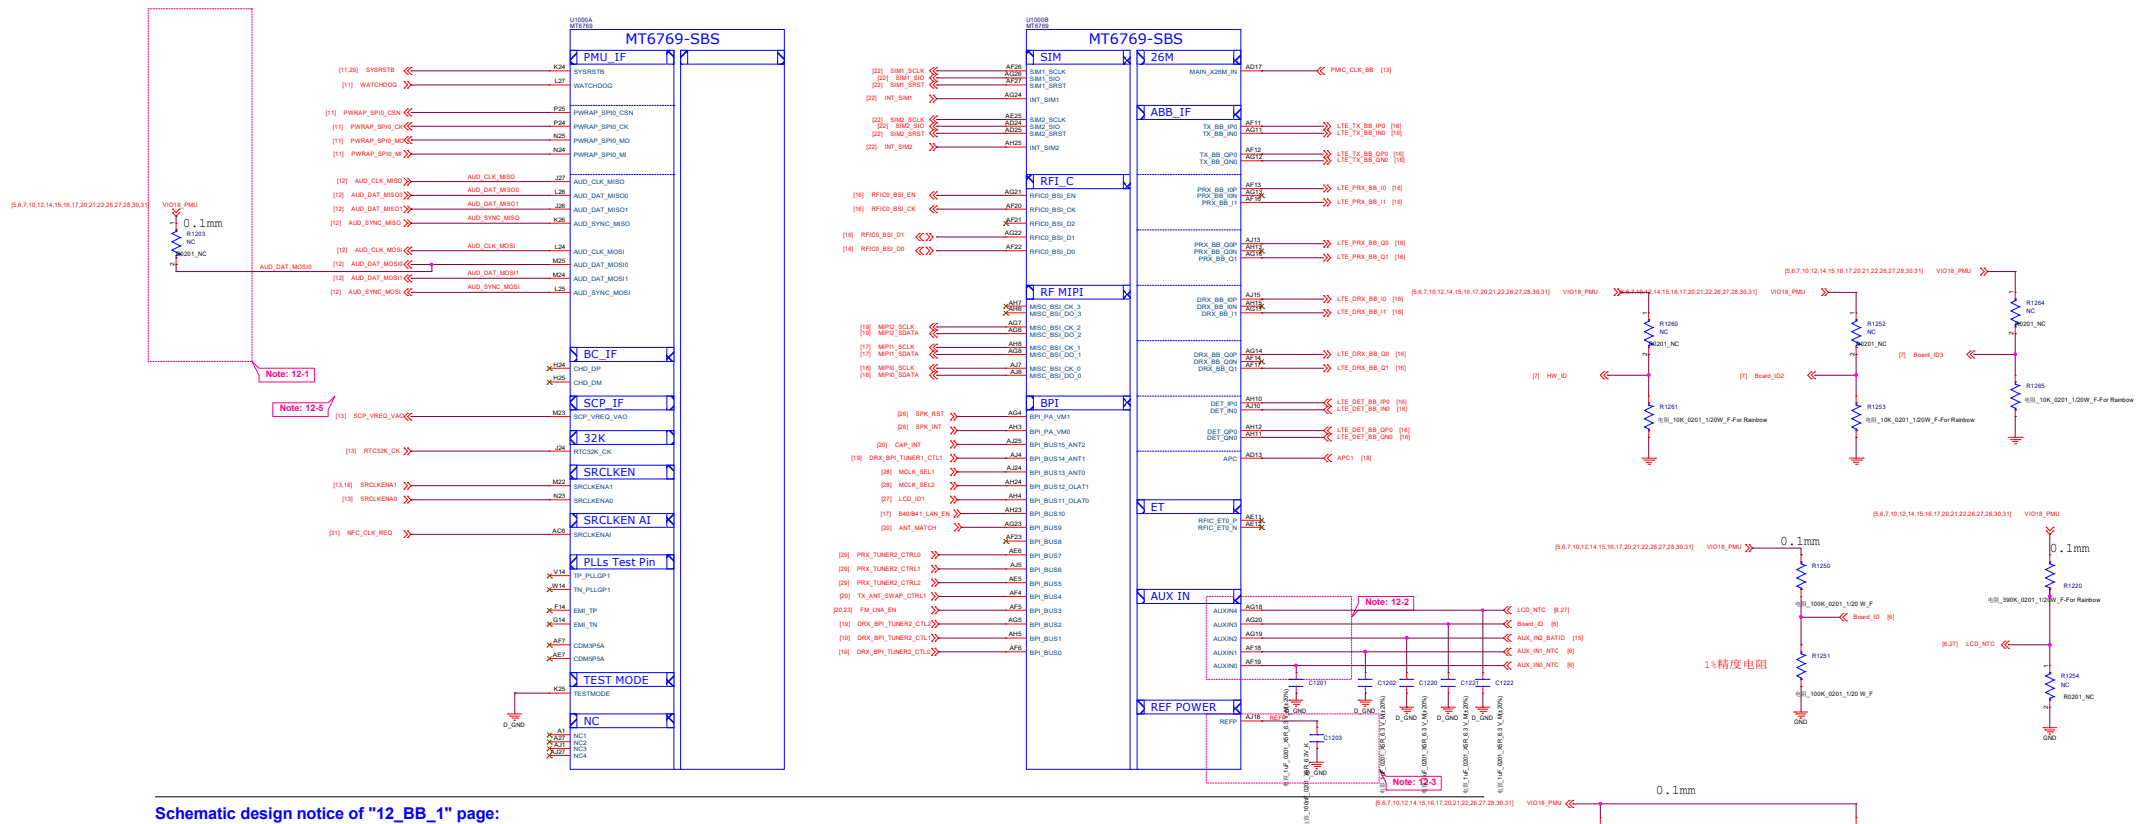

Schematic design notice of "12_BB_1" page:

Note 12-1: PWRAP_SPI0_CSN" and "AUD_DAT_MOSIO" are bootstrap pins to select which interface will be the JTAG pin out

PWRAP_SPI0_CSN	AUD_DAT_MOSIO	JTAG Function	
default=PU	default=PD	AP_JTAG	MD_JTAG
HI	LO	N/A	N/A
HI	HI (by ext. PD)	SPI0 + EINT8	SPI2 + SPI3
LO	LO	SPI0 + EINT8	N/A
LO	HI (by ext. PD)	N/A	N/A

Note 12-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 12-3: The de-coupling cap. for REFP (AJ18 ball) have to be placed as close to BB as possible.

Note 12-4: HW pin for DDR type feature in bootstrap (refer to BB HW design Notice)

AUD_SYNC_MISO	AUD_CLK_MISO	CAM_PDN3	PMIC 6358 voltage	DDR Type
default=PD	default=PD	default=PD	VDRAM1 / VDRAM2	DDR
No ext. pull	No ext. pull	No ext. pull	1.125v / 0.6v	LP4X eMCP
No ext. pull	12K pull to VIO18	No ext. pull	OFF / 1.8v	Reserved
12K pull to VIO18	No ext. pull	No ext. pull	1.225v / OFF	LP3 eMCP
12K pull to VIO18	12K pull to VIO18	No ext. pull	1.125v / 1.8v	Reserved

Note 12-5: Charger must have D+/D- pin for charger type USB detection.
Charger must have at least 500mA USB current for All charger type.



Thermistor to sense RF PA temperature

1. R1208 must close to L1E Band 7 PA or the bottom PA ~2mm.
2. The distance is the shortest distance from package edge to edge.

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 01_Block_Diagram

Size D Project J15_MB_V1

Rev V1

Date: Monday, May 25, 2020


Sheet 6 of 31

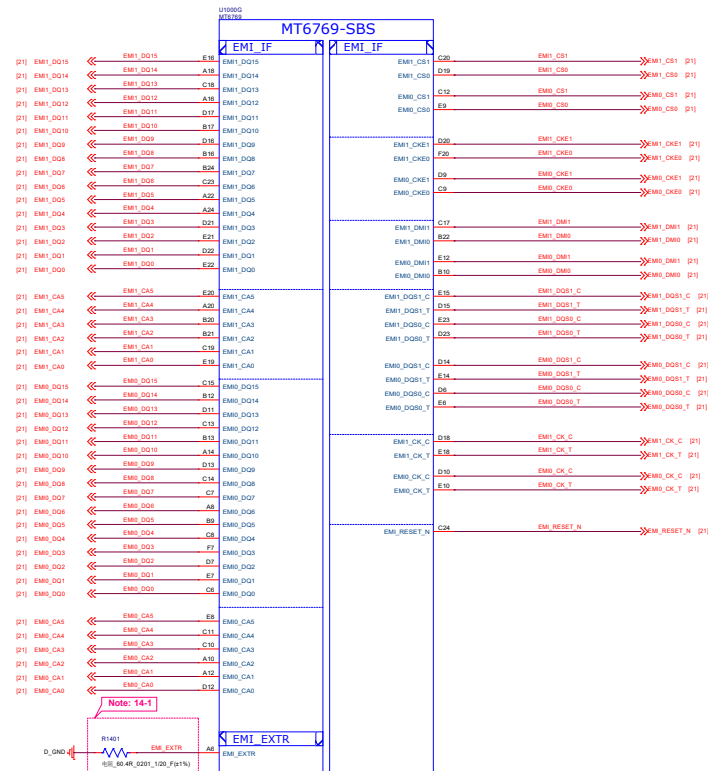

Schematic design notice of "14_BB_3" page.

Note 14-1: R1401 please select 60.4 ohm (1%) resistor

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev v1
Date: Monday, May 25, 2020		Sheet 8 of 31

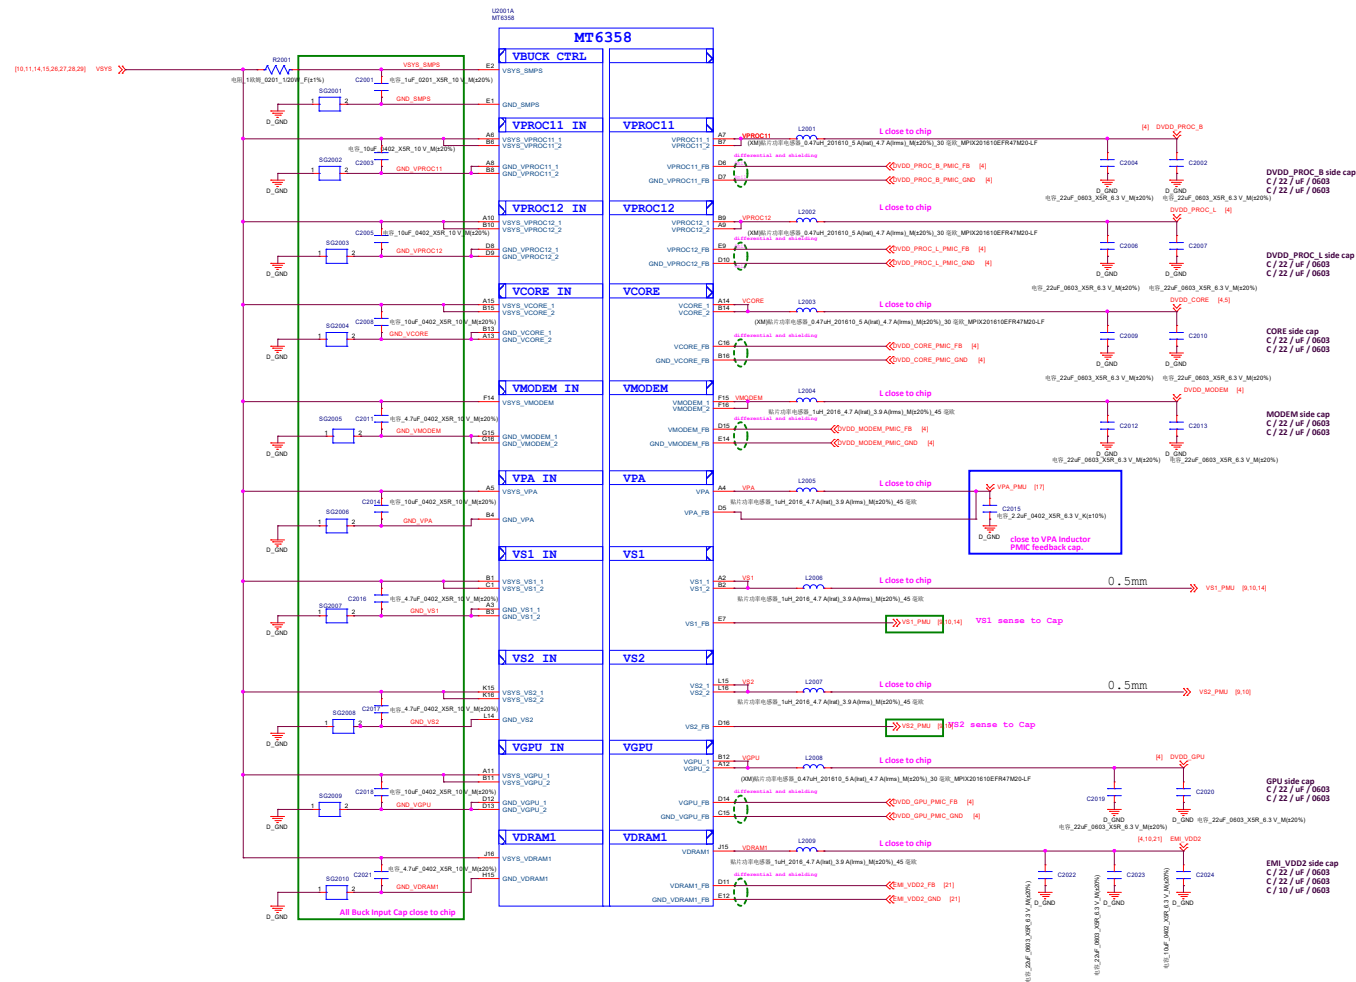

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 01_Block_Diagram

Size D Project J15_MB_V1

Rev v1

Date: Monday, May 25, 2020

Sheet 9 of 31

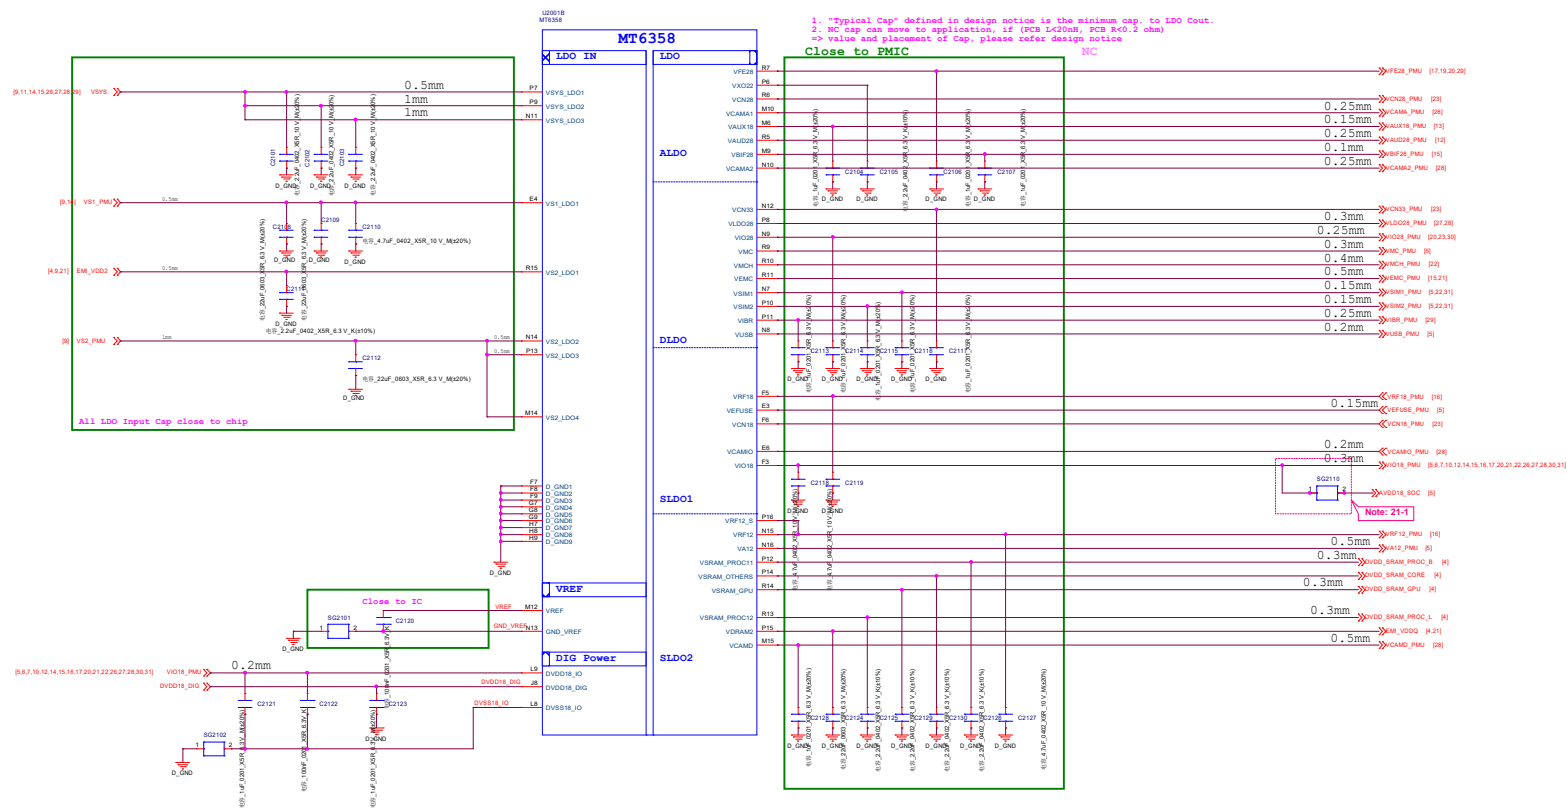


Schematic design notice of "21_POWER_MT6358-LDO" page.

Note 21-1: Please set SG2110 close to C2118, making star connection between VIO18_PMU and AVDD18_SOC near to LDO cap. C2118
 Please also refer to MT6358 design notice for further detail design information


Note 21-2: If these power trace can meet LDO layout constraint, these CAP can be NC or removed.
 Please refer to MT6358 design notice.

Note: 21-2

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev V1
Date: Monday, May 25, 2020		Sheet 10 of 31

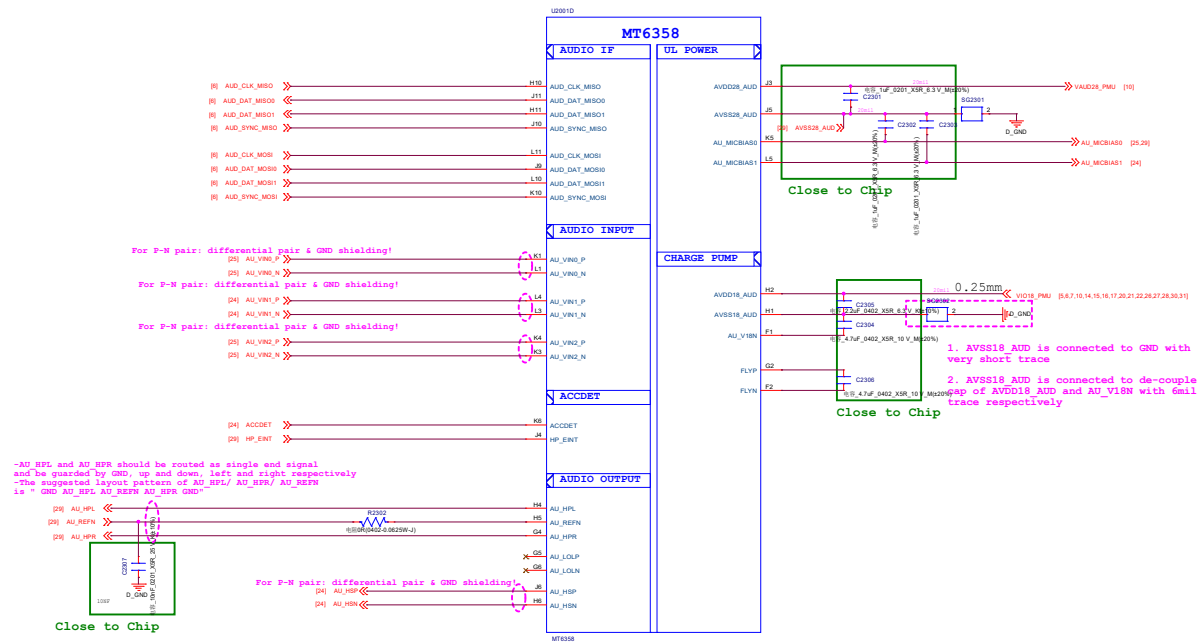


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev V1
Date: Monday, May 25, 2020	Sheet 12 of 31	

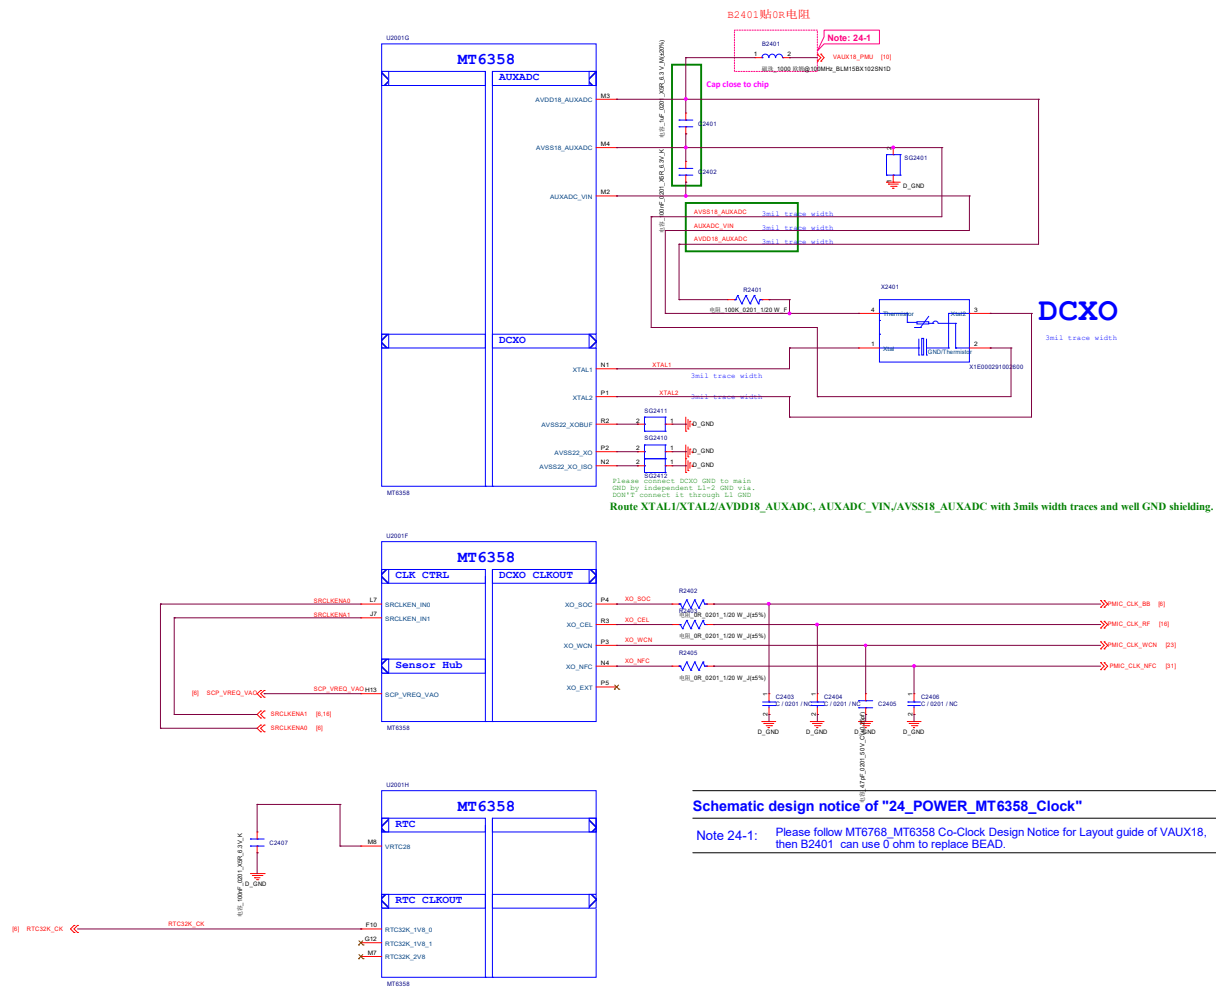


华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev V1
Date: Monday, May 25, 2020	Sheet 13 of 31	

LDO for Rear Camera (VCAMD_EXT1) 1.06V

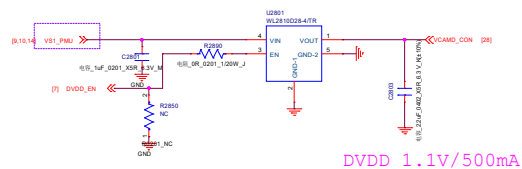


DVDD 1.1V/500mA

LDO for Dual Camera (VCAMA_EXT) 2.8V

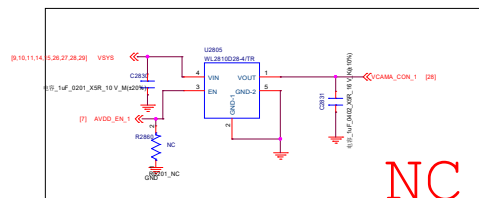


NC


LDO for Dual Camera (VCAMA_EXT) 2.8V

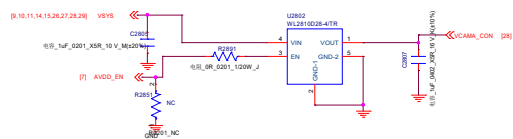

Ext. EMI_VDD1 for LPDDR4X VDD1

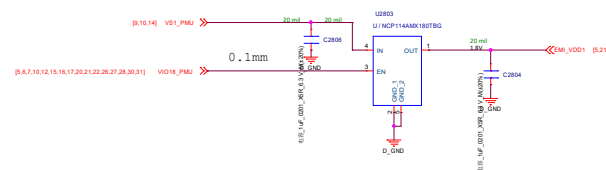

Flash LED 5V Boost

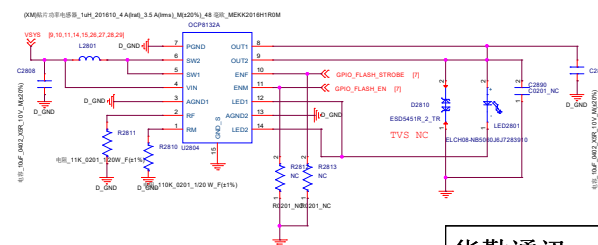

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 01_Block_Diagram

Size D Project J15_MB_V1


Rev V1

Date: Monday, May 25, 2020

Sheet 14 of 31

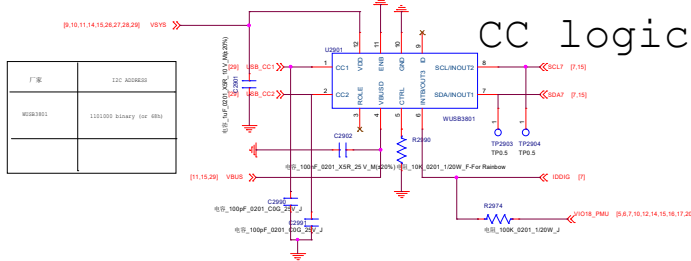


BATTERY CONNECTOR

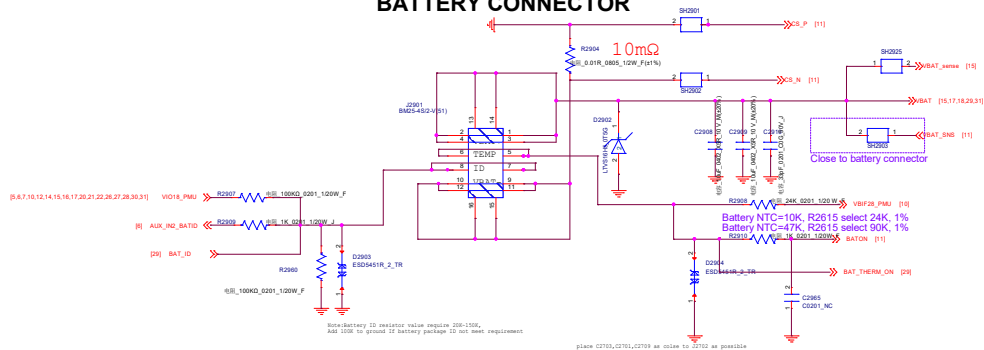


Schematic design notice of "29_EXT_WLED+DB+FL+CHG+PD" page.

Note 29-1: For better ESD or surge performance we need choose suitable device for system protection. Please refer to [Surge device selection guide V2.0] provide by MTK.


SW Charger

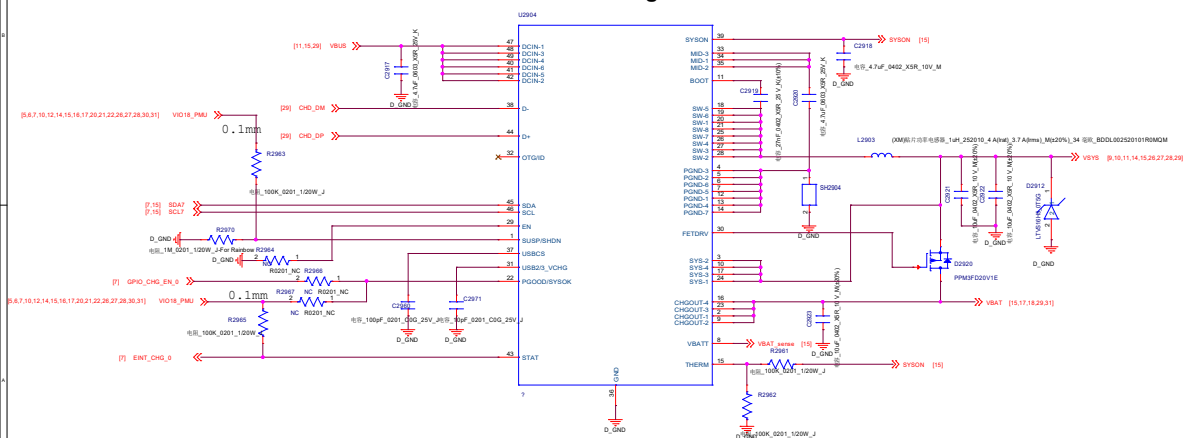

LCM Backlight LED Driver

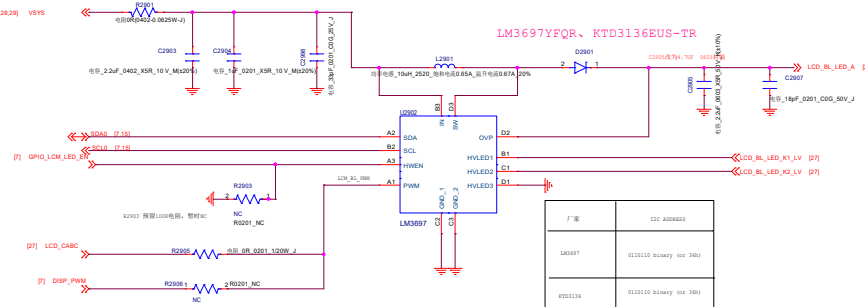

LCM Bias

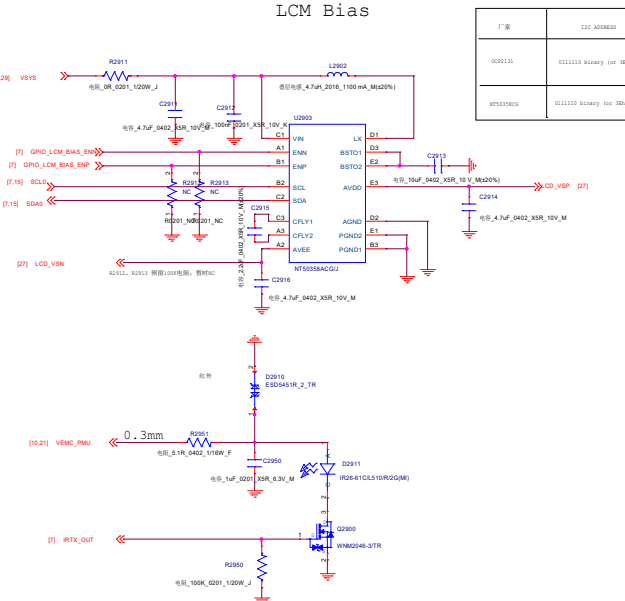

华勤通讯 Huaqin Telecom Technology Com., Ltd


Title 01_Block_Diagram

Size D Project J15_MB_V1

Rev v1

Date: Monday, May 25, 2020

Sheet 15 of 31

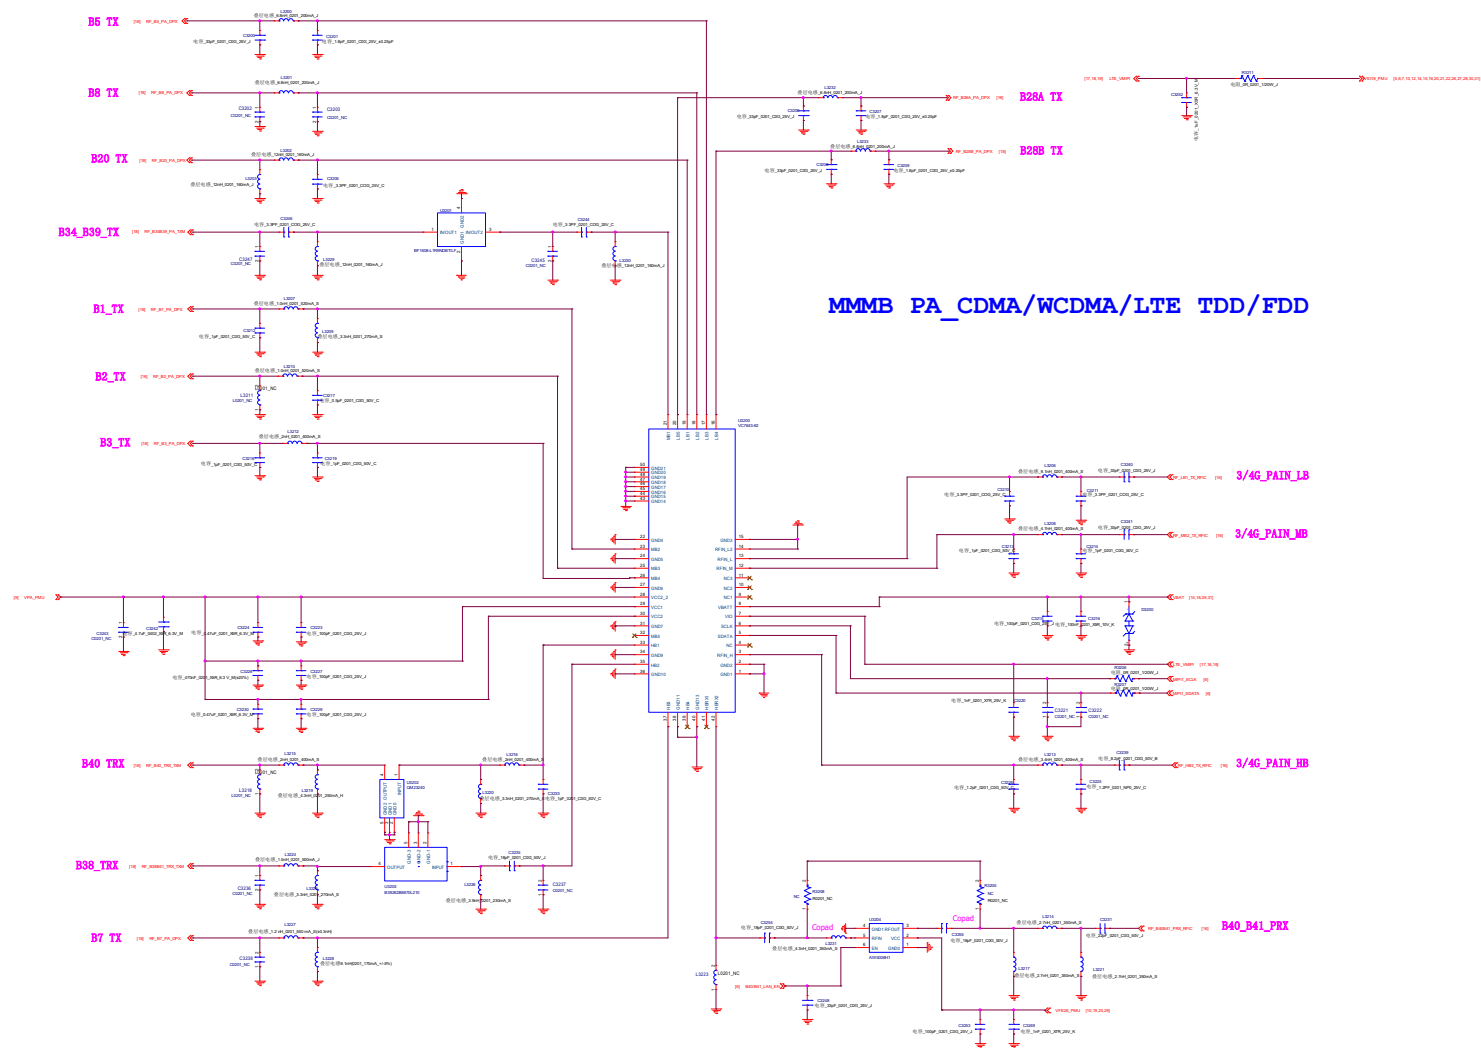

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 32_RF_MT6177_RF_TX

Size E Project F9_MB_V1

Rev v1

Date: Monday, May 25, 2020 Sheet 17 of 31


MAIN_ANT

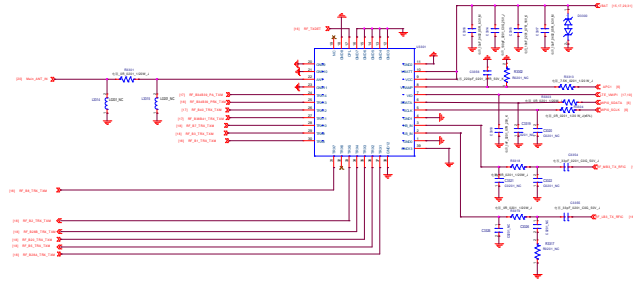


TXM_GSM

TRX_LB


B5 TRX

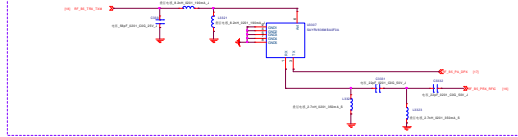

B8 TRX

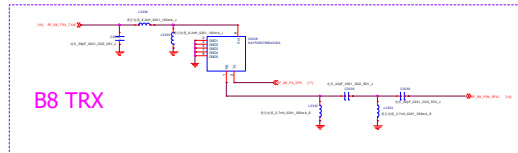


B20 TRX



B28A TRX




B28B TRX




TRX_MB


B1/3 TRX

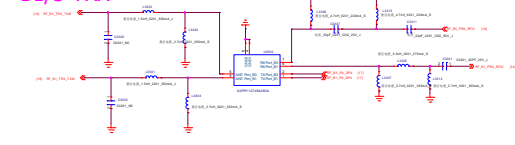

B2 TRX

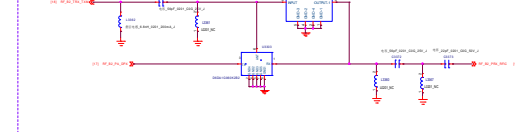


B34 B39 TRX

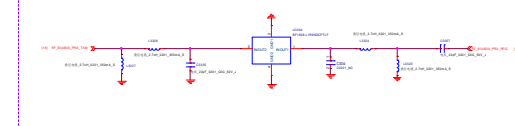

TRX_HB

B7 TRX

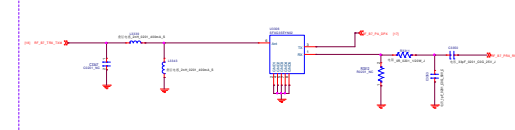

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 33_RF_MT6177_RF_PRX

Size Project F9_MB_V1
Custom





Date: Monday, May 25, 2020

Sheet 18 of 31



DIV_ANT

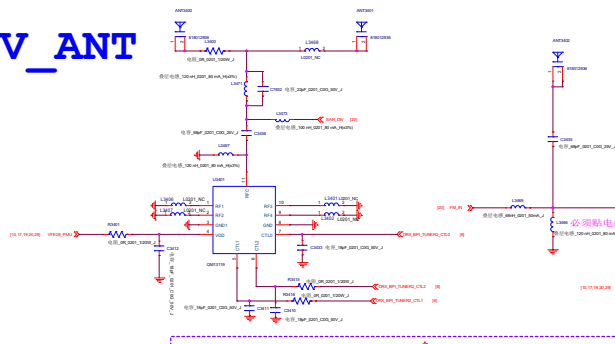






DIV_LB

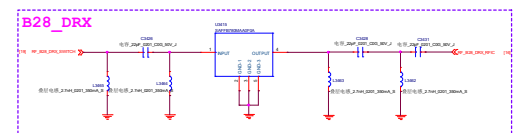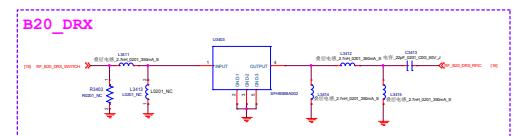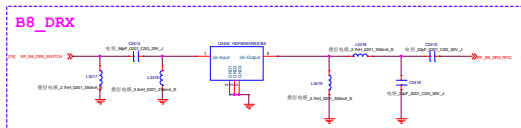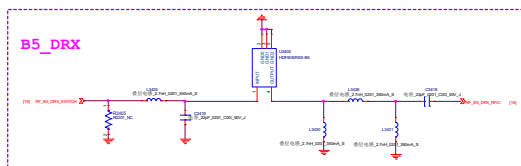

DIV_MB

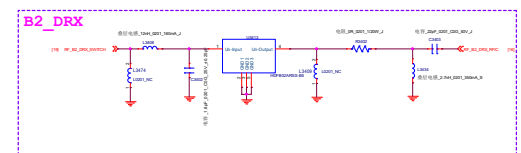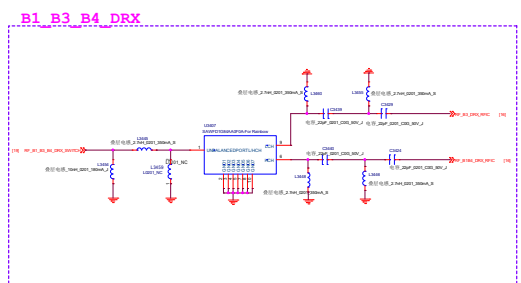

DIV_HB

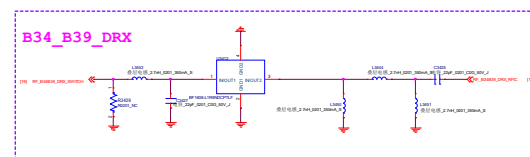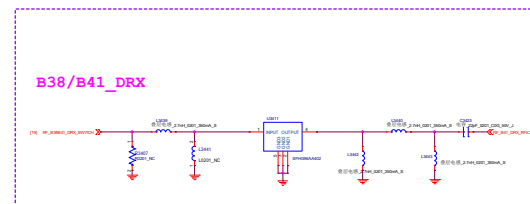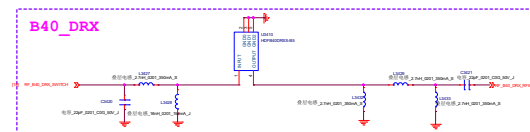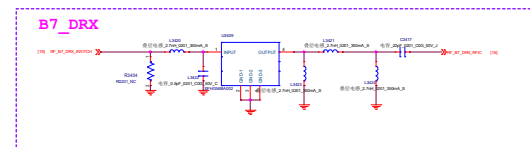

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 34_RF_MT6177_RF_DRX

Size E Project F9_MB_V1

Rev V1

Date: Monday, May 25, 2020

Sheet 19 of 31

同轴座

空口检测


TAS

MAIN DPDT SWITCH


SAR Sensor

FM

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 35_DPDT			
Size A0	Project F9_MB_V1		Rev v1
Date: Monday, May 25, 2020		Sheet 20 of 31	

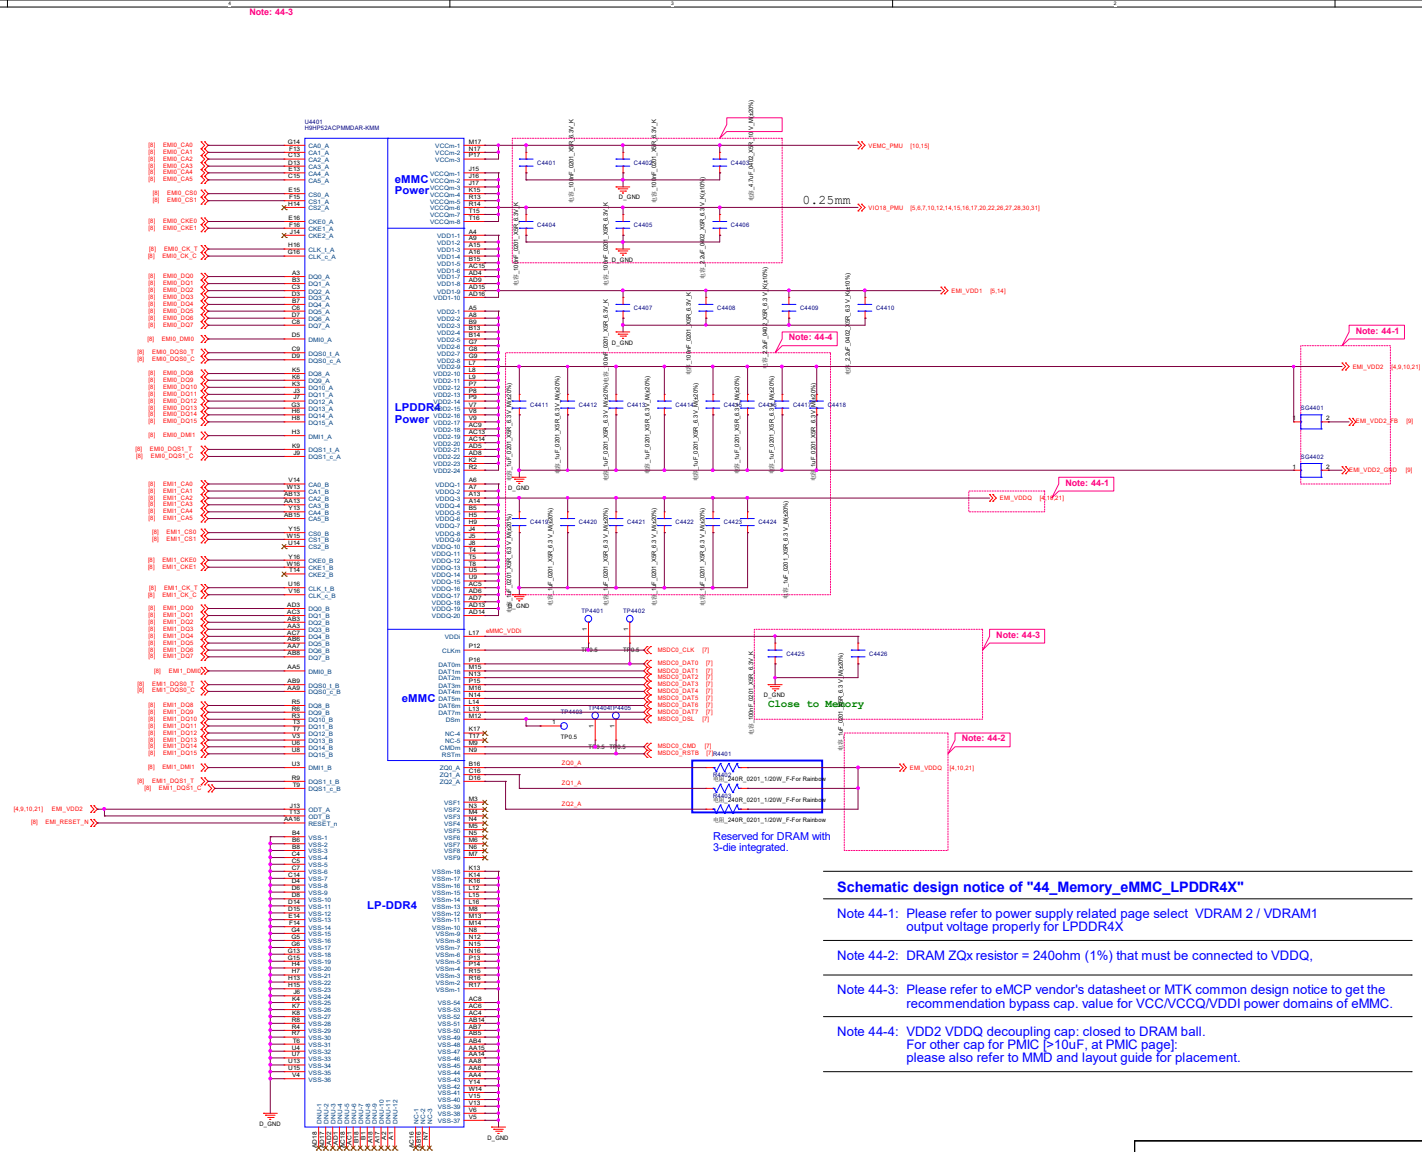

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 01_Block_Diagram			
Size D	Project J15_MB_V1		Rev v1
Date: Monday, May 25, 2020		Sheet 21 of 31	

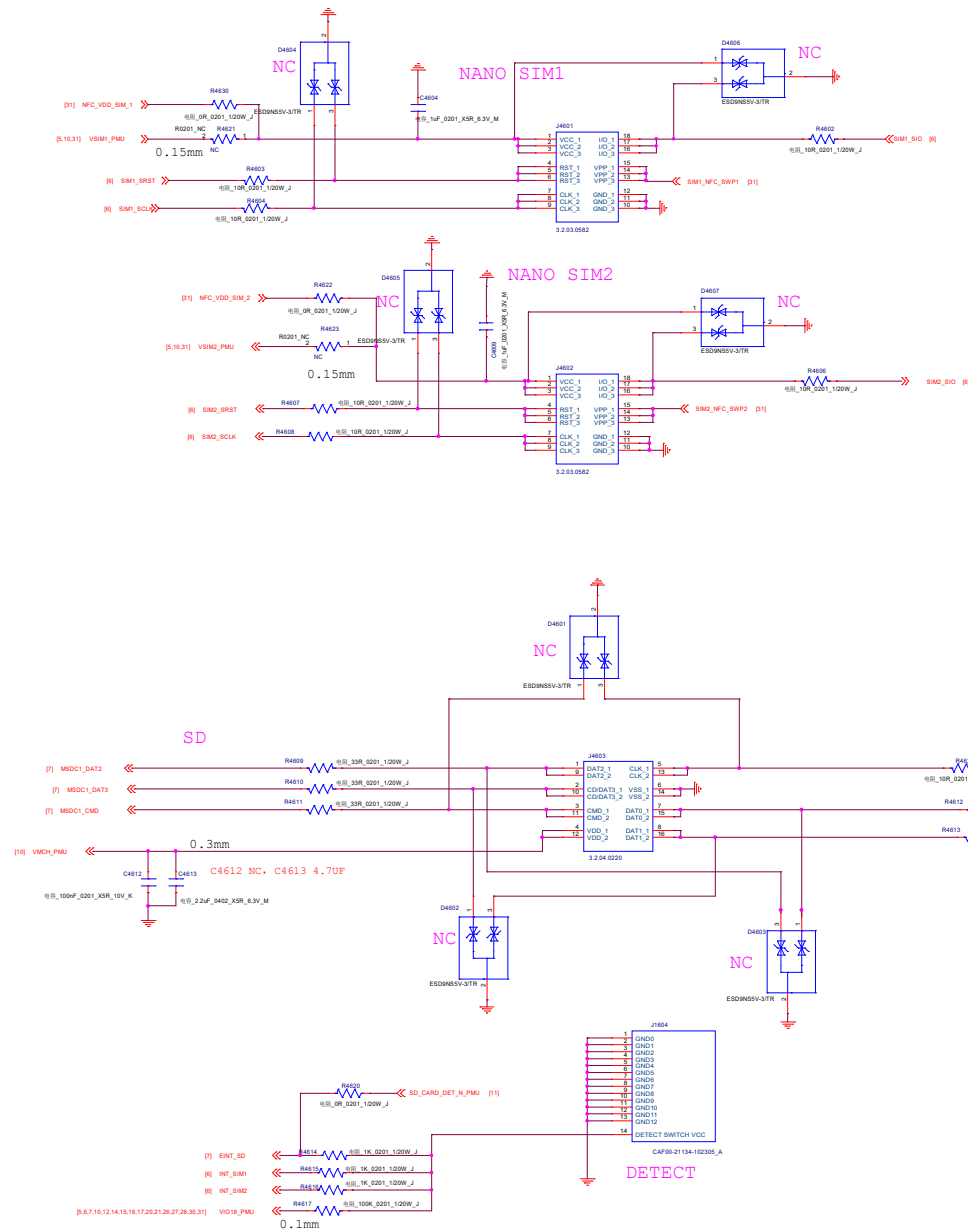

Note 46-1:

Schematic design notice of "46_MEMORY_SD Card" page.

For better ESD performance, please select suitable components for system protection.


华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 01_Block_Diagram

Size D	Project J15_MB_V1	Rev V1
--------	-------------------	--------

Date: Monday, May 25, 2020	Sheet 22 of 31
----------------------------	----------------

Earphone Microphone

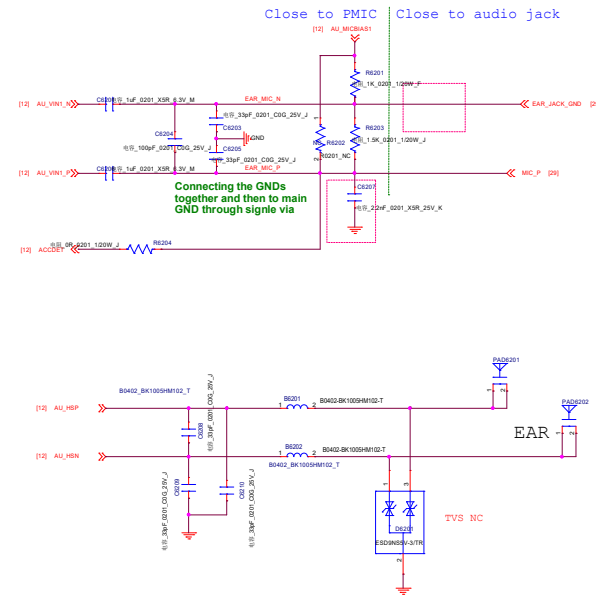

Schematic design notice of "62_PERI_AUDIO_IO" page.

Note 62-1: Part # of BEAD6202, BEAD6203, BEAD6204 and BEAD6205 needs changed to "BLM18BD102SN1" for high THD performance (~90dB) but this BOM change will results in FM RSSI 10dB degraded .

Note 62-2: Reserved Cap for CS/RS test, please double check multi-key function when used

Note 62-3:


Earphone Jack	Earphone Jack
0 ohm	100nF

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 01_Block_Diagram

Size D	Project J15_MB_V1	Rev V1
--------	-------------------	--------

Date: Monday, May 25, 2020	Sheet 24 of 31
----------------------------	----------------

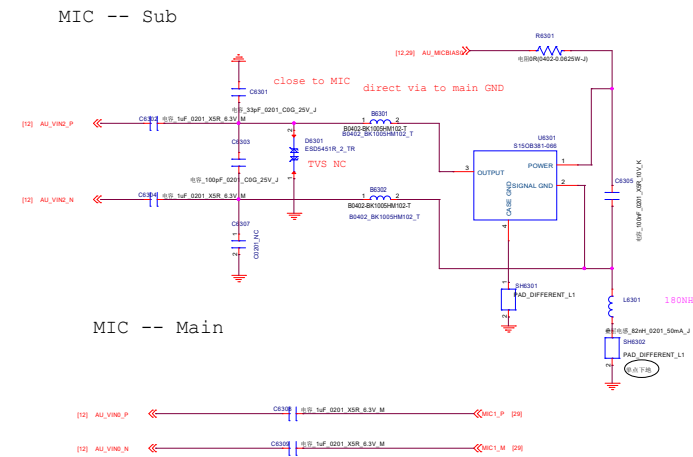


Schematic design notice of "63_PERI_AUDIO_IO" page.

Note 63-1: 1 uF for ACC mode

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev V1
Date: Monday, May 25, 2020	Sheet 25 of 31	


The diagram illustrates the internal structure and pin connections of the STM32F405VCT6 microcontroller. Key components and connections include:

- Microcontroller Core:** The central component, labeled STM32F405VCT6, showing its internal architecture and pin connections.
- Power and Ground Connections:**
 - VDD (VDD_1.2V) and GND connections for the microcontroller.
 - External power and ground connections for various pins (e.g., VDD_1.2V, GND).
- Peripheral Connections:**
 - I2C (I2C1, I2C2) and SPI (SPI1, SPI2) connections.
 - UART (USART1, USART2) and CAN (CAN1) connections.
 - Other peripherals like ADC (ADC1, ADC2), DAC (DAC1, DAC2), and TIM (TIM1, TIM2, TIM3, TIM4, TIM5, TIM6, TIM7, TIM8, TIM9, TIM10, TIM11, TIM12, TIM13, TIM14, TIM15, TIM16, TIM17, TIM18, TIM19, TIM20, TIM21, TIM22, TIM23, TIM24, TIM25, TIM26, TIM27, TIM28, TIM29, TIM30, TIM31, TIM32, TIM33, TIM34, TIM35, TIM36, TIM37, TIM38, TIM39, TIM40, TIM41, TIM42, TIM43, TIM44, TIM45, TIM46, TIM47, TIM48, TIM49, TIM50, TIM51, TIM52, TIM53, TIM54, TIM55, TIM56, TIM57, TIM58, TIM59, TIM60, TIM61, TIM62, TIM63, TIM64, TIM65, TIM66, TIM67, TIM68, TIM69, TIM70, TIM71, TIM72, TIM73, TIM74, TIM75, TIM76, TIM77, TIM78, TIM79, TIM80, TIM81, TIM82, TIM83, TIM84, TIM85, TIM86, TIM87, TIM88, TIM89, TIM90, TIM91, TIM92, TIM93, TIM94, TIM95, TIM96, TIM97, TIM98, TIM99, TIM100, TIM101, TIM102, TIM103, TIM104, TIM105, TIM106, TIM107, TIM108, TIM109, TIM110, TIM111, TIM112, TIM113, TIM114, TIM115, TIM116, TIM117, TIM118, TIM119, TIM120, TIM121, TIM122, TIM123, TIM124, TIM125, TIM126, TIM127, TIM128, TIM129, TIM130, TIM131, TIM132, TIM133, TIM134, TIM135, TIM136, TIM137, TIM138, TIM139, TIM140, TIM141, TIM142, TIM143, TIM144, TIM145, TIM146, TIM147, TIM148, TIM149, TIM150, TIM151, TIM152, TIM153, TIM154, TIM155, TIM156, TIM157, TIM158, TIM159, TIM160, TIM161, TIM162, TIM163, TIM164, TIM165, TIM166, TIM167, TIM168, TIM169, TIM170, TIM171, TIM172, TIM173, TIM174, TIM175, TIM176, TIM177, TIM178, TIM179, TIM180, TIM181, TIM182, TIM183, TIM184, TIM185, TIM186, TIM187, TIM188, TIM189, TIM190, TIM191, TIM192, TIM193, TIM194, TIM195, TIM196, TIM197, TIM198, TIM199, TIM200, TIM201, TIM202, TIM203, TIM204, TIM205, TIM206, TIM207, TIM208, TIM209, TIM210, TIM211, TIM212, TIM213, TIM214, TIM215, TIM216, TIM217, TIM218, TIM219, TIM220, TIM221, TIM222, TIM223, TIM224, TIM225, TIM226, TIM227, TIM228, TIM229, TIM230, TIM231, TIM232, TIM233, TIM234, TIM235, TIM236, TIM237, TIM238, TIM239, TIM240, TIM241, TIM242, TIM243, TIM244, TIM245, TIM246, TIM247, TIM248, TIM249, TIM250, TIM251, TIM252, TIM253, TIM254, TIM255, TIM256, TIM257, TIM258, TIM259, TIM260, TIM261, TIM262, TIM263, TIM264, TIM265, TIM266, TIM267, TIM268, TIM269, TIM270, TIM271, TIM272, TIM273, TIM274, TIM275, TIM276, TIM277, TIM278, TIM279, TIM280, TIM281, TIM282, TIM283, TIM284, TIM285, TIM286, TIM287, TIM288, TIM289, TIM290, TIM291, TIM292, TIM293, TIM294, TIM295, TIM296, TIM297, TIM298, TIM299, TIM300, TIM301, TIM302, TIM303, TIM304, TIM305, TIM306, TIM307, TIM308, TIM309, TIM310, TIM311, TIM312, TIM313, TIM314, TIM315, TIM316, TIM317, TIM318, TIM319, TIM320, TIM321, TIM322, TIM323, TIM324, TIM325, TIM326, TIM327, TIM328, TIM329, TIM330, TIM331, TIM332, TIM333, TIM334, TIM335, TIM336, TIM337, TIM338, TIM339, TIM340, TIM341, TIM342, TIM343, TIM344, TIM345, TIM346, TIM347, TIM348, TIM349, TIM350, TIM351, TIM352, TIM353, TIM354, TIM355, TIM356, TIM357, TIM358, TIM359, TIM360, TIM361, TIM362, TIM363, TIM364, TIM365, TIM366, TIM367, TIM368, TIM369, TIM370, TIM371, TIM372, TIM373, TIM374, TIM375, TIM376, TIM377, TIM378, TIM379, TIM380, TIM381, TIM382, TIM383, TIM384, TIM385, TIM386, TIM387, TIM388, TIM389, TIM390, TIM391, TIM392, TIM393, TIM394, TIM395, TIM396, TIM397, TIM398, TIM399, TIM400, TIM401, TIM402, TIM403, TIM404, TIM405, TIM406, TIM407, TIM408, TIM409, TIM410, TIM411, TIM412, TIM413, TIM414, TIM415, TIM416, TIM417, TIM418, TIM419, TIM420, TIM421, TIM422, TIM423, TIM424, TIM425, TIM426, TIM427, TIM428, TIM429, TIM430, TIM431, TIM432, TIM433, TIM434, TIM435, TIM436, TIM437, TIM438, TIM439, TIM440, TIM441, TIM442, TIM443, TIM444, TIM445, TIM446, TIM447, TIM448, TIM449, TIM450, TIM451, TIM452, TIM453, TIM454, TIM455, TIM456, TIM457, TIM458, TIM459, TIM460, TIM461, TIM462, TIM463, TIM464, TIM465, TIM466, TIM467, TIM468, TIM469, TIM470, TIM471, TIM472, TIM473, TIM474, TIM475, TIM476, TIM477, TIM478, TIM479, TIM480, TIM481, TIM482, TIM483, TIM484, TIM485, TIM486, TIM487, TIM488, TIM489, TIM490, TIM491, TIM492, TIM493, TIM494, TIM495, TIM496, TIM497, TIM498, TIM499, TIM500, TIM501, TIM502, TIM503, TIM504, TIM505, TIM506, TIM507, TIM508, TIM509, TIM510, TIM511, TIM512, TIM513, TIM514, TIM515, TIM516, TIM517, TIM518, TIM519, TIM520, TIM521, TIM522, TIM523, TIM524, TIM525, TIM526, TIM527, TIM528, TIM529, TIM530, TIM531, TIM532, TIM533, TIM534, TIM535, TIM536, TIM537, TIM538, TIM539, TIM540, TIM541, TIM542, TIM543, TIM544, TIM545, TIM546, TIM547, TIM548, TIM549, TIM550, TIM551, TIM552, TIM553, TIM554, TIM555, TIM556, TIM557, TIM558, TIM559, TIM560, TIM561, TIM562, TIM563, TIM564, TIM565, TIM566, TIM567, TIM568, TIM569, TIM570, TIM571, TIM572, TIM573, TIM574, TIM575, TIM576, TIM577, TIM578, TIM579, TIM580, TIM581, TIM582, TIM583, TIM584, TIM585, TIM586, TIM587, TIM588, TIM589, TIM590, TIM591, TIM592, TIM593, TIM594, TIM595, TIM596, TIM597, TIM598, TIM599, TIM600, TIM601, TIM602, TIM603, TIM604, TIM605, TIM606, TIM607, TIM608, TIM609, TIM610, TIM611, TIM612, TIM613, TIM614, TIM615, TIM616, TIM617, TIM618, TIM619, TIM620, TIM621, TIM622, TIM623, TIM624, TIM625, TIM626, TIM627, TIM628, TIM629, TIM630, TIM631, TIM632, TIM633, TIM634, TIM635, TIM636, TIM637, TIM638, TIM639, TIM640, TIM641, TIM642, TIM643, TIM644, TIM645, TIM646, TIM647, TIM648, TIM649, TIM650, TIM651, TIM652, TIM653, TIM654, TIM655, TIM656, TIM657, TIM658, TIM659, TIM660, TIM661, TIM662, TIM663, TIM664, TIM665, TIM666, TIM667, TIM668, TIM669, TIM670, TIM671, TIM672, TIM673, TIM674, TIM675, TIM676, TIM677, TIM678, TIM679, TIM680, TIM681, TIM682, TIM683, TIM684, TIM685, TIM686, TIM687, TIM688, TIM689, TIM690, TIM691, TIM692, TIM693, TIM694, TIM695, TIM696, TIM697, TIM698, TIM699, TIM700, TIM701, TIM702, TIM703, TIM704, TIM705, TIM706, TIM707, TIM708, TIM709, TIM710, TIM711, TIM712, TIM713, TIM714, TIM715, TIM716, TIM717, TIM718, TIM719, TIM720, TIM721, TIM722, TIM723, TIM724, TIM725, TIM726, TIM727, TIM728, TIM729, TIM730, TIM731, TIM732, TIM733, TIM734, TIM735, TIM736, TIM737, TIM738, TIM739, TIM740, TIM741, TIM742, TIM743, TIM744, TIM745, TIM746, TIM747, TIM748, TIM749, TIM750, TIM751, TIM752, TIM753, TIM754, TIM755, TIM756, TIM757, TIM758, TIM759, TIM760, TIM761, TIM762, TIM763, TIM764, TIM765, TIM766, TIM767, TIM768, TIM769, TIM770, TIM771, TIM772, TIM773, TIM774, TIM775, TIM776,

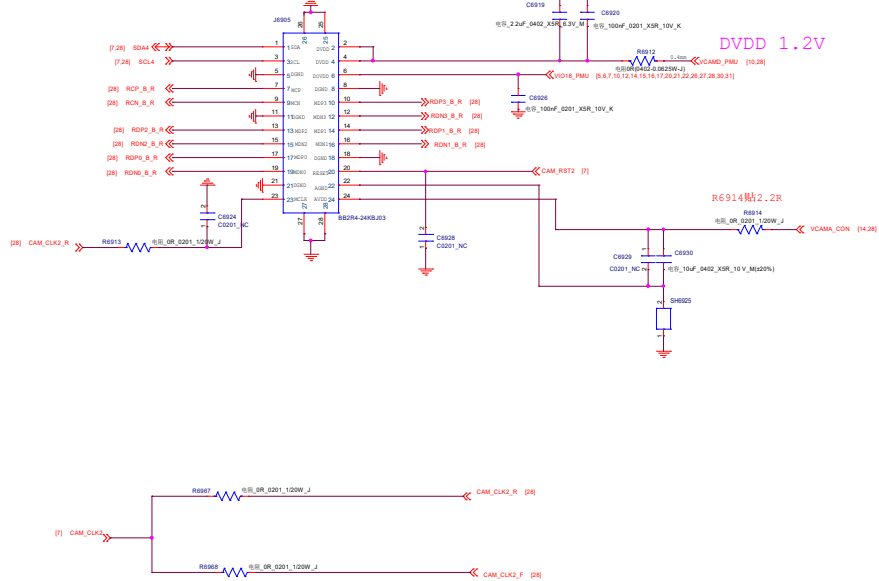

INPUTS			OUTPUTS	
CLK_REG1	CLK_REG2	MCLK_IN	CLK_OUT1	CLK_OUT2
L	L	X	L	L
L	H	CLK	L	CLK
H	L	CLK	CLK	L
H	H	CLK	CLK	CLK

OE	BEL	Function
H	X	IO pins High-Impedance
L	L	$CLK(PIN) = CLK(A/PIN)$ $DATA(PIN) = DATA(PIN)$
L	H	$CLK(PIN) = CLK(B/PIN)$ $DATA(PIN) = DATA(B/PIN)$

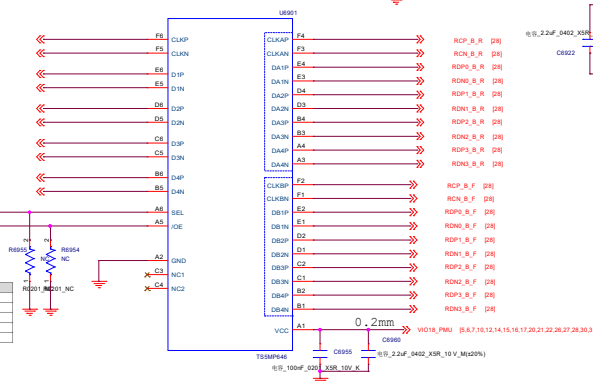[illegible]

Sheet 28 of 31





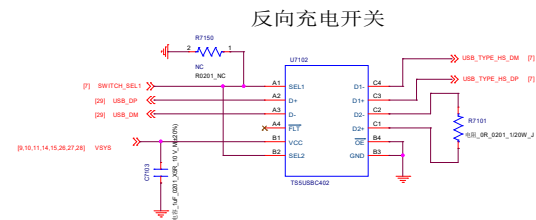


Table 1. Function Table


OE	SEL1	SEL2	D- Connection	D+ Connection
H	X	X	High-Z	High-Z
L	L	L	D- to D1-	D+ to D1+
L	L	H	D- to D1-	D+ to D2+
L	H	L	D- to D2-	D+ to D1+
L	H	H	D- to D2-	D+ to D2+

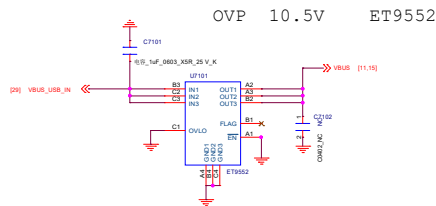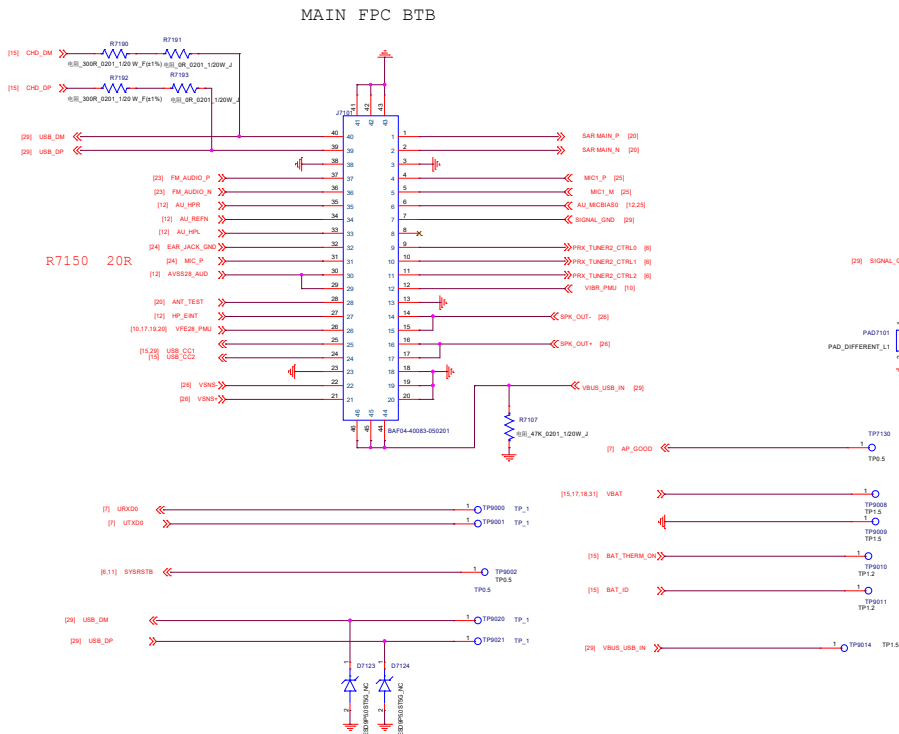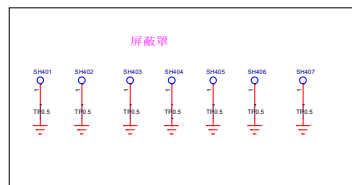

KEY BTB

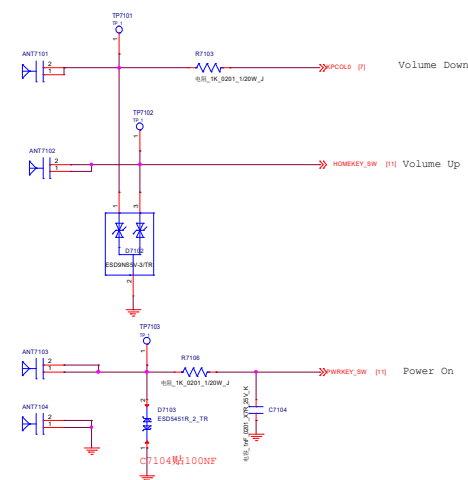


螺丝孔



USB

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 01_Block_Diagram		
Size D	Project J15_MB_V1	Rev V1
Date: Monday, May 25, 2020	Sheet 29 of 31	

M-Sensor

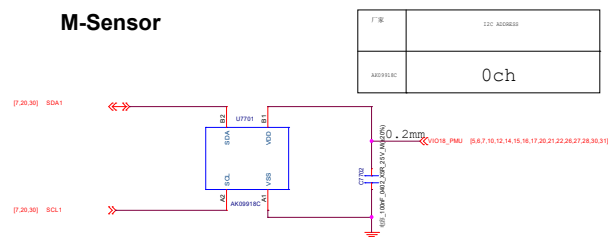


厂家	12C: A008033
地址/IC	0ch

Accerometer + Gyro Sensor


default SPI (if sensor hub support)

Gyro+A sensor

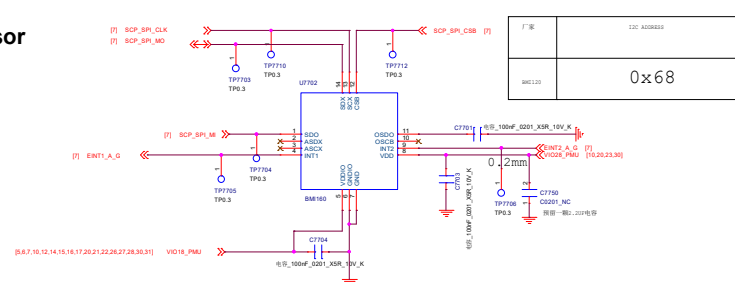

厂家	12C: A008033
地址/IC	0x68

ALS PS STK3337-X

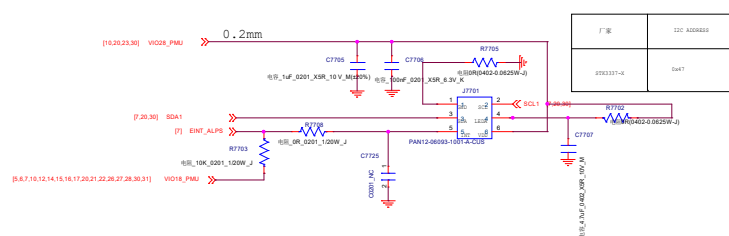

厂家	12C: A008033
地址/IC	0x47

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 01_Block_Diagram

Size D Project J15_MB_V1

Rev v1

Date: Monday, May 25, 2020

Sheet 30 of 31

