

ASUS ZS672KS

RF Hardware Trouble Shooting Guide

ZS672KS Supported Bands

2G: **GSM** GSM850/EGSM/DCS/PCS

3G: **WCDMA** B1/B2/B3/B4/B5(B6/B19)/B8

4G: **LTE-FDD** B1/B2/B3/B4/B5/B7/B8/B12/B17/
B18/B19/B20/B26/B28

LTE-TDD B34/B38/B39/B40/B41/B42

4*4MIMO B1/B3/B7

5G: **NR-FDD** N1/N2/N3/N5/N7/N8/N12/N20/
N28

NR-TDD N38/N77/N78

4*4MIMO B1/N3/N7/N77/N78


N77: B42/N77/N78

HB : B7/B38/B40/B41/N7/N38

MB: B1/B2/B3/B4/B34/B39/N1/N2/N3

LB: B5/B8/B12/B17/B18/B19/B20/B26/B28/N5/N8/N12/N20/N28

Tx/PRx path block diagram

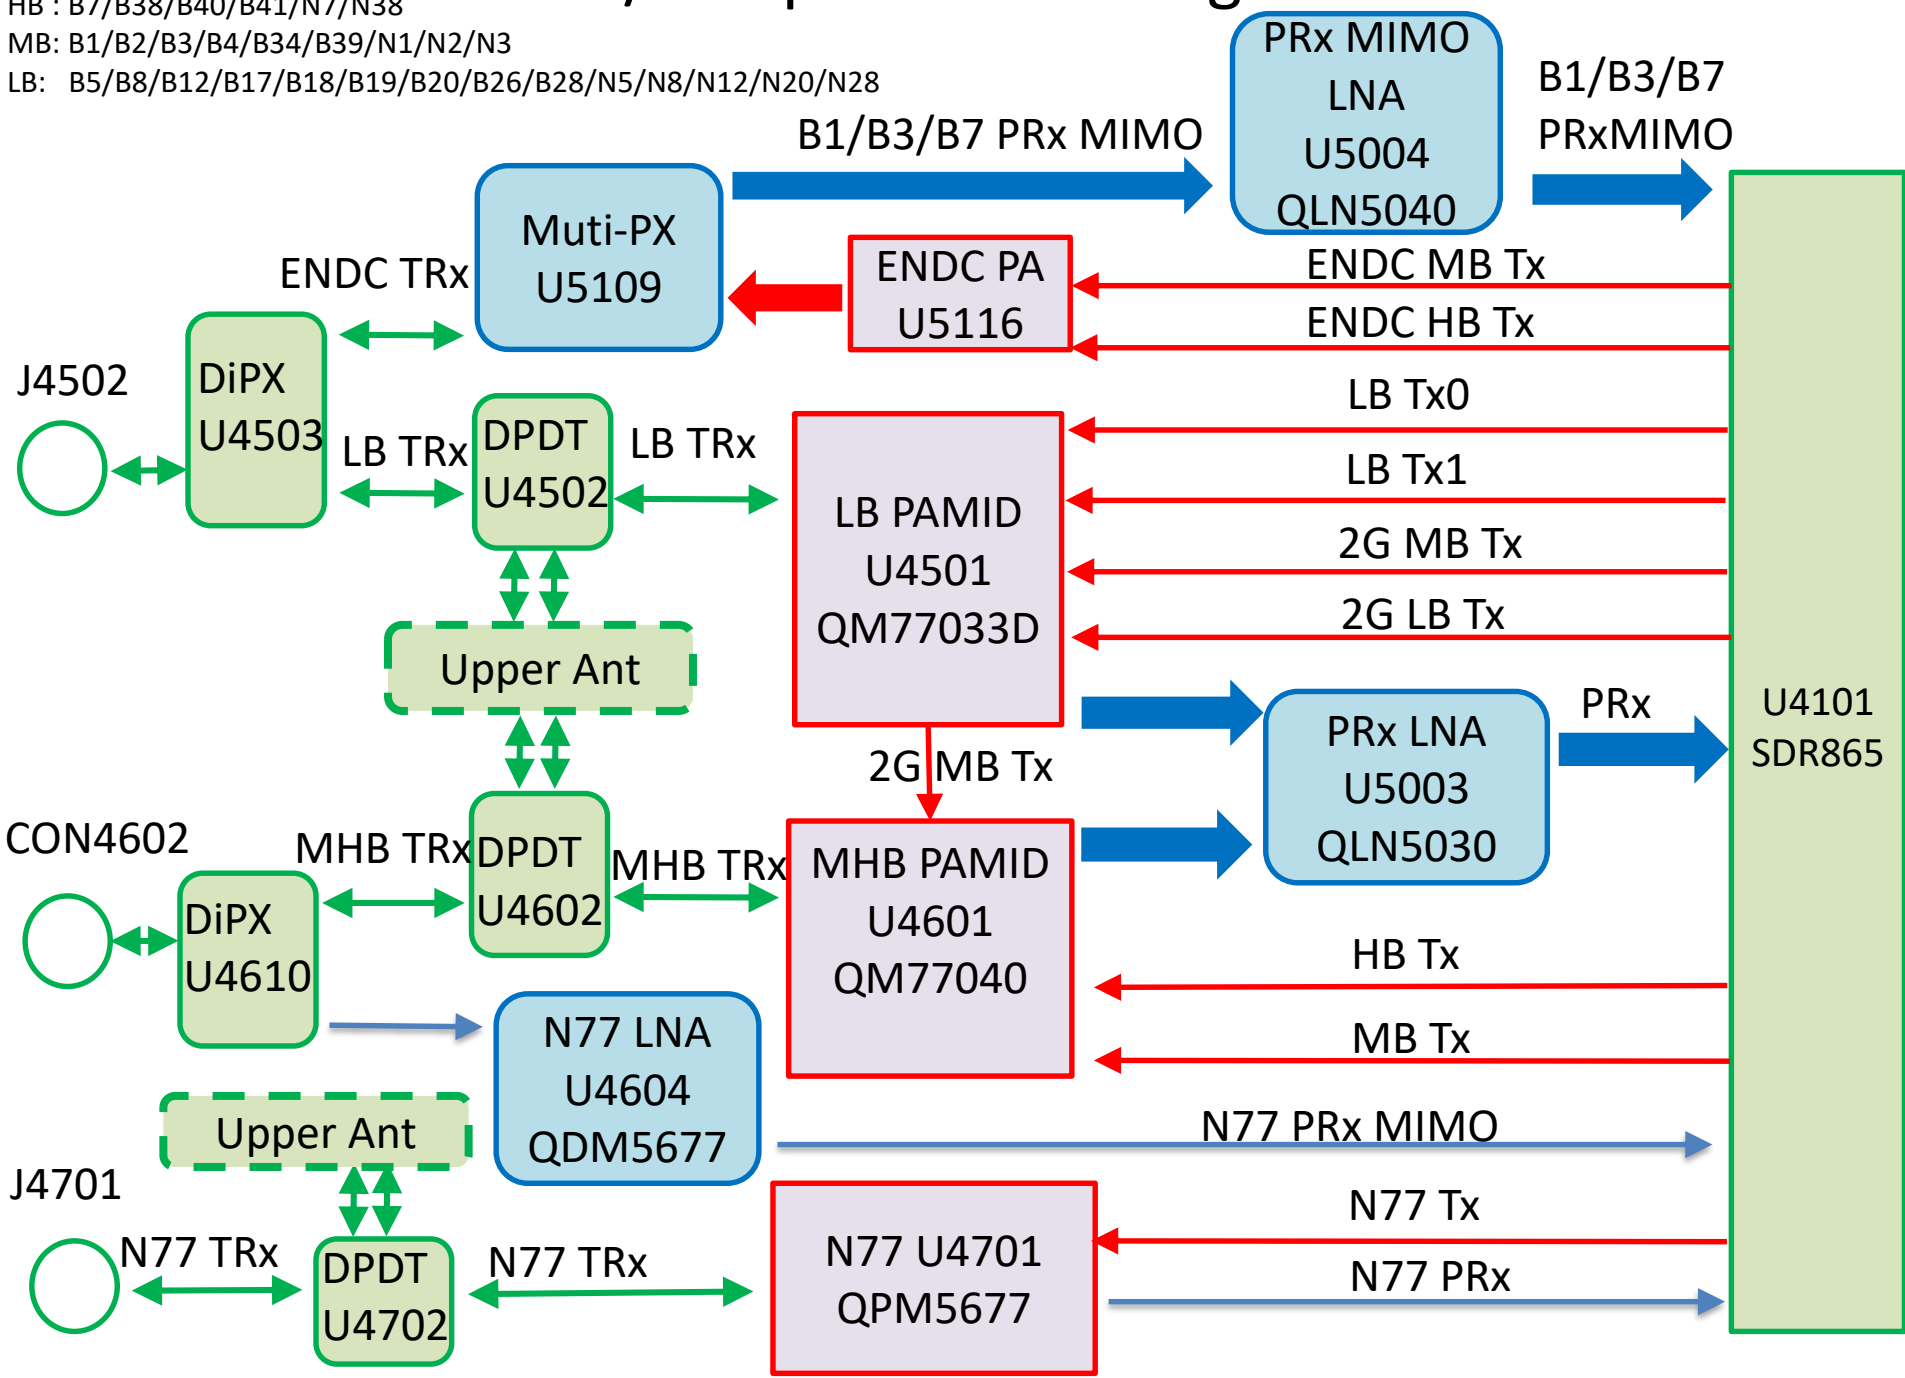


N77: B42/N77/N78

HB : B7/B38/B40/B41/N7/N38

MB: B1/B2/B3/B4/B34/B39/N1/N2/N3

LB: B5/B8/B12/B17/B18/B19/B20/B26/B28/N5/N8/N12/N20/N28

DRx path block diagram

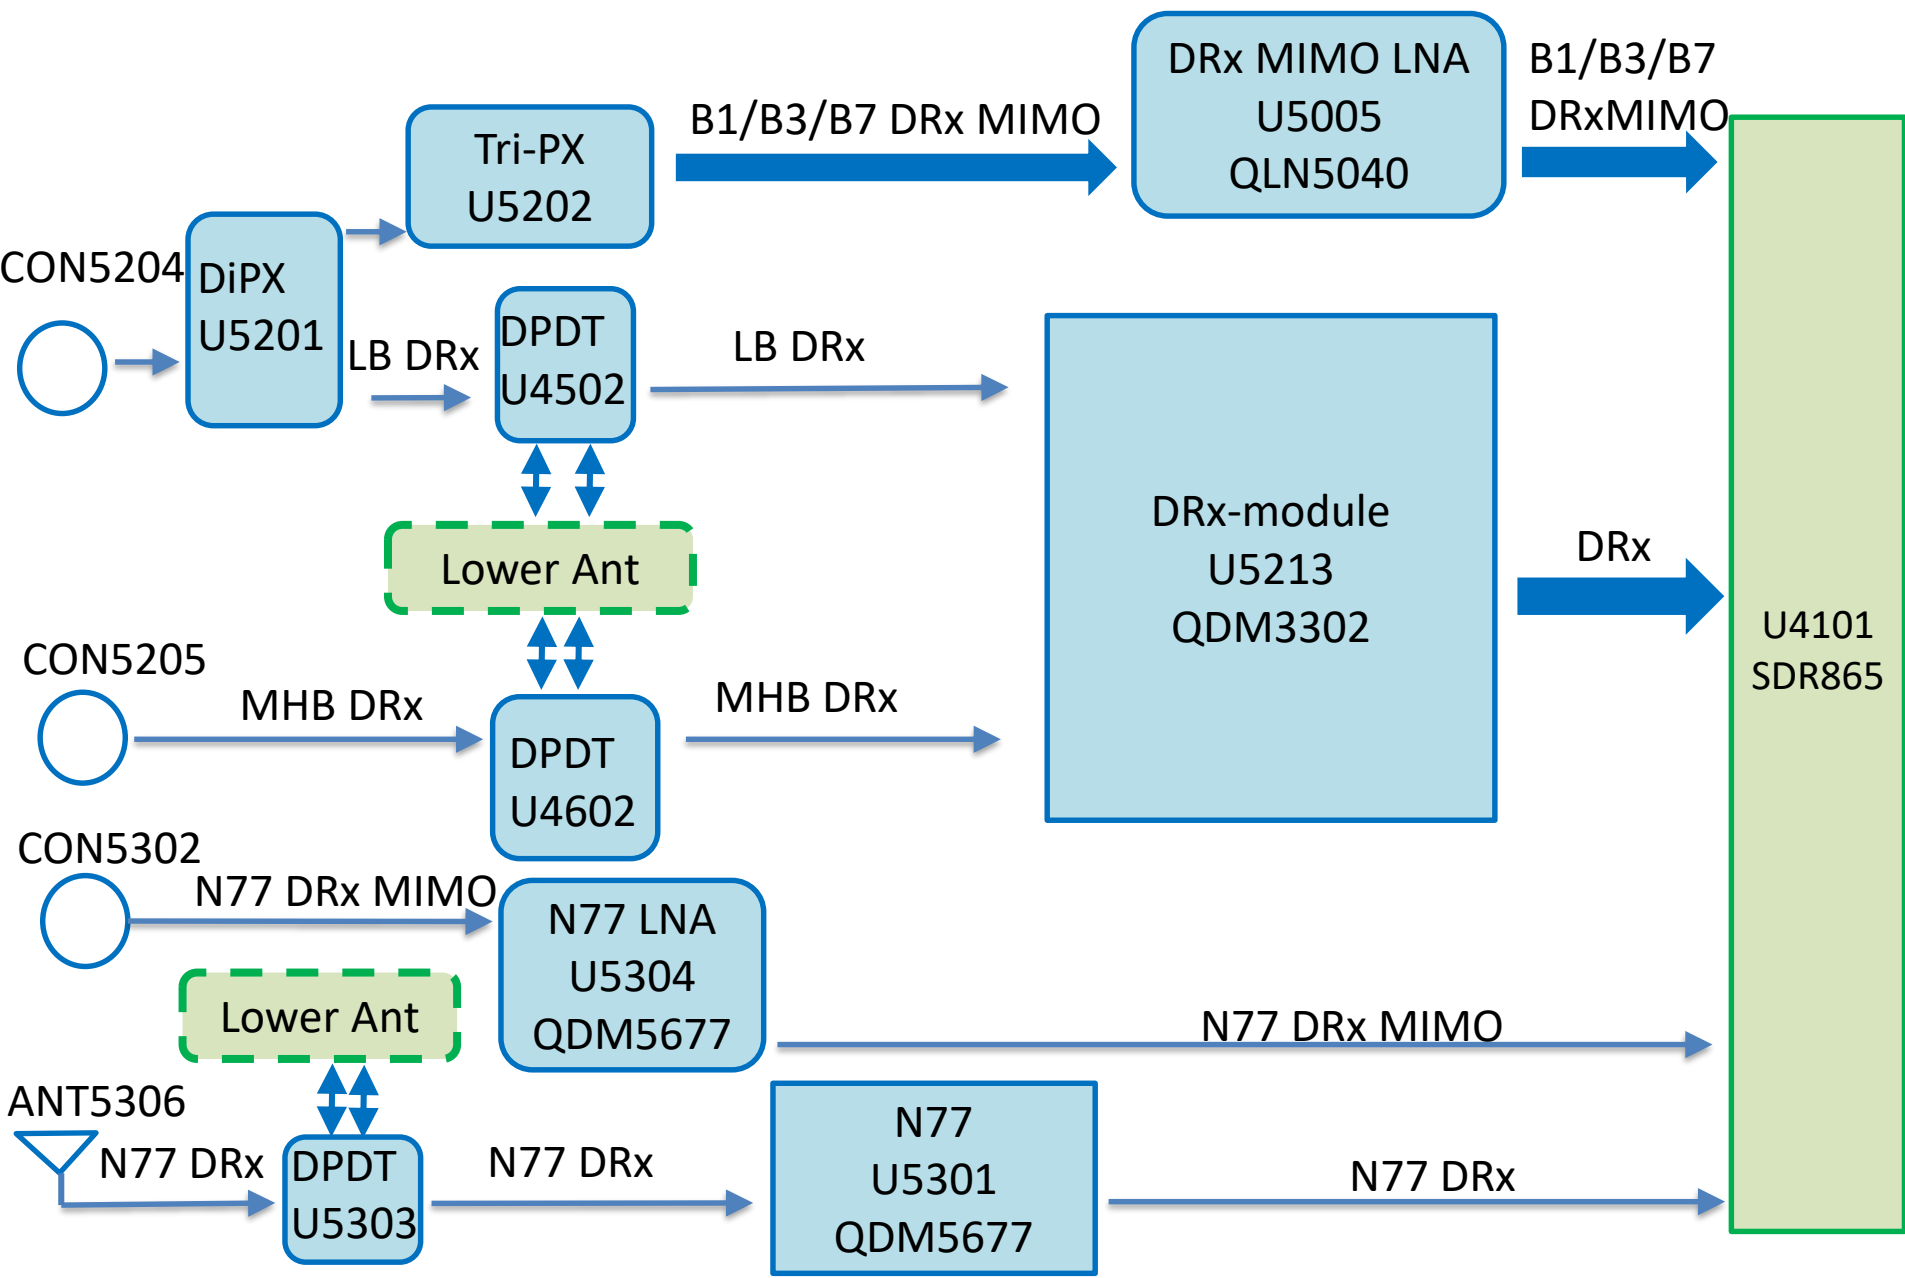

RFFE SCAN fail

Error Code : 3921

1. Computer search
"QFDT" and open

Qualcom Factory Debug Tool

File Tools Help

Product: **SampleProduct** COM: **59** **Connect** Operating Mode: **ONLINE**

Device Information

HLOS/FFBM: **FFBM** FTM/ONLINE NV: **FFBM** **Reset** FTM/ONLINE RUNTIME: **FFBM** Power Supply: **On** **Off**

5

Status PRESENT means pass, MISSING FATAL means no devices.
Please reference dev(devices) location on the next page

Report

```
File Size = 1480
File Version = 2
RFBW ID = 802
Number of Device Instances = 33
Number of Device Instances Present = 33
Error Code = 0
```

Dev Inst	BUS	MID	PID	P_REV	USID	Status
0	, 0	, (0x0)	, (0x0)	, 0x0	, 0xFF	PRESENT
1	, 32	, (0x0)	, (0x0)	, 0x0	, 0xFF	PRESENT
2	, 32	, (0x0)	, (0x0)	, 0x0	, 0xFF	PRESENT
3	, 32	, (0x0)	, (0x0)	, 0x0	, 0xFF	PRESENT
4	, 32	, (0x0)	, (0x0)	, 0x0	, 0xFF	PRESENT
5	, 35	, QUALCOMM(0x217)	, (0x1AC)	, 0xD0	, 0x8	PRESENT
6	, 37	, QUALCOMM(0x217)	, (0x253)	, 0x10	, 0x3	PRESENT
7	, 35	, QUALCOMM(0x217)	, (0x338)	, 0x0	, 0xD	PRESENT
8	, 35	, QUALCOMM(0x217)	, (0x337)	, 0x1	, 0x4	PRESENT
9	, 37	, QUALCOMM(0x217)	, (0x257)	, 0x0	, 0xB	PRESENT
10	, 39	, QUALCOMM(0x217)	, (0x257)	, 0x0	, 0x8	PRESENT
11	, 37	, QUALCOMM(0x217)	, (0x26E)	, 0x2	, 0xA	PRESENT
12	, 39	, QUALCOMM(0x217)	, (0x26E)	, 0x2	, 0x2	PRESENT

4

RFFE Scan

Debug Messages

Clear

Error Code : 3921

Device location

Dev
location

Index	1	2	3	4	5	6	7	8
Physical Device	QET5100	QET5100	QET6100	QM77040_U4601	QM77033D_U4501_ASM	QM77033D_U4501_PA	QLN5030_P_U5003	QLN5040_MIMO_P_U5004
Disabled On Card Variants								
Proc Ver	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst
Comm Master	SDR	SDR	SDR	SDR	SDR	SDR	SDR	SDR
Chan	1	2	3	1	2	2	5	5
MID	0x217	0x217	0x217	0x134	0x134	0x134	0x217	0x217
PID	0x35	0x35	0x0337	0x43	0x45	0x44	0x0257	0x026E
Rev	0x00	0x00	0x01	0x0	0x0	0x0	0x0	0x02
Skip Check								
Default USID	0x04	0x04	0x04	0x08	0x08	0x0F	0x08	0x0A
Assigned USID	0x04	0x04	0x04	0x08	0x08	0x0F	0x08	0x0A

Dev
location

Index	9	10	11	12	13	14
Physical Device	QLN5040_MIMO_D_U5005	QDM3302_D_RSW_U5213	QDM3302_D_RLN_U5213	QPM5677_RUC_U4701	QPM5677_RLN_U4701	QPM_CTRL
Disabled On Card Variants						
Proc Ver	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst
Comm Master	SDR	SDR	SDR	SDR	SDR	SDR
Chan	7	7	7	3	5	3
MID	0x217	0x217	0x217	0x217	0x217	0x217
PID	0x026E	0x41D	0x810	0x01AC	0x0253	0x338
Rev	0x02	0x1	0x2	0xD2	0x10	0x00
Skip Check						
Default USID	0x0A	0x0C	0x08	0x08	0x03	0x0D
Assigned USID	0x0A	0x0C	0x08	0x08	0x03	0x0D

Dev
location

Index	15	16	17	24	29
Physical Device	QDM5677_U5301	QDM5677_U4604	QDM5677_U5304	RF5426_U5116	BGSA143ML_U304
Disabled On Card Variants					
Proc Ver	v2_burst	v2_burst	v2_burst	v2_burst	v2_burst
Comm Master	SDR	SDR	SDR	SDR	MDM
Chan	7	5	7	2	0
MID	0x217	0x217	0x217	0x0134	0x11A
PID	0x253	0x253	0x253	0xFD	0x32
Rev	0x2	0x2	0x2	0x0	0x0
Skip Check					non_fatal
Default USID	0x04	0x09	0x09	0x0F	0x06
Assigned USID	0x04	0x09	0x09	0x0E	0x06

Cal log

LTE_B1_Connected_V2_FBRX_PRX_TX0	PASS	1.01
LTE_B2_Connected_V2_FBRX_PRX_TX0	PASS	0.59
LTE_B3_Connected_V2_FBRX_PRX_TX0	PASS	1.00
LTE_B4_Connected_V2_FBRX_PRX_TX0	PASS	0.91
LTE_B5_Connected_V2_FBRX_PRX_TX0	PASS	0.50
LTE_B7_Connected_V2_FBRX_PRX_TX0	PASS	1.42
LTE_B8_Connected_V2_FBRX_PRX_TX0	PASS	0.39
LTE_B12_Connected_V2_FBRX_PRX_TX0	PASS	0.43
LTE_B17_Connected_V2_FBRX_PRX_TX0	PASS	0.38
LTE_B18_Connected_V2_FBRX_PRX_TX0	PASS	0.38
LTE_B19_Connected_V2_FBRX_PRX_TX0	PASS	0.38
LTE_B20_Connected_V2_FBRX_PRX_TX0	PASS	0.38
LTE_B26_Connected_V2_FBRX_PRX_TX0	PASS	0.38
LTE_B28A_Connected_V2_FBRX_PRX_TX0	PASS	0.57
LTE_B28B_Connected_V2_FBRX_PRX_TX0	PASS	0.38
LTE_B34_Connected_V2_FBRX_PRX_TX0	PASS	0.59
LTE_B38_Connected_V2_FBRX_PRX_TX0	PASS	0.91
LTE_B39_Connected_V2_FBRX_PRX_TX0	PASS	0.91
LTE_B40_Connected_V2_FBRX_PRX_TX0	PASS	0.59
LTE_B41_Connected_V2_FBRx_PRX_TX0	PASS	0.90

PRx	Sub6_n28_Connected_V2_Primary
	Sub6_n38_Connected_V2_Primary
	Sub6_n77A_Connected_V2_Primary_FBRx_PRx
	Sub6_n77B_Connected_V2_Primary_FBRx_PRx
DRx	Sub6_n1_Connected_V2_Diversity
	Sub6_n2_Connected_V2_Diversity
	Sub6_n3_Connected_V2_Diversity
Tx	Sub6_n1_UnConnected_V2
	LTE_B2_V2


Search Cal log from SN computer. Find the corresponding hardware path according to the fail band. There is Cal log indication on left side ◦

Antenna Port

PARAMETERS: Rx Gain Calibration Parameters

Technology	Band	Sub Band	Signal Path	RFM Device	Antenna Path	PLL ID	Antenna Number	Time (s)
LTE	5	0	65	4	2	1	0	


bottom

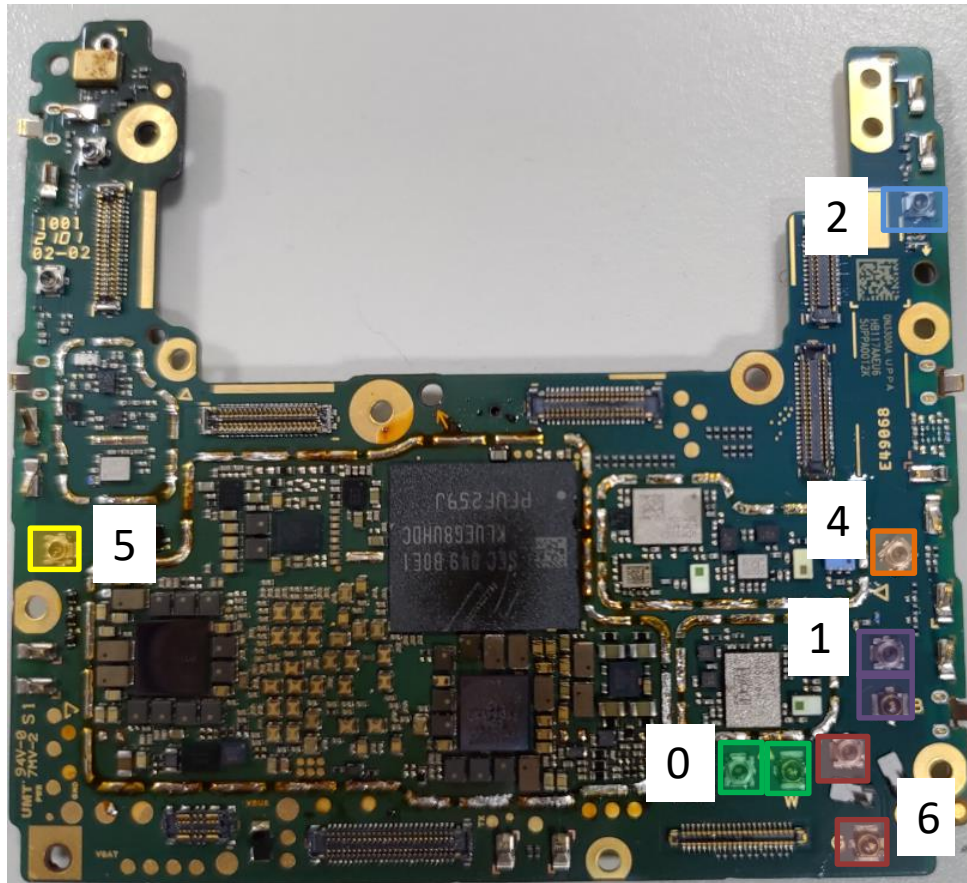

- 0. LB TRx & B1/B3/B7 PRx MIMO + NR
- 1. MHB TRx & N77 PRx MIMO + NR
- 2. MHB DRx + NR
- 4. LB DRx & B1/B3/B7 DRx MIMO + NR
- 5. N77 DRx MIMO
- 6. N77 TRx


GSM 850/900 Tx Path

bottom

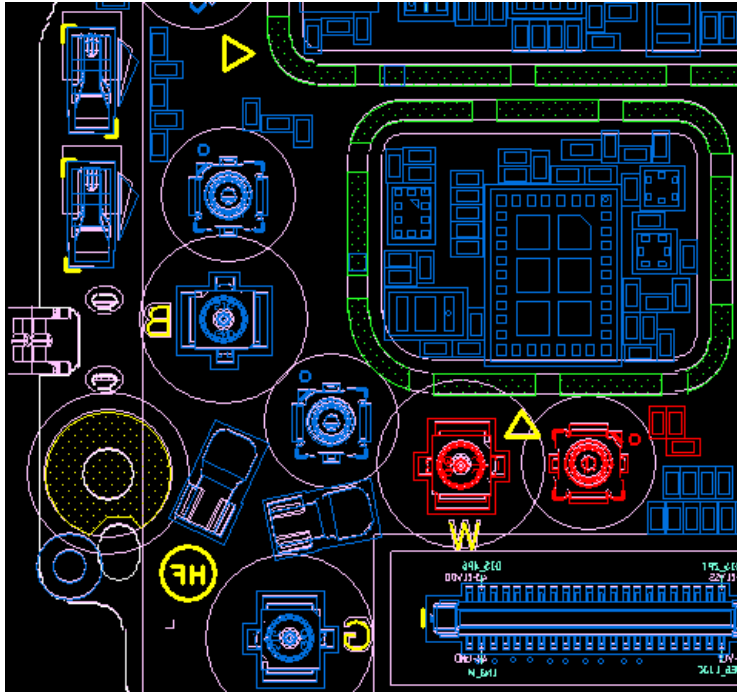

RF Connector LB
J4501 J4502

top

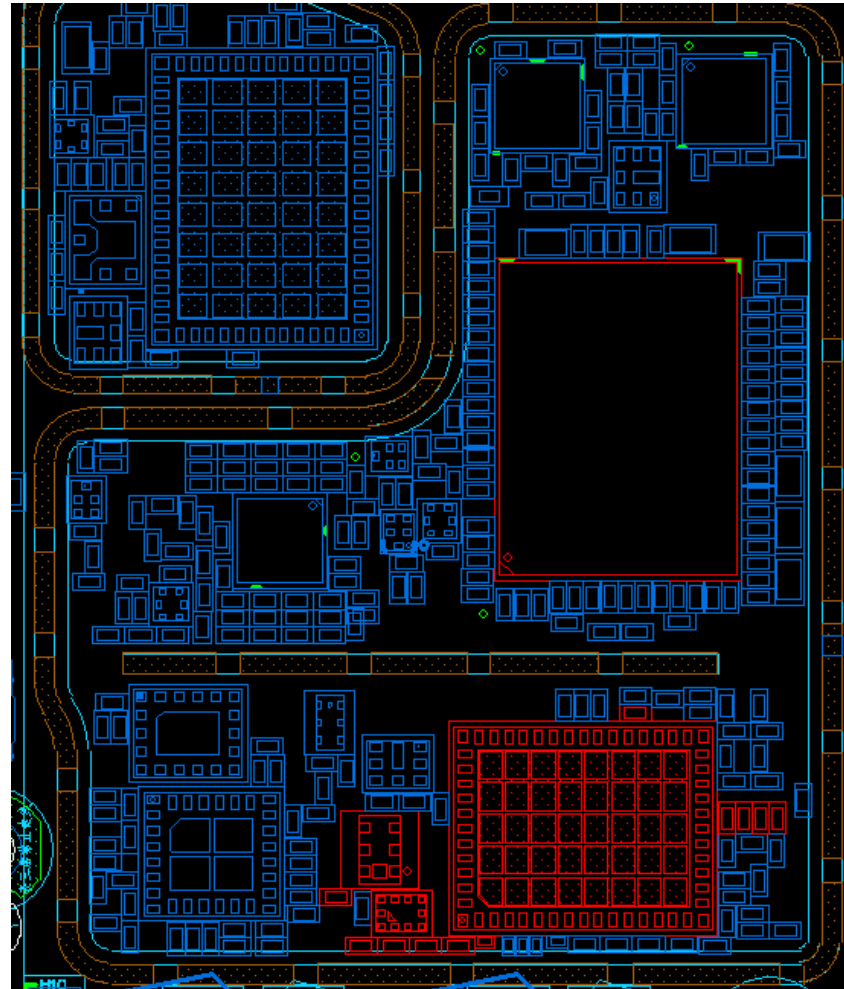

SDR865
U4101

LB + B1/B3/B7 DiPX
U4503

LB DPDT
U4502


LB PAMID QM77033D
U4501

GSM DCS/PCS Tx Path

bottom

MHB + N77 DiPX
U4610


MHB DPDT
U4602

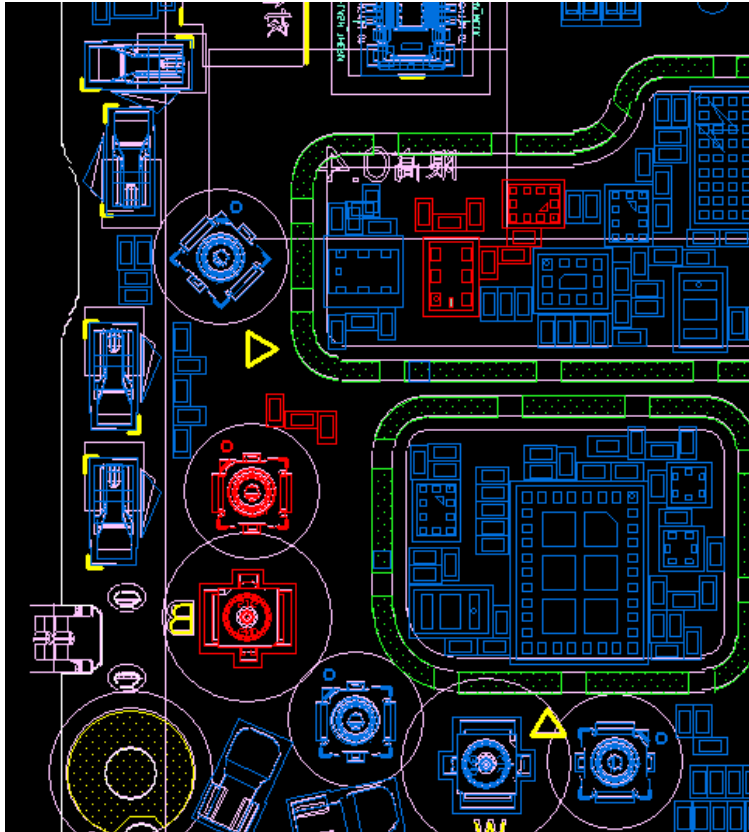

RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040
U4601

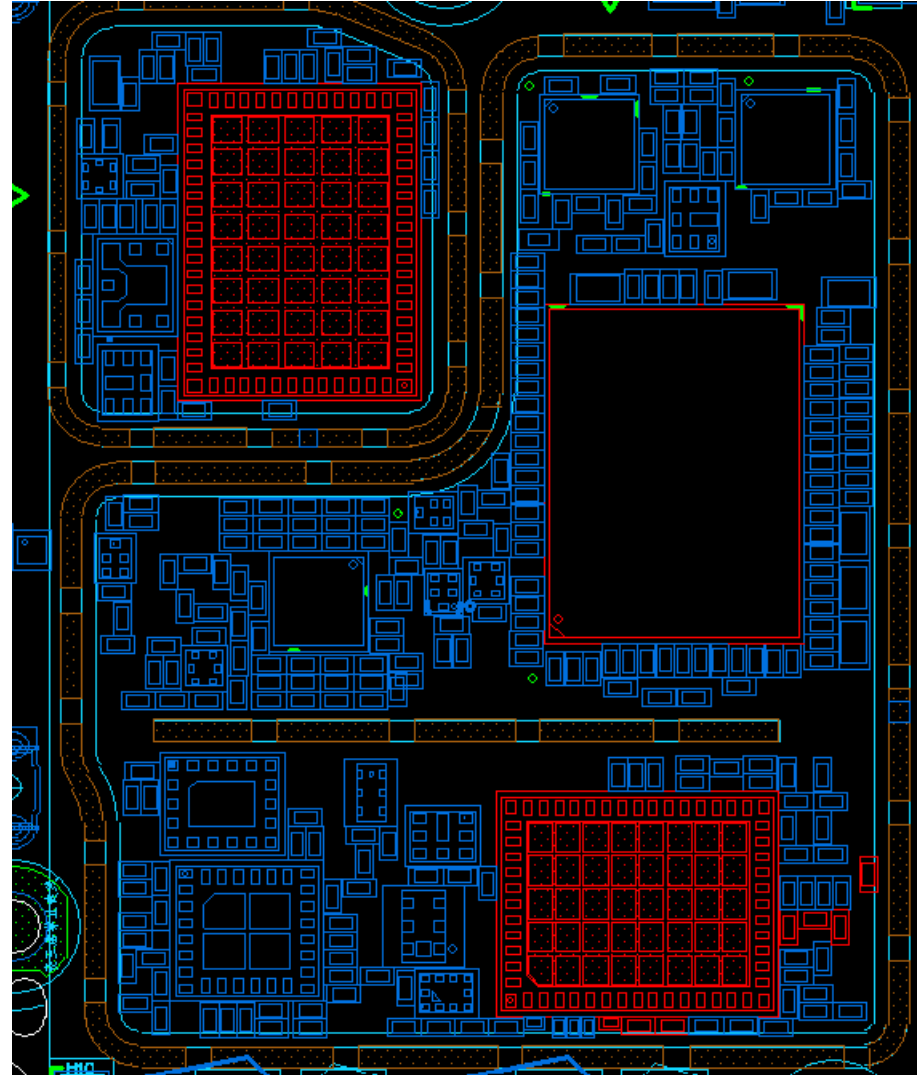


SDR865
U4101

LB PAMID QM77033D
U4501


3G/4G/5G LB Tx0 Path

bottom

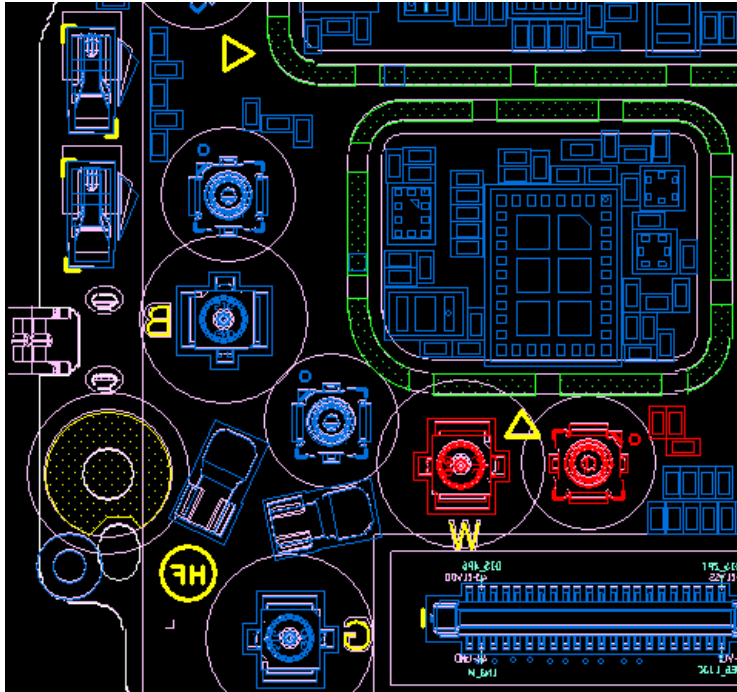

RF Connector LB
J4501 J4502

top

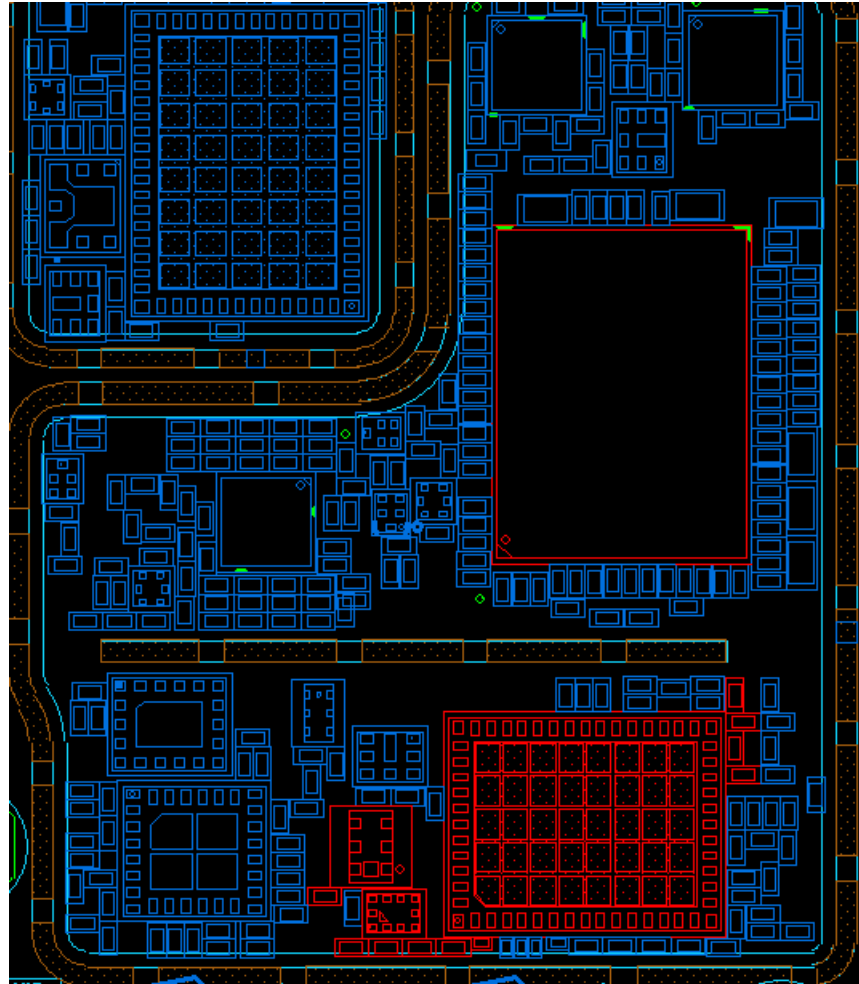

SDR865
U4101


LB + B1/B3/B7 DiPX
U4503

LB DPDT
U4502

LB PAMID QM77033D
U4501


3G/4G/5G LB Tx1 Path

bottom

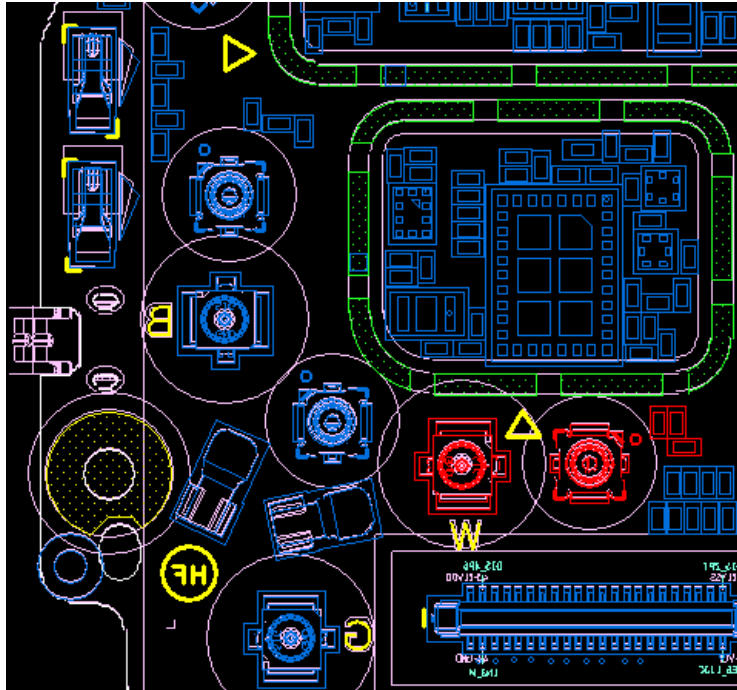

RF Connector LB
J4501 J4502

top

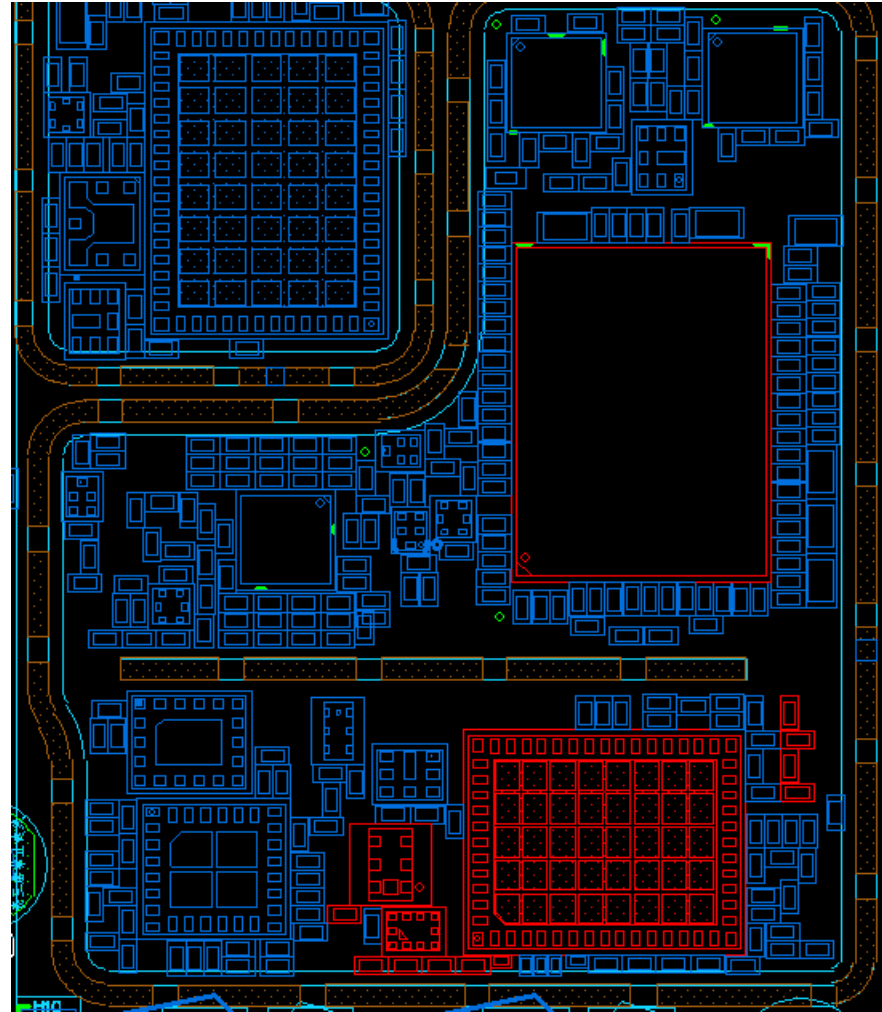

SDR865
U4101


LB + B1/B3/B7 DiPX
U4503

LB DPDT
U4502

LB PAMID QM77033D
U4501

B28/N28 Tx0 Path

bottom

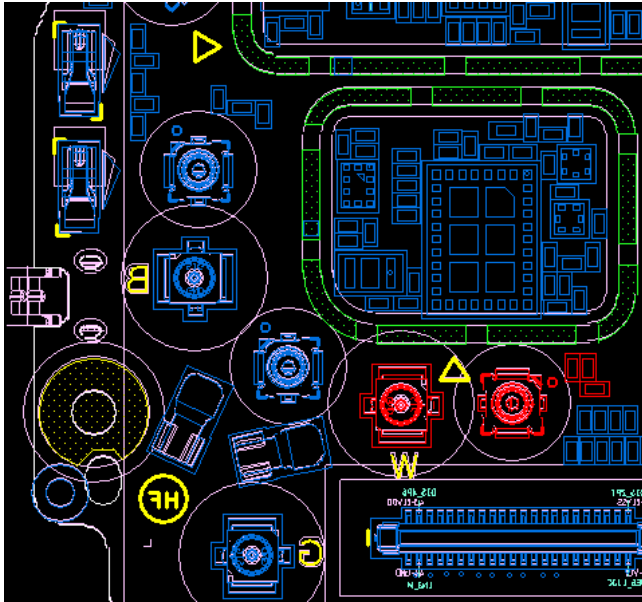


RF Connector LB
J4501 J4502

B28 DUX FILTER
U4504

LB + B1/B3/B7
DiPX
U4503

top

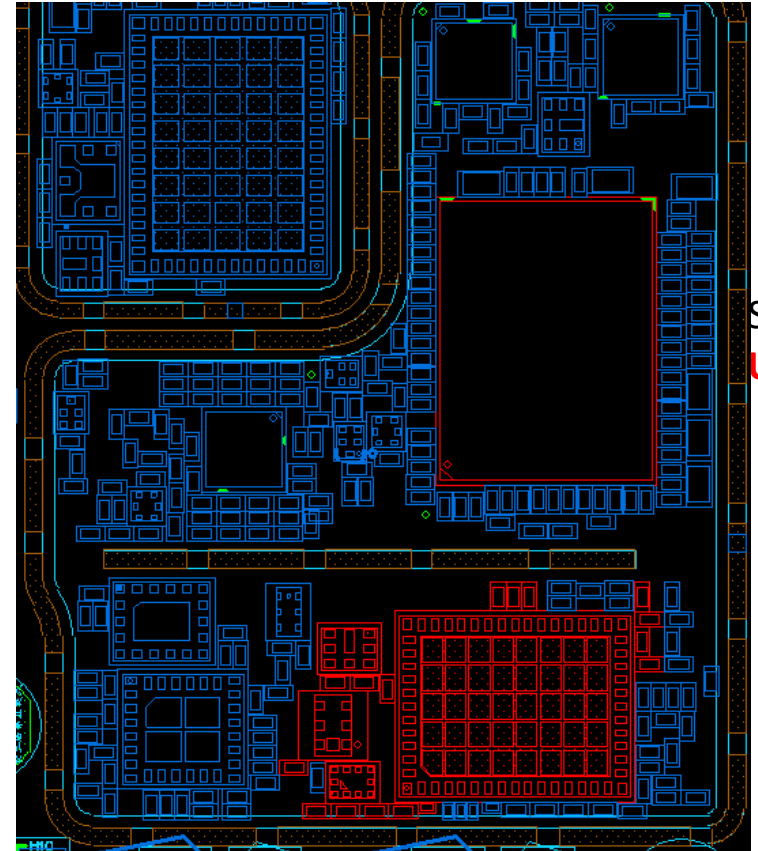


SDR865
U4101

LB DPDT
U4502

LB PAMID QM77033D
U4501

B28/N28 Tx1 Path

bottom

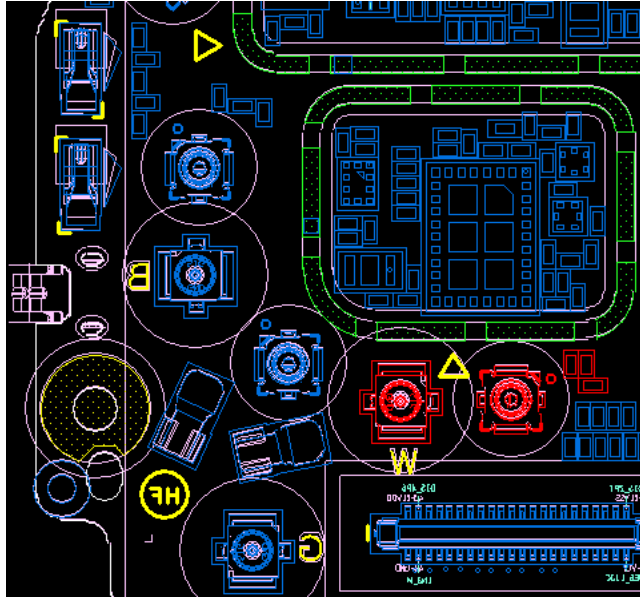


RF Connector LB
J4501 J4502

B28 DUX FILTER
U4504

LB + B1/B3/B7
DiPX
U4503

top

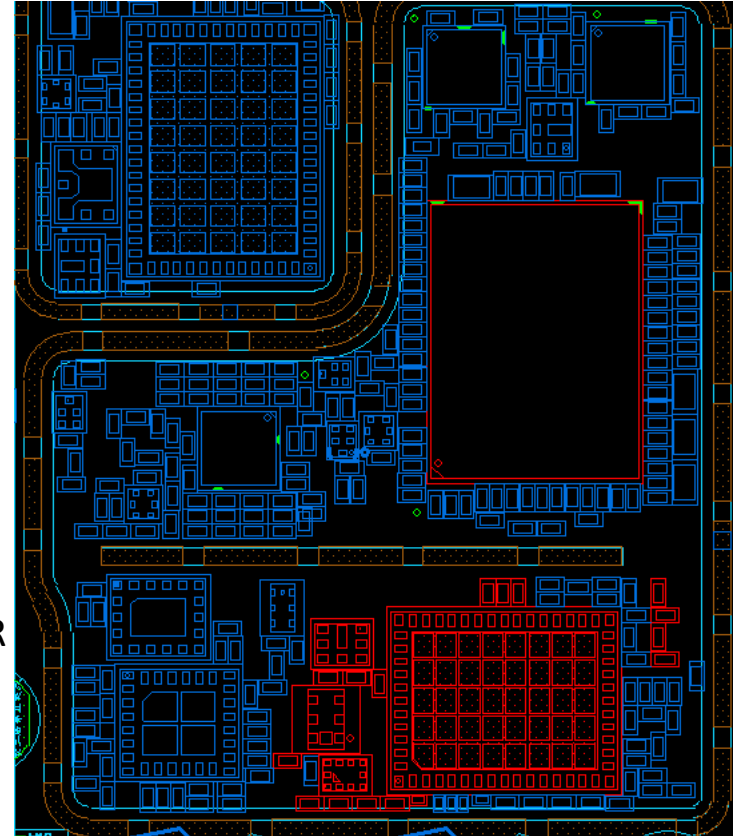

SDR865
U4101

LB DPDT
U4502

LB PAMID QM77033D
U4501

3G/4G/5G MB Tx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT


U4602

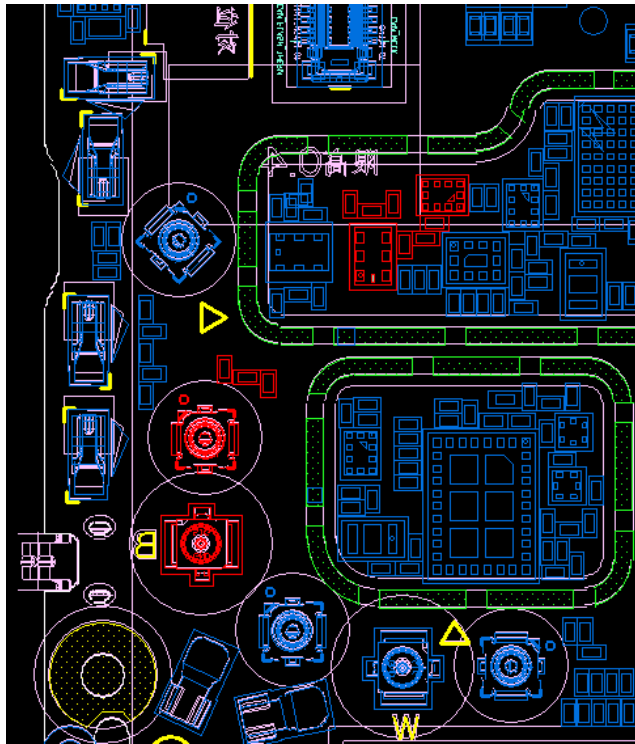

top

MHB PAMID QM77040

U4601

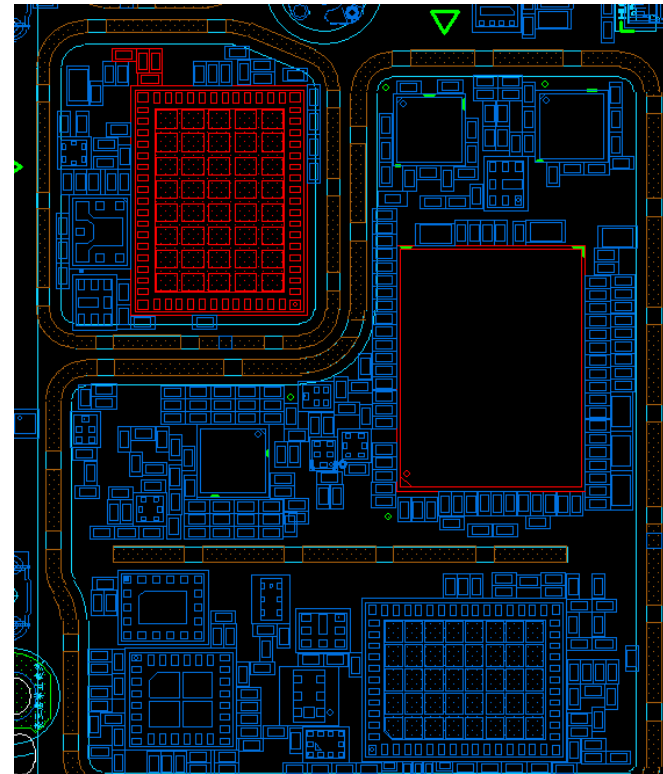

SDR865

U4101

RF Connector MHB
CON4601 CON4602

3G/4G/5G HB Tx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

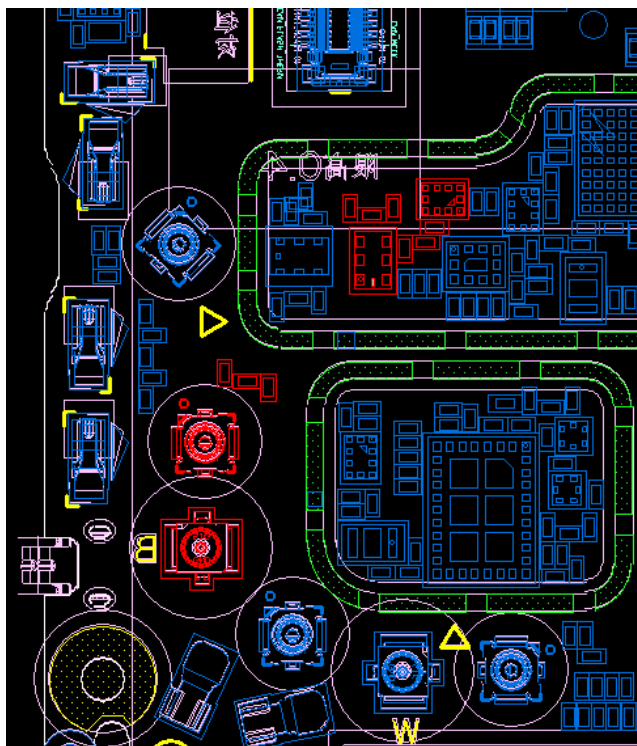


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

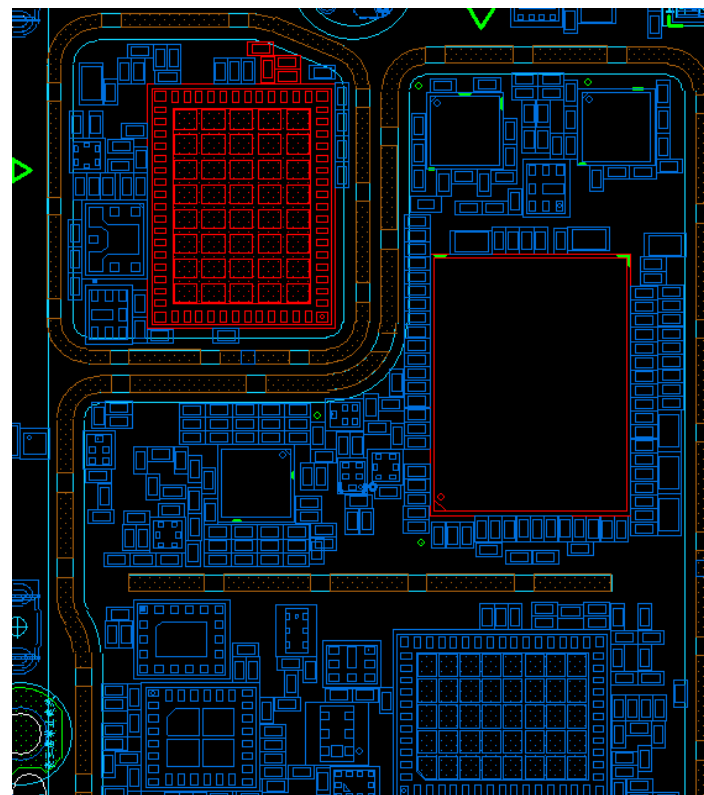

SDR865
U4101


B42/N77/N78 Tx Path

bottom

N77 DPDT

U4702


N77 BPF
U4705

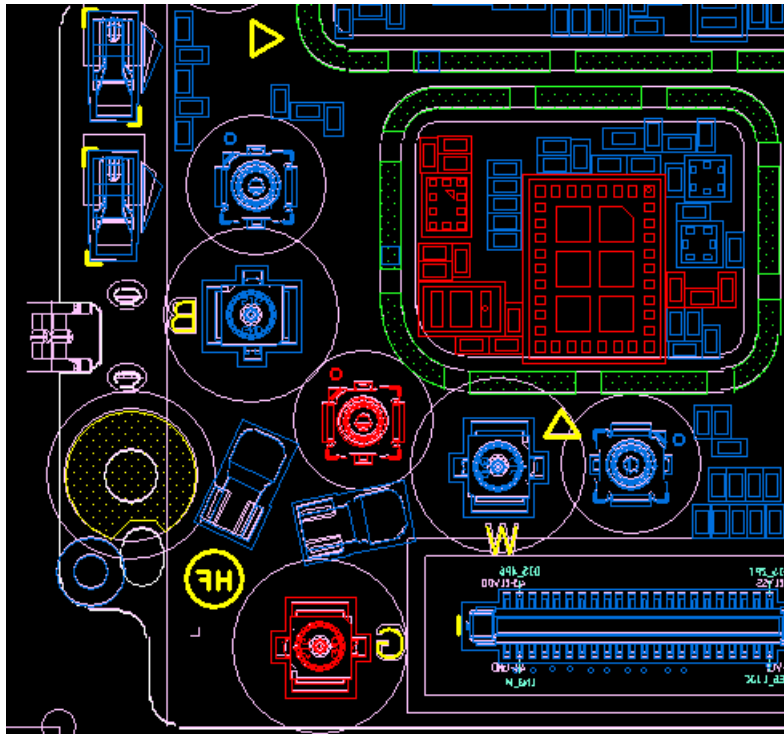

N77 PA QPM5677
U4701

RF Connector N77
J4701 CON4701


top

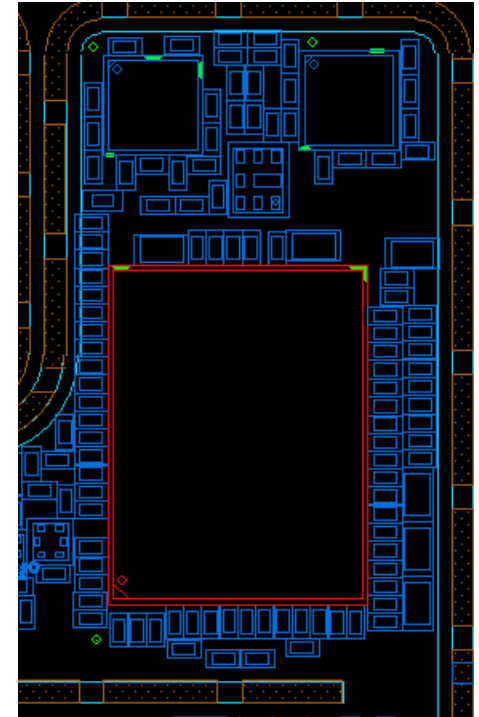

SDR865
U4101

FBRx Path

bottom

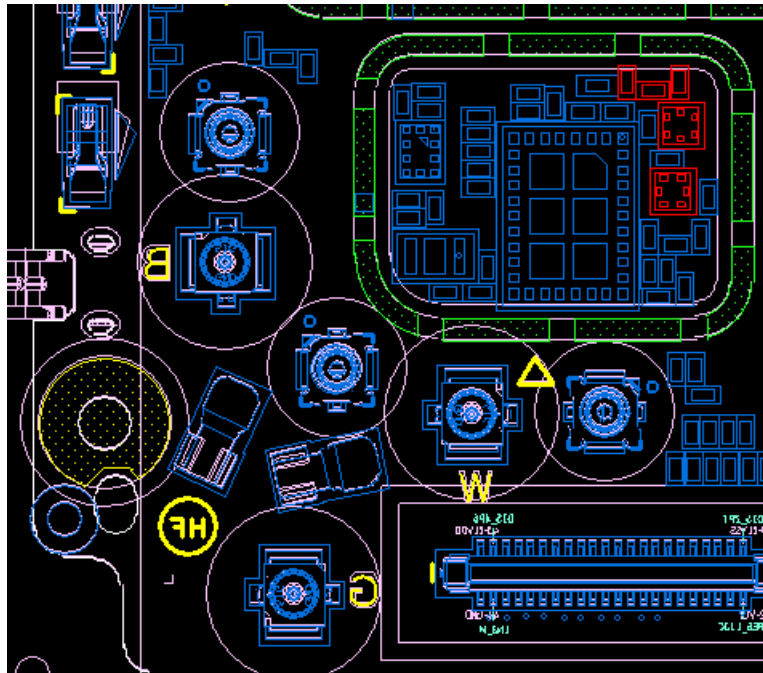


SPDT

U4606

SPDT

U4611

top

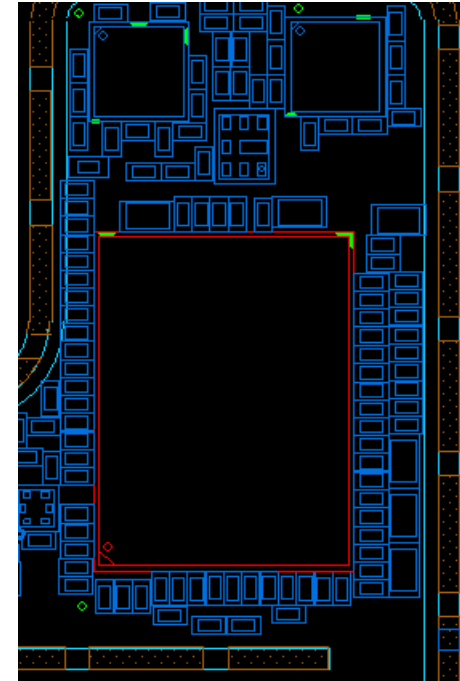


SDR865

U4101


DCDC

bottom

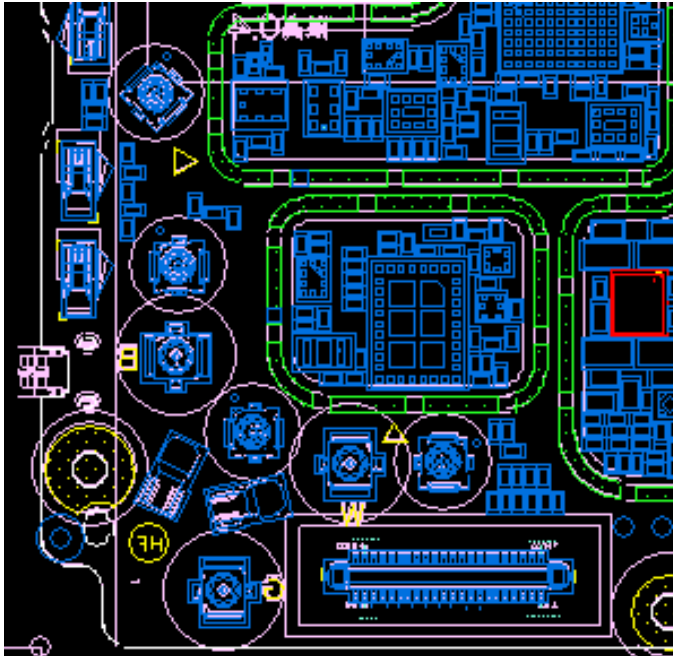

QET6100 for N77
U4901

top

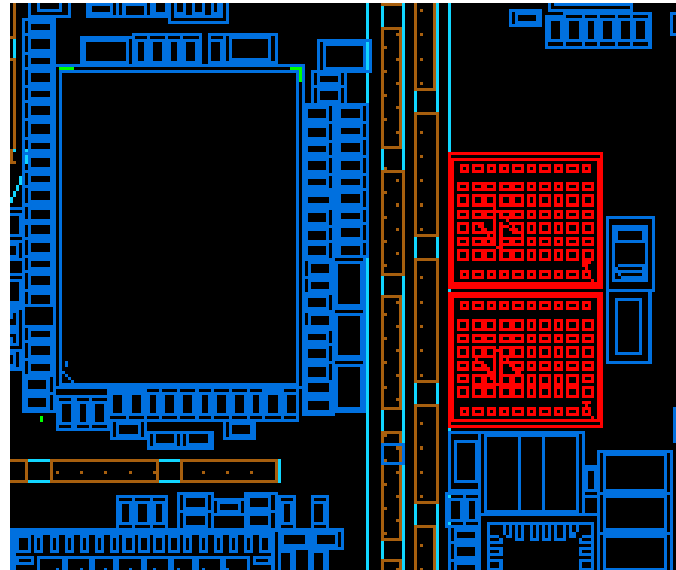


QET5100M for MHB
U4801

QET5100M for LB
U4802

LB B8 PRx Path

bottom

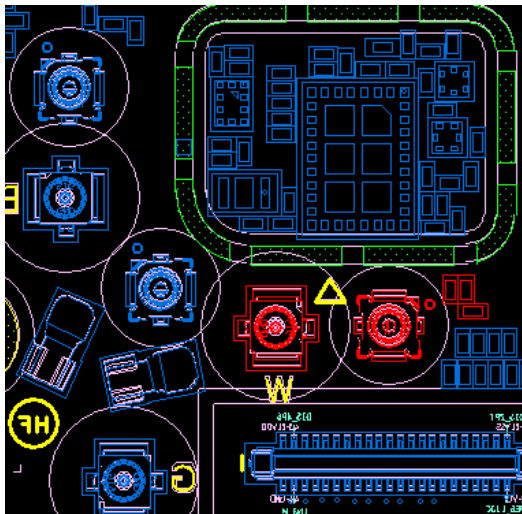


RF Connector LB
J4501 J4502

top

PRx LNA QLN5030
U5003

LB LNA SPDT
U5007

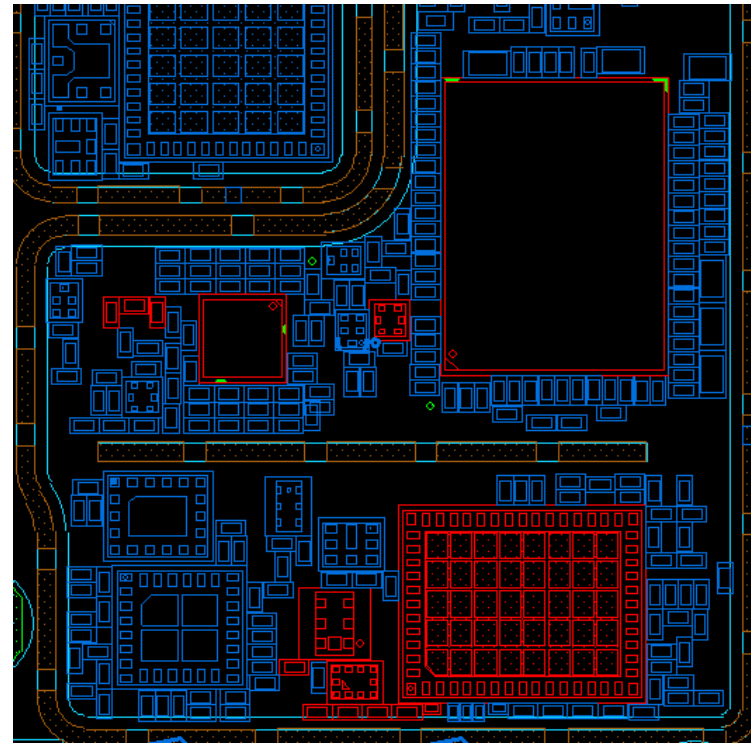

SDR865
U4101


LB + B1B3B7 DiPX
U4503

LB DPDT
U4502

LB PAMID QM77033D
U4501

LB B20 PRx Path

bottom

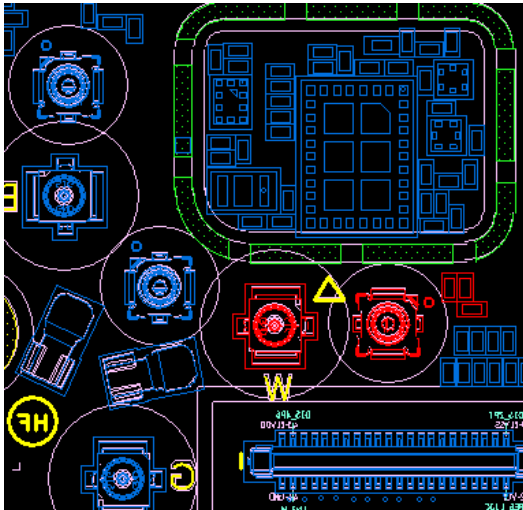

RF Connector LB

J4501 J4502


top

PRx LNA QLN5030

U5003

LB LNA SPDT

U5007

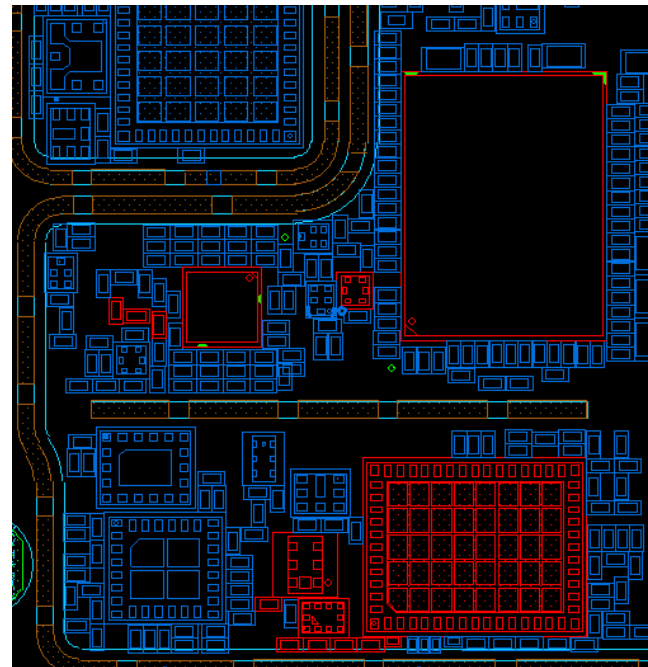

SDR865

U4101

LB + B1B3B7 DiPX

U4503

LB DPDT


U4502

LB PAMID QM77033D

U4501

LB B26 PRx Path

bottom

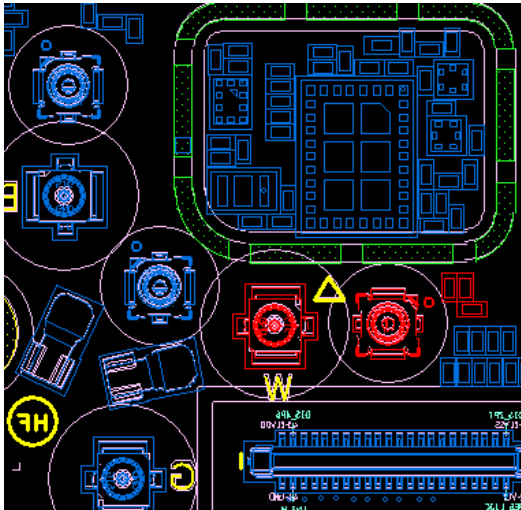

RF Connector LB

J4501 J4502


top

PRx LNA QLN5030

U5003

LB LNA SPDT

U5007

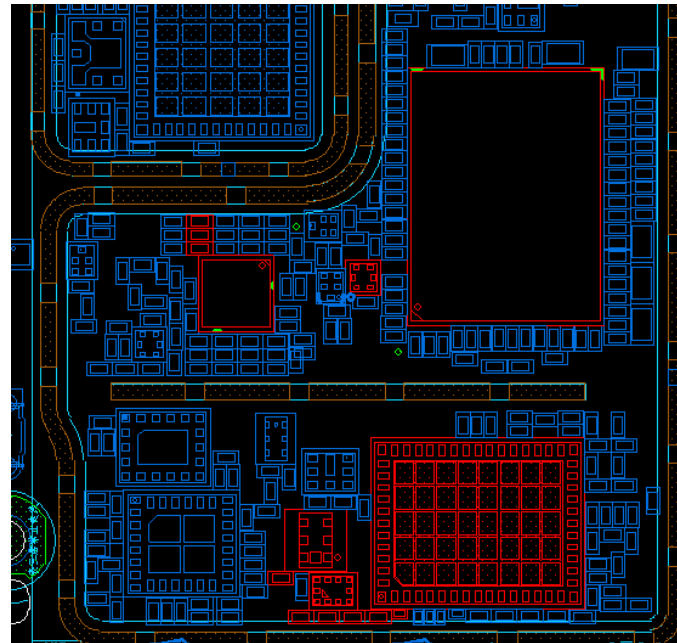

SDR865

U4101

LB + B1B3B7 DiPX

U4503

LB DPDT


U4502

LB PAMID QM77033D

U4501

LB B12 PRx Path

bottom

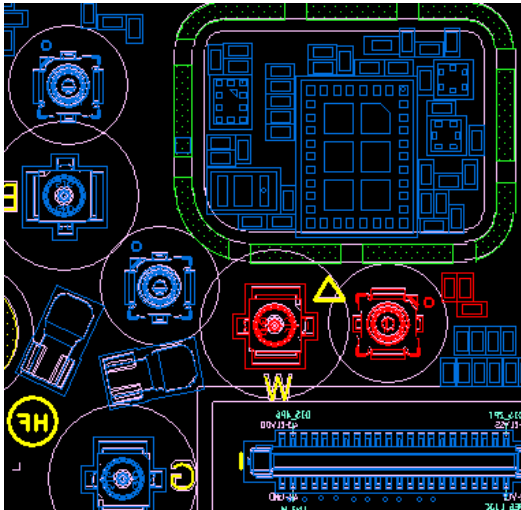


RF Connector LB
J4501 J4502

top

PRx LNA QLN5030
U5003

LB LNA SPDT
U5007

LB SP3T
U5006

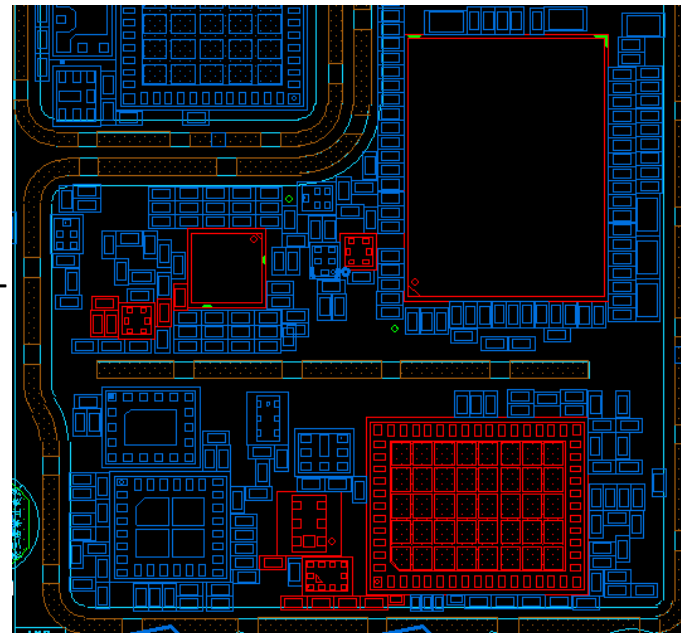

SDR865
U4101


LB + B1B3B7 DiPX
U4503

LB DPDT
U4502

LB PAMID QM77033D
U4501

LB B28 PRx Path

bottom

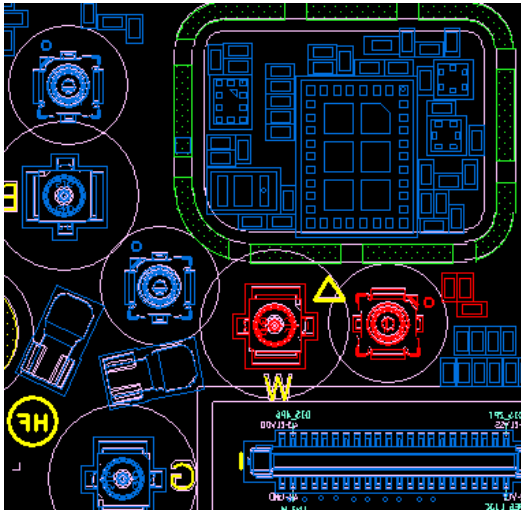

RF Connector LB
J4501 J4502


top

PRx LNA QLN5030
U5003

LB LNA SPDT
U5007

LB SP3T
U5006

B28 Filter
U4504

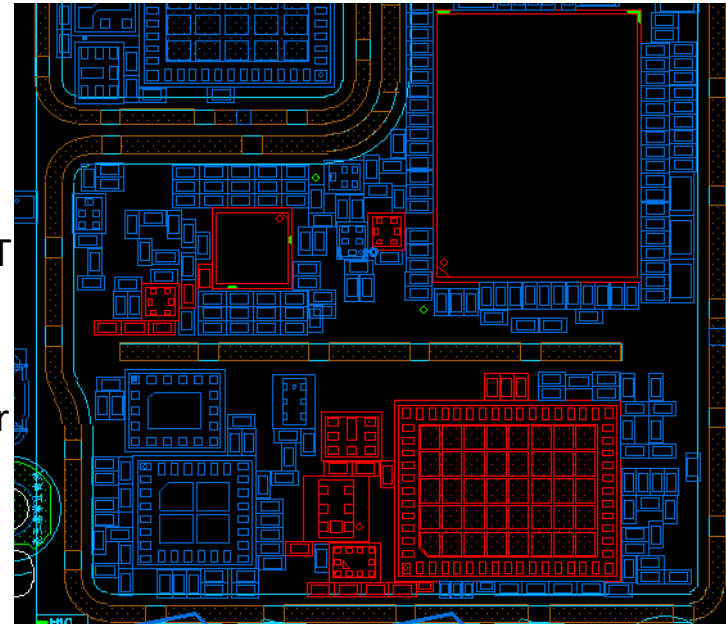

SDR865
U4101

LB + B1B3B7 DiPX
U4503

LB DPDT
U4502

LB PAMID QM77033D
U4501

MB B1/B4 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

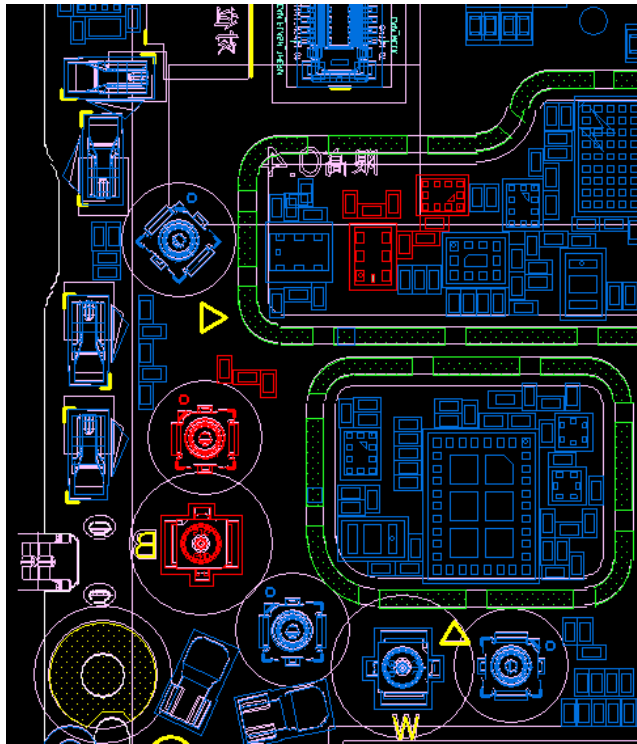


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

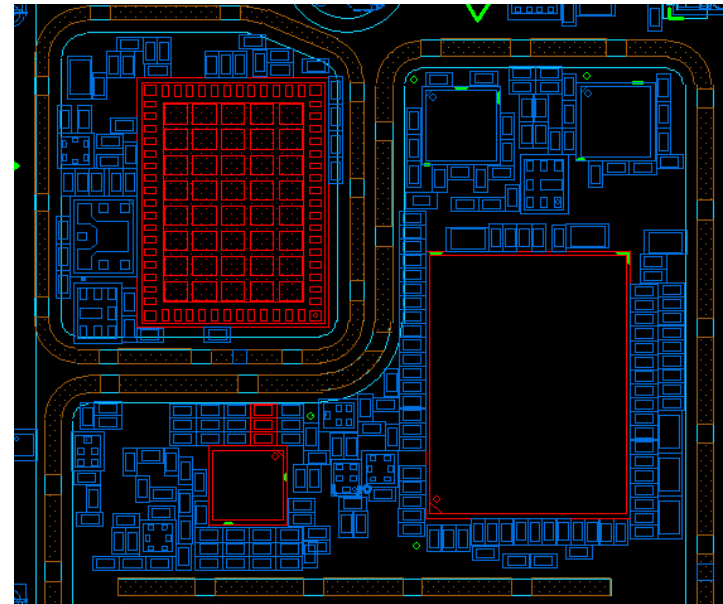

SDR865
U4101

PRx LNA QLN5030

U5003

MB B2 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

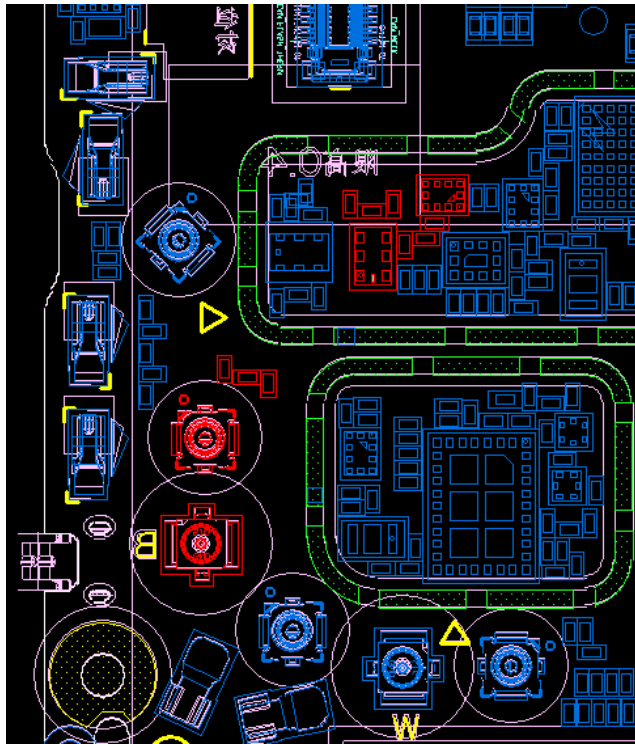


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

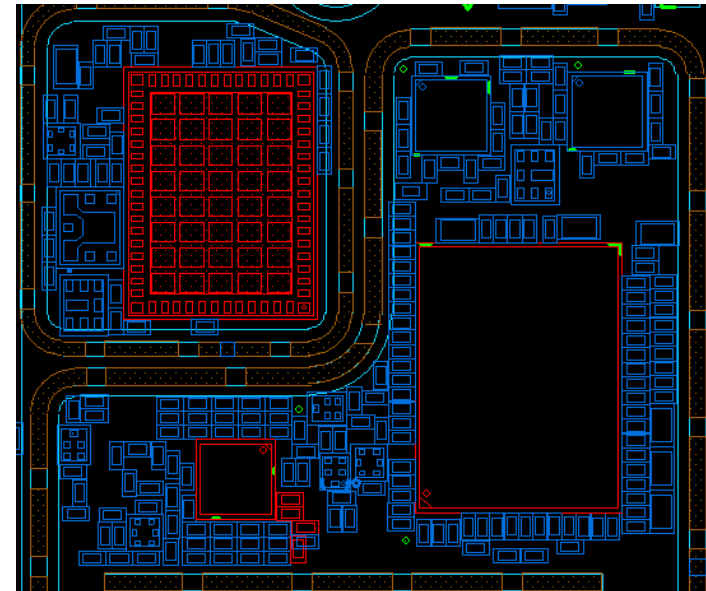

SDR865
U4101

PRx LNA QLN5030

U5003

MB B3 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

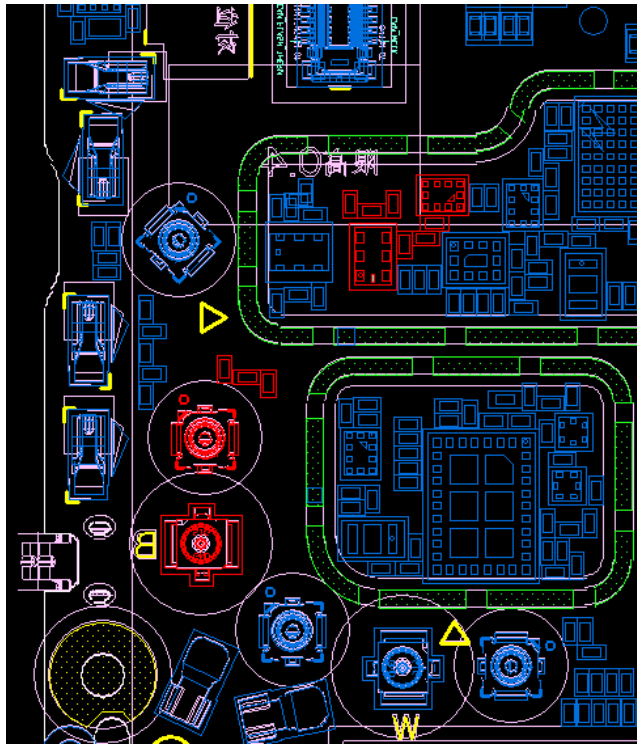


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

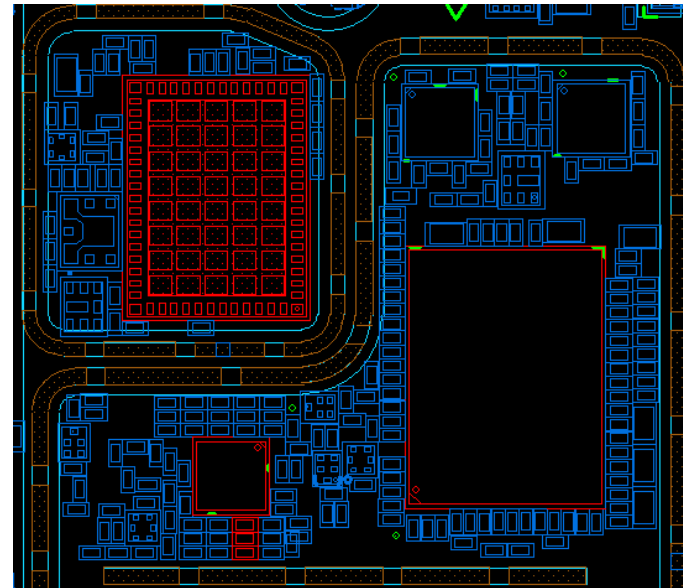

PRx LNA QLX5030

U5003

SDR865

U4101

MB B39 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

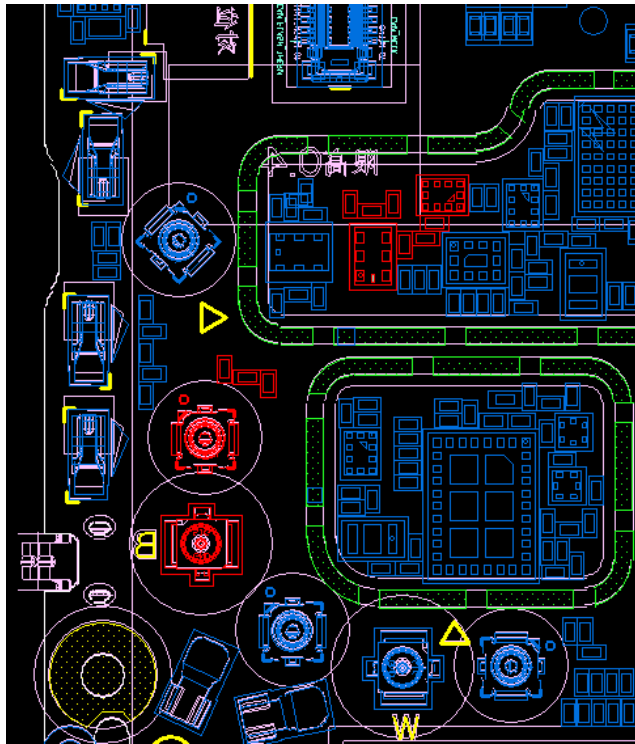


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

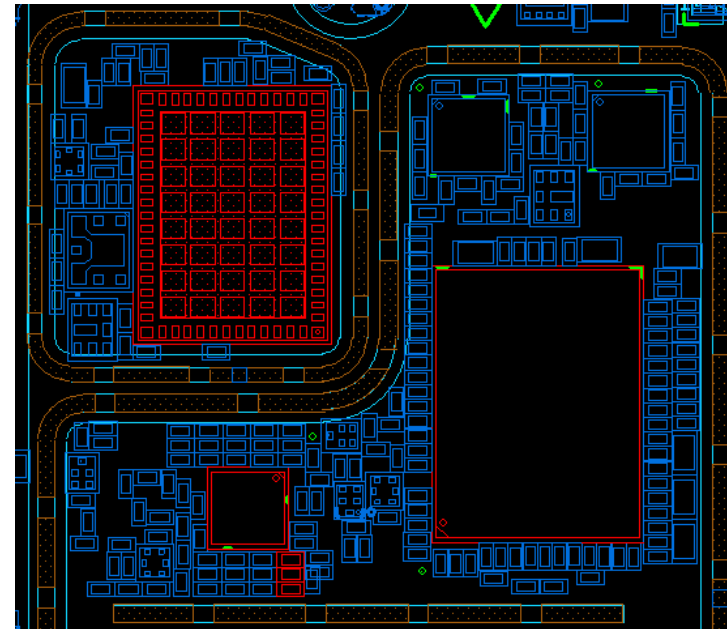

PRx LNA QLX5030

U5003

SDR865

U4101

MB B34 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

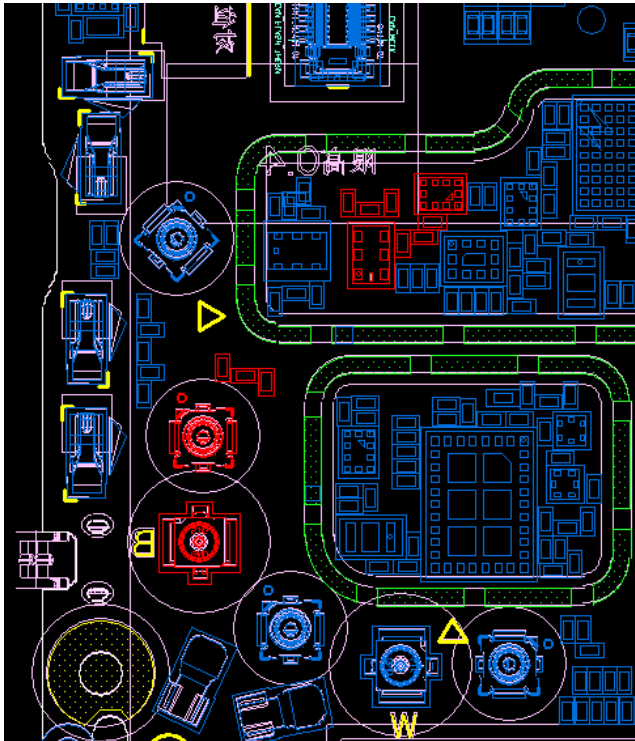


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

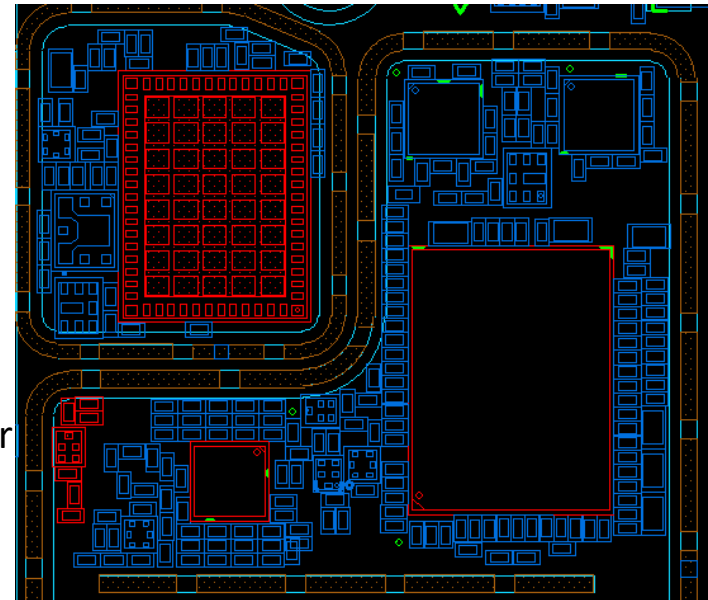

SDR865
U4101

B34 Filter
U5002

PRx LNA QL5030

U5003

HB B7 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

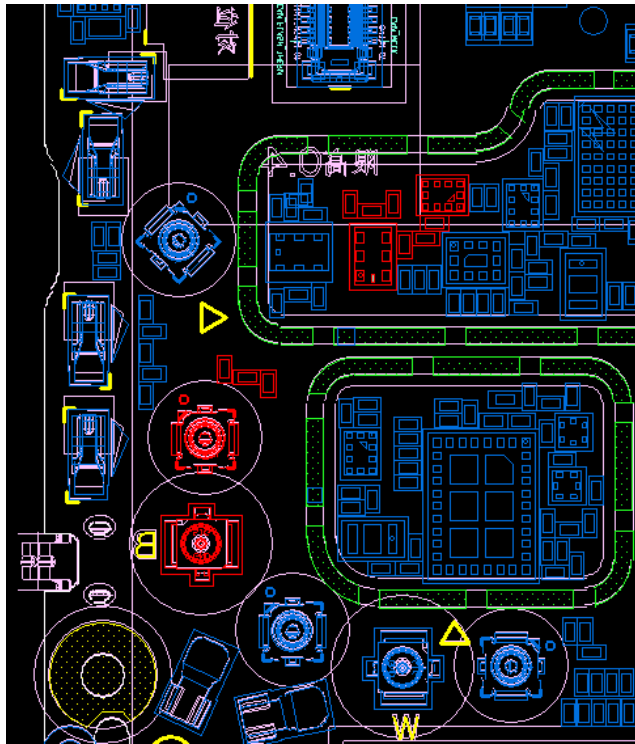


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

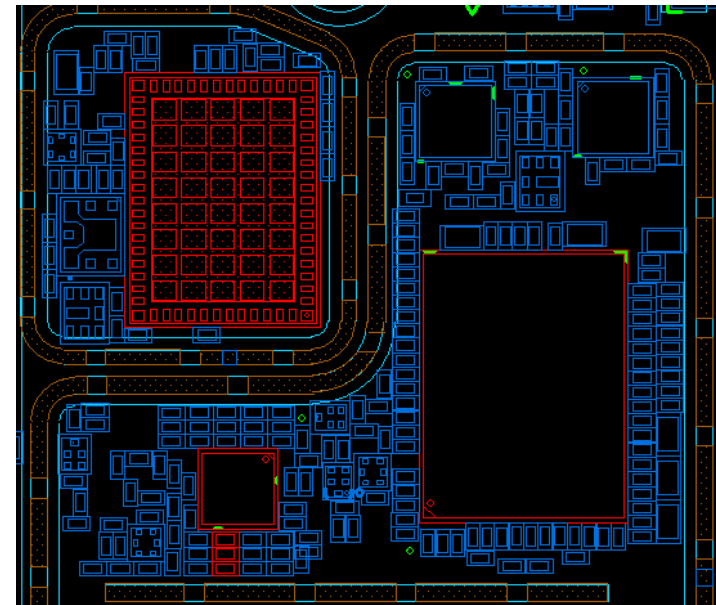

SDR865
U4101

PRx LNA QL5030

U5003

HB B40 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

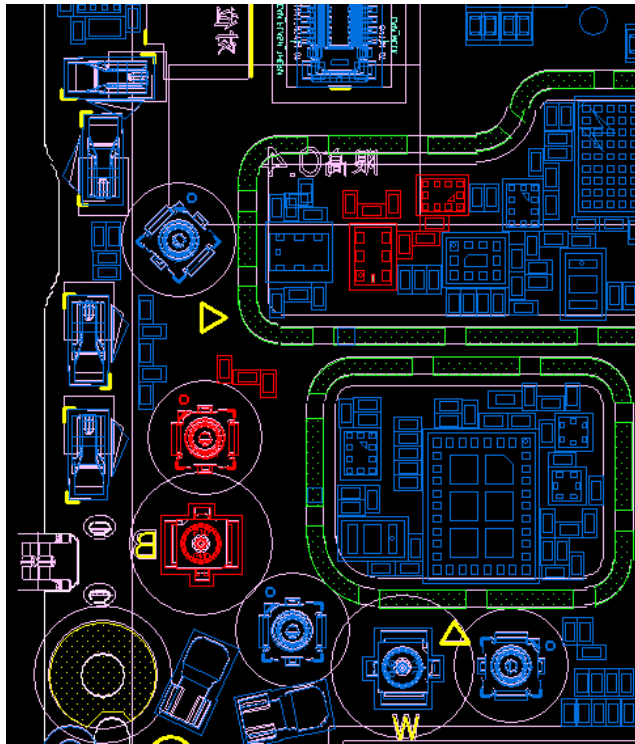


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

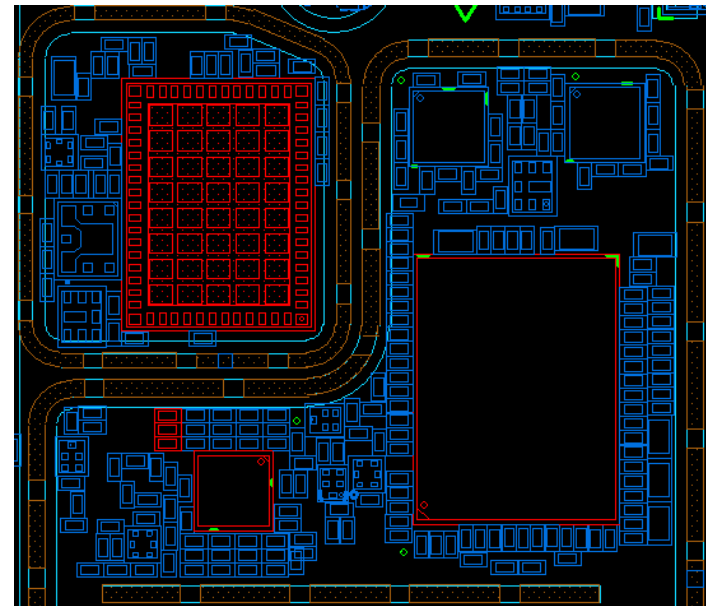

SDR865
U4101

PRx LNA QLN5030

U5003

HB B38/B41 PRx Path


bottom

MHB + N77 DiPX

U4610

MHB DPDT

U4602

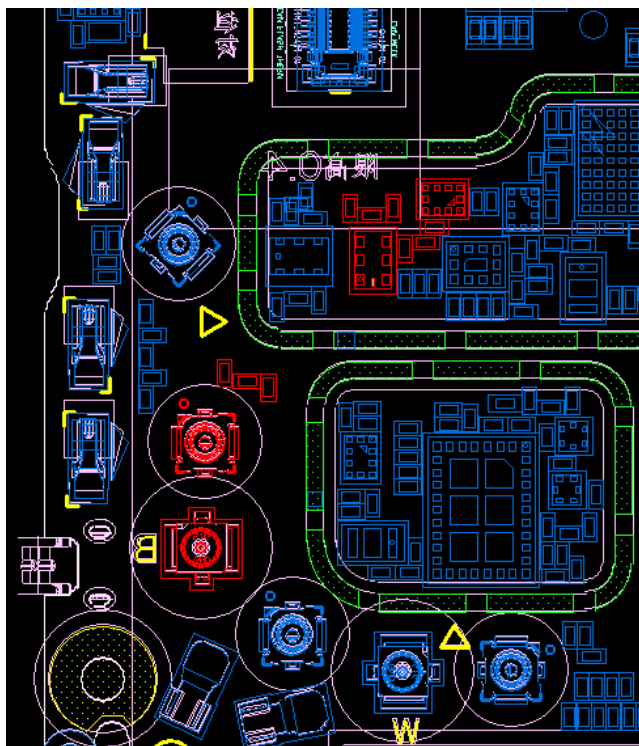


RF Connector MHB
CON4601 CON4602

top

MHB PAMID QM77040

U4601

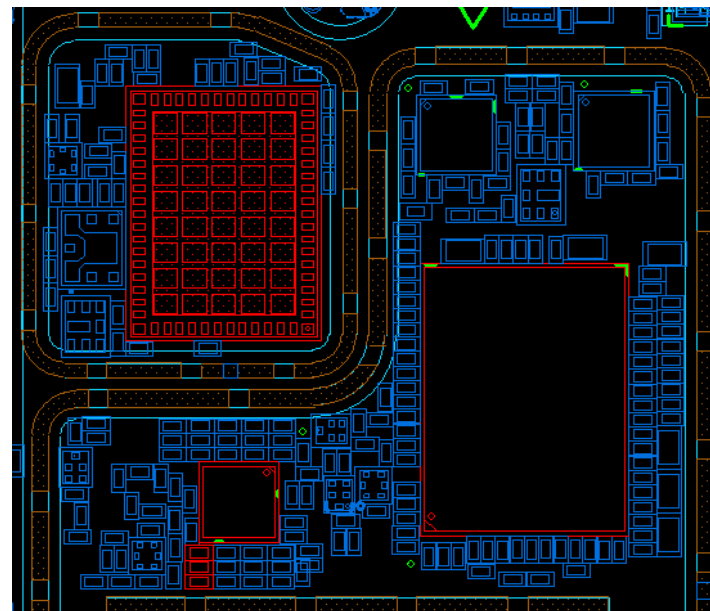

PRx LNA QL5030

U5003

SDR865

U4101


B42/N77/N78 PRx Path

bottom

N77 PA QPM5677
U4701


N77 DPDT
U4702

N77 BPF
U4705

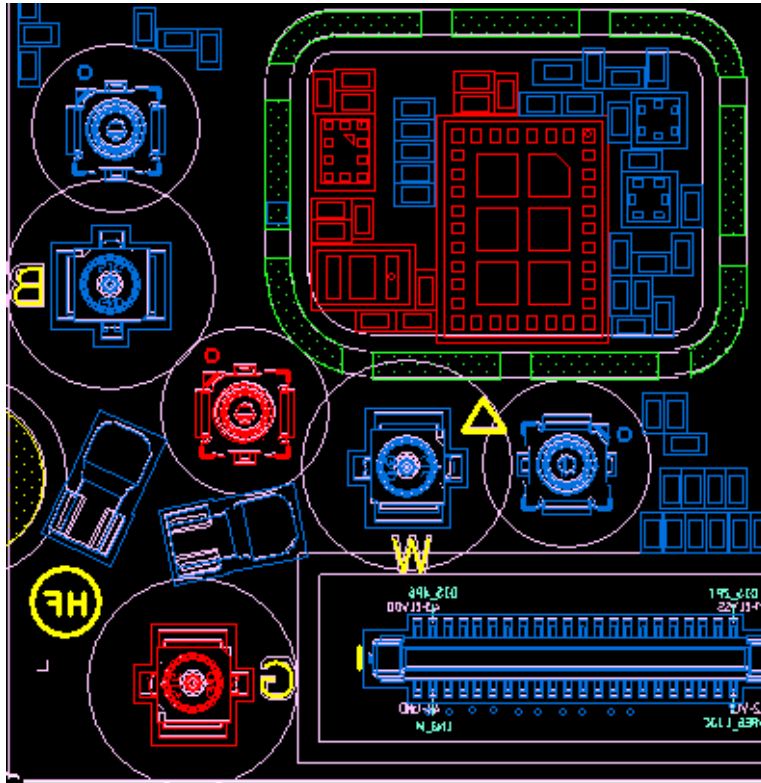

RF Connector N77
J4701 CON4701

top

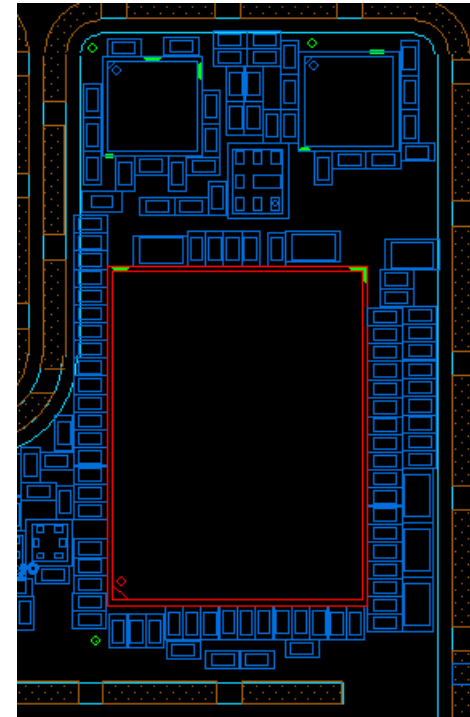


SDR865
U4101

LB DRx Path

bottom

DiFEM QDM3302
U5213

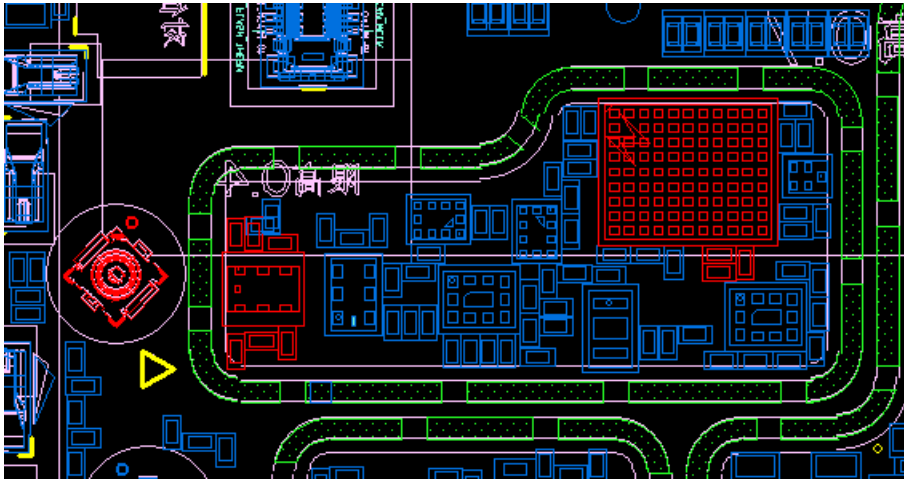


Div. RF connector LB
CON5204

LB+B1B3B7 DiPX
U5201

top

SDR865
U4101

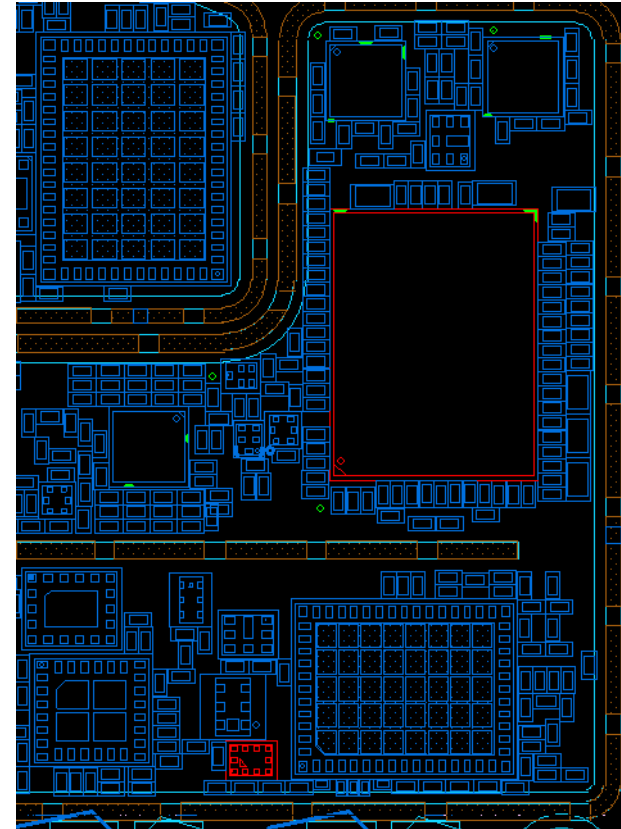


LB DRx DPDT
U4502

MHB DRx Path

bottom


Div. RF
connector MHB
CON5205

MHB DRx DPDT
U4602

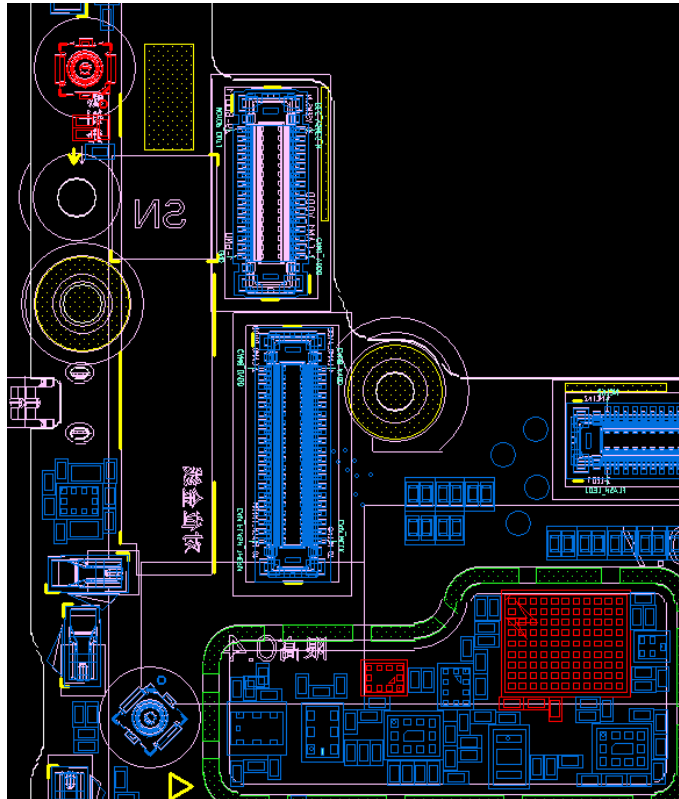

DiFEM QDM3302
U5213


top

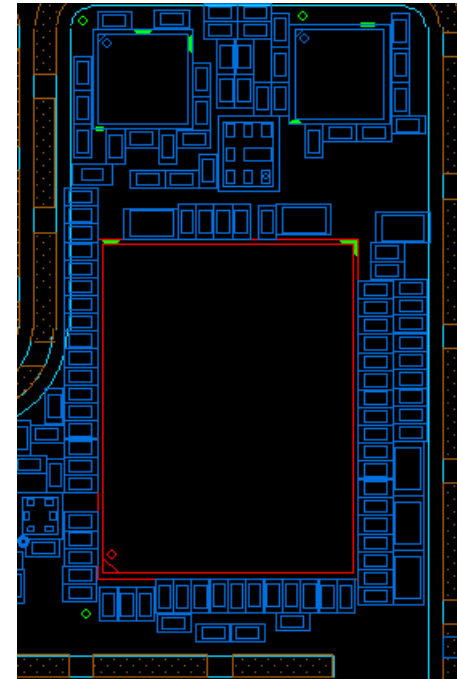

SDR865
U4101

B42/N77/N78 DRx Path

bottom

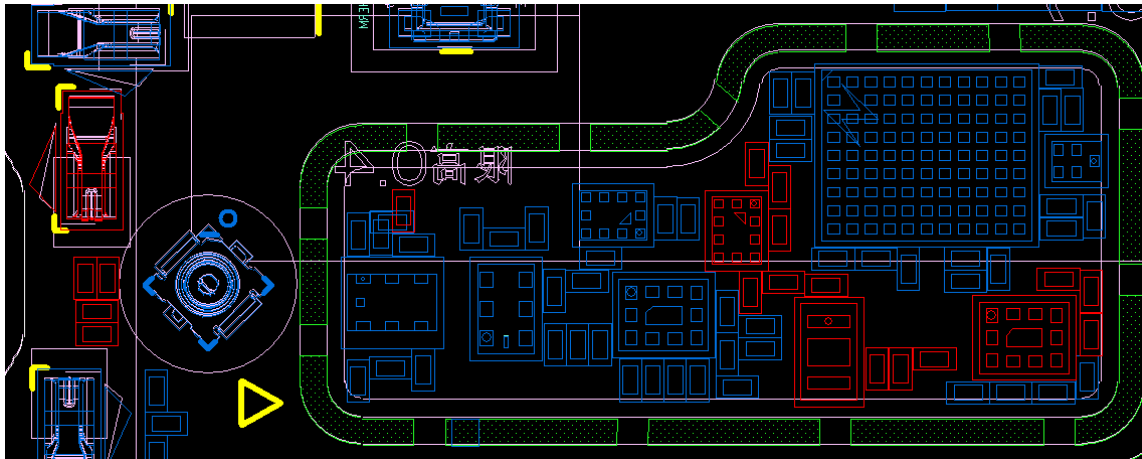


Div. RF ANT N77
ANT5306

DRx N77 DPDT
U5303

DRx N77 FILTER
U5302

DRx QDM5677
U5301


top

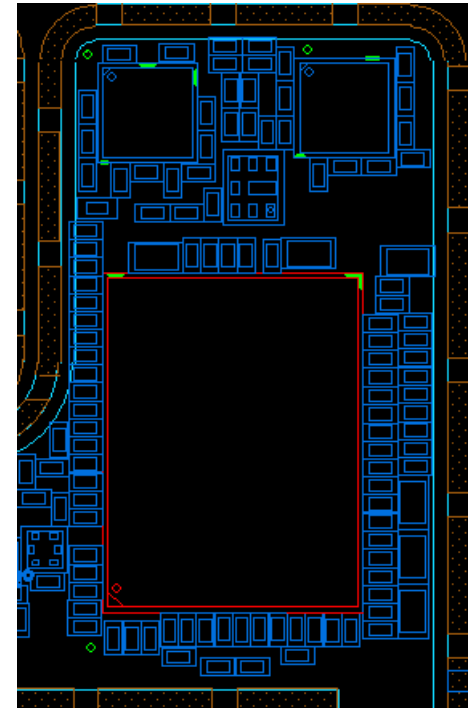

SDR865
U4101

B1 Tx1 Path


bottom

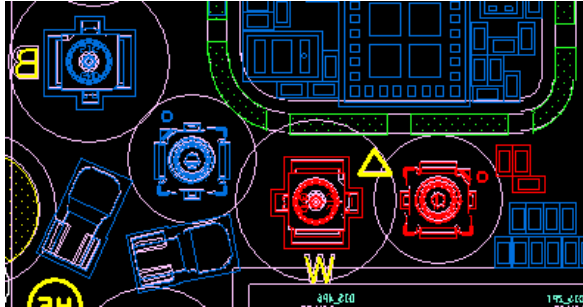

RF Connector LB
J4501 J4502

ENDC filter
U5109

top

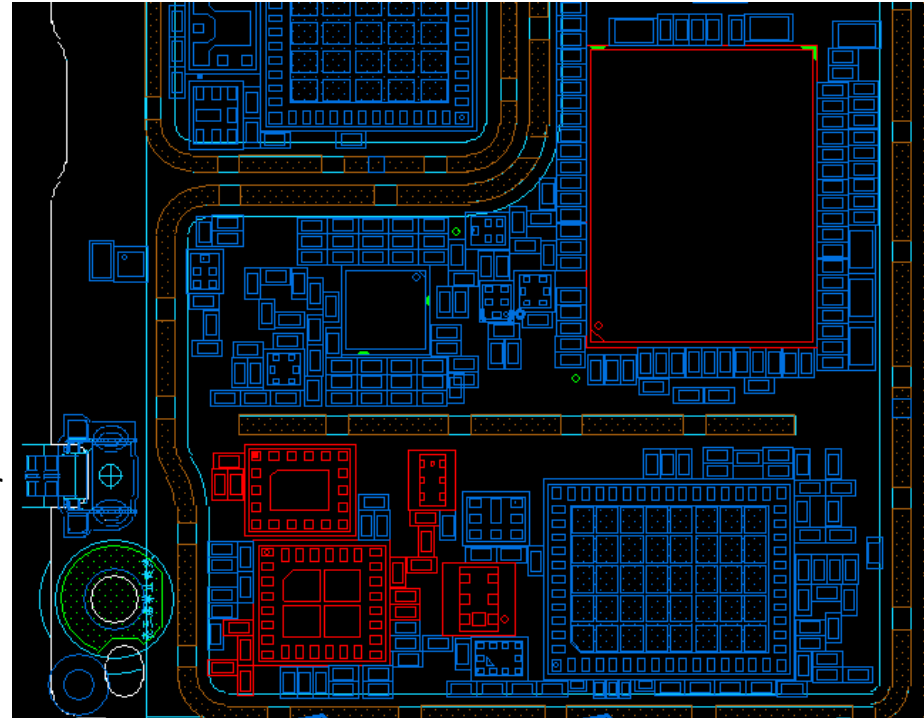

ENDC MMPA
U5116


ENDC coupler
U5111

LB + B1/B3/B7 DiPX
U4503

SDR865
U4101

B3 Tx1 Path


bottom

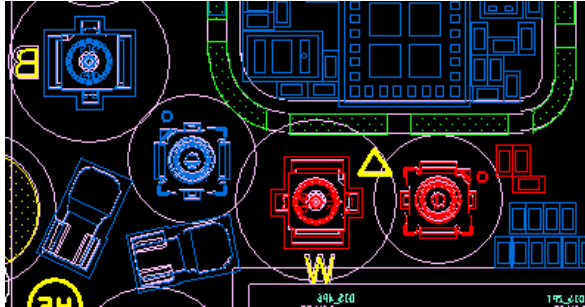

RF Connector LB
J4501 J4502

ENDC filter
U5109

top

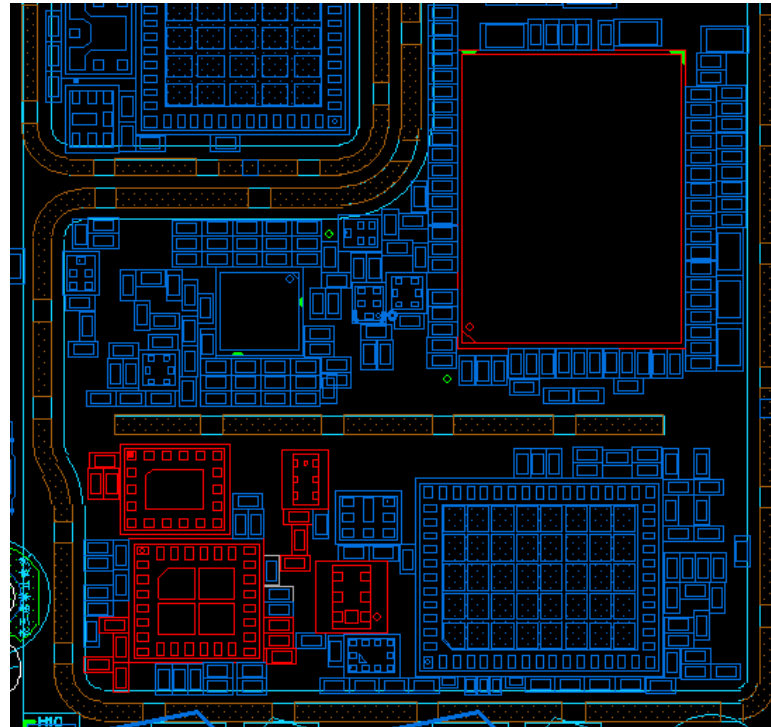

SDR865
U4101


ENDC MMPA
U5116

LB + B1/B3/B7 DiPX
U4503

ENDC coupler
U5111

B7 Tx1 Path

bottom

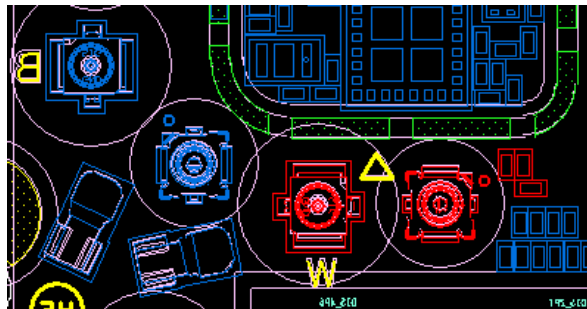


RF Connector LB

J4501 J4502

ENDC filter

U5109

top

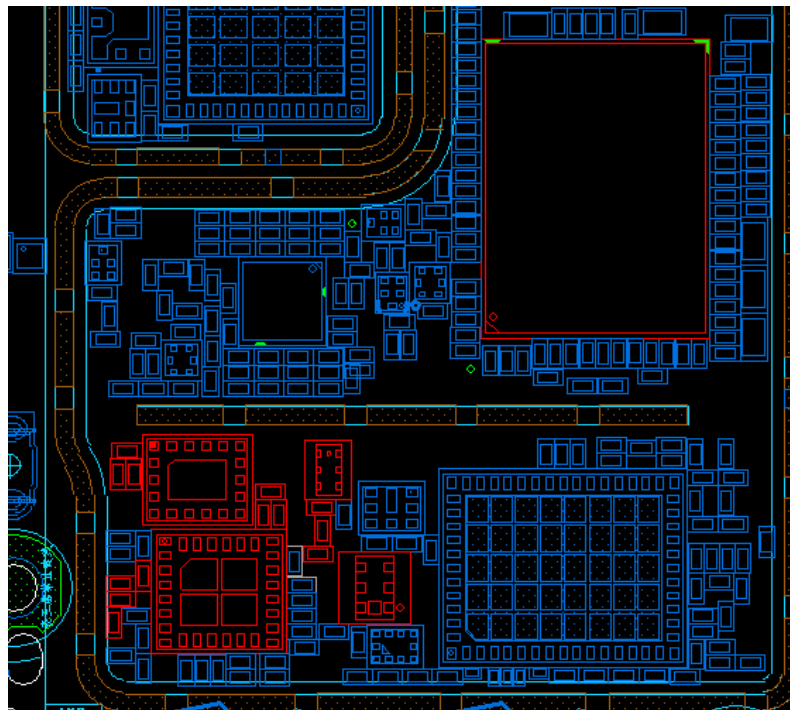

SDR865

U4101

ENDC MMPA

U5116

LB + B1/B3/B7 DiPX


U4503

ENDC coupler

U5111

B1 PRx MIMO Path


bottom

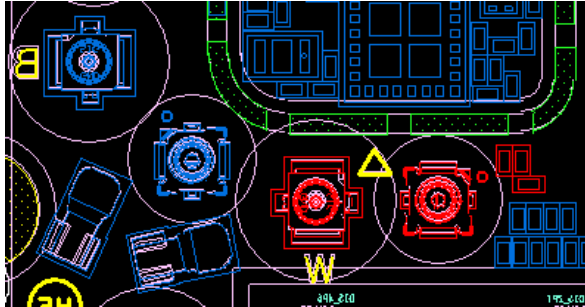

RF Connector LB
J4501 J4502

ENDC filter
U5109

top

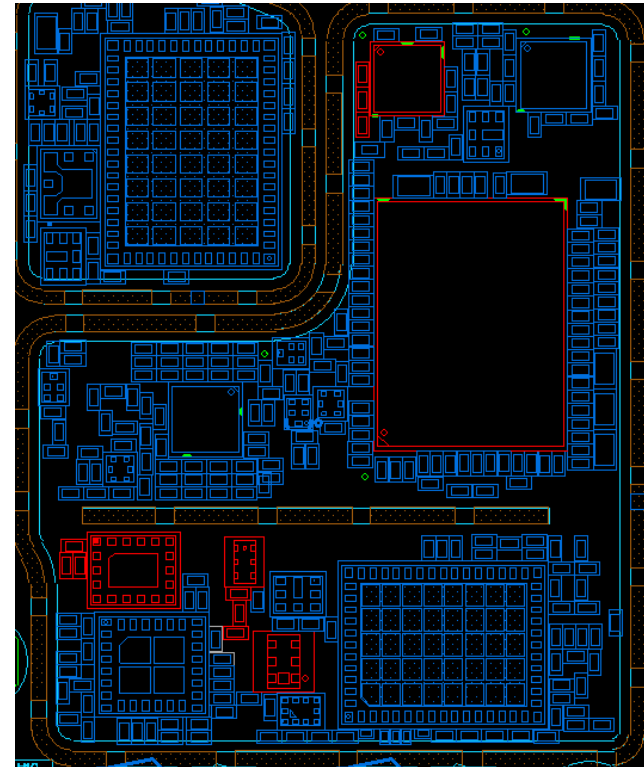

ENDC coupler
U5111


QLN5040 PRx MIMO
U5004

LB + B1/B3/B7 DiPX
U4503

SDR865
U4101

B3 PRx MIMO Path

bottom

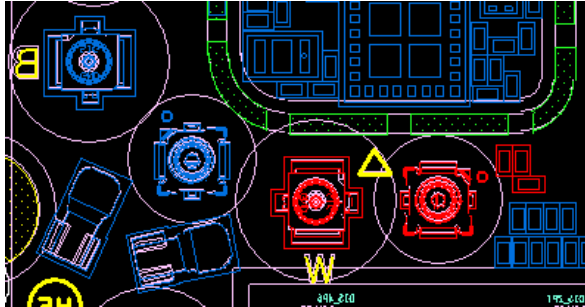


RF Connector LB
J4501 J4502

ENDC filter
U5109

top

QLN5040 PRx MIMO
U5004

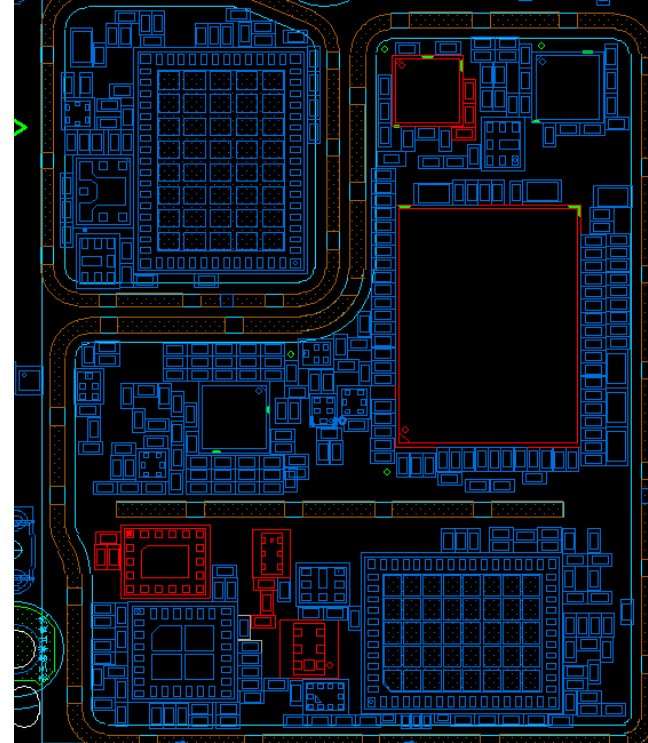


ENDC coupler
U5111

LB + B1/B3/B7 DiPX
U4503

SDR865
U4101

B7 PRx MIMO Path

bottom

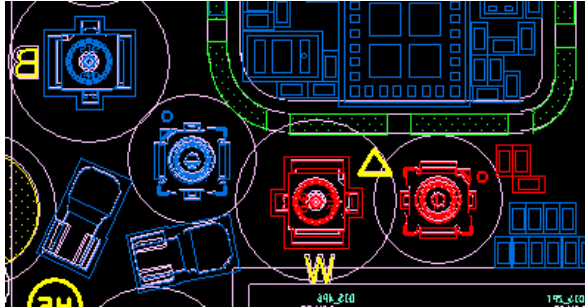


RF Connector LB
J4501 J4502

ENDC filter
U5109

top

QLN5040 PRx MIMO
U5004

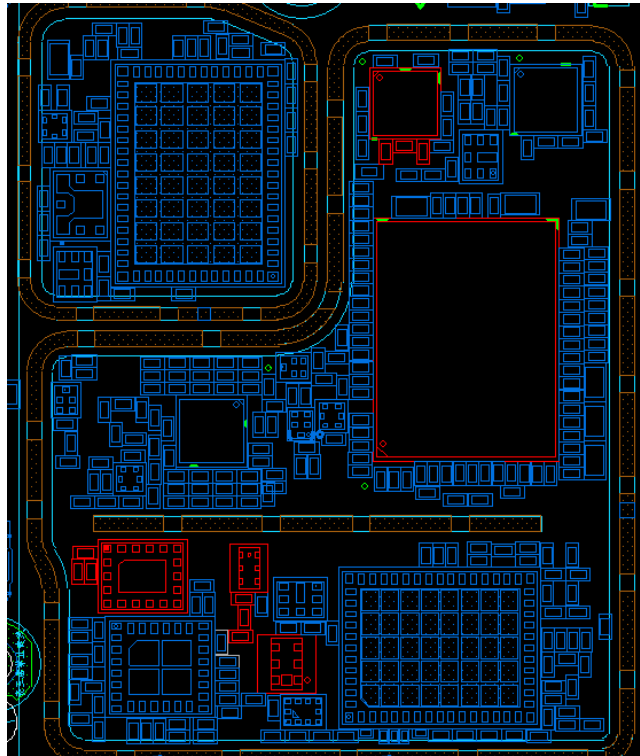


SDR865
U4101

ENDC coupler
U5111

LB + B1/B3/B7 DiPX
U4503

B1 DRx MIMO Path

bottom

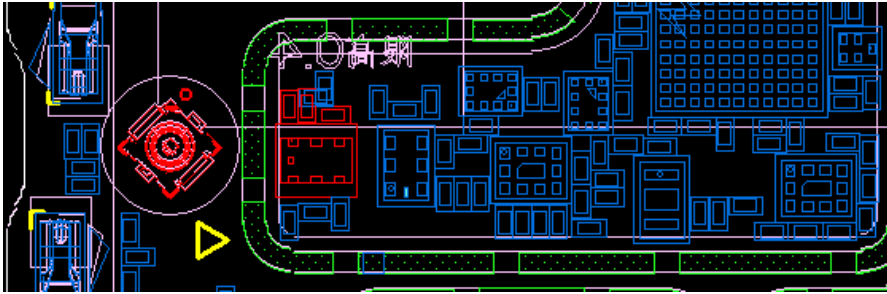


Div. RF connector LB
CON5204

LB+B1B3B7 DiPX
U5201

top

B1B3B7 Tri-PX
U5202

QLN5040 DRx MIMO
U5005

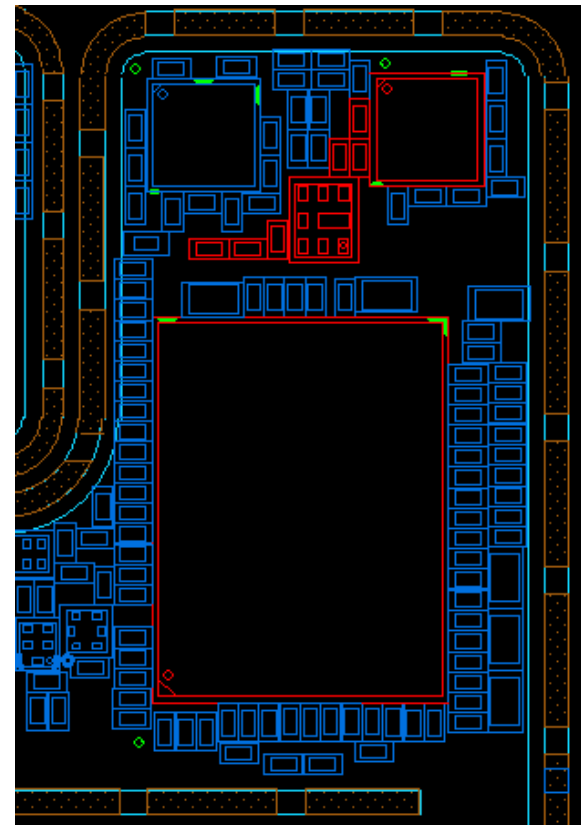

SDR865
U4101

B3 DRx MIMO Path

bottom


top

B1B3B7 Tri-PX

QLN5040 DRx MIMO

U5202

U5005

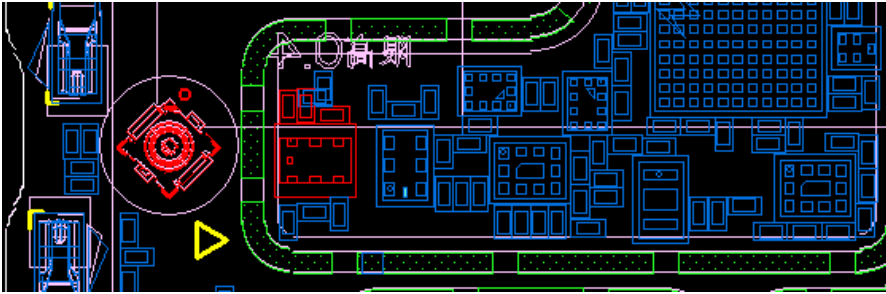


Div. RF connector LB

LB+B1B3B7 DiPX

CON5204

U5201

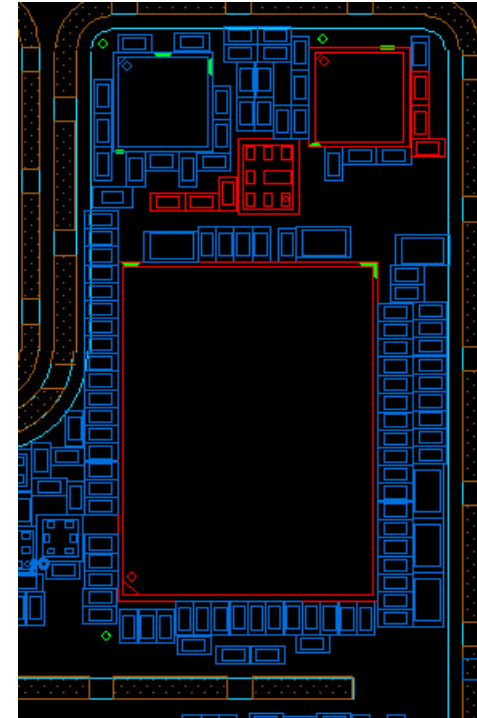

SDR865

U4101

B7 DRx MIMO Path

bottom


top

B1B3B7 Tri-PX

U5202

QLN5040 DRx MIMO

U5005

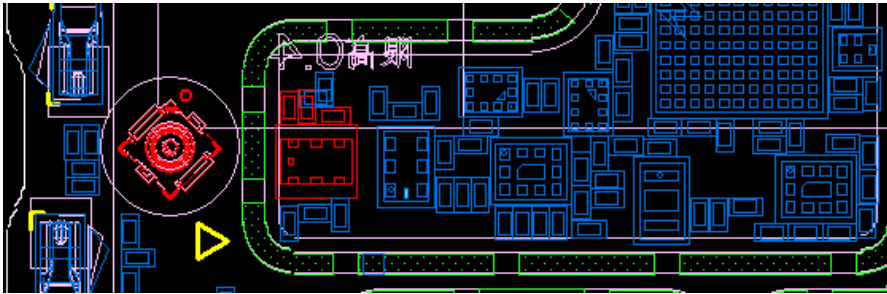


Div. RF connector LB

CON5204

LB+B1B3B7 DiPX

U5201

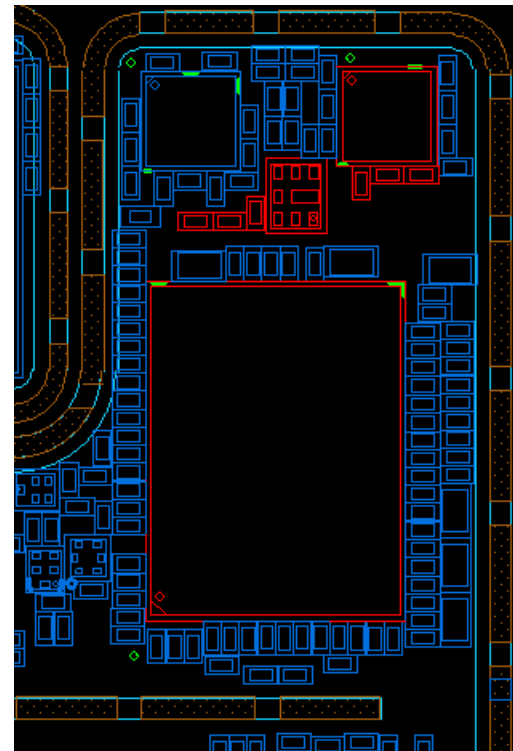

SDR865

U4101

B42/N77/N78 PRx MIMO Path


bottom

MHB + N77 DiPX

U4610

PRx MIMO QDM5677


U4604

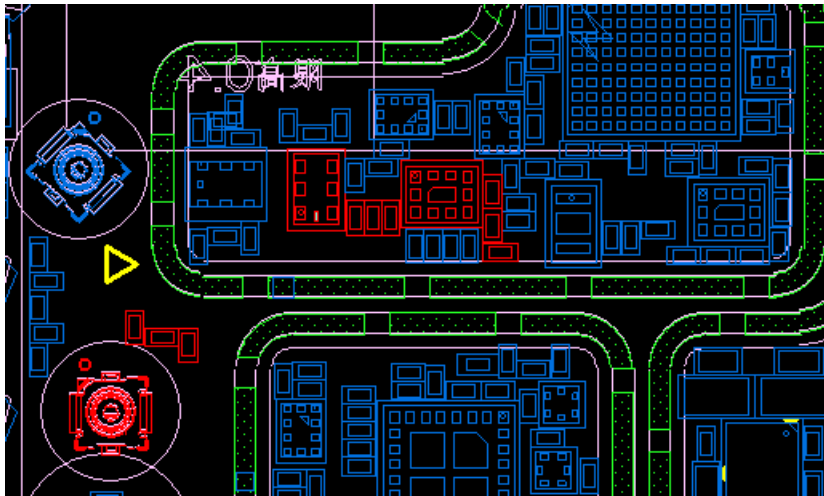

MHB + N77 connector

CON4602

top

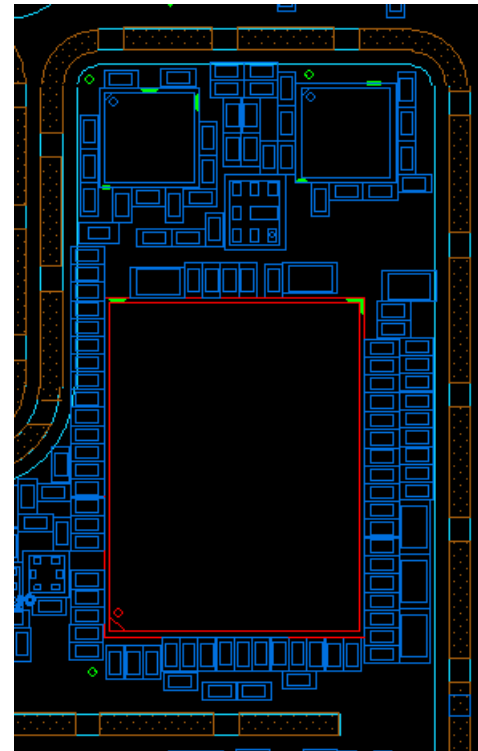


SDR865

U4101

B42/N77/N78 DRx MIMO Path


bottom

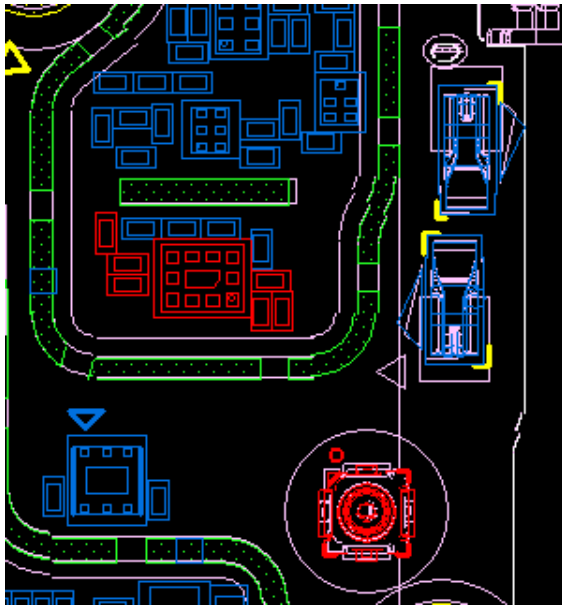

DRx MIMO QDM5677
U5304


MHB + N77 connector
CON5302

top

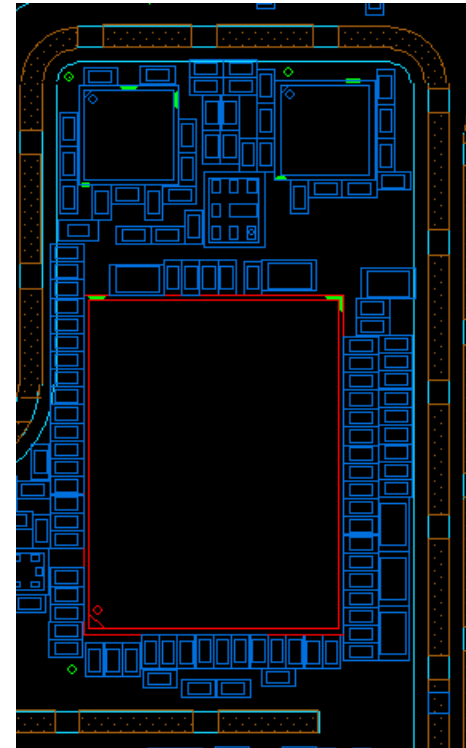


SDR865
U4101

WIFI/BT/GPS Block Diagram

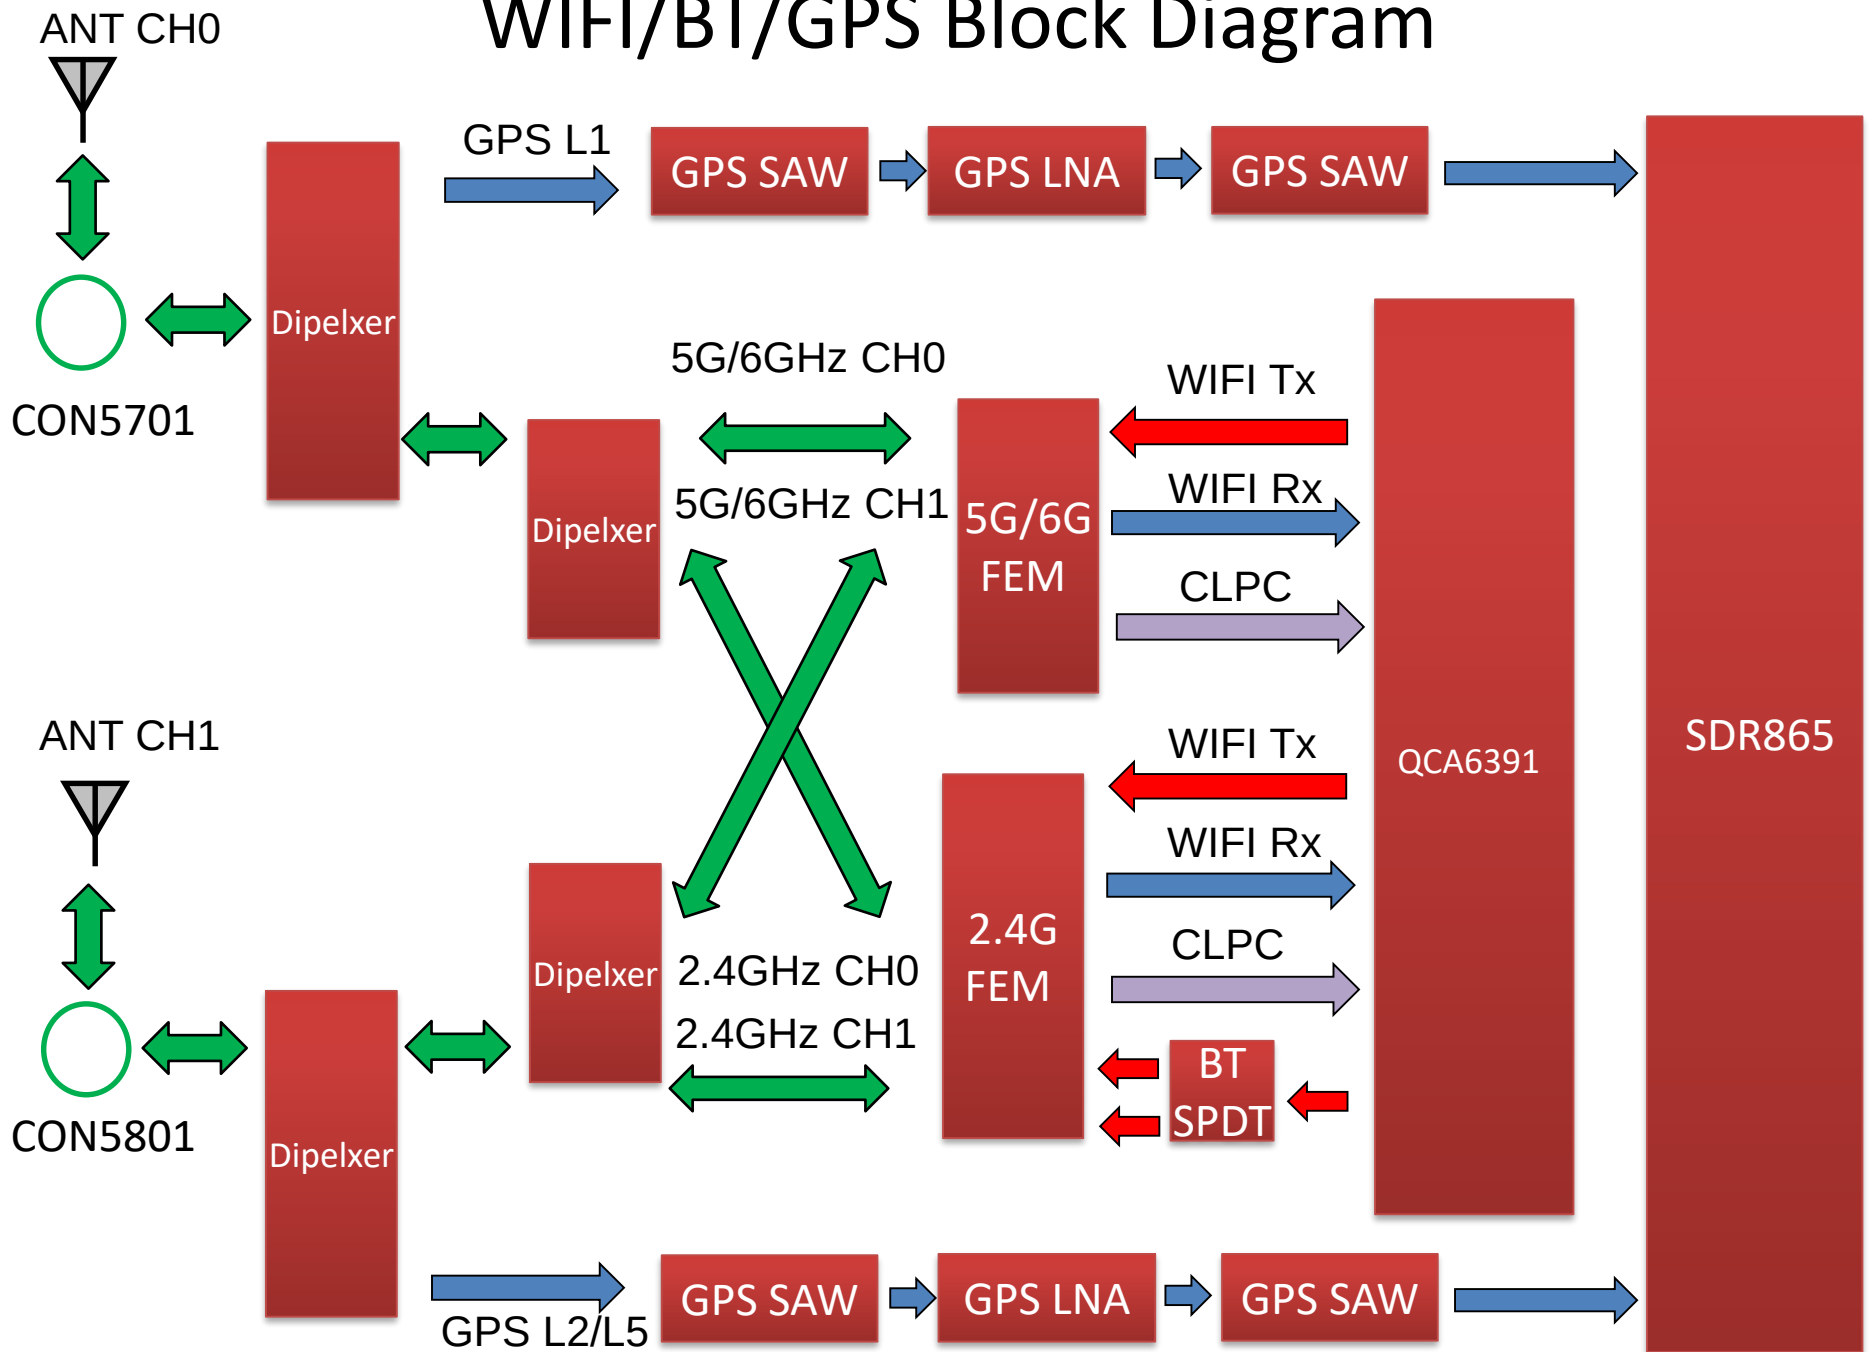

WIFI CH0 2.4G Tx


bottom

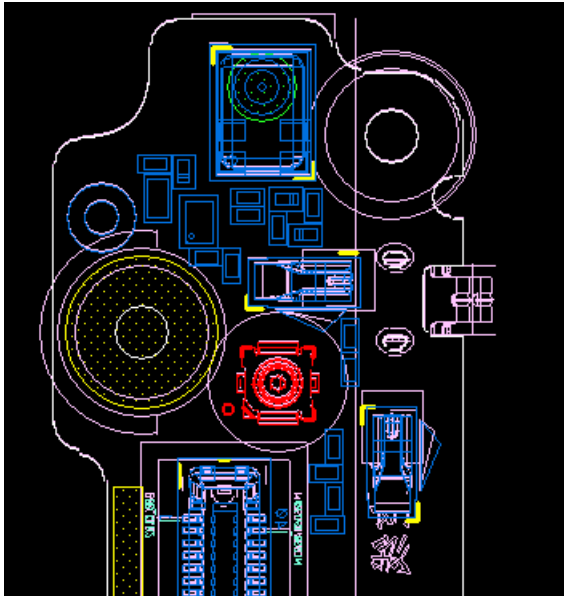

CH0 Connector
CON5701

Top

CH0 DiPX
U5704

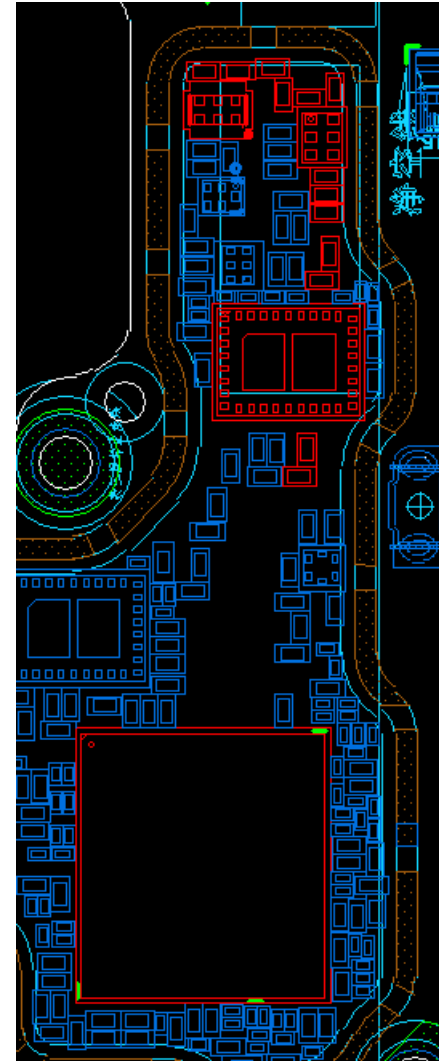


CH0 DiPX 2.4/5
U5708

2.4G FEM
U5705

WCN6851
U5501

WIFI CH0 2.4G Rx


bottom

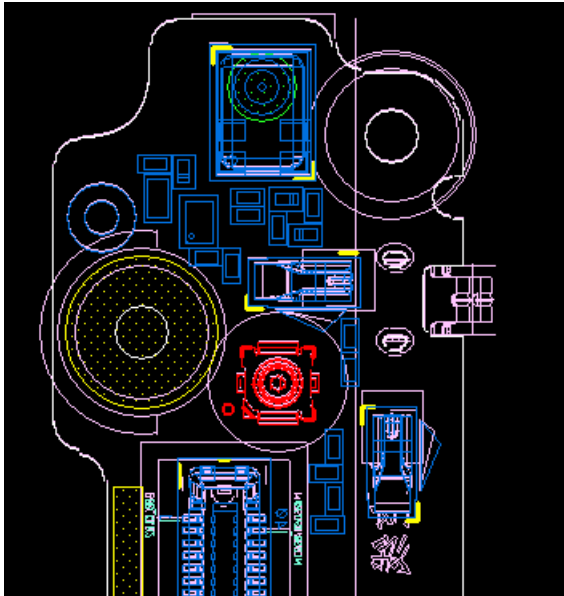

CH0 Connector
CON5701

Top

CH0 DiPX
U5704

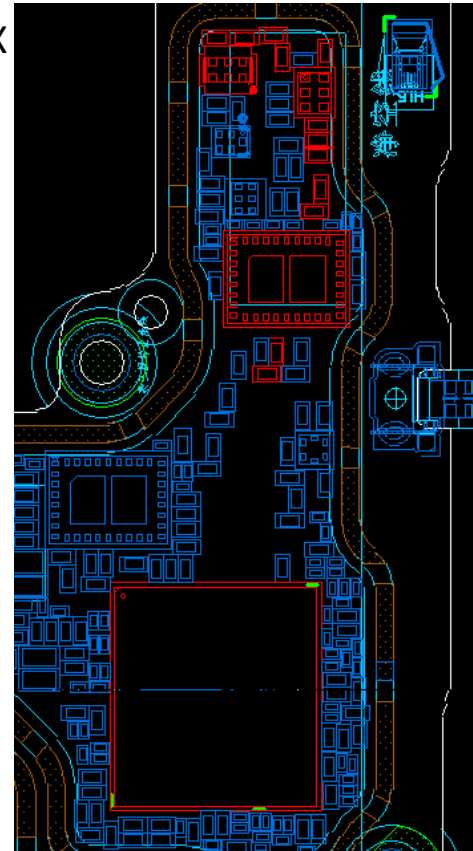


CH0 DiPX 2.4/5
U5708

2.4G FEM
U5705

WCN6851
U5501

WIFI CH0 5G/6G Tx

bottom

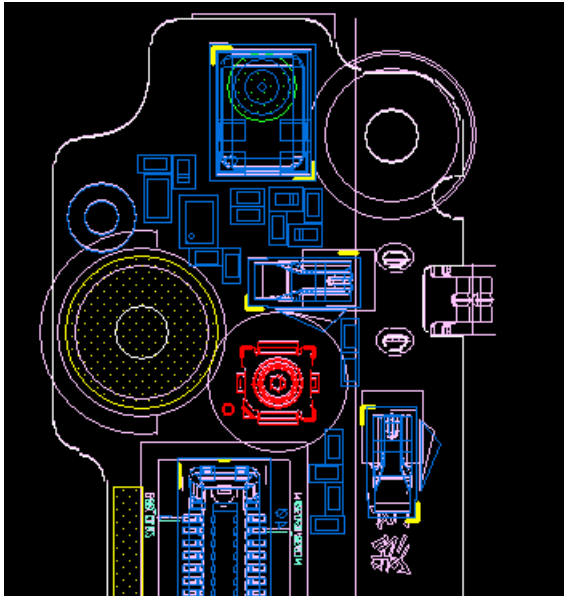


CH0 Connector
CON5701

Top

CH0 DiPX
U5704

5G FEM
U5809

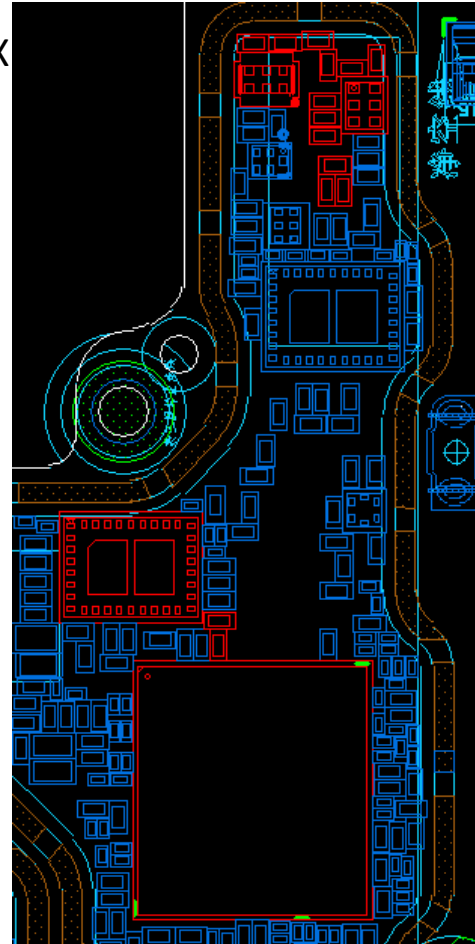


CH0 DiPX 2.4/5
U5708

WCN6851
U5501

WIFI CH0 5G/6G Rx

bottom

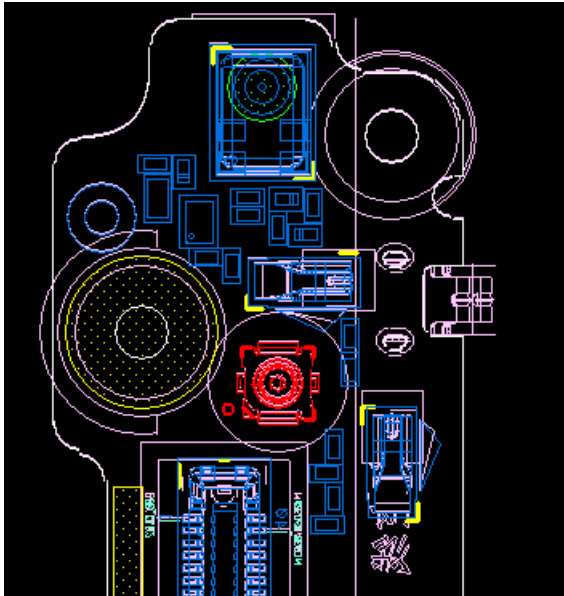


CH0 Connector
CON5701

Top

CH0 DiPX
U5704

5G FEM
U5809

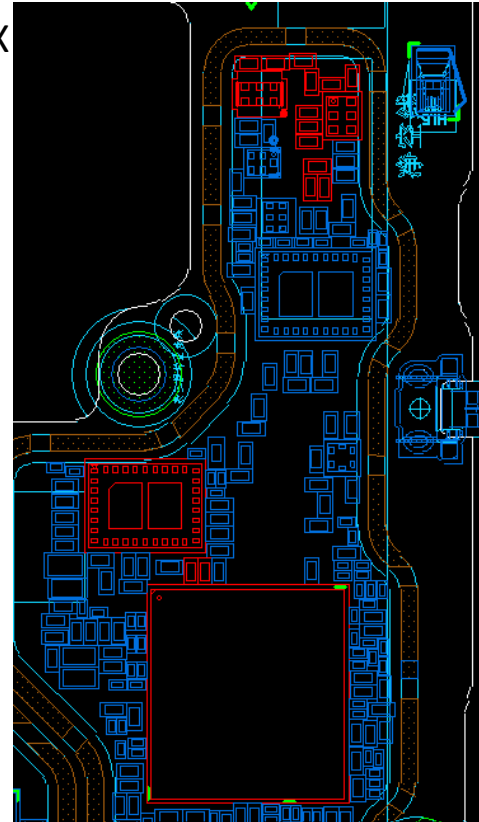


CH0 DiPX 2.4/5
U5708

WCN6851
U5501

WIFI CH1 2.4G Tx

bottom

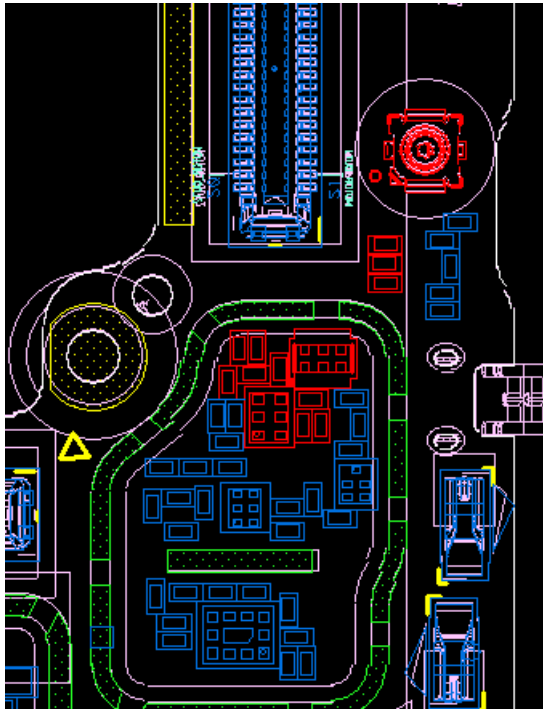


CH1 Connector
CON5801

CH1 DiPX
U5804

CH1 DiPX 2.4/5
U5810

Top

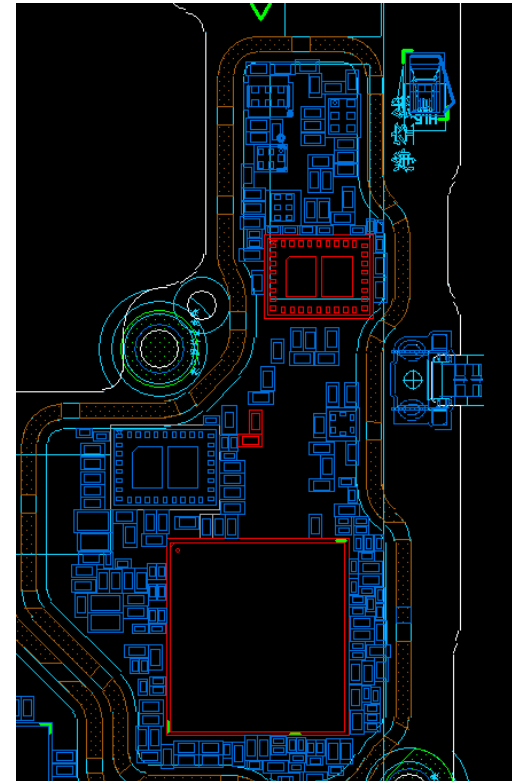


2.4G FEM
U5705

WCN6851
U5501

WIFI CH1 2.4G Rx

bottom

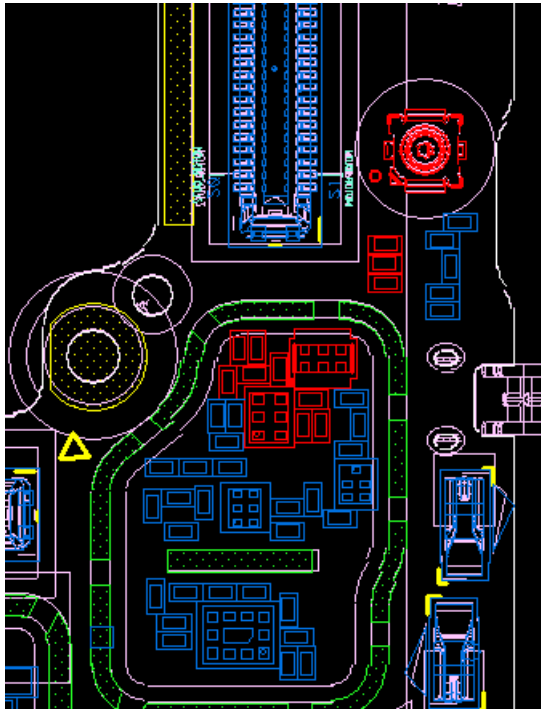


CH1 Connector
CON5801

CH1 DiPX
U5804

CH1 DiPX 2.4/5
U5810

Top

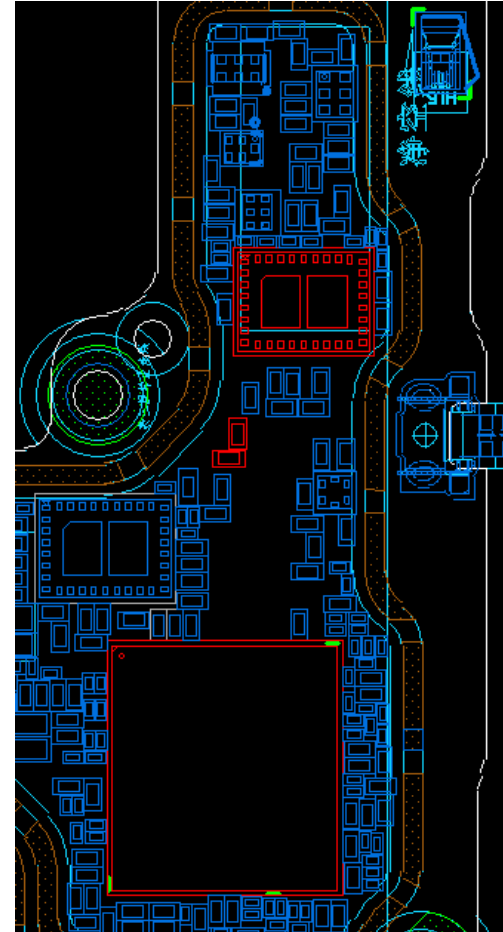


2.4G FEM
U5705

WCN6851
U5501

WCN6851
U5501

WIFI CH1 5G/6G Rx

bottom

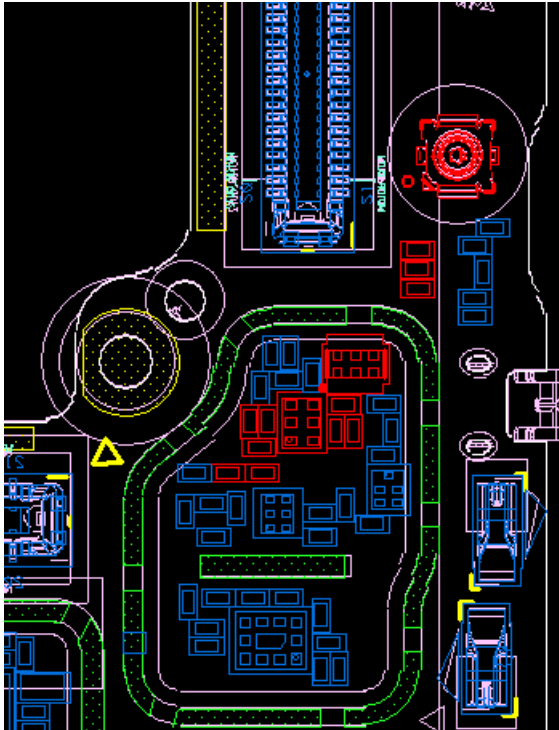


CH1 Connector
CON5801

CH1 DiPX
U5804

CH1 DiPX 2.4/5
U5810

Top

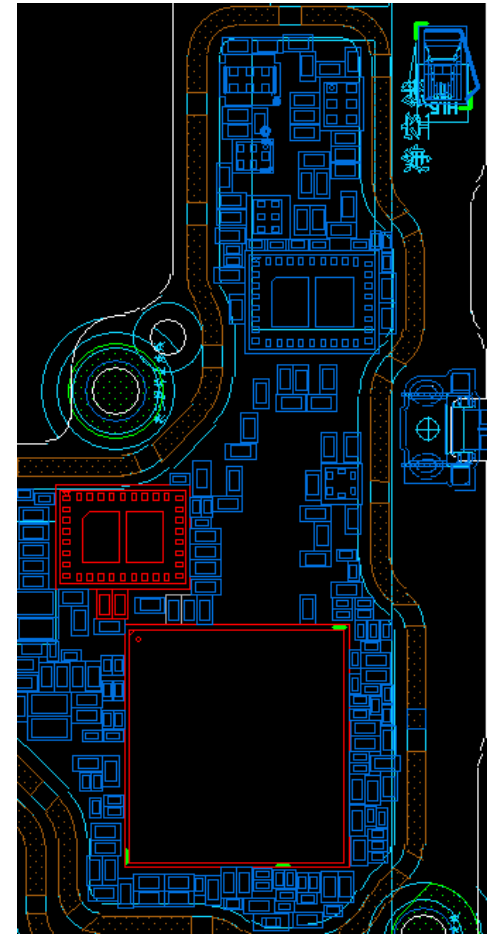


5G FEM
U5809

WCN6851
U5501

BT CH0 2.4G Tx


bottom

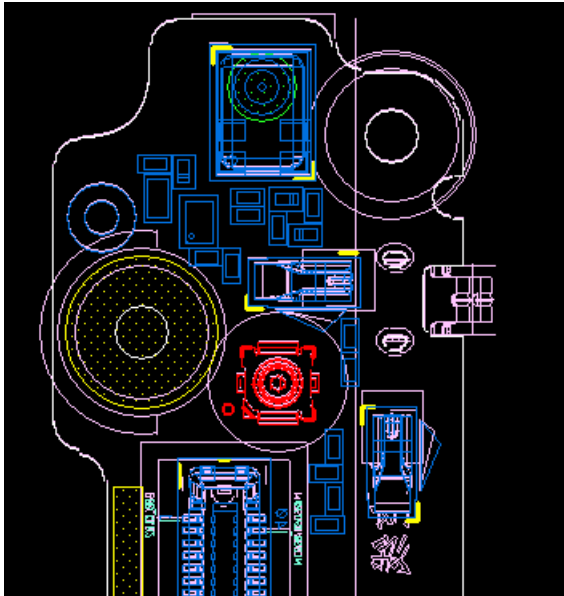

CH0 Connector
CON5701

Top

CH0 DiPX
U5704

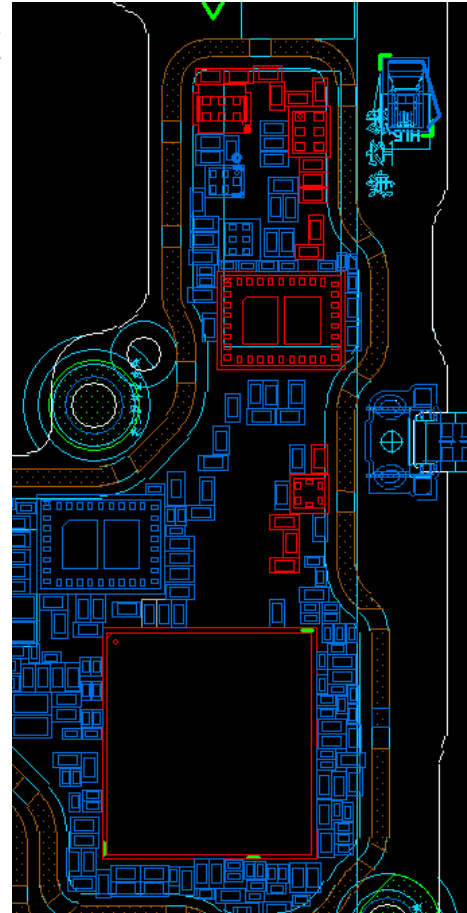

CH0 DiPX 2.4/5
U5708


2.4G FEM
U5705

BT SPDT
U5707

WCN6851
U5501

BT CH1 2.4G Tx

bottom

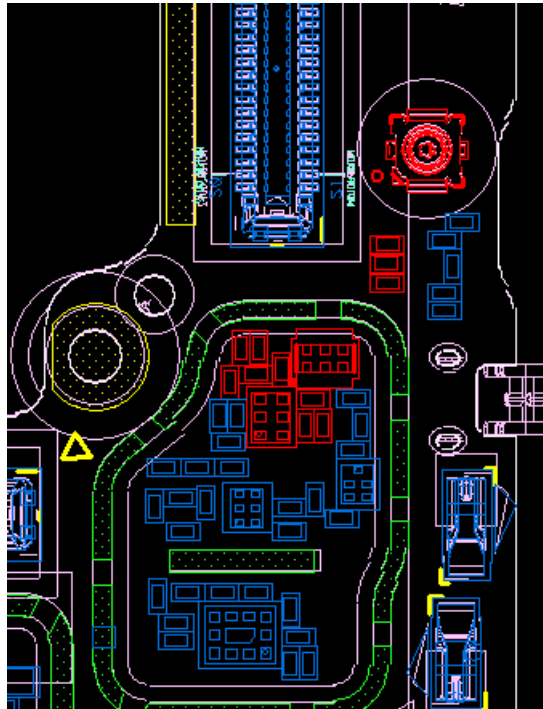


CH1 Connector
CON5801

CH1 DiPX
U5804

CH1 DiPX 2.4/5
U5810

Top

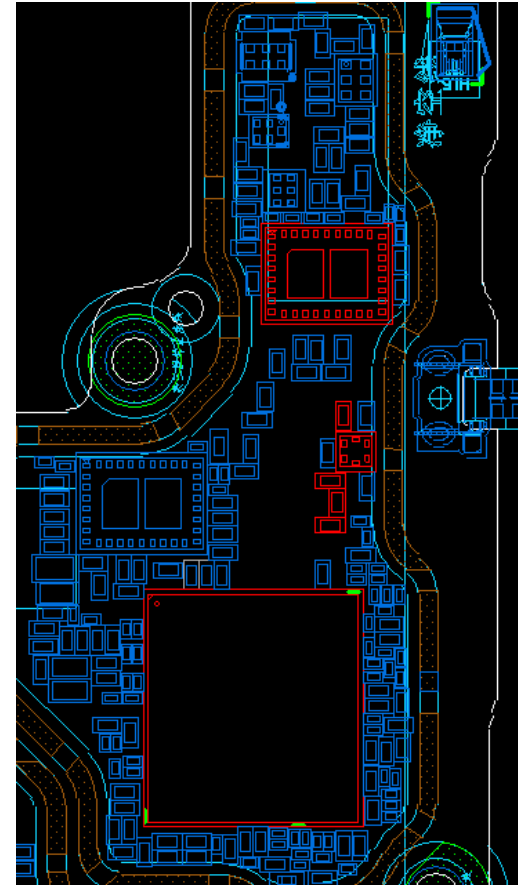

2.4G FEM
U5705

BT SPDT
U5707


WCN6851
U5501

ZS672KS Trouble Shooting Guide

GPS/NFC

GPS_L1 (Error code:8221)

MB(BOT)

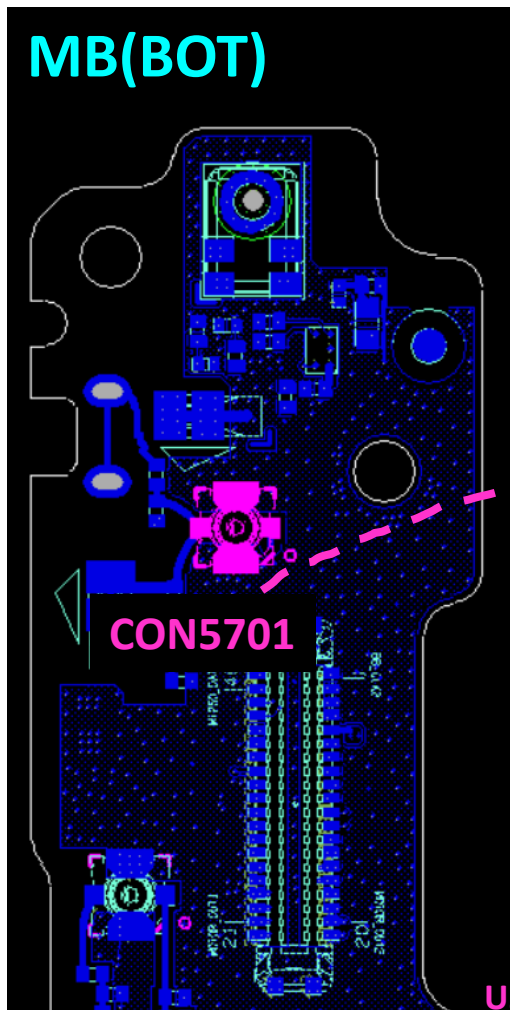

□ GPS_L1 path

CON5701: RF SWITCH CONNECTOR

U5704: TRIPLEXER


U5702: Pre SAW

U5701: LNA


U5703: Post SAW

U4101: Transceiver/SDR868


MB(TOP)

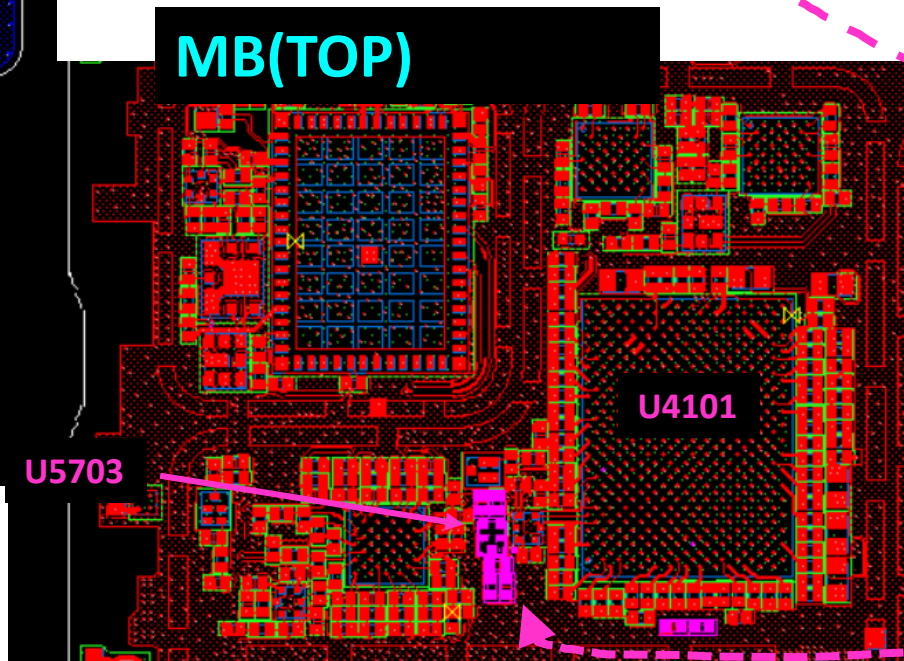




MB(TOP)

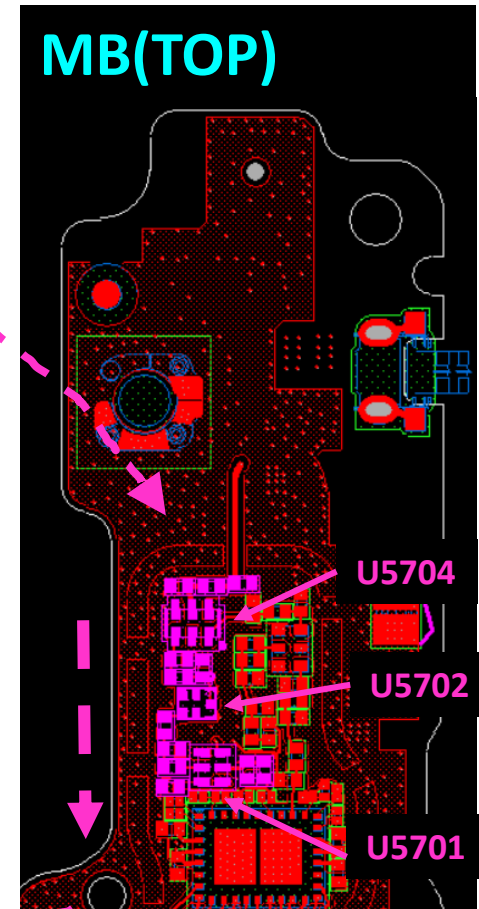

GPS_L2/L5 (Error code:8225)

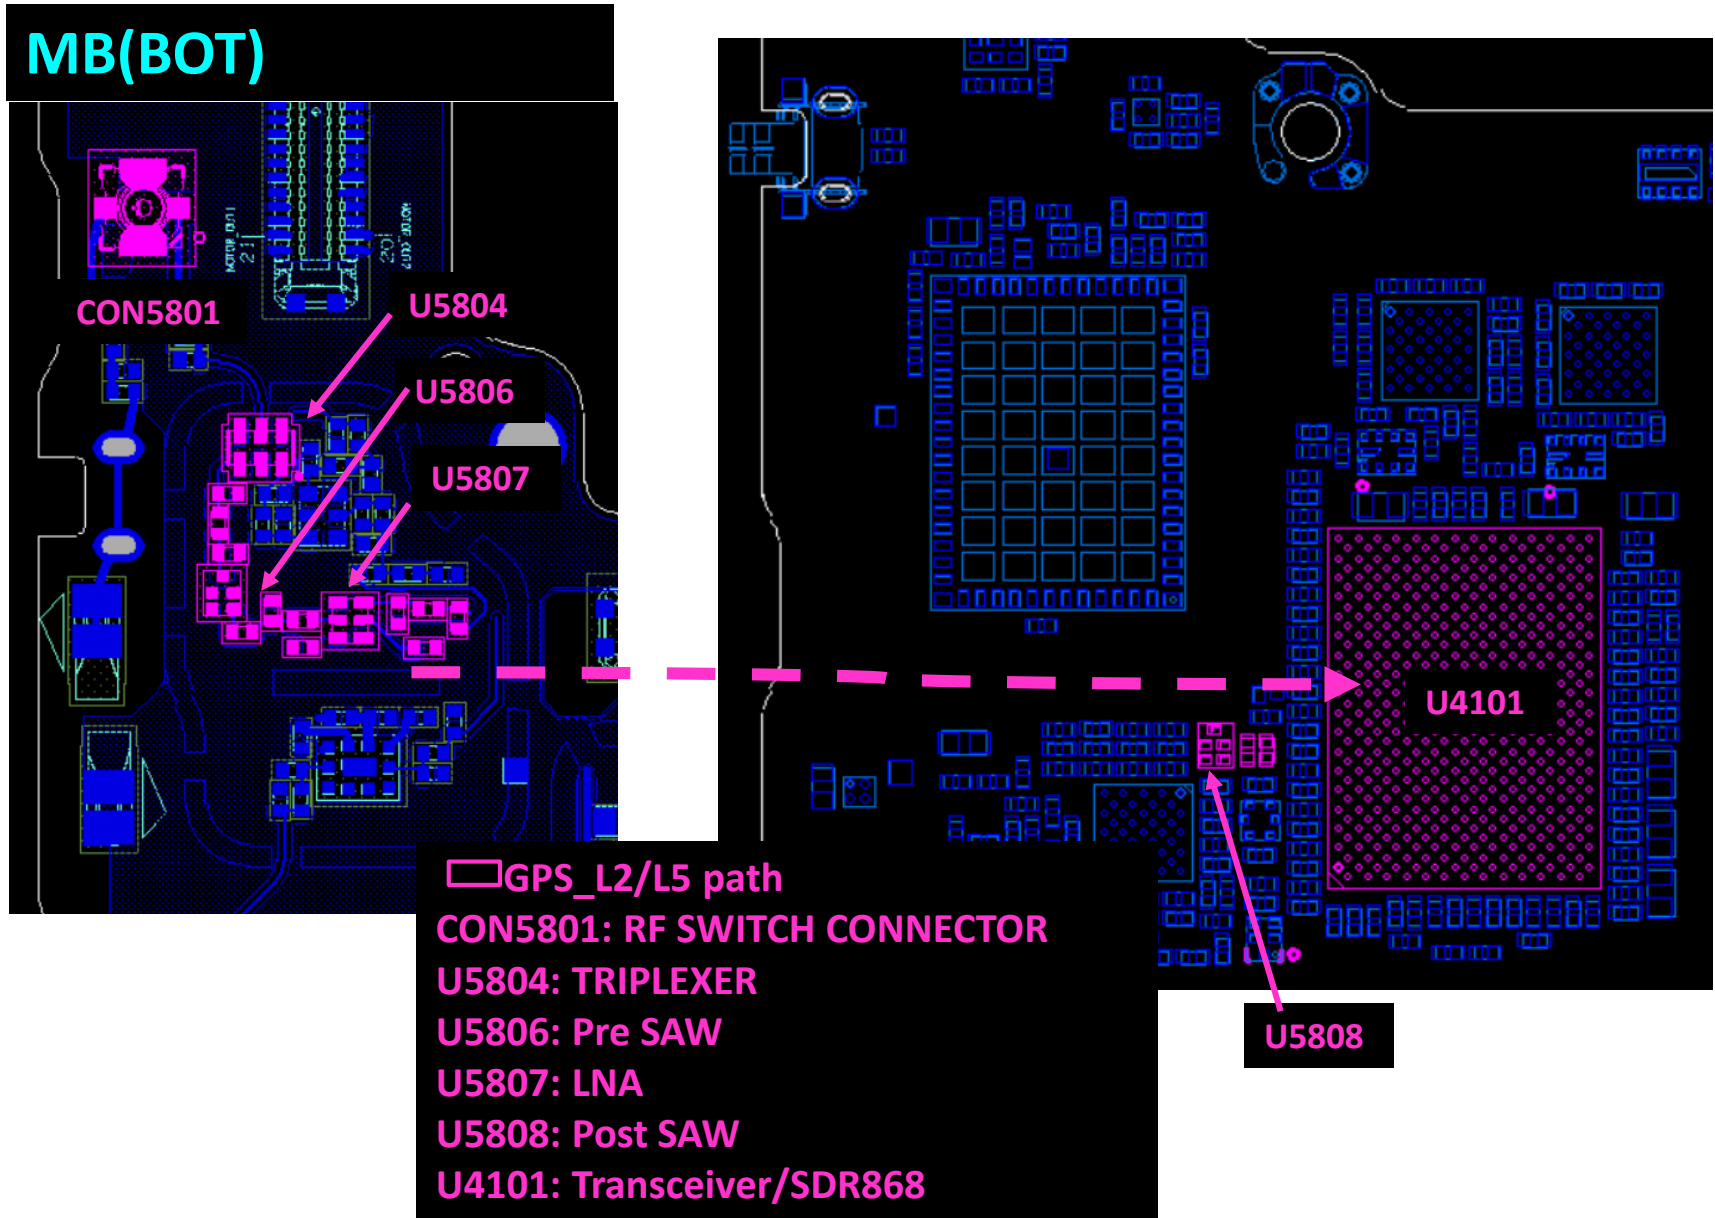


NFC (1993)

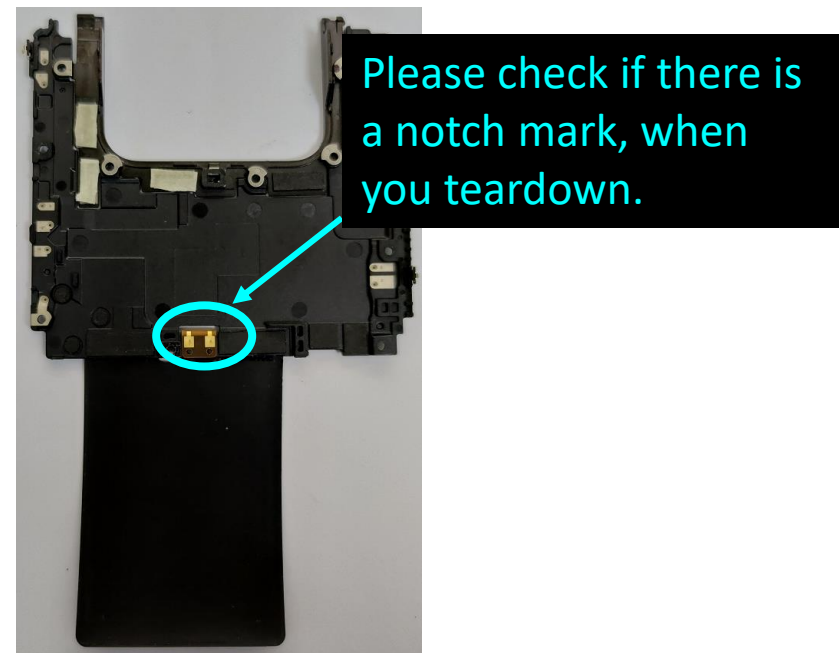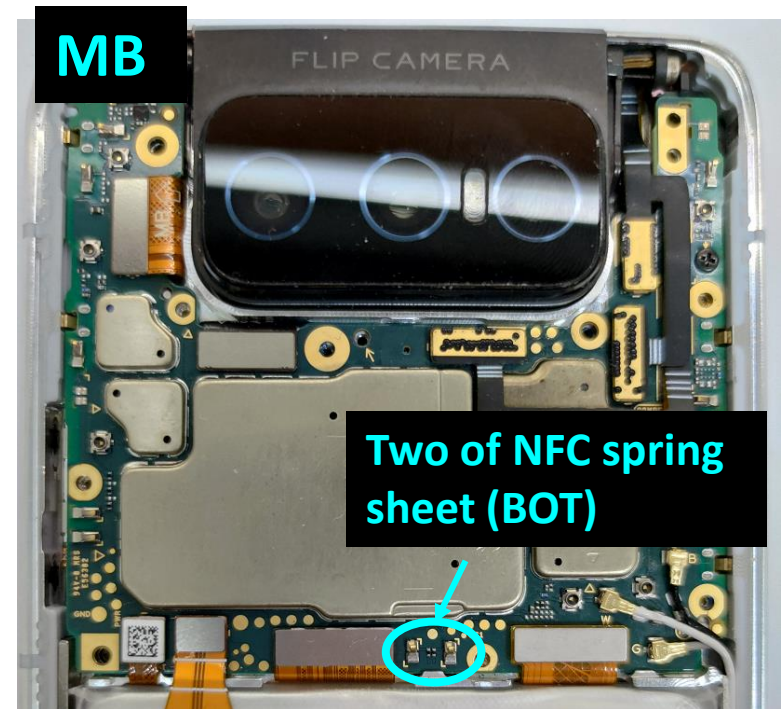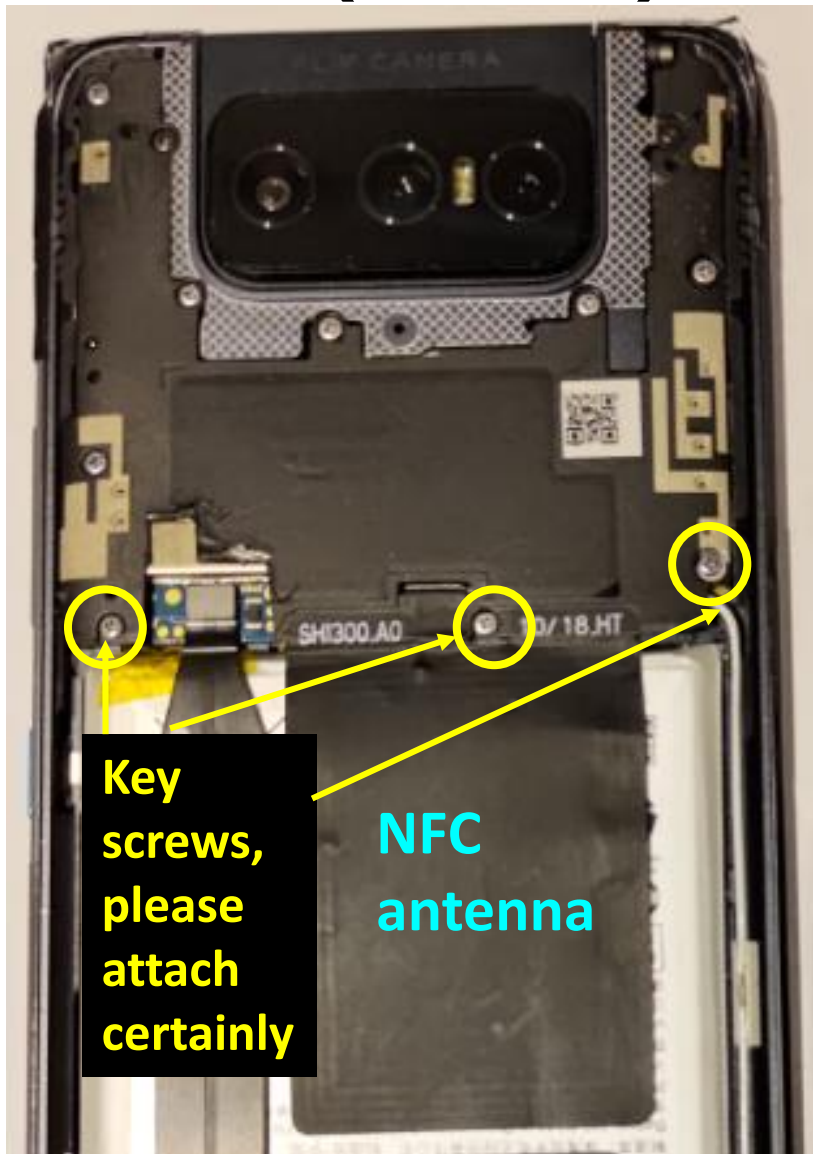

NFC(1993)


MB(Top)

Two of NFC spring sheet (Top)

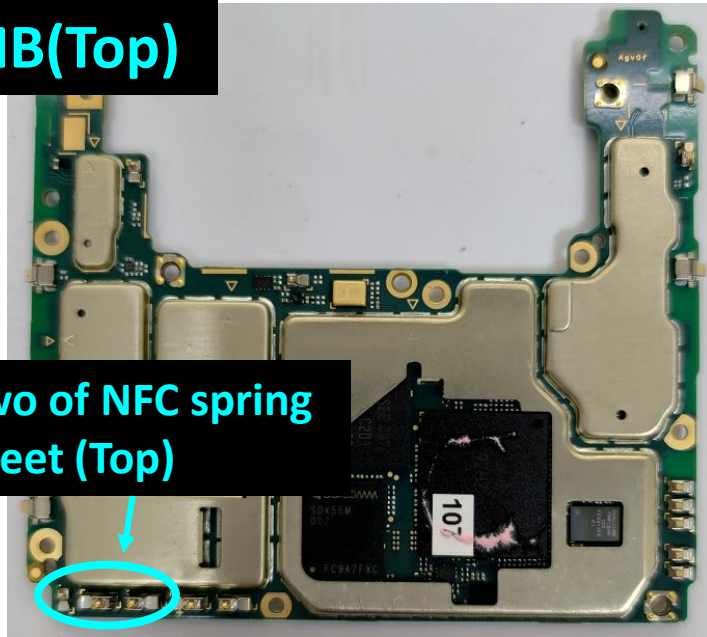

MB(Bot.)

Two of NFC spring sheet (BOT), and two of 0 ohm between the spring

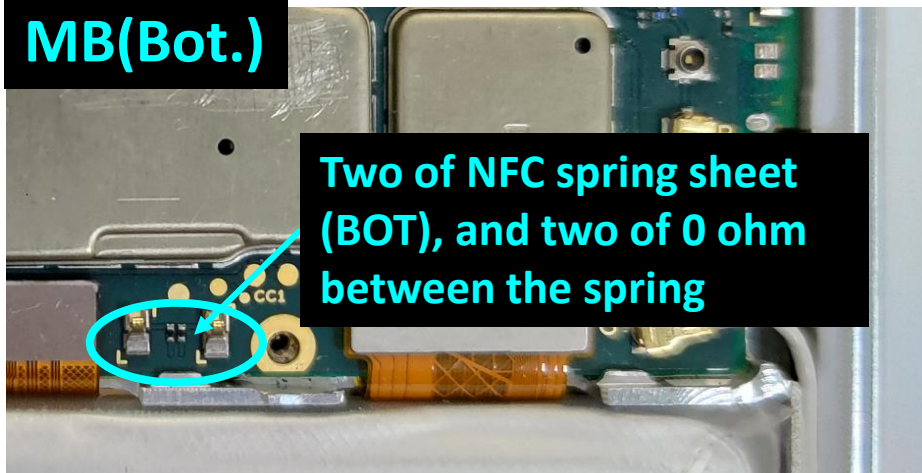


MB(Bot.)

Two of FPC are connected NFC signal from MB to SIM_SB, please attach certainly

SIM_SB

Please check if there is a notch mark, when you teardown

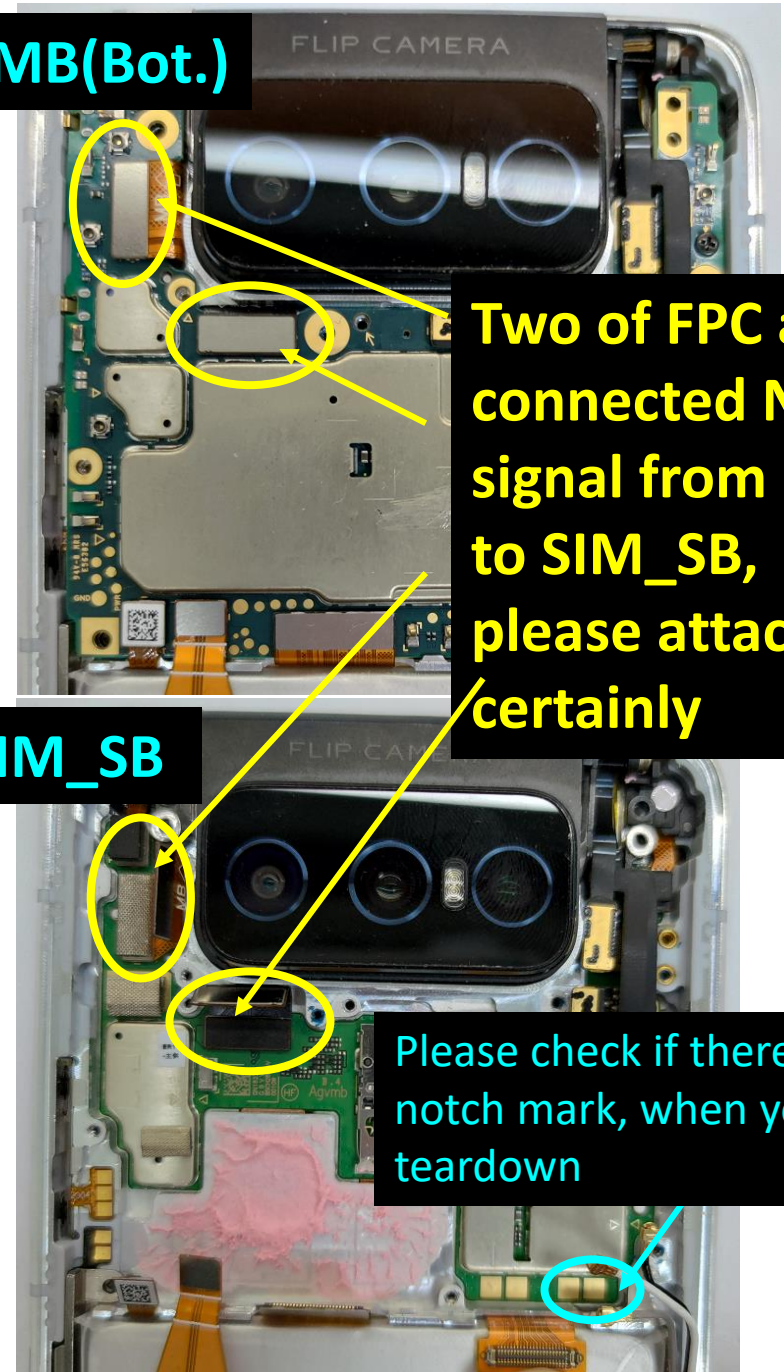

NFC(1993)

□ NFC components

U301: NFC CHIP-NXP/NQ410

U302: DC/DC CONVERTER

X301: XTAL 27.12MHZ

SIM_SB

