

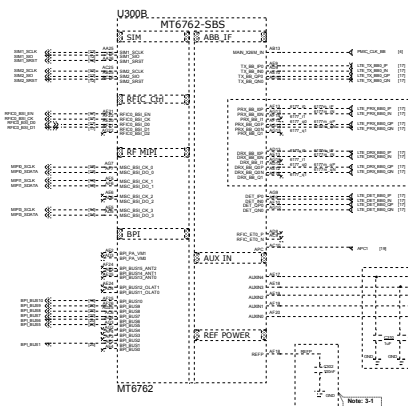


ashakaas

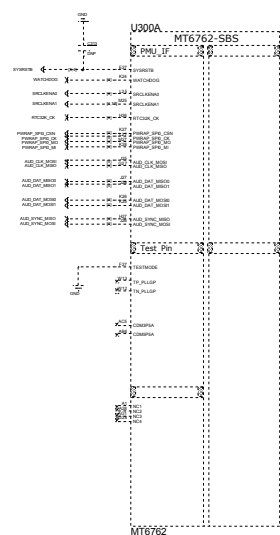

Schematic design notice of "12_BB_1" page.

Note 3-1: The de-coupling cap. for REFP (AF18 ball) have to be placed as close to BB as possible.

Note 3-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.


Note 3-3: "PWRAP_SPI0_CSN" and "AUD_DAT_MOSI0" are bootstrap pin to select which interface will be the JTAG pin out.

PWRAP SPI0_CSN	AUD_DAT_MOSI	JTAG Function	
default=PU	default=PD	AP JTAG	MD JTAG
HI	LO	N/A	N/A
HI	HI (by not PUS)	SPI0+ENT8	SPI1+SPI3
LO (by not PUS)	LO	SPI0+ENT8	N/A
LO (by not PUS)	HI (by not PUS)	MSDC1	N/A

Note 3-4: PWRAP_SPI0_MII is DDR type feature in bootstrap


USE CASE	PWRAP_SPI0_Mi	Booting interface
	default=PU	DDR
	LO	MSDC0 pin mux
	LP3	follow LP3 Ref SCH.

Note 3-5: Please set unused IQ pins in NC

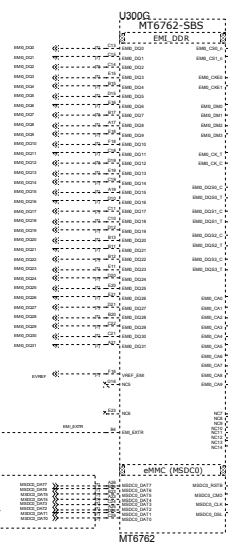



R318 please select 34.8 ohm (1%) resistor





Note 14-2: Please check eMCP LP3 and eMCP LP4X pin mux

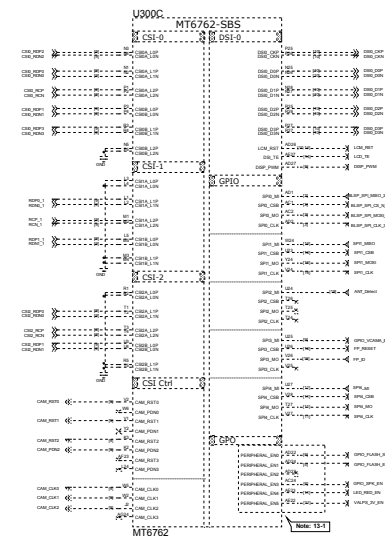


Schematic design notice of "13_BB_2" page

Note 13-1: The enable pin of acoustic or optoelectronic devices (e.g. SPK AMP/Backlight/Charger OCP/OVP) suggest to use Peripheral_EN[0:5]
If use other GPIOs as enable pin, suggest to reserve 0201 NC to GND

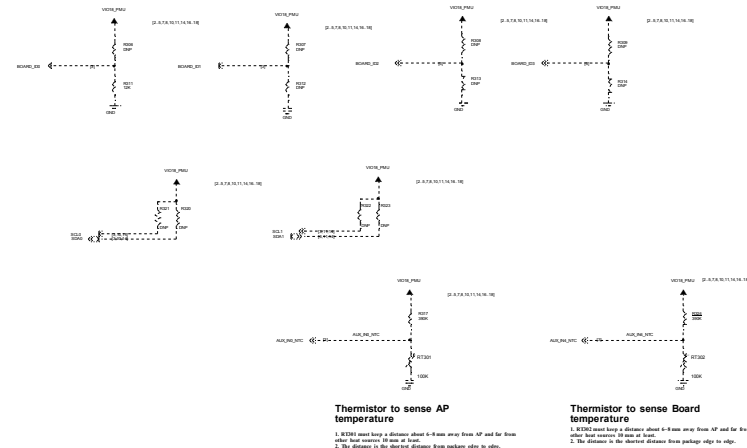


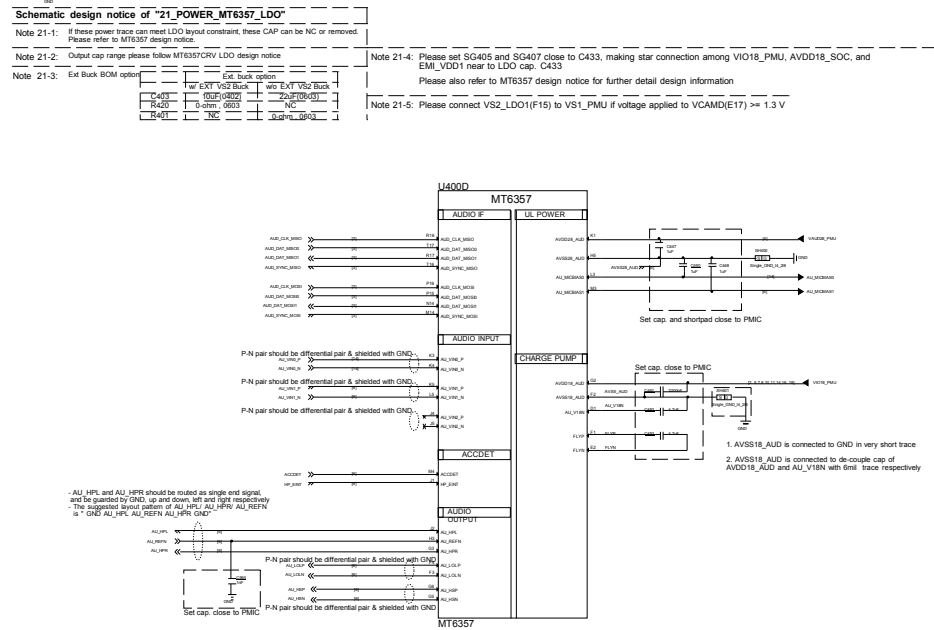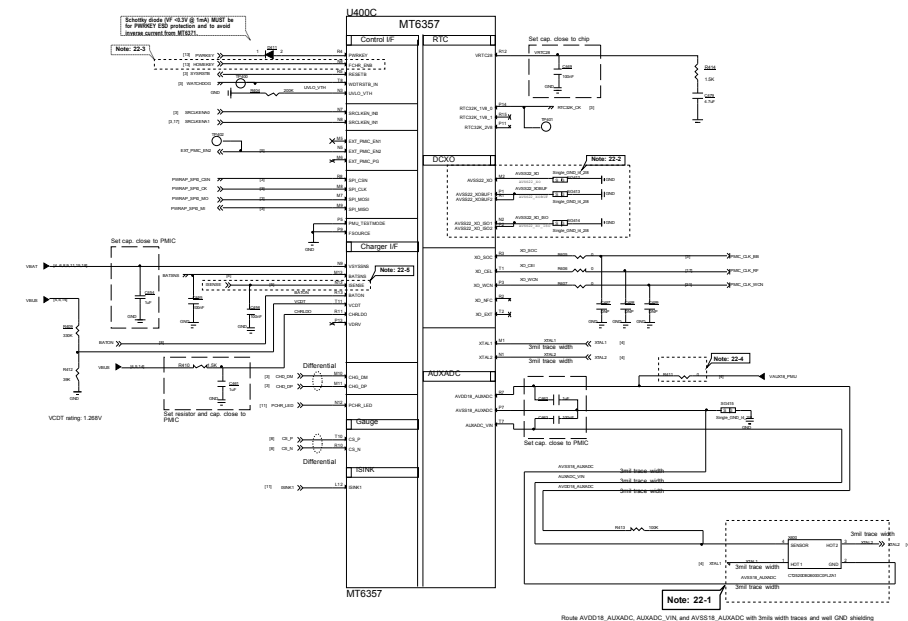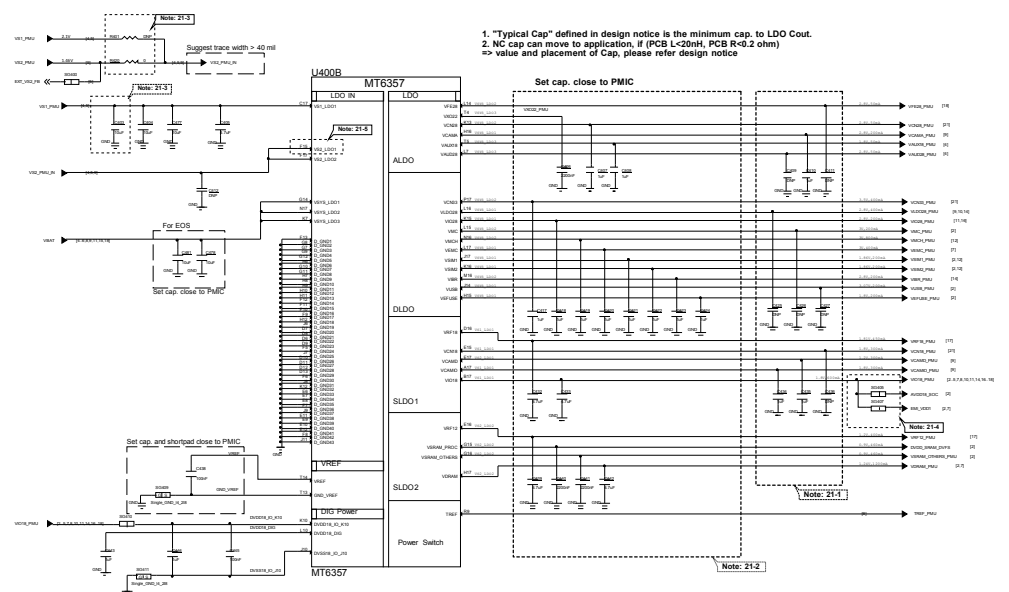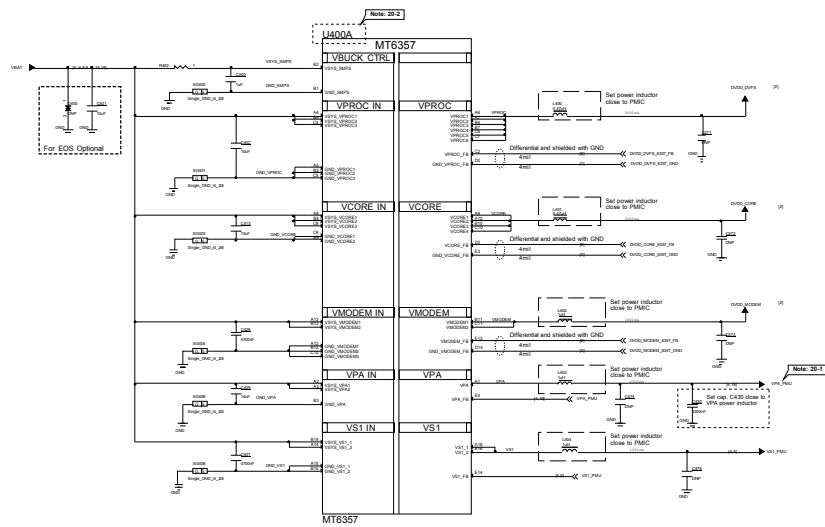


LCM Backlight LED driver

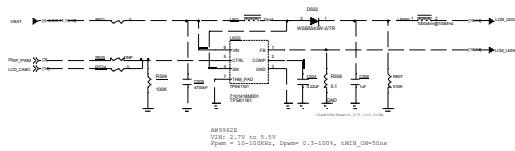


LCD Bias

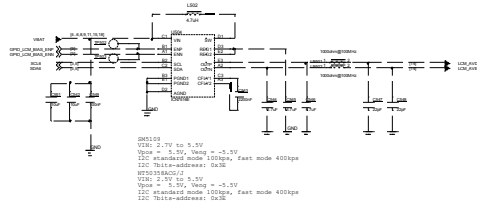


Flash LED 5V Boost

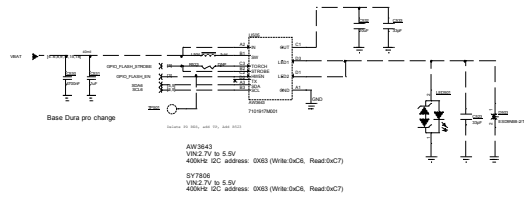


Charger

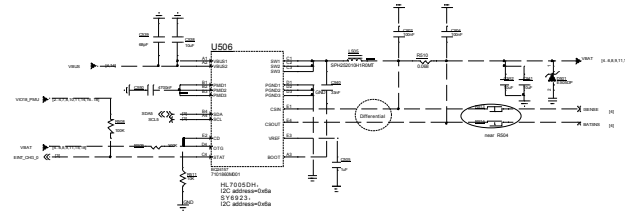

LDO for VA12

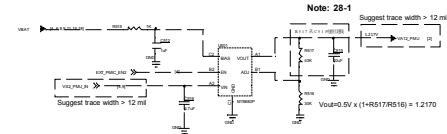

Ext. Bulk for VS2



Schematic design notice of "27_POWER_SubPMIC-HV powers" page:

Note 27-1: To minimize RF de-sense, it is recommended to reserve 0-ohm and 0402 cap for BOM fine tuning.

Note 27-2: To minimize RF de-sense, it is recommended to reserve 0-ohm and 0201 cap. for BOM fine tuning.

Note 27-3: C2705 could be replaced with $C / 1 / \mu F / 50V + C / 1 / \mu F / 50V$

Schematic design notice of "28_POWER_ThirdParty-Power"


Note 28-1: VA12 Layout placement please close to AP.

Note 28-2: VS2 Bulk Layout placement please close to PMIC MT6357


Note 28-3: VCN33 LDO Layout placement please close to MT6631

Handset 2nd Microphone


SPEAKER

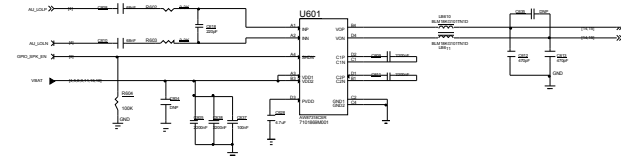


EAR PIECE



Earphone Audio



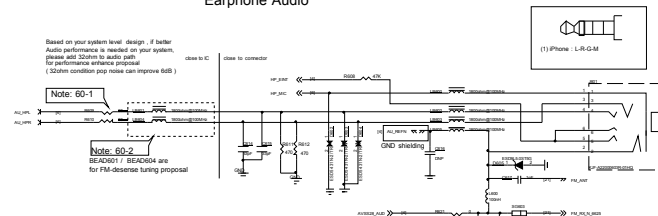


Earphone MICPHONE


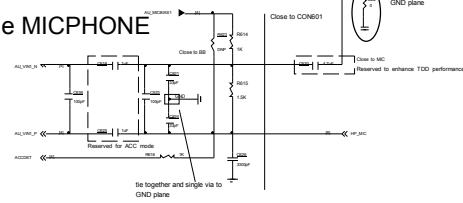





BATTERY CONNECTOR

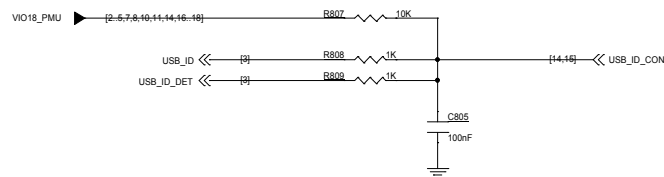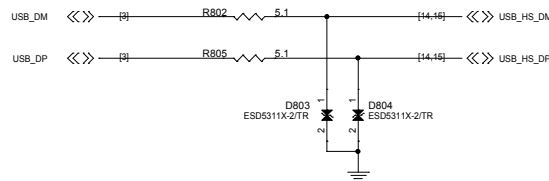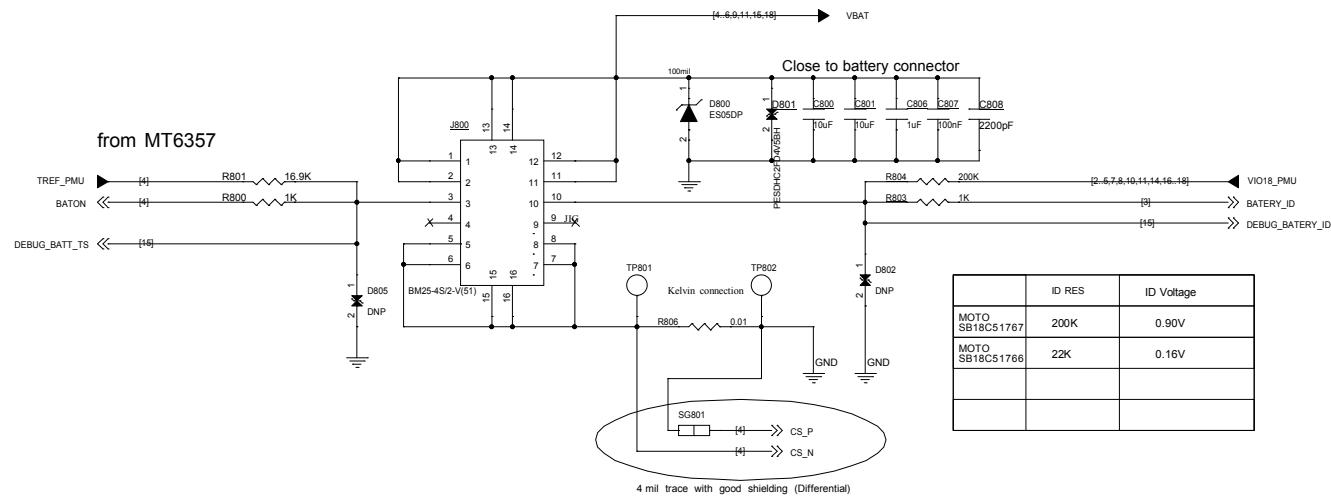



Rear-Main Camera(AF-13M)

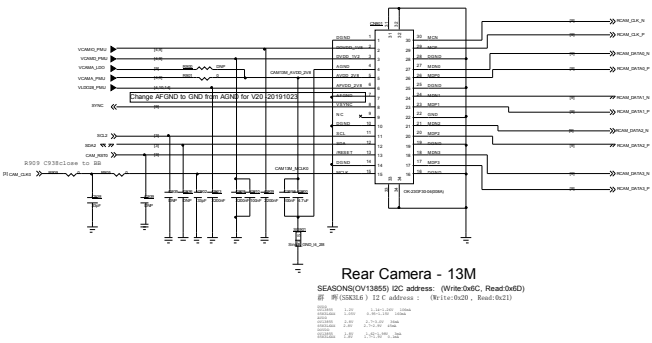


Rear-Slave Camera(FF-2M)

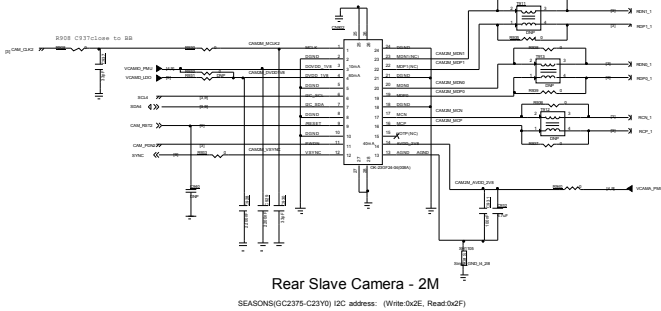






Front-FF-5M Camera Connector

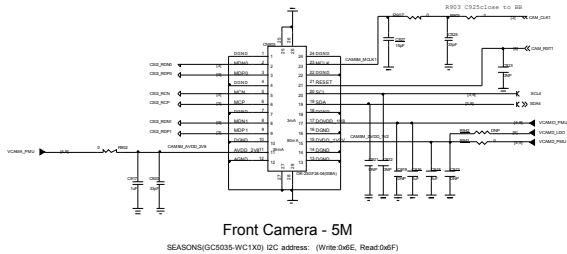


LCM Connector

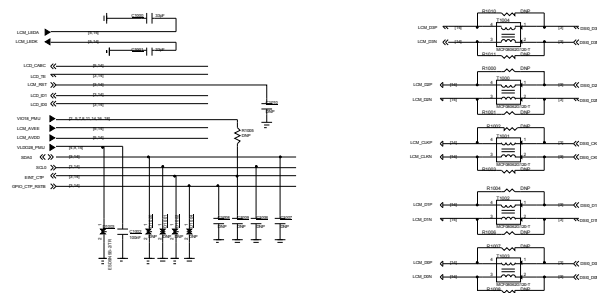

GT1151 I2C address: 0X5D (Write:0xBA, Read:0xBB)
or 0x14 (Write:0x28, Read:0x29)

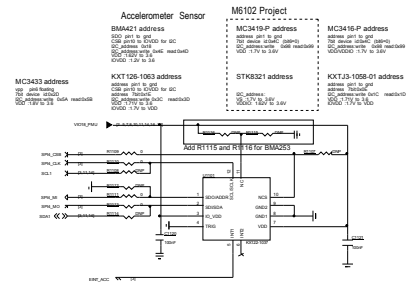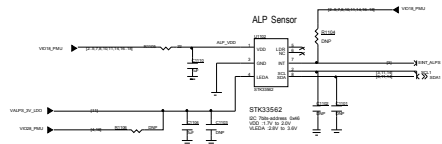


SIM and TF

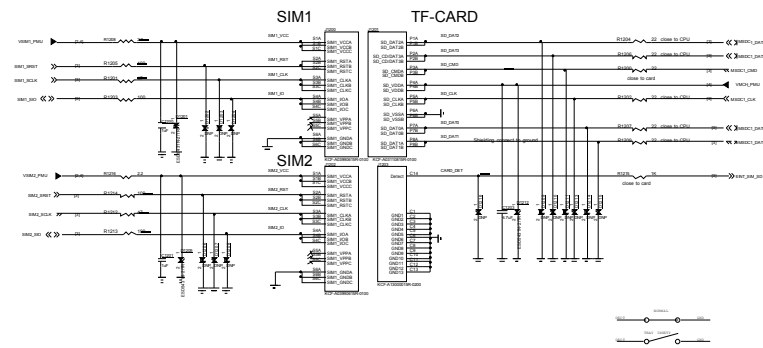


KEY

Volume Up : HOME Key / GND
Volume Down : KPCOL1/GND
DO NOT put pull-up resistor on PWRKEY

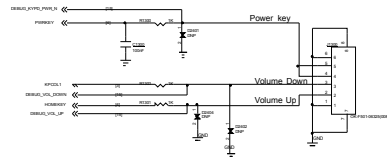


OVP

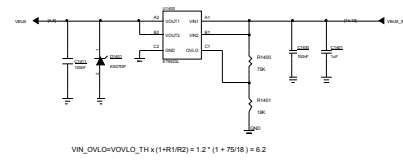


Sub Connector

0xXX (Write:0xXX, Read:0xXX)


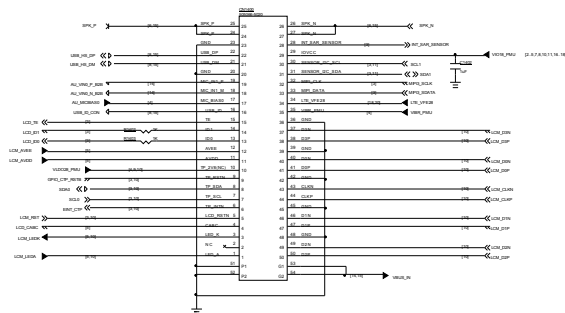


Download mode TP




USB Test point


Now TP size is 1.2, need?




KEY Test point






BATTERY Test point




SPK Test point









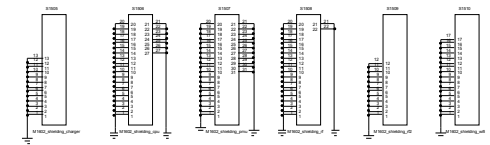


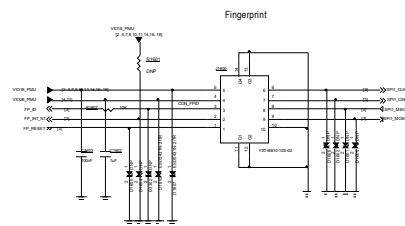

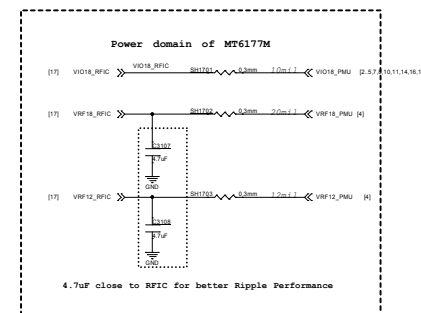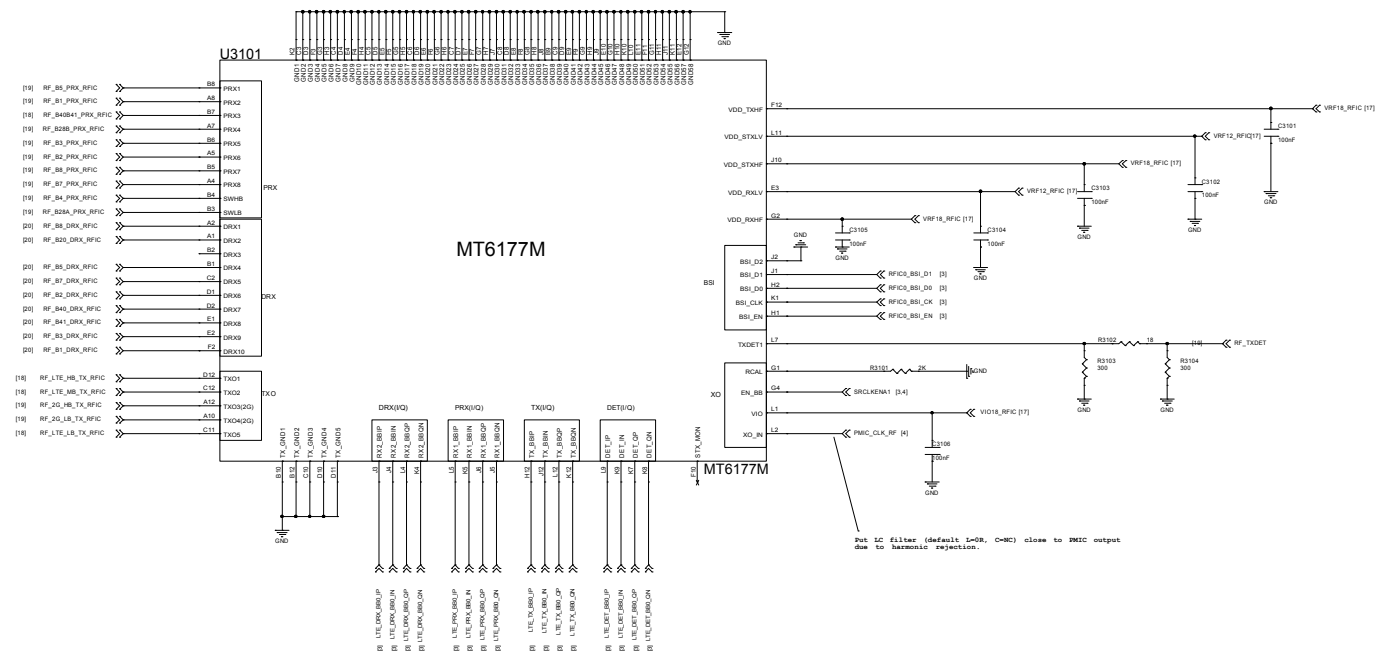

RF MT6177

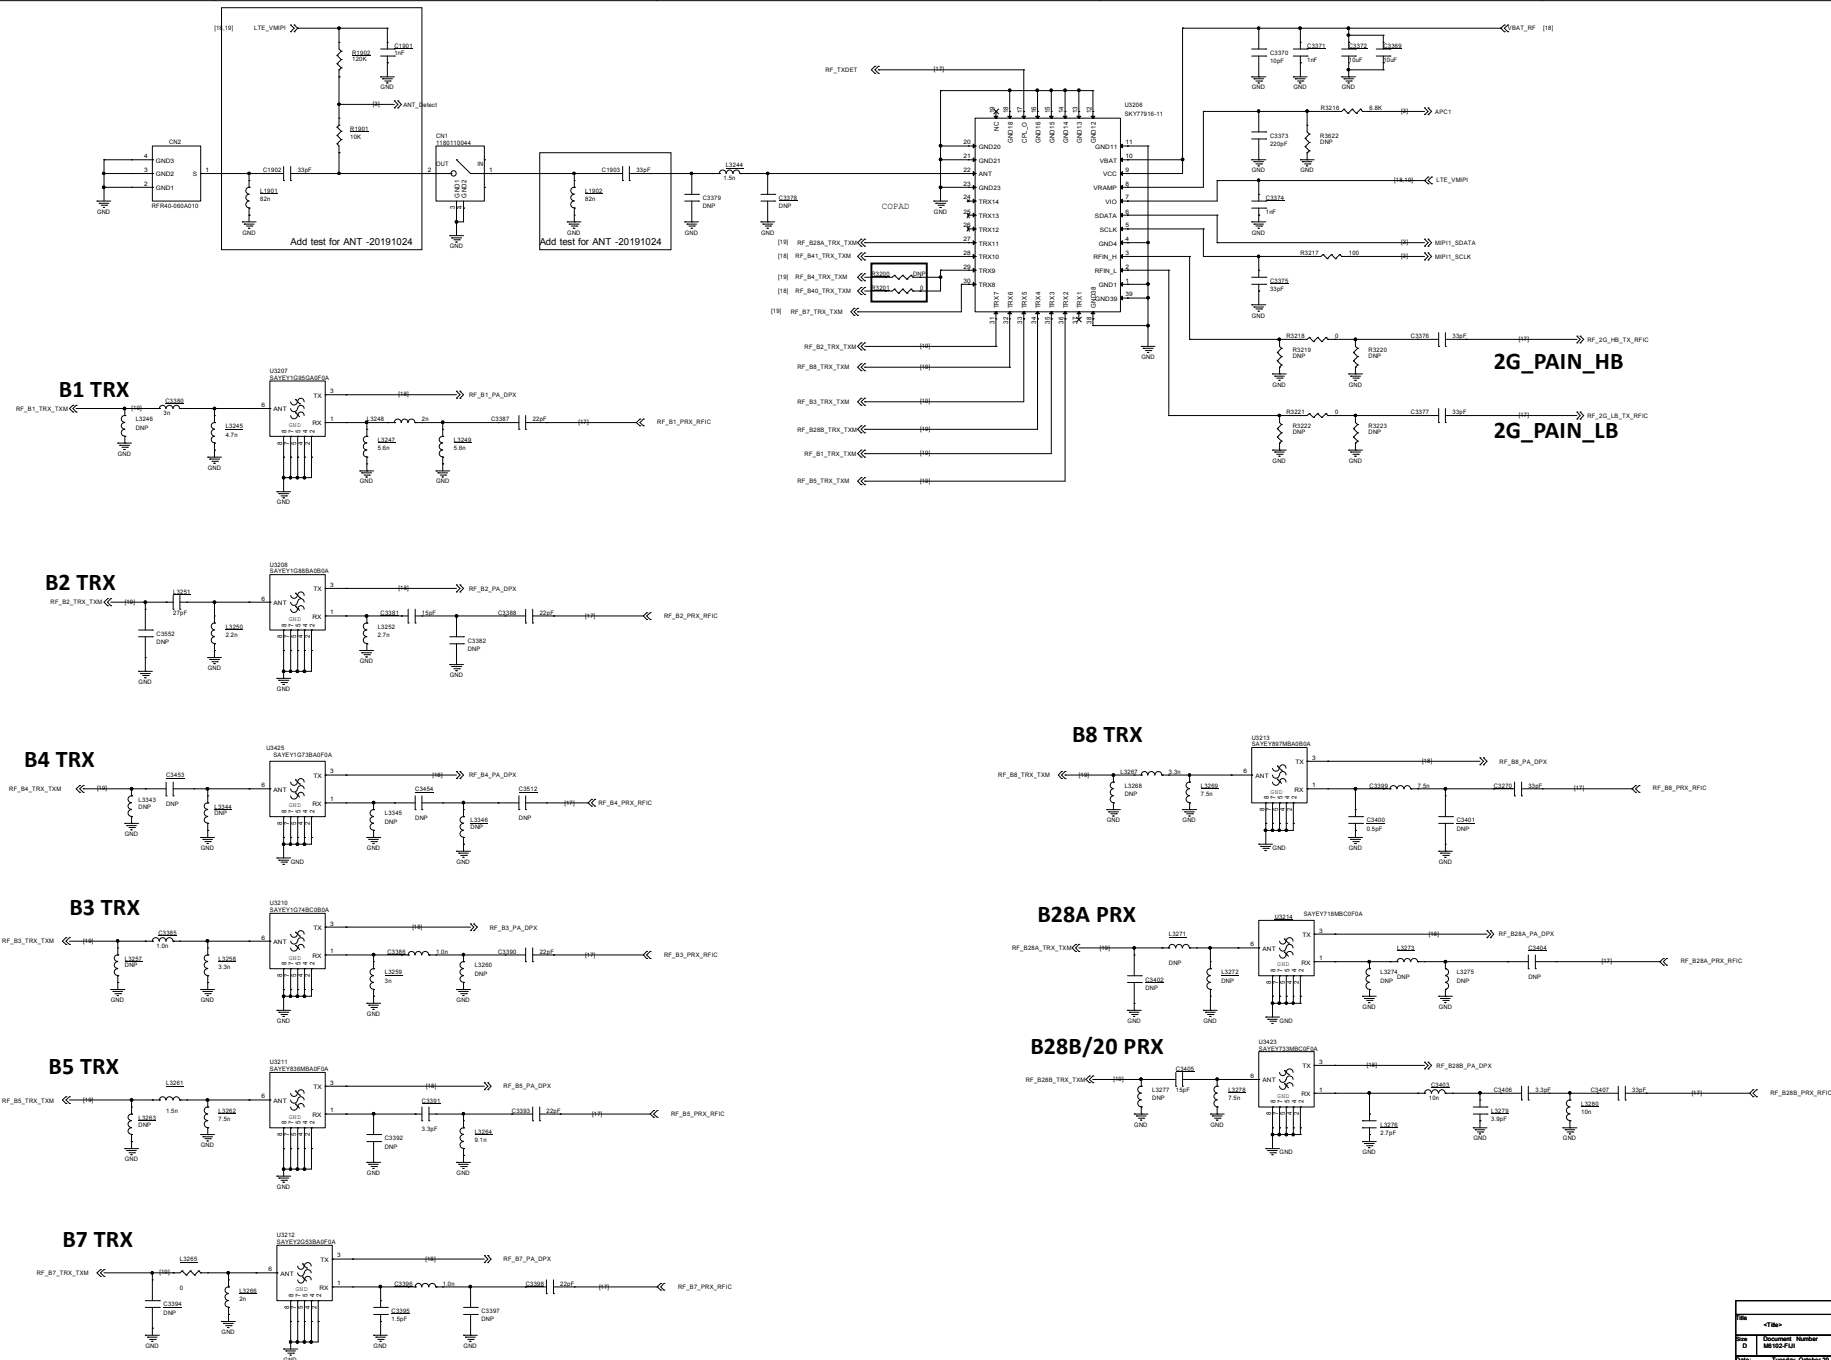

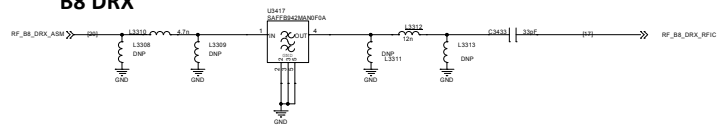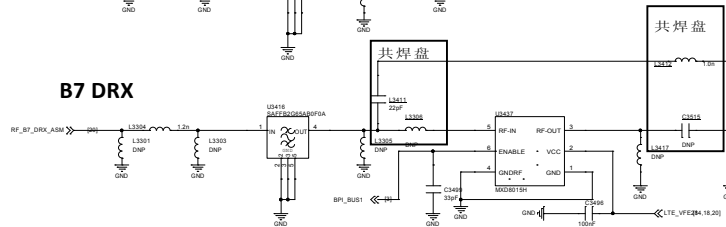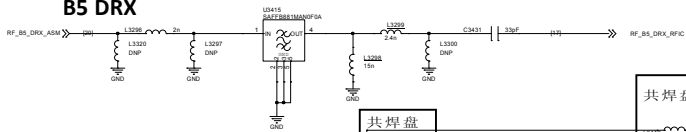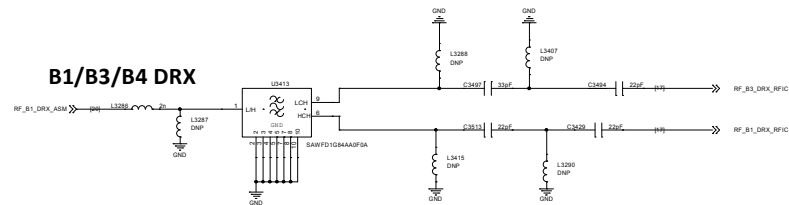

File			
<Title>			
Size	Document Number	Rev	
D	ME102-FUII	V10	
Date:	Friday, October 24, 2014	Sheet	20 of 21

