


测量设备： 福禄克115C

Measuring equipment: fluke 115C

Lower
resistance
reference XS

下层阻值参考XS

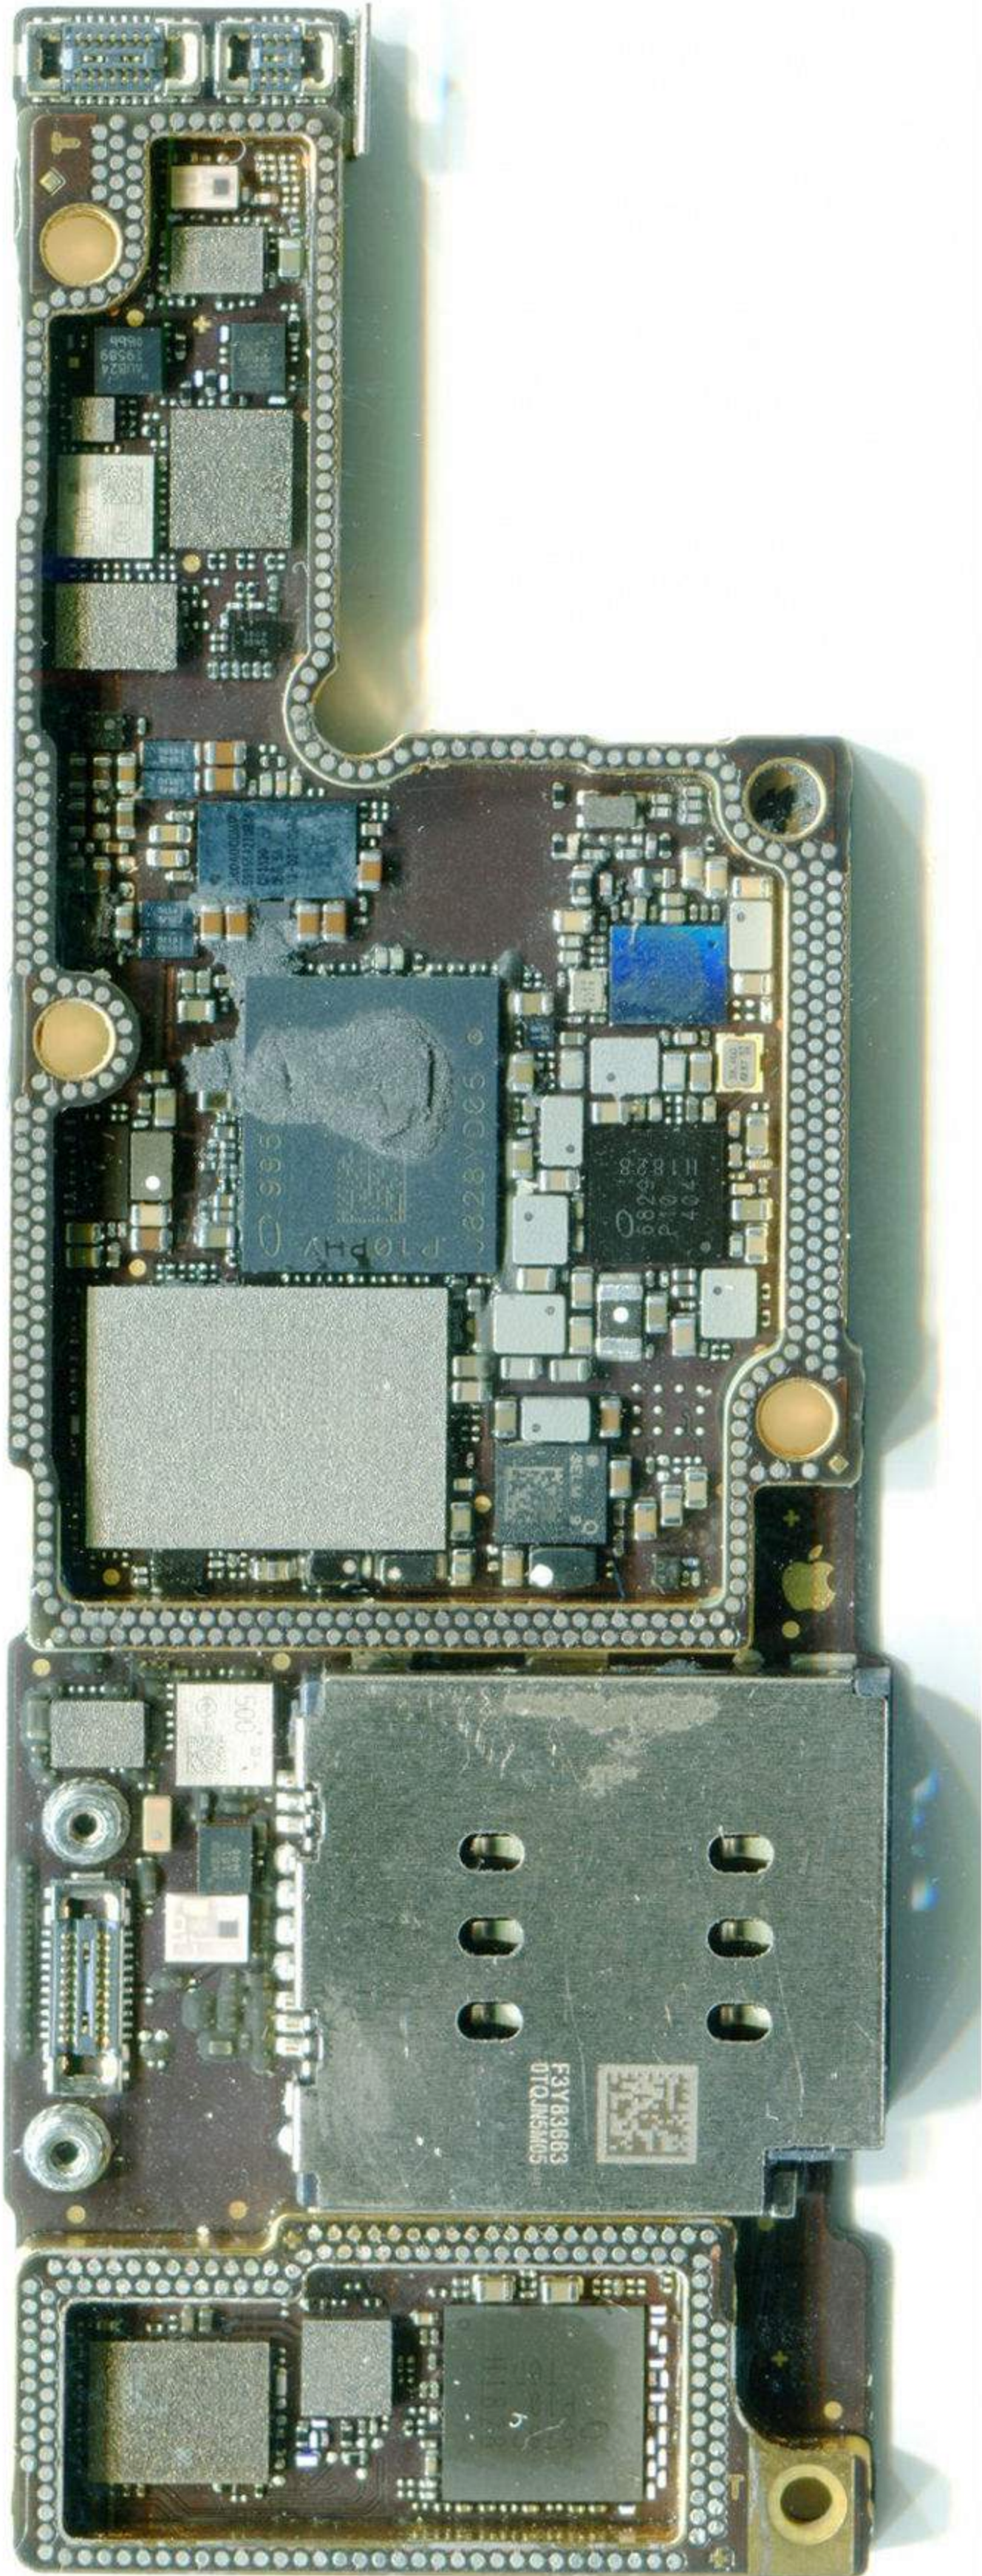

U6150			
333	344	625	GND
GND	OL	GND	351
GND	GND	GND	351
OL	293	339	GND

U6300 USB控制							
OL	OL	OL	OL	OL	356	GND	GND
513	546	550	552	554	559	557	GND
593	603	608	611	614	OL	353	482
OL	632	OL	633	560	GND	354	307
OL	633	OL	633	GND	OL	OL	1259
GND	500	495	490	356	357	OL	354
OL	GND	355	356	364	355	357	GND

U3100 自举升压			
284	356	296	GND
285	356	371	GND
542	339	549	GND
542	GND	547	GND

硬盘 U2600													
	GND		GND		GND		GND		GND		GND		GND
GND		GND		677		OL		350		677		OL	
	468		GND		GND		GND		350		OL		GND
GND		248		290		GND		GND		GND		GND	
	OL		GND		GND		GND		290		492		290
GND		365		364		492		492		492		492	
	OL		361		GND		1314		GND		GND		GND
GND		366		364		492		290		492		492	
	367		OL		GND		GND		GND		365		291
GND		365		GND		676		OL		365		GND	
	568		676		OL		GND		89		365		GND
GND		GND		290		290		290		290		676	
GND		GND		GND		GND		GND		GND		OL	

U3600 陀螺仪			
	GND	353	353
GND			
GND			
GND			
GND			
	GND	GND	496

U4700 大音频									
GND	587	362	362	OL	GND	393	OL	OL	OL
OL	540	363	OL	OL	OL	GND	OL	OL	OL
324	1070	362	OL	OL	OL	OL	OL	OL	OL
GND	OL	365	OL	OL	OL	OL	OL	GND	OL
365	363	365	OL	OL	OL	GND	GND	GND	GND
390	360	387	364	362	364	GND	GND	GND	OL
816	398	362	364	362	GND	GND	GND	GND	OL
388	387	363	361	GND	OL	OL	GND	363	OL
OL	OL	OL	OL	OL	OL	OL	568	GND	OL
324	OL	OL	OL	GND	402	OL	GND	626	626
GND	391	324	325	688	742	88	GND	626	OL

U6200快充IC			
GND	445	OL	GND
338	OL	353	OL
342	OL	OL	OL
OL	552	GND	356

U3700							
383	383	OL	OL	OL	OL	383	383
OL	OL	383	325	325	325	OL	OL
OL	GND	GND	GND	357	OL	GND	690
OL	GND	OL	OL	GND	OL	581	402
OL	357	OL	OL	GND	556	GND	355
GND	OL	445	GND	365	582	295	381
OL	OL	OL	357	OL	GND	GND	GND
357	357	295	GND	OL	GND	OL	OL
GND	OL	OL	OL	OL	GND	357	357

U4120闪光灯驱动1			
GND	325	350	
321	543	350	
OL	596	596	
OL	545	OL	

U4100闪光灯驱动2			
GND	325	350	
321	543	350	
OL	596	596	
OL	545	OL	

U4400									
353	353	353	OL	354	380	386	353	563	353
OL	OL	OL	OL	360	GND	GND	GND	OL	OL
GND	GND	GND	GND	294	GND	OL	OL	GND	GND
OL	OL	OL	GND	GND	GND	GND	OL	OL	OL
OL	353	OL	空	GND	GND	空	OL	353	OL
282	353	GND	空	353	GND	空	GND	353	354
OL	382	GND	OL	GND	GND	GND	GND	382	OL
OL	OL	OL	OL	354	GND	OL	353	OL	OL
OL	OL	OL	OL	OL	OL	OL	OL	OL	OL

U1401 逻辑码片			
OL	357	282	
GND	GND	360	
GND	GND	OL	

U5002 前置听筒扬声器							
377	315	550	365	349	OL	OL	
OL	GND	GND	364	GND	GND	GND	
316	580	548	GND	GND	OL	OL	
316	OL	402	363	GND	OL	OL	
404	363	362	362	GND	OL	OL	
350	349	349	GND	GND	OL	OL	
OL	GND	OL	OL	GND	OL	OL	
OL	GND	OL	OL	OL	348	348	

U4902 扬声器放大							
OL	GND	OL	OL	OL	OL	OL	346
OL	GND	OL	OL	OL	OL	OL	346
346	GND	GND	GND	GND	GND	GND	GND
363	363	GND	362	364	GND	OL	OL
550	GND	GND	401	362	335	OL	OL
314	GND	GND	617	362	335	GND	GND
377	OL	313	313	401	335	OL	OL

U5102 振动控制器							
OL	GND	OL	OL	OL	OL	OL	342
OL	OL	OL	OL	OL	OL	OL	342
341	360	GND	GND	GND	OL	GND	OL
565	566	GND	368	361	GND	OL	OL
550	GND	GND	398	359	341	OL	OL
OL	GND	GND	599	360	342	GND	GND
OL	OL	340	340	398	342	OL	OL

U2700 电源																							
GND	GND	GND	GND	351	379	138	GND	138	378	29	GND	28	380	102	GND	28	380	28	GND				
9	9	GND	GND	GND	379	138	GND	GND	378	29	GND	28	380	OL	GND	28	380	28	GND				
380	379	OL	GND	352	OL	GND	GND	GND	OL	GND	GND	GND	OL	GND	GND	GND	0	GND	GND				
9	9	GND	GND	OL	GND	GND	GND	138	GND	GND	GND	29	GND	GND	GND	GND	GND	GND	GND				
GND	GND	GND	GND	367	367	367	368	OL	OL	GND	GND	GND	386	OL	584	216	GND	214	214				
9	OL	GND	GND	476	459	367	367	369	OL	OL	OL	GND	1940	OL	671	GND	OL	379	380				
379	379	OL	GND	OL	583	OL	367	366	367	OL	671	GND	OL	1942	GND	OL	83	GND	82				
9	9	GND	9	OL	788	OL	OL	OL	451	650	GND	1947	1943	OL	GND	GND	GND	GND	GND				
GND	GND	GND	GND	OL	OL	OL	OL	OL	831	316	365	GND	1474	GND	368	OL	GND	305	GND	304			
9	9	GND	GND	524	684	OL	OL	OL	345	365	GND	OL	362	OL	GND	GND	OL	380	380				
379	379	OL	GND	710	620	OL	707	OL	OL	GND	GND	OL	369	829	GND	28	GND	GND	28				
526	526	GND	525	OL	OL	OL	OL	OL	367	367	OL	GND	GND	OL	OL	OL	379	380	GND	GND			
GND	GND	GND	GND	OL	366	OL	GND	GND	GND	GND	GND	387	385	OL	OL	0	GND	28	28				
242	GND	241	GND	GND	GND	GND	GND	622	OL	395	OL	516	OL	379	379	GND	OL	380	380				
376	379	379	OL	GND	OL	OL	482	384	384	386	385	385	385	OL	OL	5	GND	GND	5				
324	323	323	GND	GND	GND	323	323	323	OL	5	526	372	454	385	386	OL	GND	GND	GND				
GND	GND	GND	OL	OL	OL	323	323	323	456	5	526	527	454	385	386	OL	GND	GND	5	5			
GND	324	GND	OL	OL	291	291	291	456	5	5	513	454	385	386	OL	GND	0	380	380				

U3300 充电IC											
GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND
351	351	351	351	OL	351	349	349	349			
OL	OL	OL	OL	OL	OL	OL	OL	OL	OL	OL	OL
OL	OL	OL	OL	OL	OL	OL	OL	OL	OL	OL	OL
OL	OL	GND	GND	GND	OL	474	OL	OL			
581	GND	683	空	OL	572	361	361	OL			
351	351	351	351	351	351	351	GND	1847	GND		
OL	OL	OL	OL	OL	OL	OL	GND	GND			