

iREPAIR



Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date:	Saturday, January 27, 2018		Sheet 1 of 47

iREPAIR





Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Saturday, January 27, 2018		Sheet 2 of 47	

iREPAIR




Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Saturday, January 27, 2018		Sheet 3 of 47	

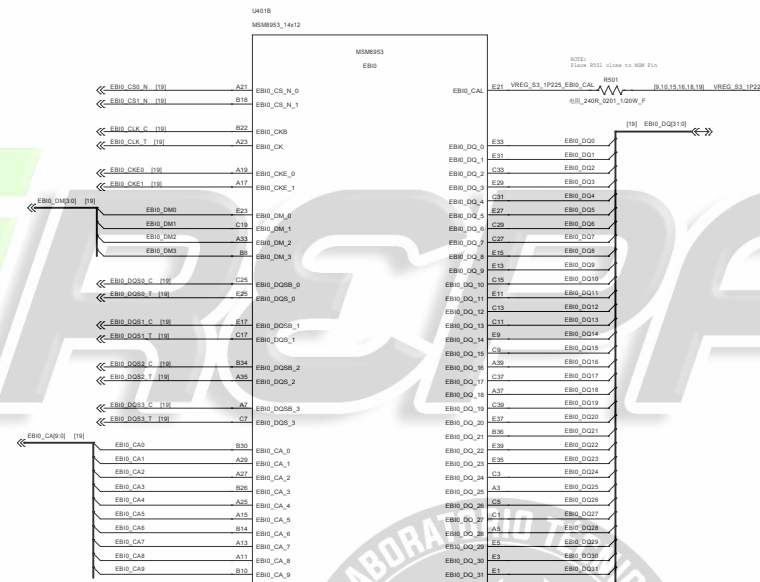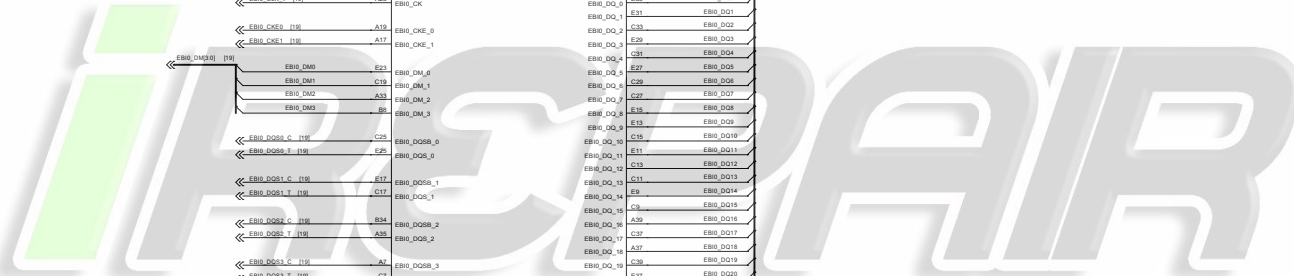


MSM8953
EBI


NOTE:
Asterisks (*) indicate modem power management (MPM) wake-up pins

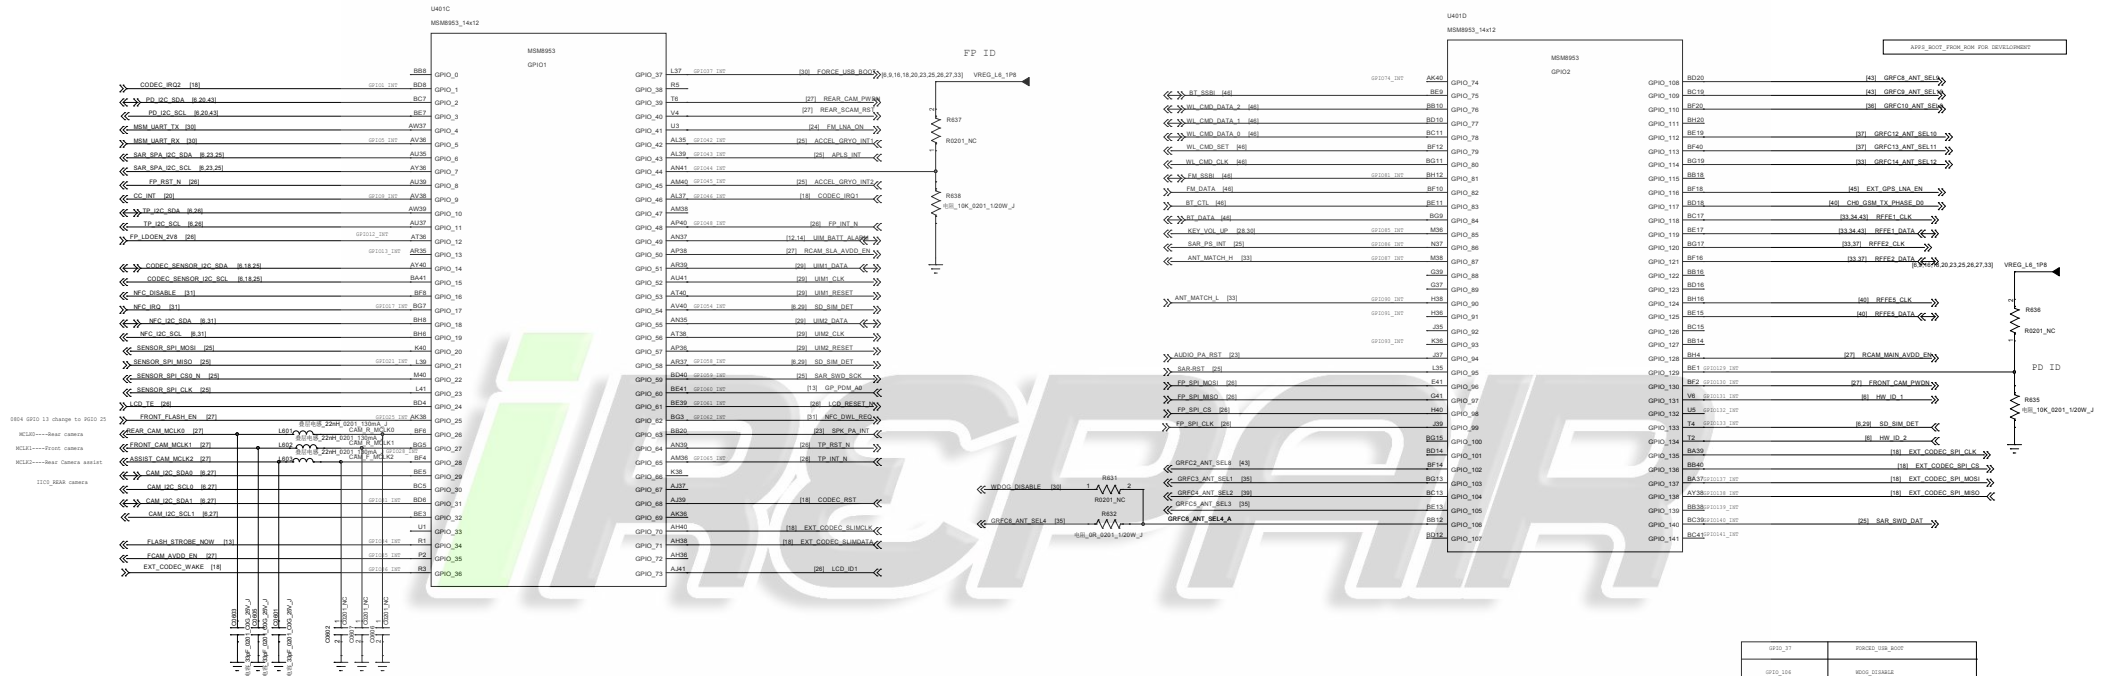


I2C PULL-UP

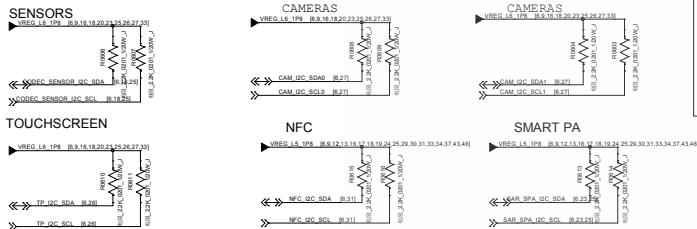

NOTE:
Ensure SW sets these GPIOs (Sensor, CTF and Camera I2C bus) to inout pull down when the peripherals are powered off to eliminate leakage.



HW Board ID




MSM8953 GPIO

GPIO_37	POWER_USB_BOOT
GPIO_104	MODEM_C14M2A
GPIO_108	APPS_BOOT_FPM_NOM


BOOT_C0M010(11)	BOOT_C0M010
0000	0001 -> 0002 -> 0003
0001	0002 -> 0003 -> 0004
0010	0003 -> 0004 -> 0005
0011	0004 -> 0005

Default Boot Config (0000) is 00010000

File	<File>
Rev	Version/Number
D	Date
Rev	Version/Number

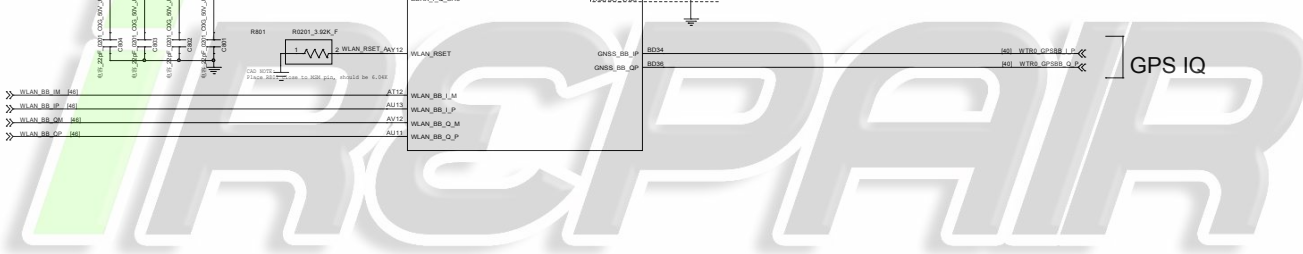MSM8953
RF


File			Name		
<Title>			<Doc>		
Size	Document Number		View		
D	<Doc>				
Date: Saturday, January 27, 2018			Sheet 8 of 47		

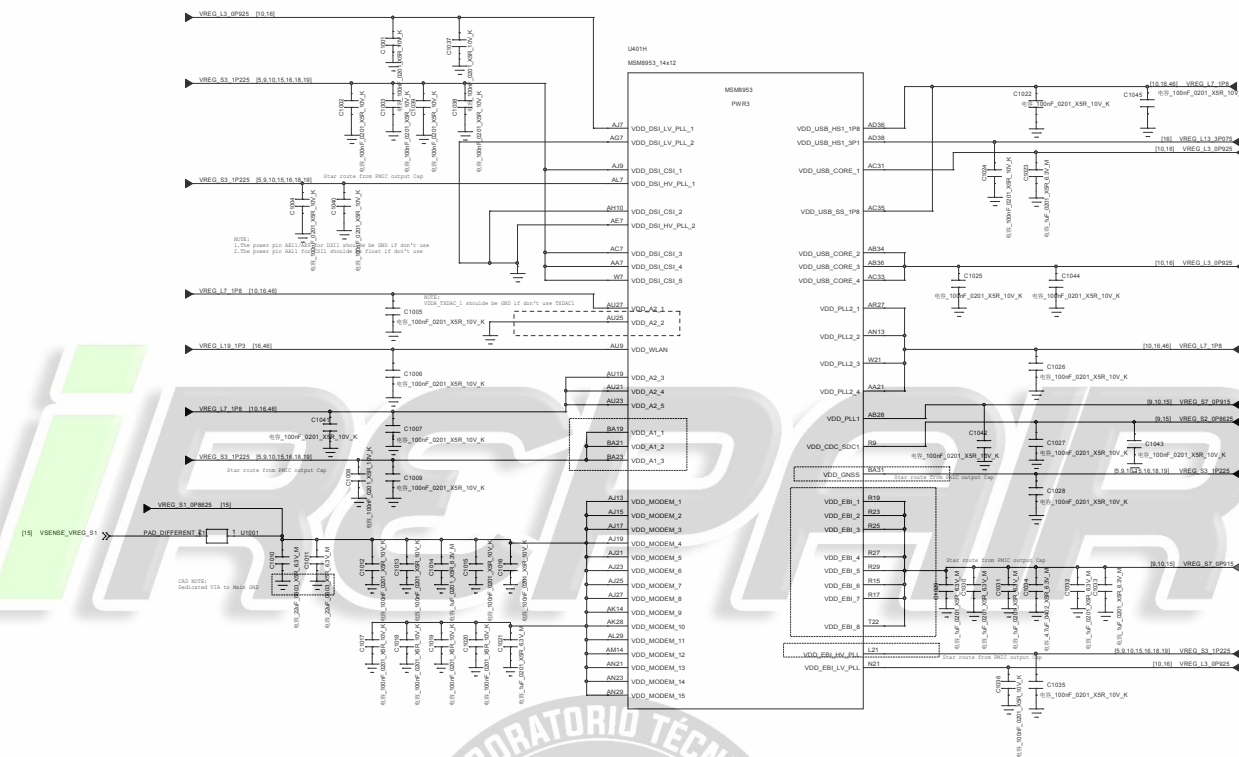


MSM8953
POWER2

Rev	<Title>	Rev
Rev	<Document Number>	Rev
Rev	<Date>	Rev
Rev	<Author>	Rev


U001J
MSM8953_14x12

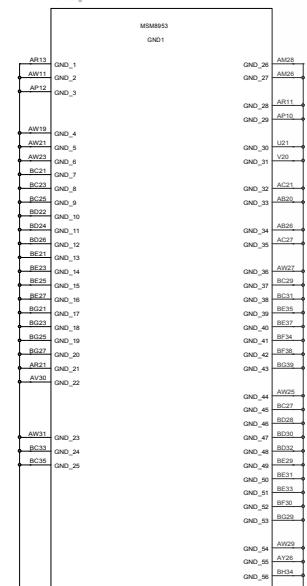


U001K
MSM8953_14x12

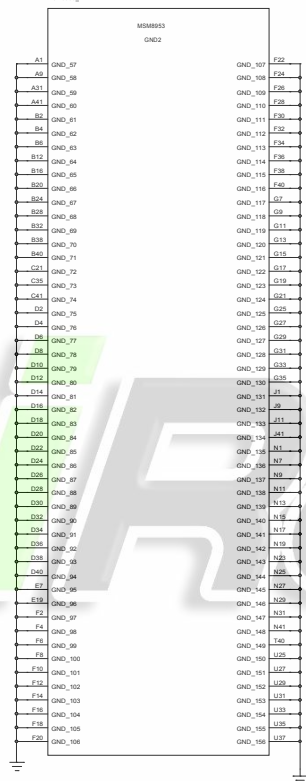


U001L
MSM8953_14x12

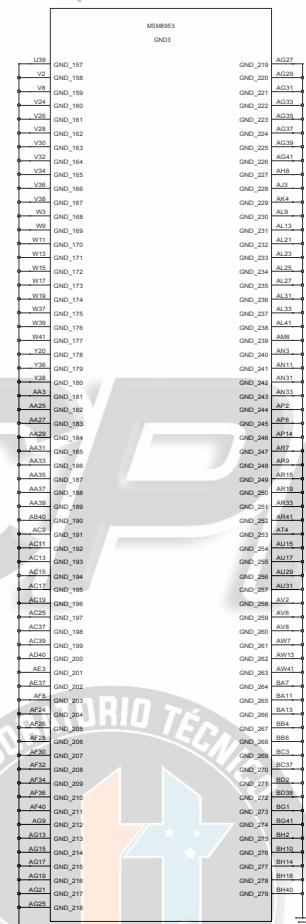

U001A
MSM8953_14x12




MSM8953
GND

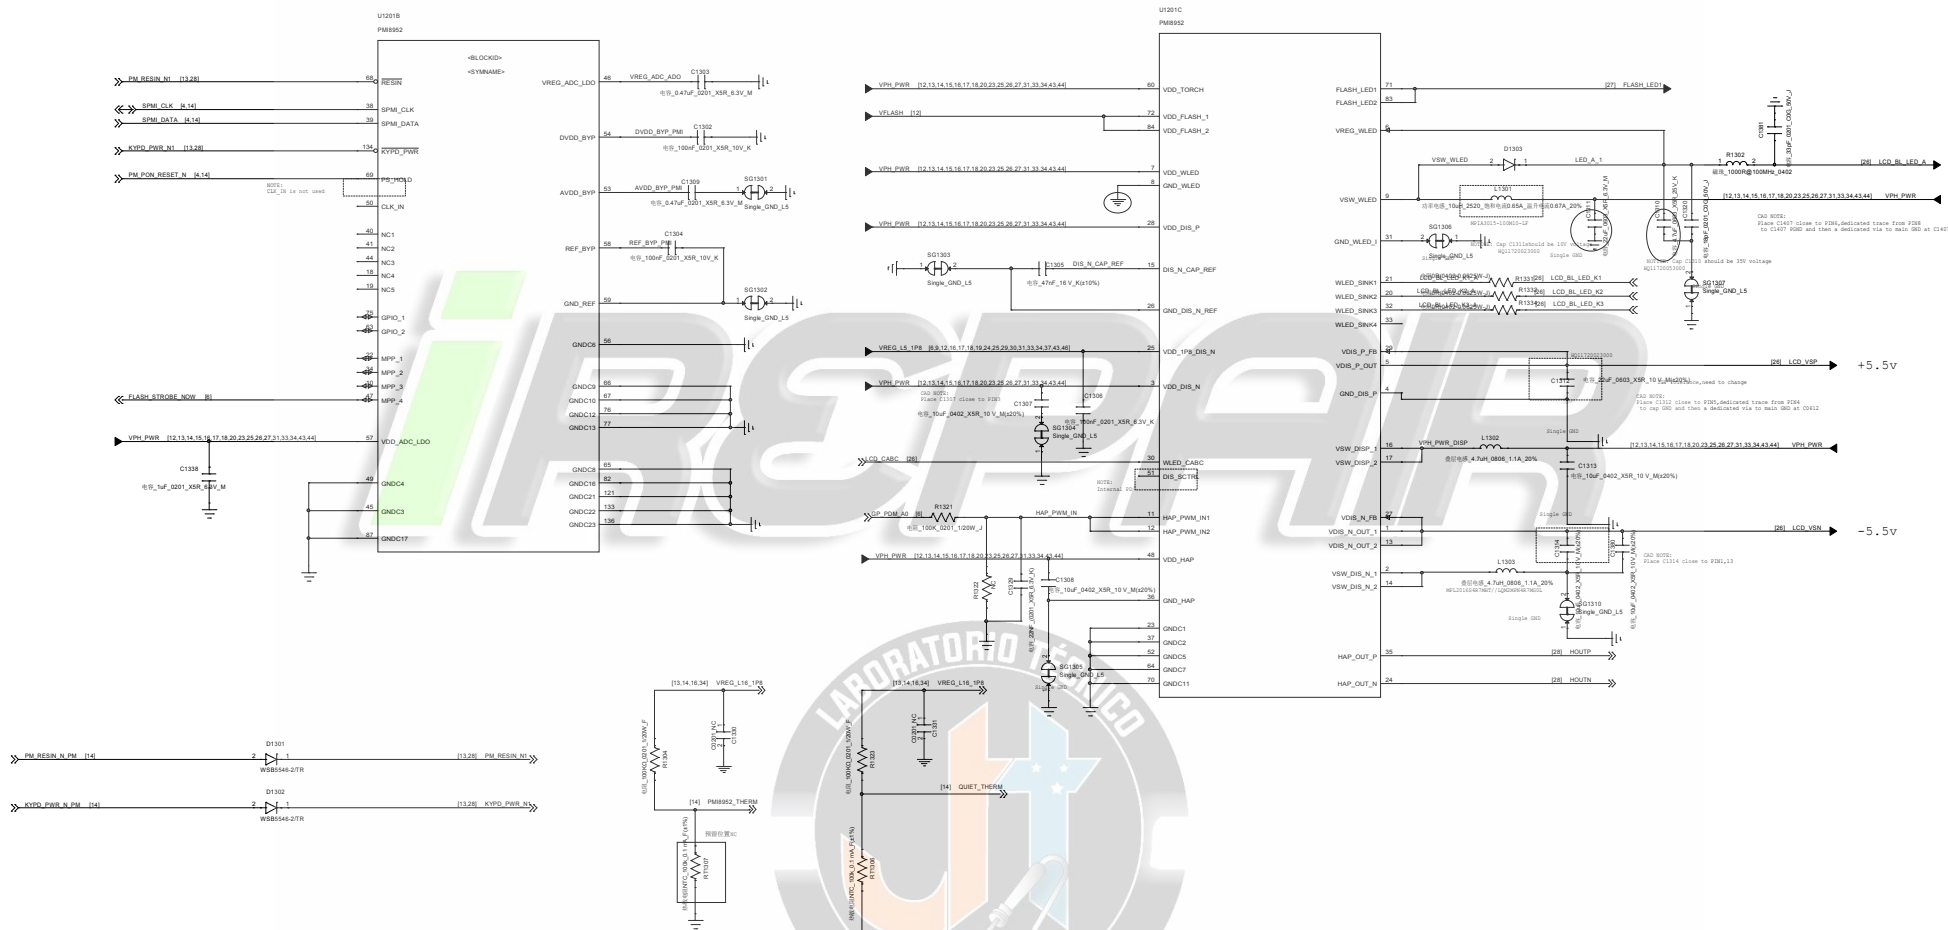

PMI8952 Control/Interface


Rev	Docu	Docu	Docu
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5	5	5	5
6	6	6	6
7	7	7	7
8	8	8	8
9	9	9	9
10	10	10	10

Function	Circuit type	Default voltage (V)	Specified range (V) (MSM8953)	Programmable range (V)	Rated current (mA)	Default on	Expected use (MSM8953)
S1	SMPS	C.87	0.4~1.14	0.32~2.04	3000	N	MSM modem
S2	SMPS	C.87	0.4~1.14	0.32~2.04	4000	Y	MSM core and graphics
S3	SMPS	1.225	1.2~1.25	0.32~2.04	2000	Y	LPDDR2/LPDDR3, MIPI CSI, and DSI, low-voltage LDOs (1, 2, 3, and 23)
S4	SMPS	2.04	1.8~2.04	0.32~2.04	2000	Y	High-voltage LDOs (4, 5, 6, 7, 16, 13, RFCLK, and XD)
S5	SMPS	C.87	0.4~1.14	0.35~1.355	3750	Y	MSM applications processor
S6	SMPS	C.87	0.4~1.14	0.35~1.355	3750	Y	MSM applications processor
S7	SMPS	0.915	0.4~1.14	0.32~2.04	2000	Y	VDDMX

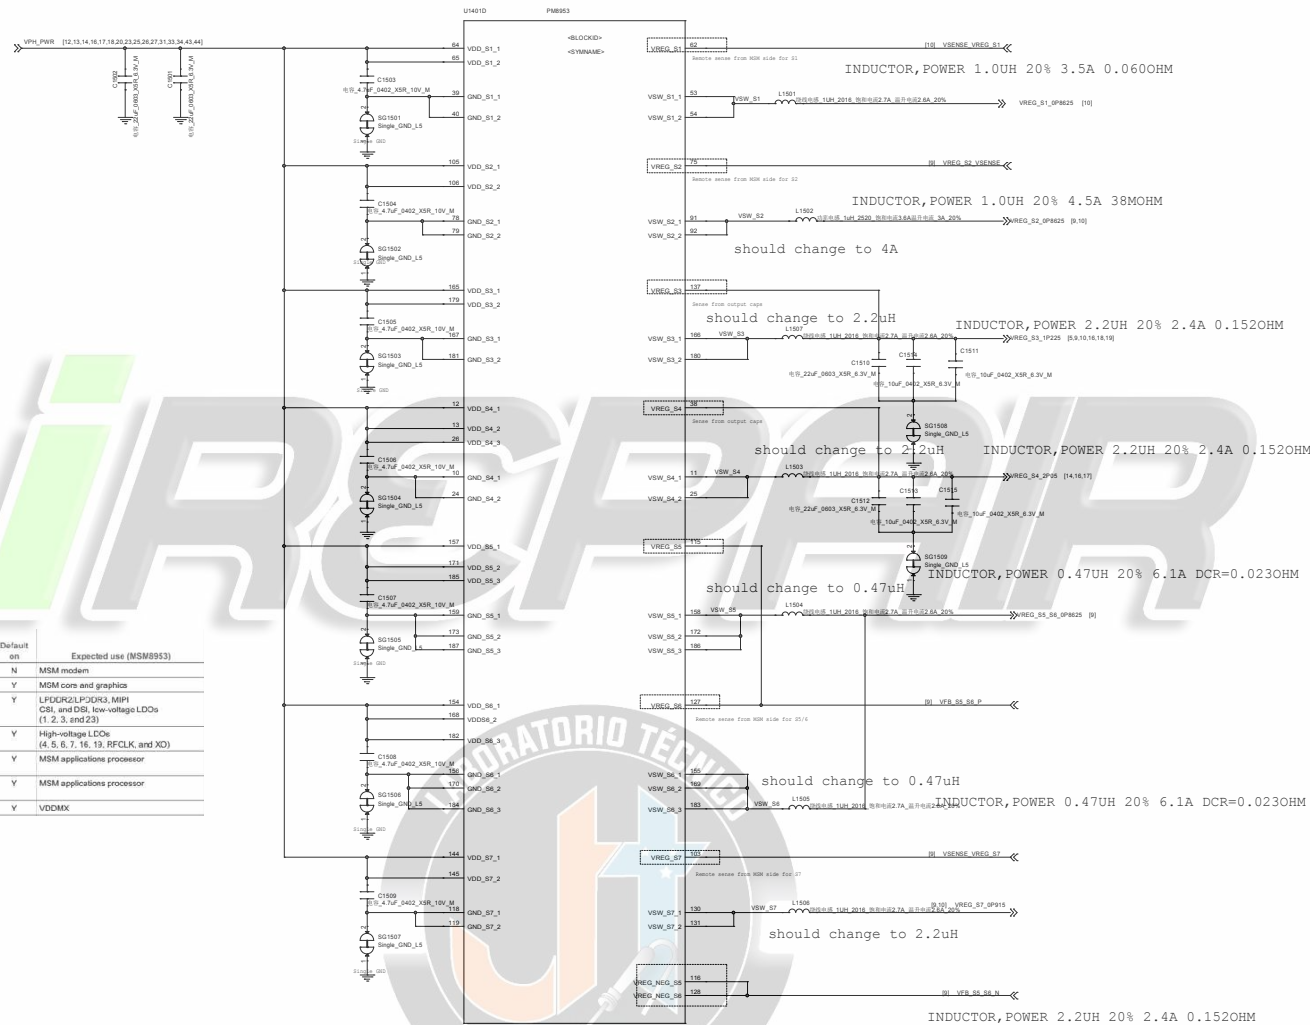

PM8953
SMPS

Rev	01	Doc ID	01558_M0_V1.0	Rev	01
Doc	01558_M0_V1.0	Doc	01558_M0_V1.0	Doc	01558_M0_V1.0
Rev	01	Doc	01558_M0_V1.0	Rev	01

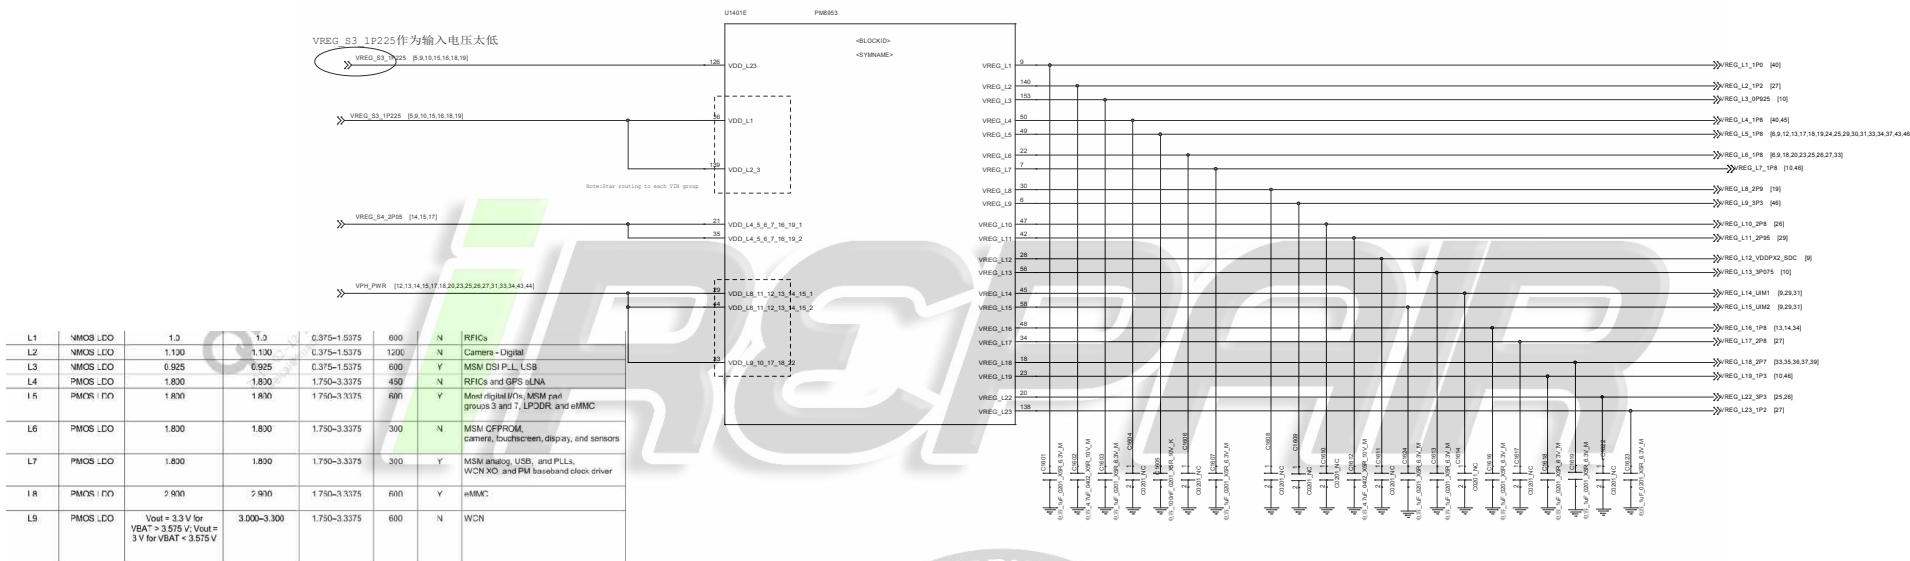


L1	NMOS LDO	1.0	1.0	0.375-1.5375	600	N	RFICs	
L2	NMOS LDO	1.100	1.100	0.375-1.5375	1200	N	Camera - Digital	
L3	NMOS LDO	0.925	0.925	0.375-1.5375	600	Y	MSM CSI P-L, USB	
L4	PMOS LDO	1.800	1.800	1.750-3.3375	450	N	RFICs and GPS sLNA	
L5	PMOS LDO	1.800	1.800	1.750-3.3375	600	Y	Most digital IP's, MSM pad groups 3 and 7, LPDDR and eMMC	
L6	PMOS LDO	1.800	1.800	1.750-3.3375	300	N	MSM CPE/PCMA, camera, touchscreen, display, and sensors	
L7	PMOS LDO	1.800	1.800	1.750-3.3375	300	Y	MSM analog, USB, and PLLs, WCN, XO, and PMI baseband clock driver	
L8	PMOS LDO	2.900	2.900	1.750-3.3375	600	Y	eMMC	
L9	PMOS LDO	Vout = 3.3 V for VBAT > 3.575 V; Vout = 3 V for VBAT < 3.575 V		3.000-3.300	1.750-3.3375	600	N	WCN

Function	Circuit type	Default V (V)	Specified range (V) (MSM8953)	Programmable range (V)	Rated current (mA)	Default Di	Expected use (MSM8953)
L10	PMOS LDO	3.0	3.0	1.750-3.3375	150	N	Sensors and touchscreen
L11	PMOS LDO	2.950	2.950	1.750-3.3375	800	Y	Micro SD
L12	PMOS LDO	2.900	1.800/2.900	1.750-3.3375	50	Y	MSM pad group 2 and SDIO
L13	PMOS LDO	3.125	3.125	1.750-3.3375	150	Y	MSM USB type C and FMIC and external codes audio
L14	PMOS LDO	1.800	1.800/5	1.750-3.3375	50	N	MSM pad group 6, dual-voltage UIM1, and NTC
L15	PMOS LDO	1.800	1.800/5	1.750-3.3375	50	N	MSM pad group 6 and dual-voltage UIM2
L16	PMOS LDO	1.800	1.800	1.750-3.3375	5	N	PMIC HK42IC
L17	PMOS LDO	2.800	2.800	1.750-3.3375	300	N	Camera and display
L18	PMOS LDO	2.700	2.700	1.750-3.3375	150	N	QTI RF baseband
L19	NMOS LDO	1.300	1.300	0.375-1.5375	800	N	MSM analog, VIOCN, and WGR
L20	Low-noise LDO	1.74	1.74	1.74-3.3375	5	Y	PMIC XO oscillators
L21	Low-noise LDO	1.74	1.74	1.74-3.3375	5	N	PMIC RF clock outputs
L22	PMOS LDO	2.800	2.800	1.750-3.3375	150	N	Camera - analog
L23	NMOS LDO	1.15	1.15	0.375-1.5375	800	N	Camera - digital




PM8953
LDO


REPAIR

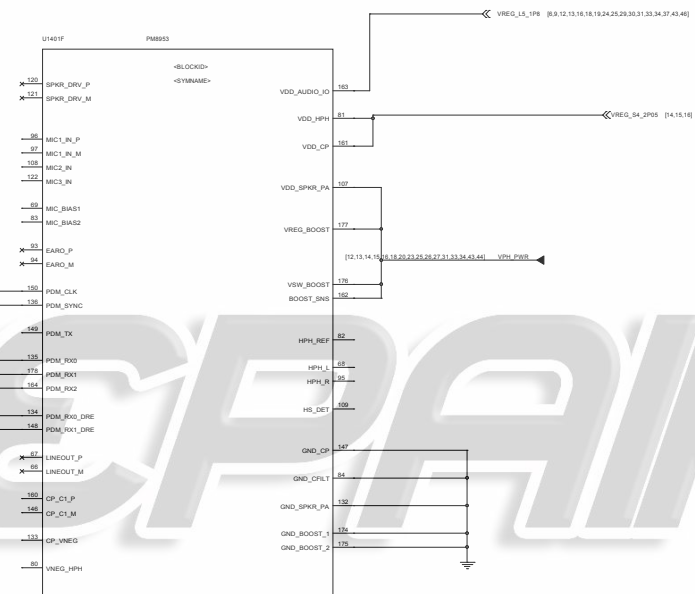

2.2µf use 10V, PN:HQ11710052000

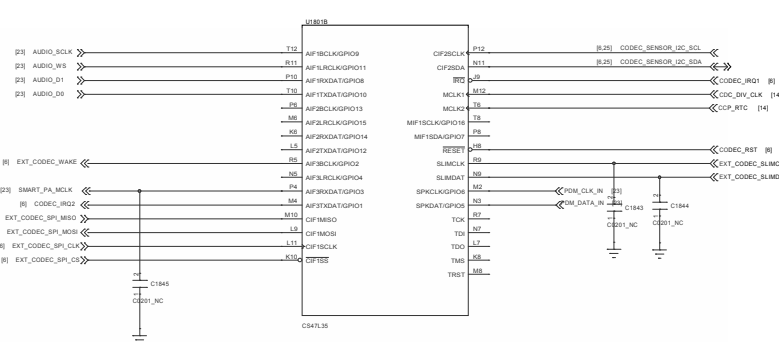


Company: Huelgin		
Block Title	Test Points	
Project	Teller	Rev 1.0
Date:	Saturday, January 27, 2018	Sheet 18 of 47

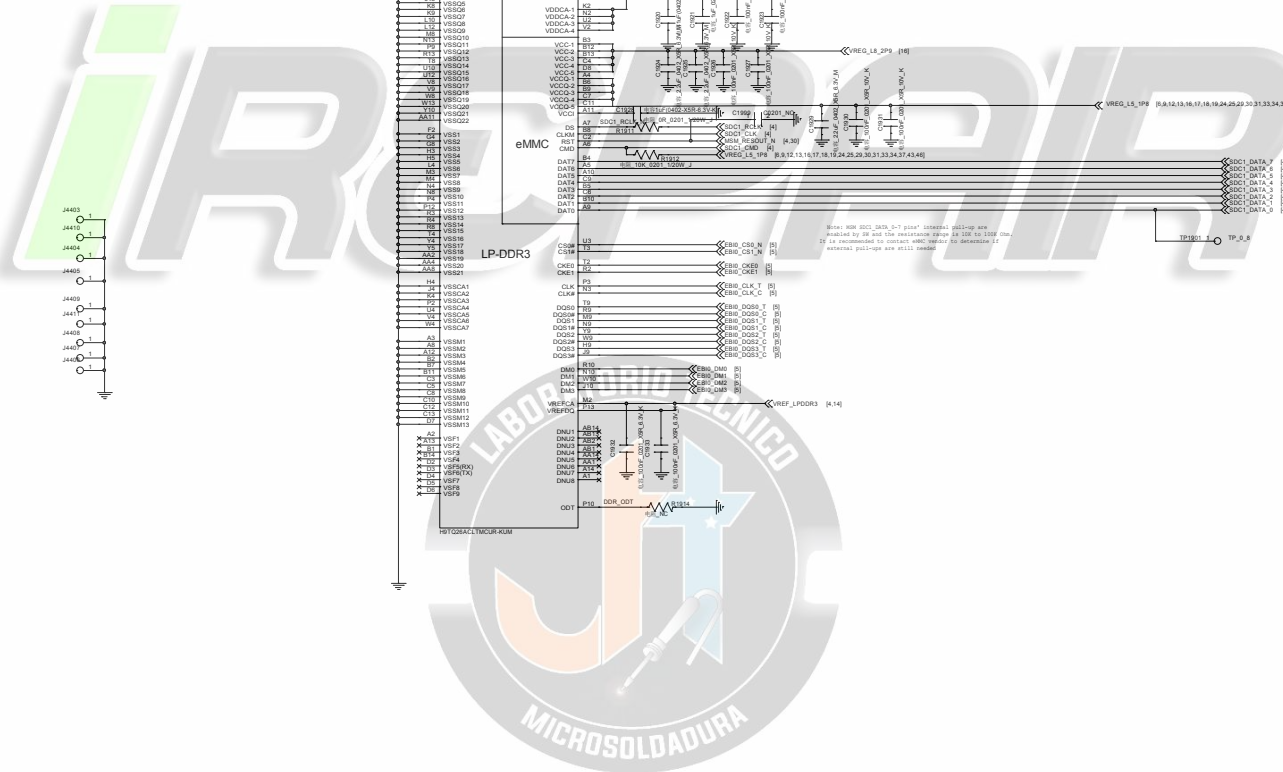

MEMORY(LPDDR3+EMMC V5.1)

Rev		Rev	Rev
<Title>		<Doc>	
<Document Number>		<Doc>	
Rev		Rev	

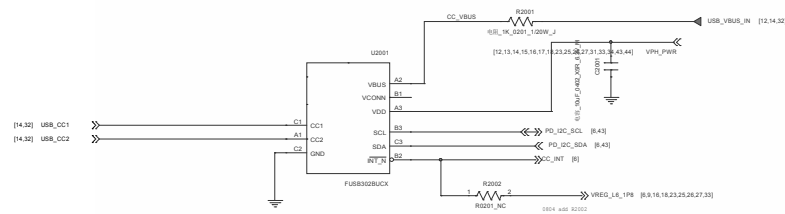


iREPAIR






iREPAIR



Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date:	Saturday, January 27, 2018		Sheet 22 of 1

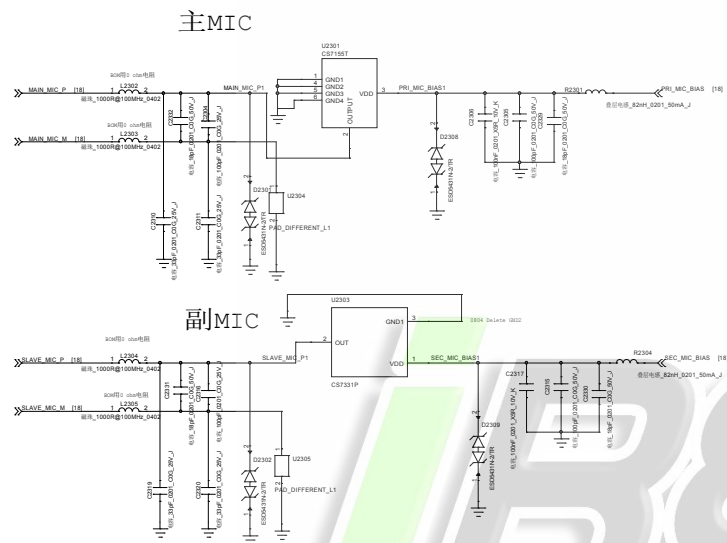


SMART PA

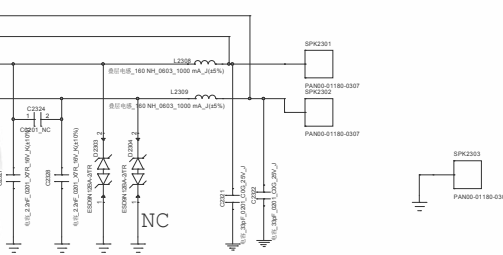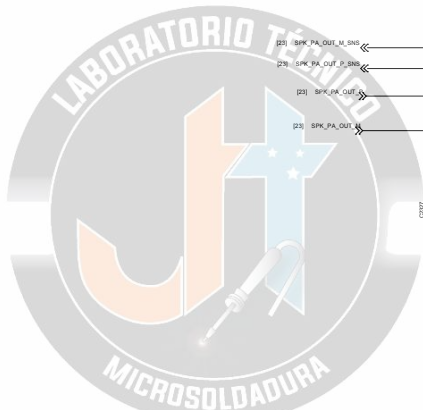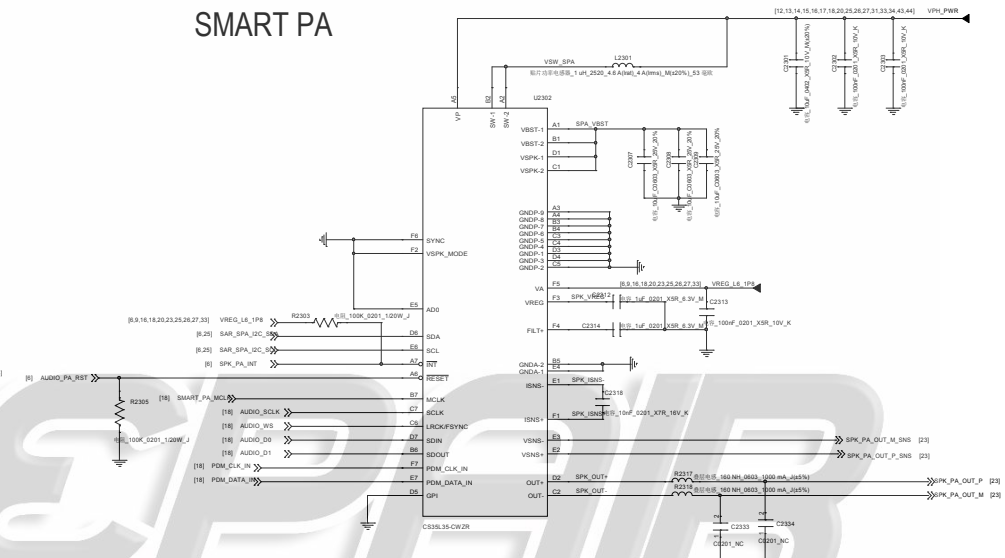

RCV_MIC_Headphone


Rev	<Title>	Rev
Rev	Document Number	Rev
D	<Doc>	Rev
Rev	Signature	Rev

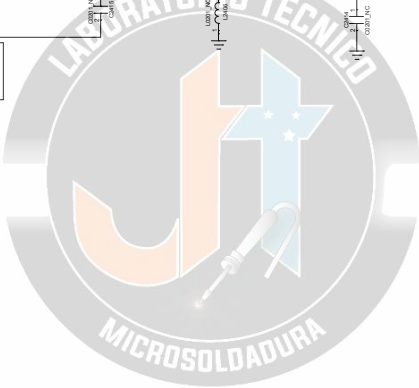


File <File>			
Size D	Document Number <Doc>	Rev <RevCod>	
Date: Saturday, January 27, 2018		Sheet 24 of 47	

ACCELEROMETER+GYRO


I2C ADDRESS 0X68 0b1101000

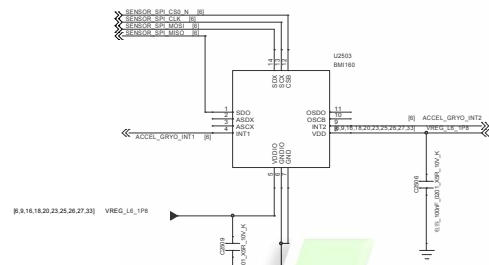

Magnetic Sensor
address of AK09918 is 0Ch

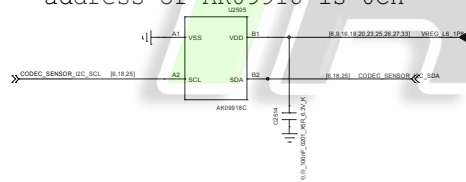


address of AK09918 is 0Ch

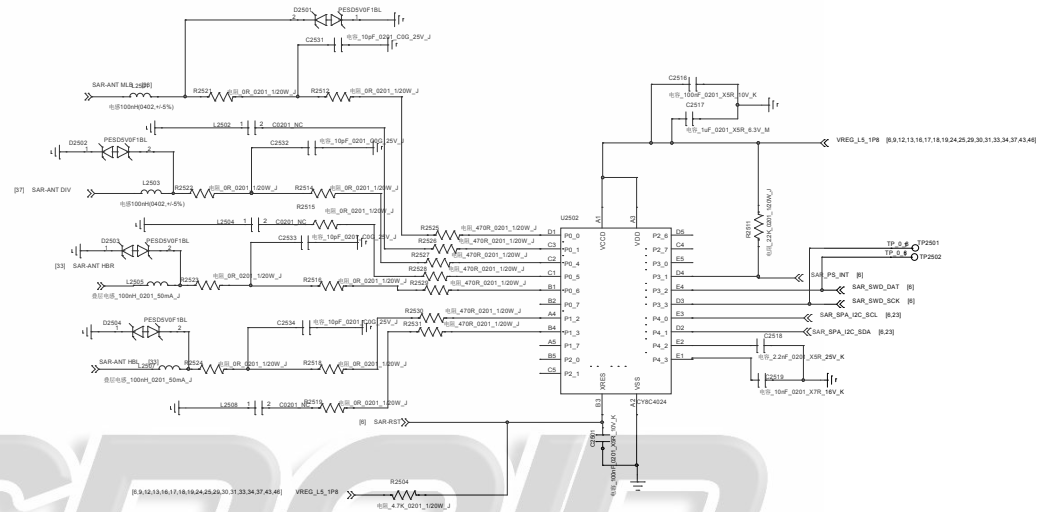


ALS/P SENSOR+Front Flash+Charge LED CONN

LED change to A-SP194W1D-C01-4T-AR2.4


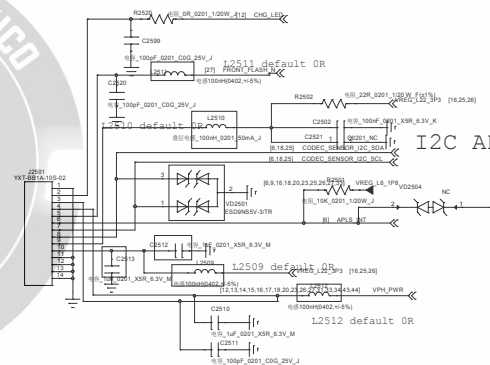


I2C ADDRESS 0X39



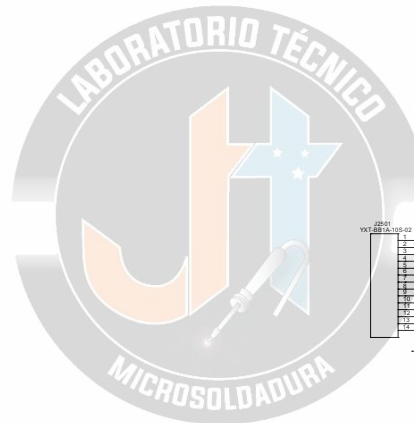


Rev	Descripción	Fecha
1	1.0	2023-03-01
2	2.0	2023-03-01
3	3.0	2023-03-01
4	4.0	2023-03-01
5	5.0	2023-03-01
6	6.0	2023-03-01
7	7.0	2023-03-01
8	8.0	2023-03-01
9	9.0	2023-03-01
10	10.0	2023-03-01


LCD MIPI Common Mode Filter

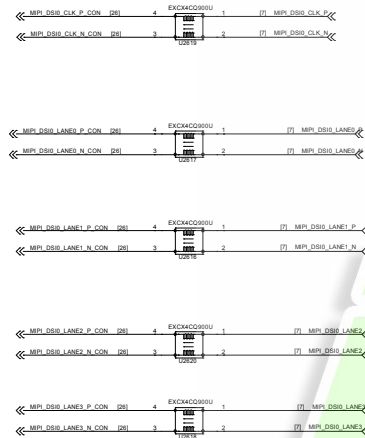


LCD/TP-Connector

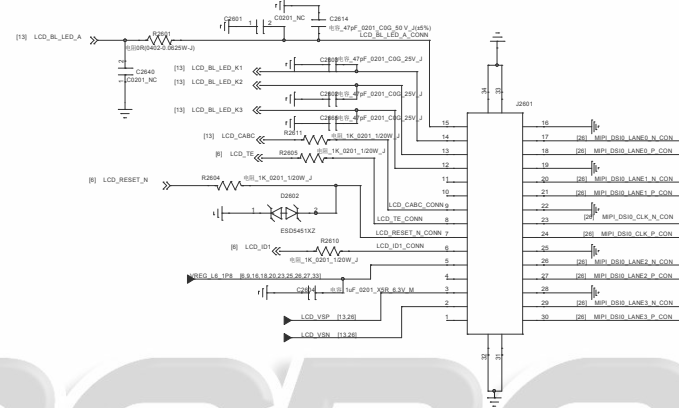

FPS-Connector

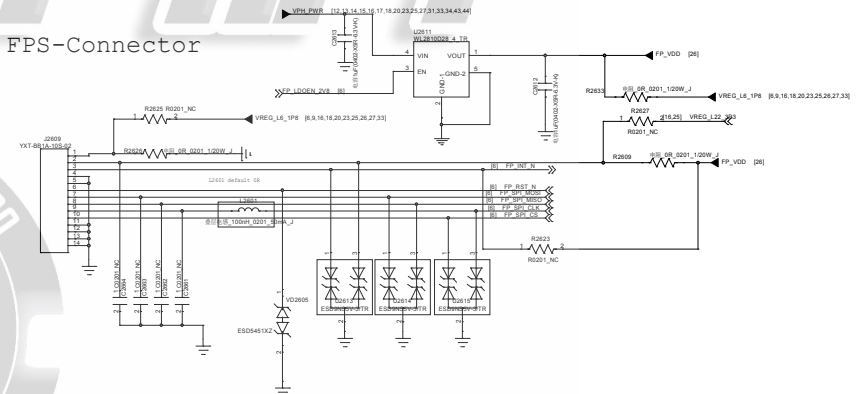


TP-Connector


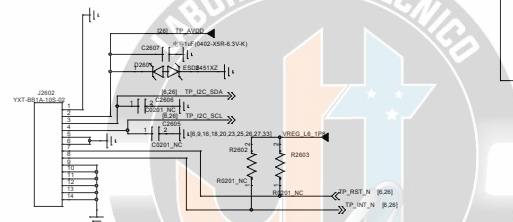


LDO should be WL2810D18-4/TR


Rev	<Title>	Rev
Rev	Document Number	Rev
D	<Doc>	Rev
Rev	Signature	Rev

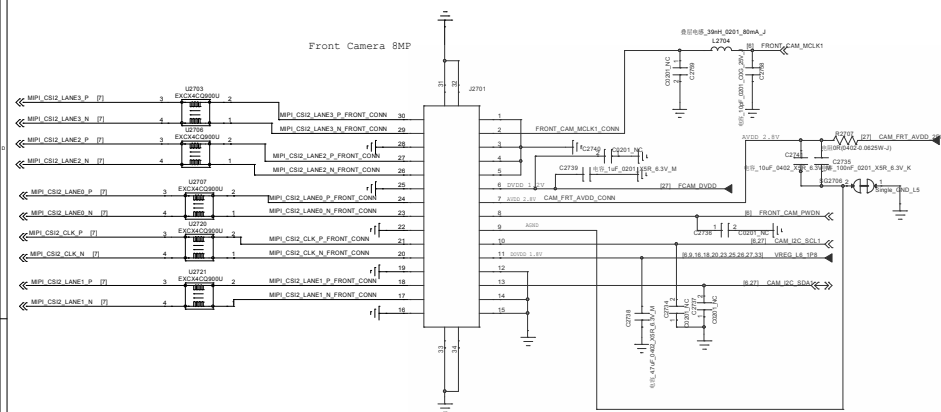


LDO

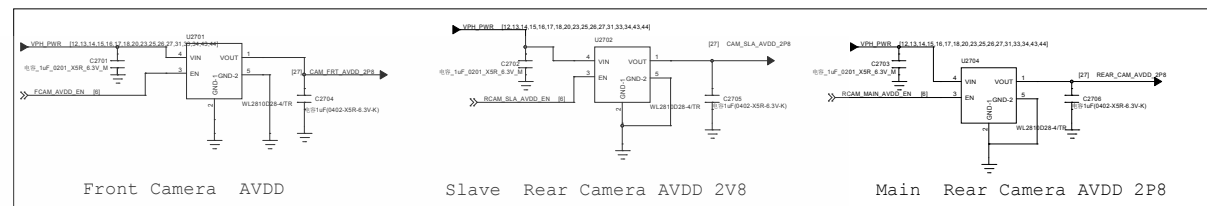


前闪

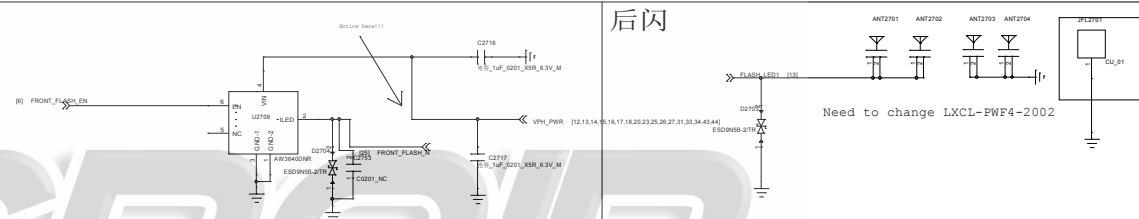


后闪

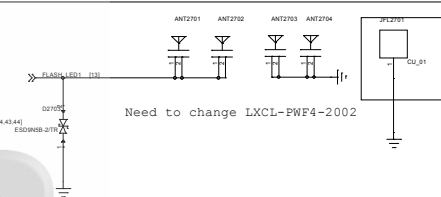

Slave Rear Camera

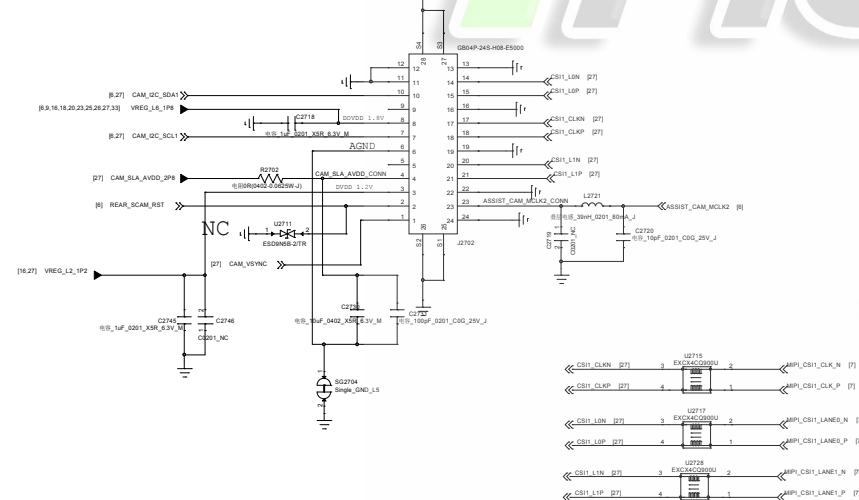

Main Rear Camera

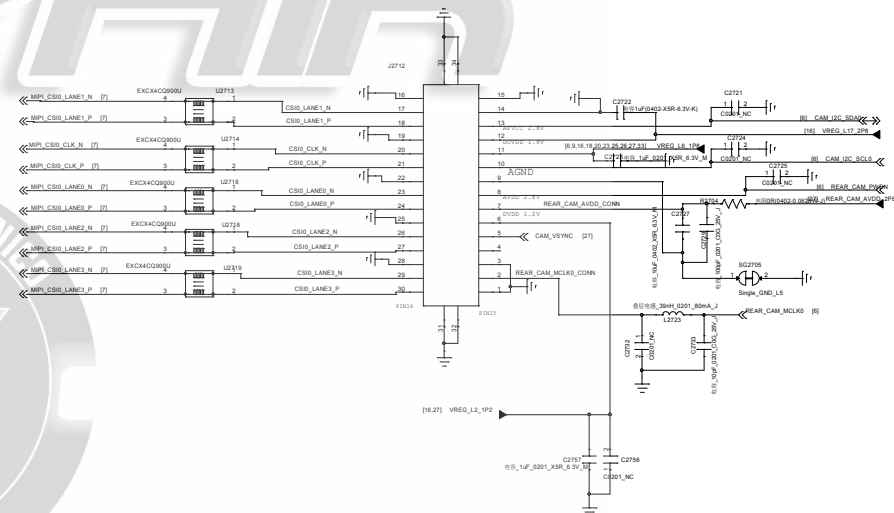


.Main/Slave Camera and Flash




Rev	<Title>	Rev
Rev	Document Number	Rev
D	<Doc>	Rev
Rev	Rev	Rev



音量键&开关机键






MOTOR

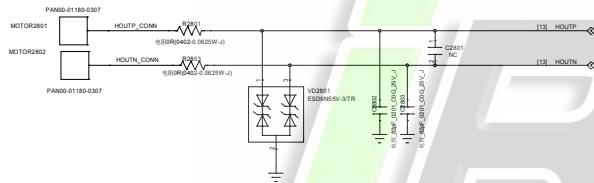

Keys

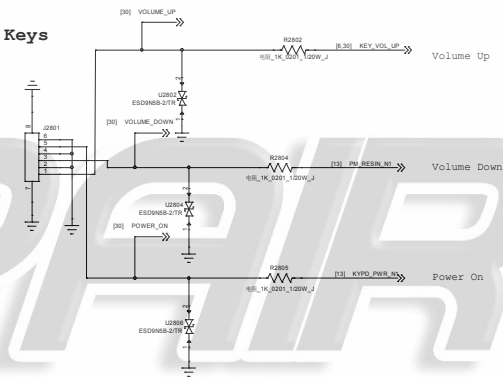


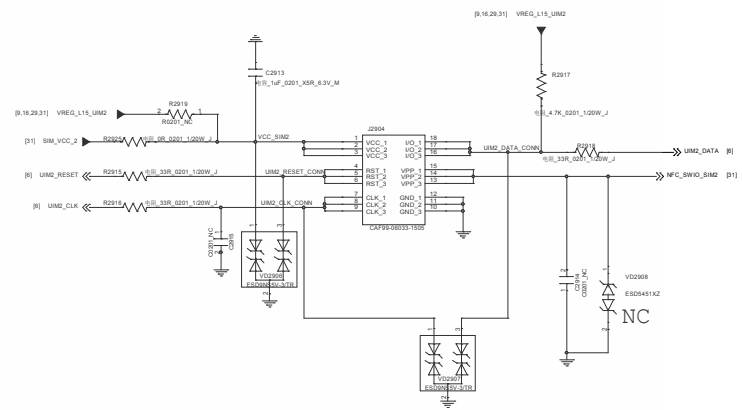

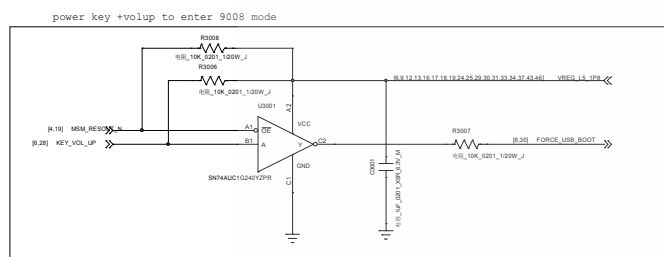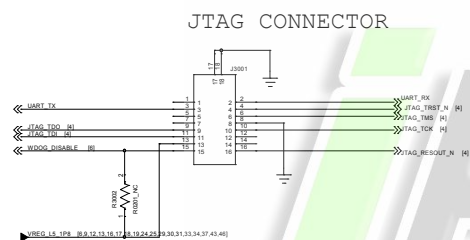

PCBA AUTOMATIC TEST point

接地弹片 TOP



接地弹片 BOT




TP/GND/Shielding






Rev	Doc	Doc	Doc
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5	5	5	5
6	6	6	6
7	7	7	7
8	8	8	8
9	9	9	9
10	10	10	10

DCDC POWER FOR NFC


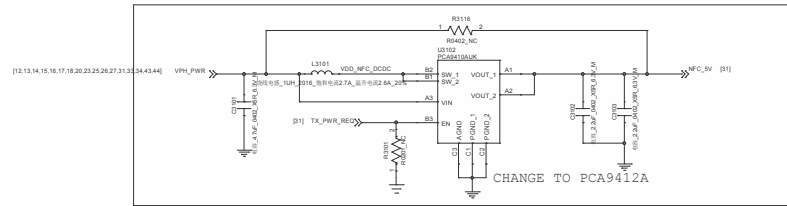


27.12MHz Crystal

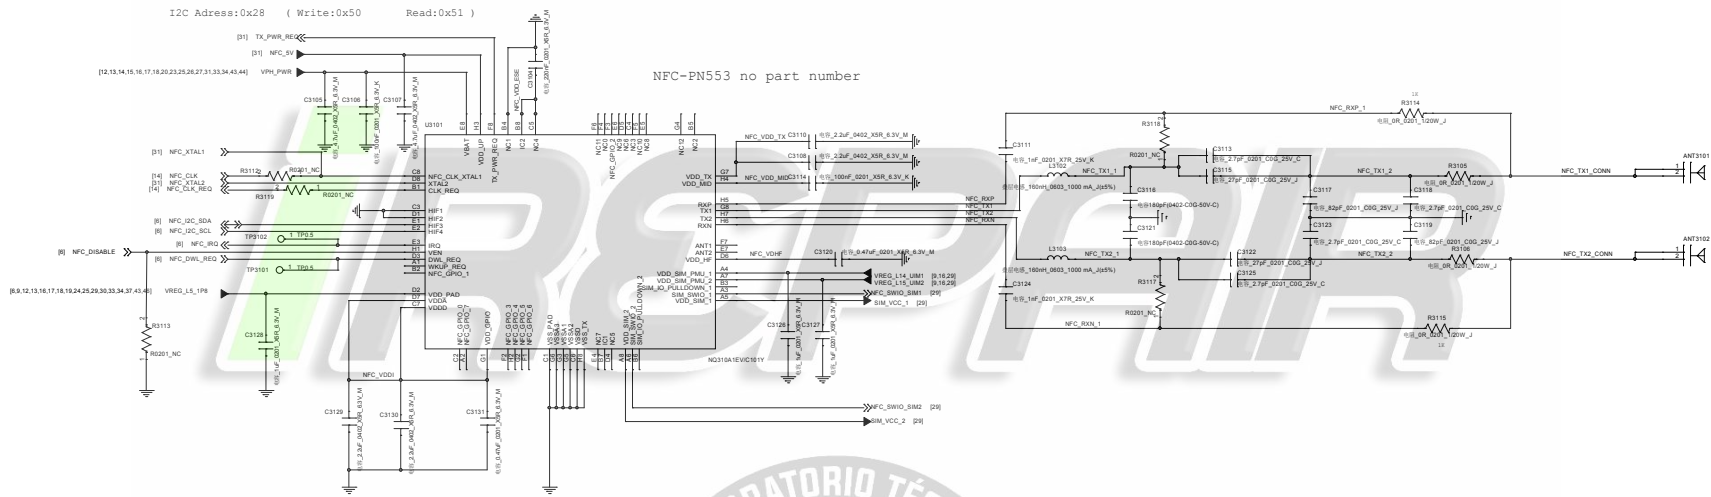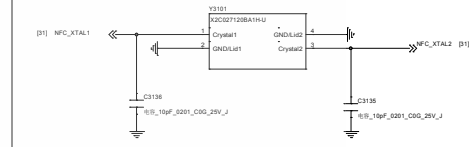

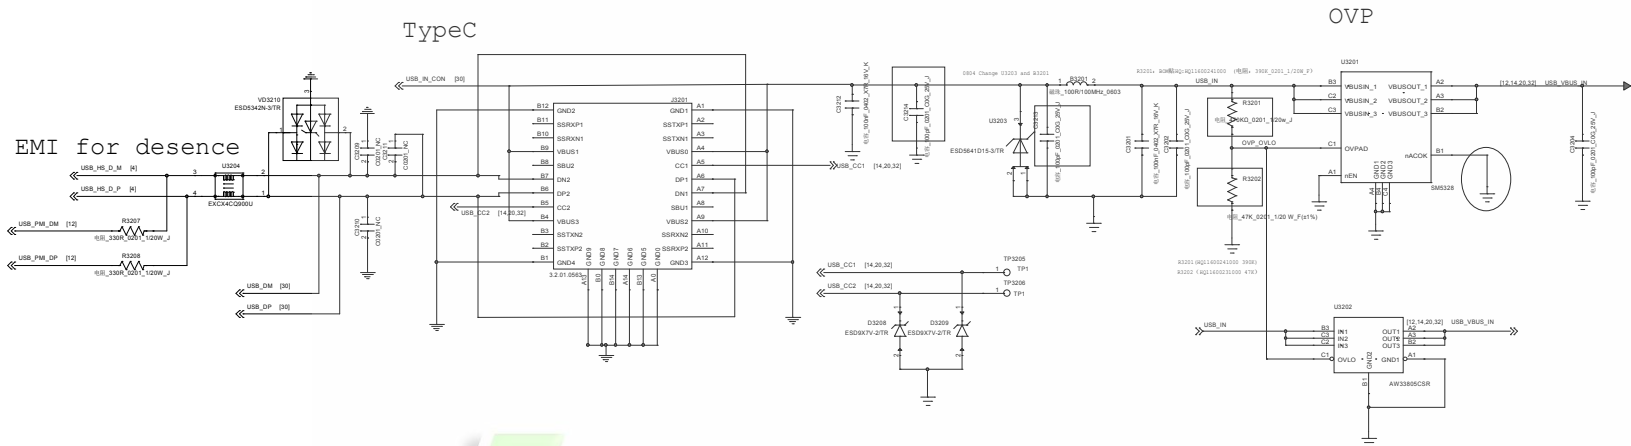


Battery Connector

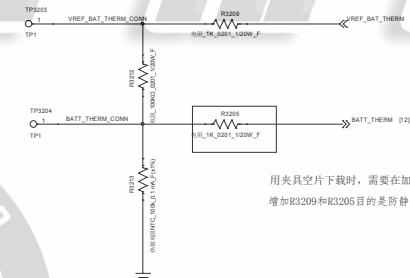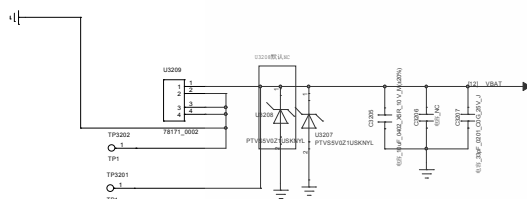

用夹具空片下载时，需要在夹具上将TP3203和TP3204短接。这样，软件可以识别为电池不在位。
增加R3209和R3205目的是防静电，和防VREF_BAT_THERM在夹具上误短路。



File	-T8a-
Document Number	-00p-
Rev	-Rev00a-
Date	2023-09-07
Page	31 of 41

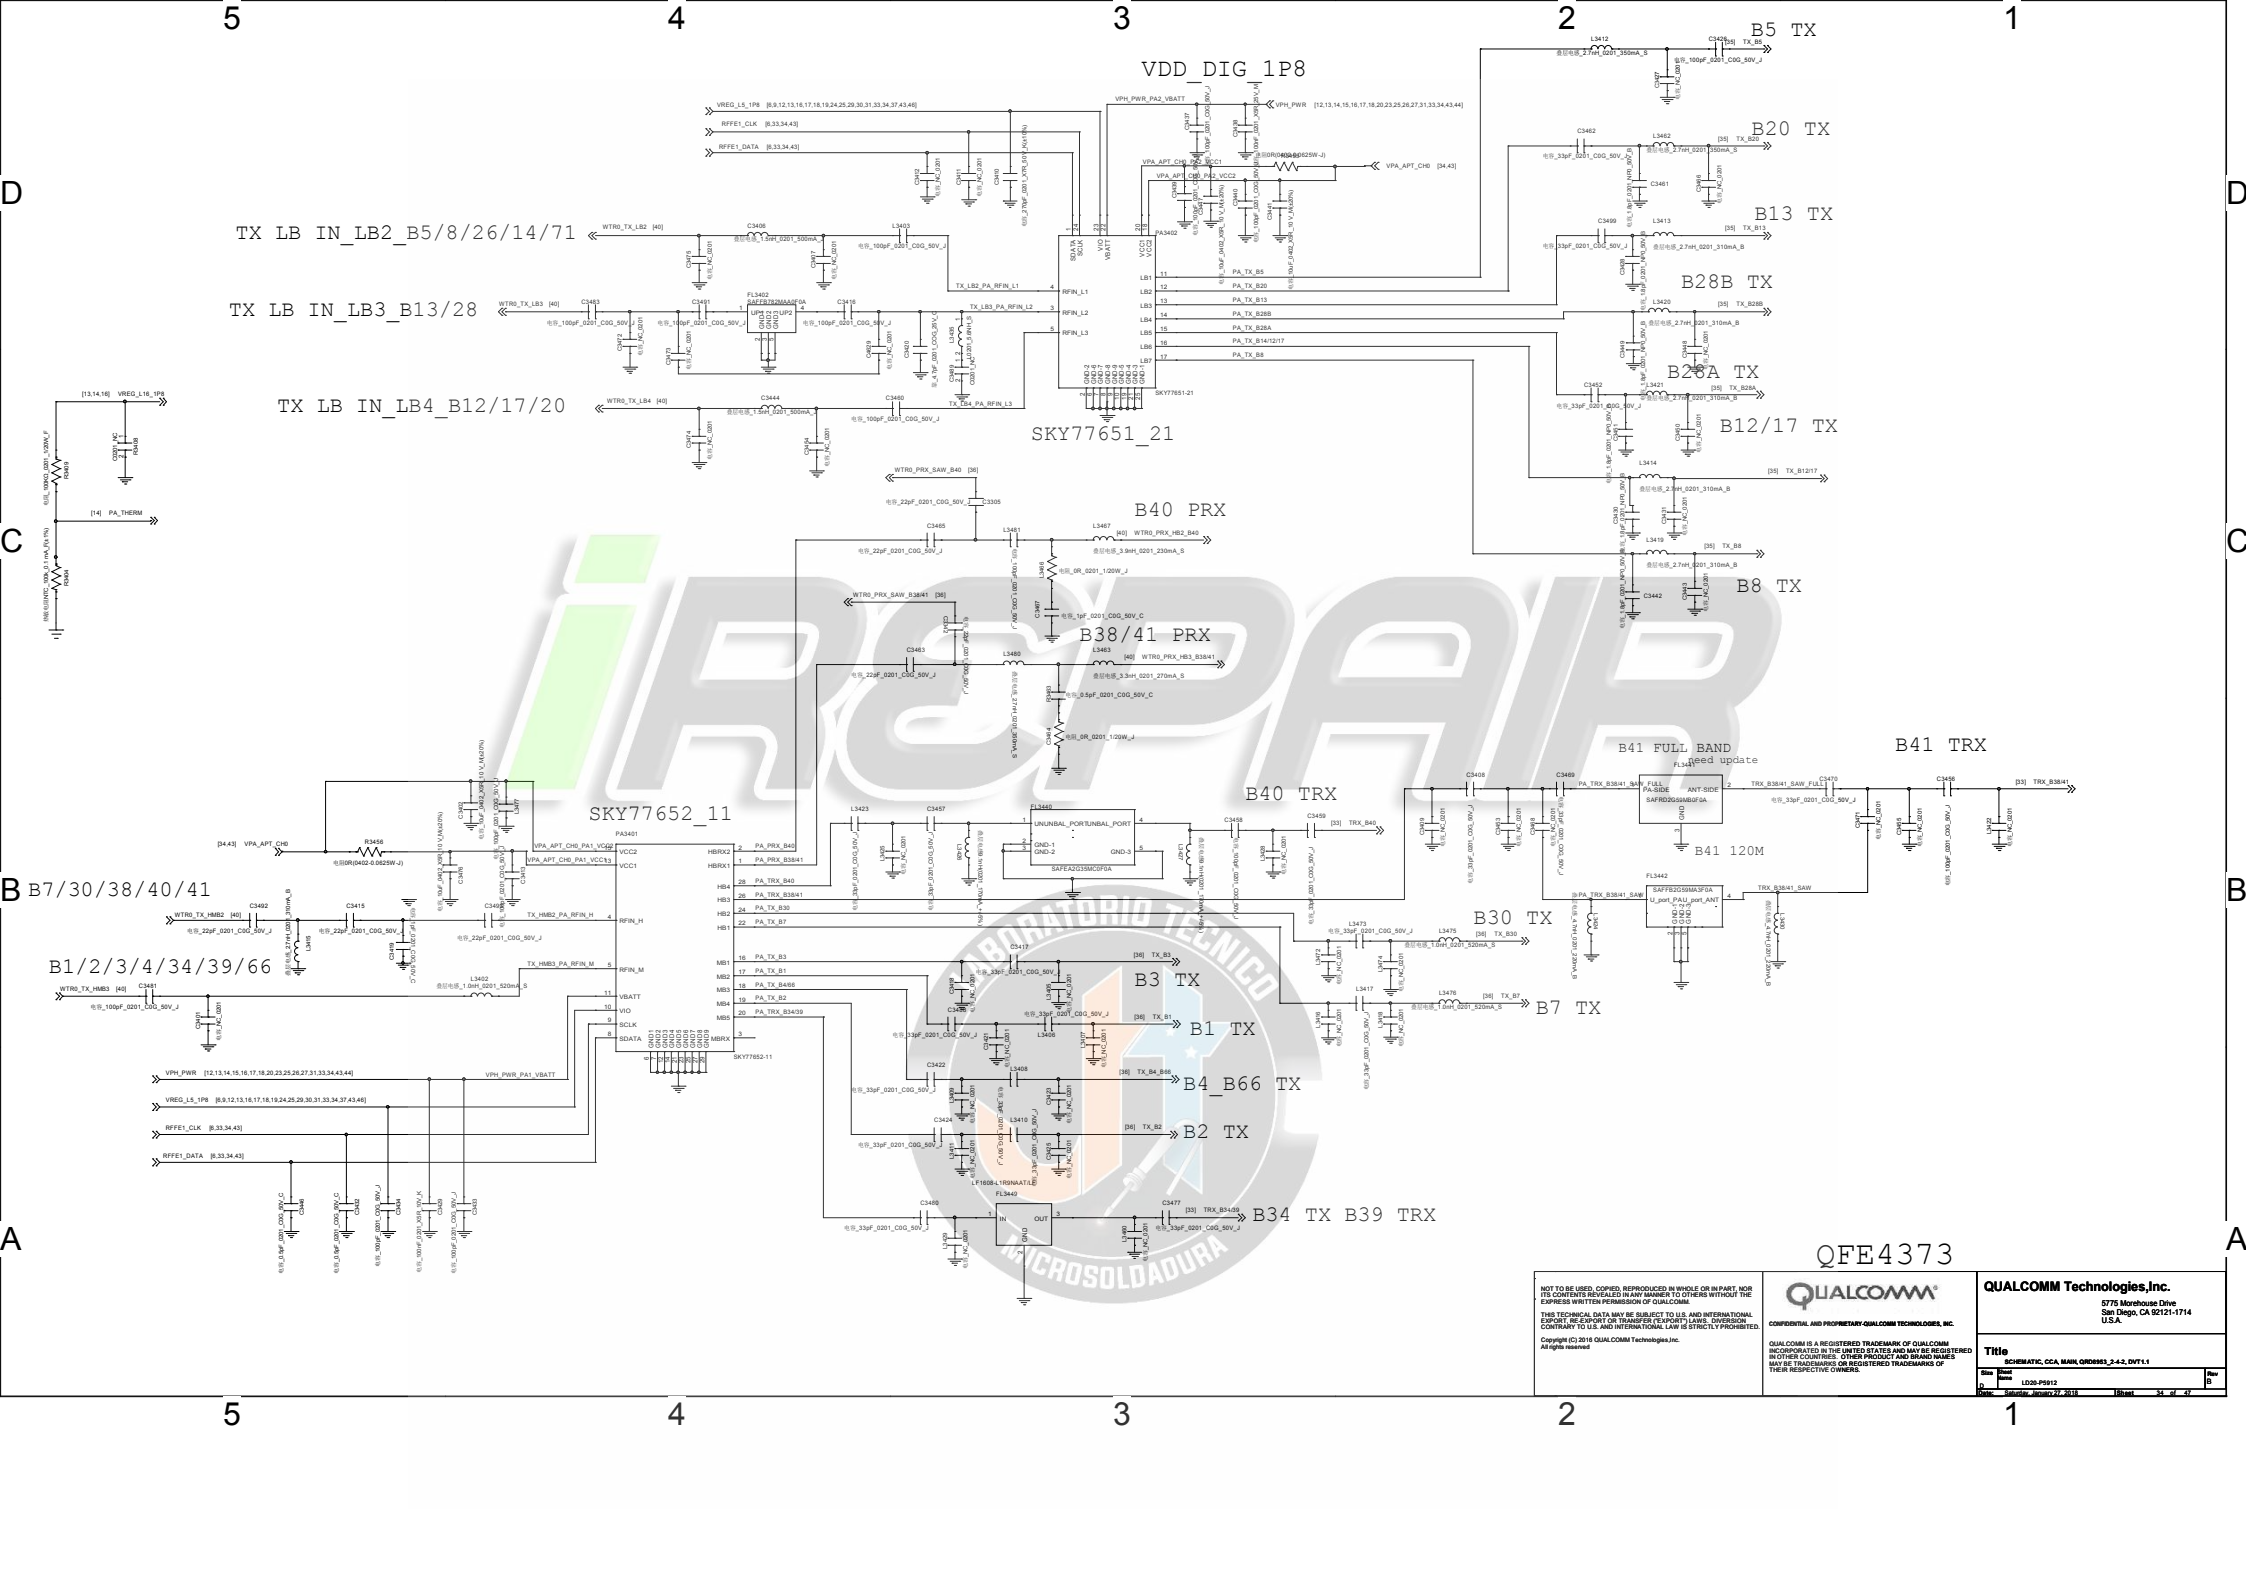

TX B3
TX B1

B1 DPX

B1/B3 QPX

B3 DPX

B2 DPX

B25/66 QPX

B4 PPX

B4:D6DA2G132K2D4
B66:D6DA2G155K2T2

B40 PRx

B30 DRX saw: SAFFB2G35KA1F0A

B30 DPX

B38/41 PRx SAFRD2G59MA0F0A

B7 DPX

change to D6HQ2G65DP01

B34/39 PRx




NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.
THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER (EQUIPMENT) LAWS, DIVISION CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED.
Copyright (C) 2018 QUALCOMM Technologies, Inc.
All rights reserved.


QUALCOMM
CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.

QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER TRADEMARKS AND SERVICE MARKS MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

QUALCOMM Technologies, Inc.
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Title
SCHEMATIC, CCA, M88L QM8813_2-42, DVT1.1
Rev
E
Doc
L202-P5812
Rev
38 of 47

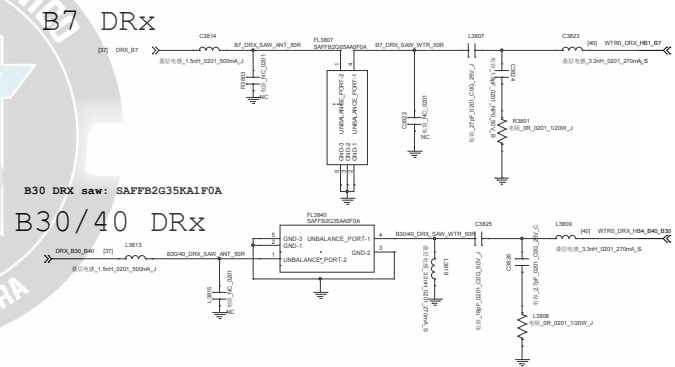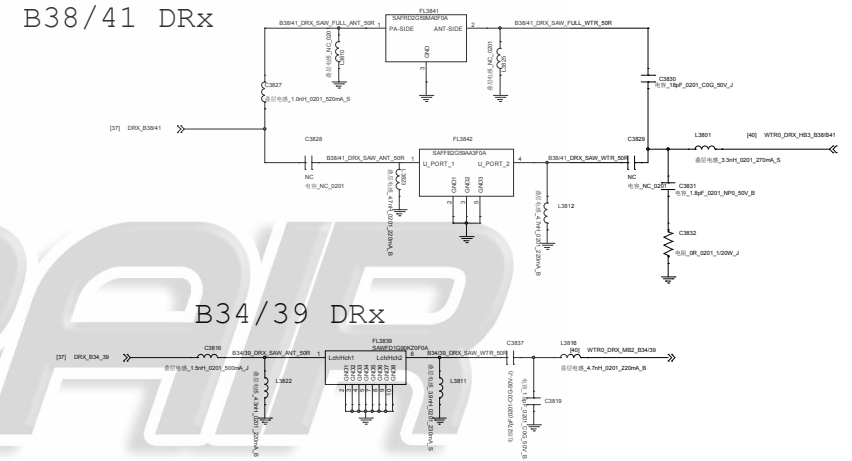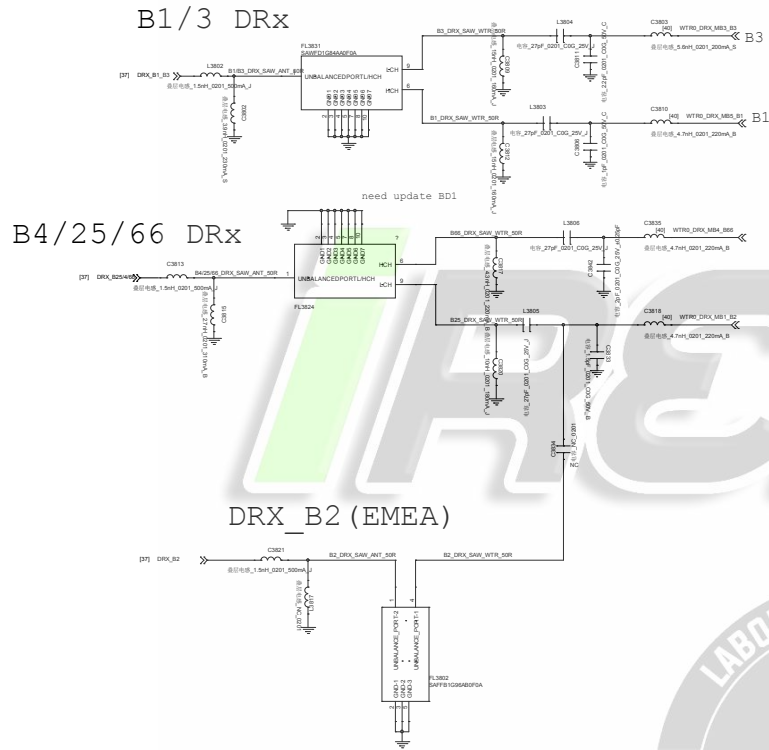

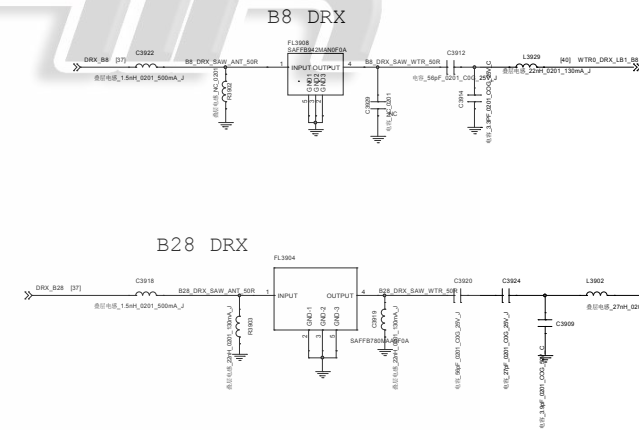[illegible]

NOT TO BE USED, COPIED, REPRODUCED IN WHICH OR IN PART NOR ITS CONTENTS REPRODUCED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. ALL TECHNIQUES, DATA AND MATERIALS MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, RE-EXPORT OR TRANSFER (EXPORT) LAWS AND REGULATIONS, CONTRACTUALLY TO U.S. AND INTERNATIONAL, LAWS AND EXISTING TRADE AGREEMENTS. Copyright (c) 2016 QUALCOMM Technologies, Inc. All rights reserved.	QUALCOMM Technologies, Inc. 5775 Monroeville Drive San Diego, CA 92121-1774 USA CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED OR OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES ARE THE REGISTERED OR UNREGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.									
Copyright (c) 2016 QUALCOMM Technologies, Inc. All rights reserved.	Title 1. MEMORANDUM, CCA, MAIN, GRADINGS, 3-4-4, DVT1.1 <table border="1"> <tr> <td data-bbox="1854 1286 1870 1287">Rev</td> <td data-bbox="1870 1286 2130 1287">Date</td> <td data-bbox="2130 1286 2145 1287">Rev</td> </tr> <tr> <td data-bbox="1854 1287 1870 1289">0</td> <td data-bbox="1870 1287 2130 1289">1/20/2016</td> <td data-bbox="2130 1287 2145 1289">0</td> </tr> <tr> <td data-bbox="1854 1289 1870 1291">1</td> <td data-bbox="1870 1289 2130 1291">1/20/2016</td> <td data-bbox="2130 1289 2145 1291">1</td> </tr> </table>	Rev	Date	Rev	0	1/20/2016	0	1	1/20/2016	1
Rev	Date	Rev								
0	1/20/2016	0								
1	1/20/2016	1								



WTRG_PORT	0
Load	1

WTR 2965_0

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT CONTROLS AND TRANSFER RESTRICTIONS. IT IS NOT TO BE EXPORTED TO U.S. AND INTERNATIONAL LAWS IF STRICTLY PROHIBITED. Copyright © 2014 QUALCOMM Technologies, Inc. All rights reserved.	 CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM is a REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.	QUALCOMM Technologies, Inc. 8775 Moorpark Drive San Diego, CA 92121-1714 U.S.A.
Title SCHWARTZ, CCA, MM, OWNERS, 2-4-2, DVT1.1	Rev 1	Date 10-09-2012
Rev 1	Date 10-09-2012	Rev 1
Date 10-09-2012	Rev 1	Date 10-09-2012

iREPAIR




Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Saturday, January 27, 2018		Sheet 41 of 47	

iREPAIR




Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date:	Saturday, January 27, 2018		Sheet 42 of 47

WIFI 2.4G

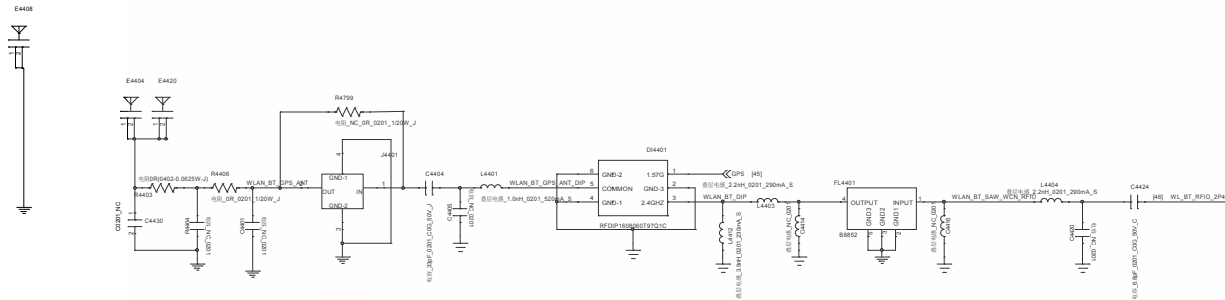

WIFI 5G

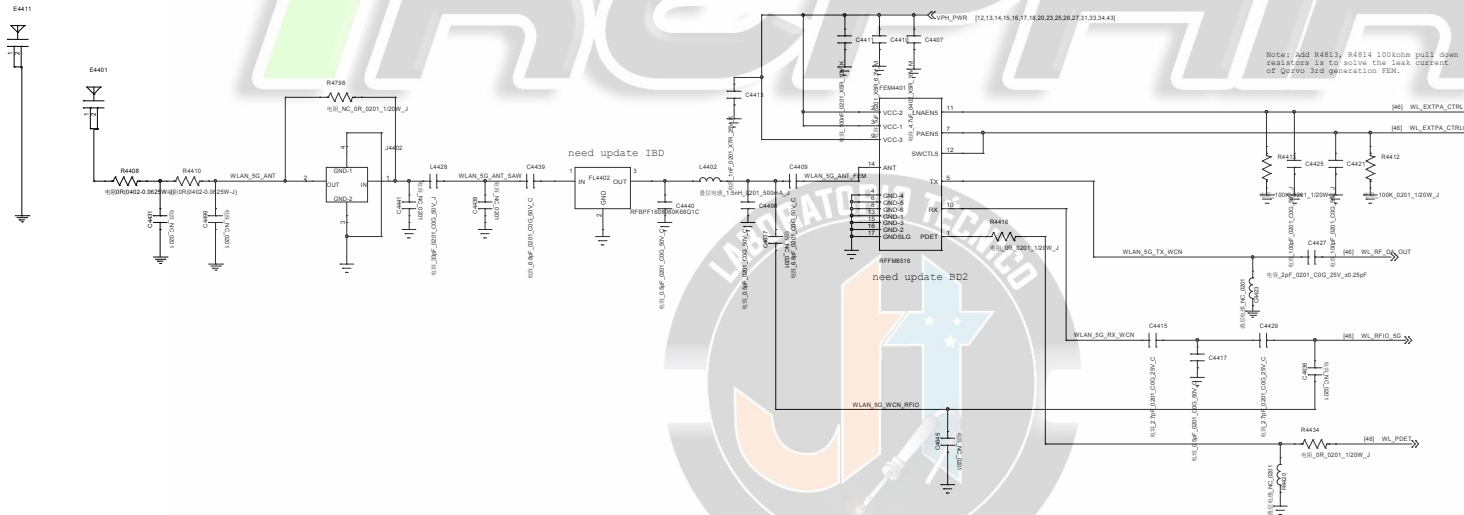

Note: Add R4813, R4814 100kohm pull down resistors is to solve the leak current of Qorvo 3rd generation FEM.

need update IBD

© 2011

WLAN_FEM

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.

THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, RE-EXPORT OR TRANSFER ("EXPORT") LAWS. DIVERSION CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED.

Copyright (C) 2016 QUALCOMM Technologies, Inc.
All rights reserved


QUALCOMM
CONFIDENTIAL AND PROPRIETARY-QUALCOMM TECHNOLOGIES, INC.

QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

QUALCOMM Technologies, Inc.
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Title	
SCHEMATIC, CCA, MAIN, ORD0953_2-4-2, DVT1.1	
Size	Sheet Name
D	LD20-P5912
Date	Sheet
Saturday, January 27, 2018	44 of 47


GPS

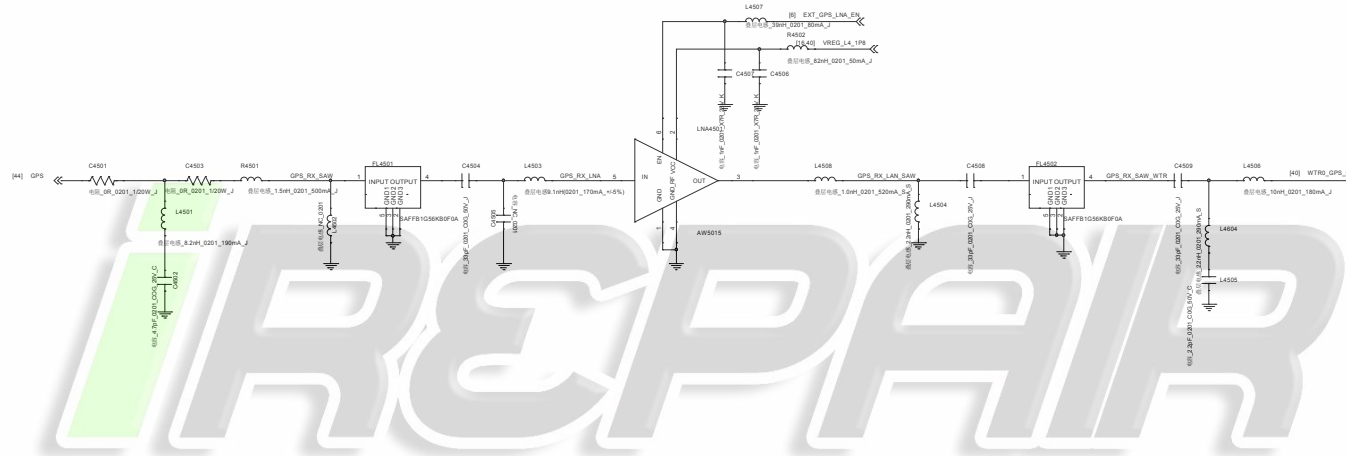

WLAN_FEM

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER (ECPART) LAWS. DIVERSION CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.		QUALCOMM CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.		QUALCOMM Technologies, Inc. 5775 Morehouse Drive San Diego, CA 92121-1714 U.S.A.
Title SCHEMATIC, CCA, M881, QRD881_3-2, DVT1.1		Rev 1	Rev 0	Rev 0

WCN3660B

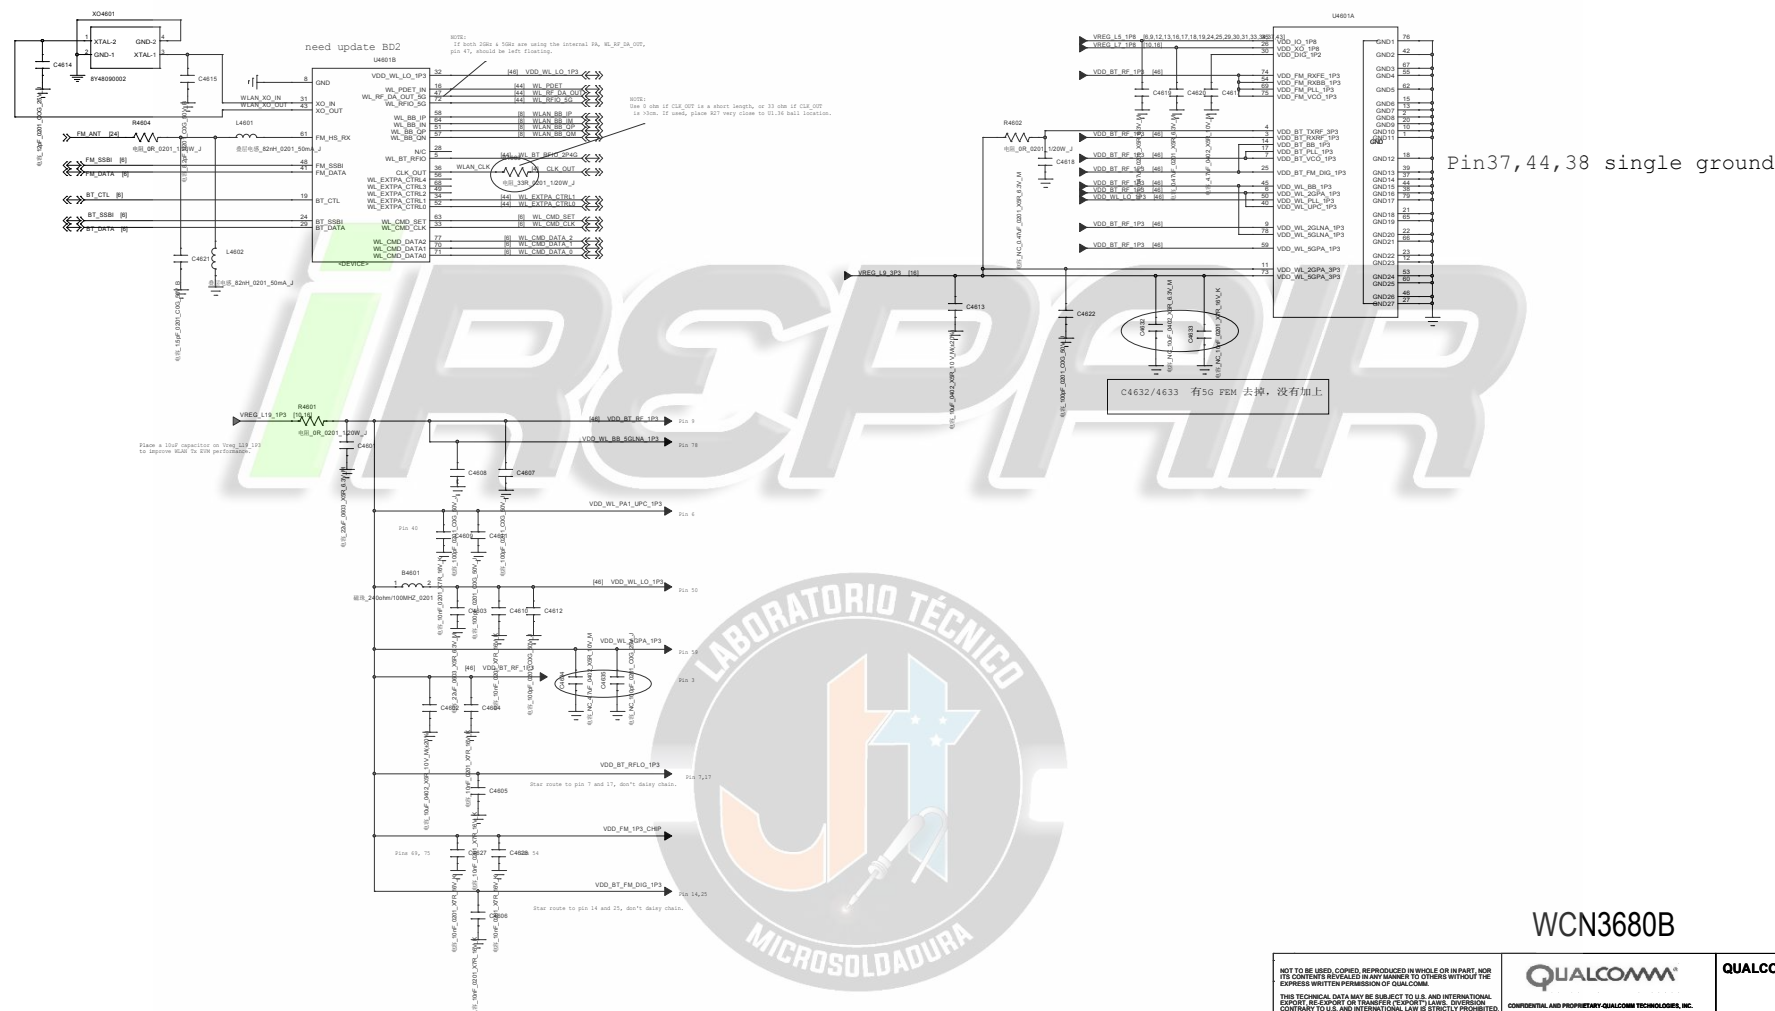

WCN3680B

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.

THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, RE-EXPORT OR TRANSFER ("EXPORT") LAWS, DIVERSION CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED.

Copyright (c) 2016 QUALCOMM Technologies, Inc.
All rights reserved.

QUALCOMM
CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.

CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.

QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

QUALCOMM Technologies, Inc.
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

RED	Title	
	SCHEMATIC, CCA, MAIN, ORD9553_2-4-2, DVT1.1	
	Size	Sheet Name
	D	LD20-PS912
	Date	Sheet
	Saturday, January 27, 2018	48 of 47

MSM8953 GPIO Configuration For QRD8953

GPIO_0	NFC_SPI_ESE_MOSI	GPIO_41		GPIO_82	FM_DATA
GPIO_1	NFC_SPI_ESE_MISO	GPIO_42	ACCL_INT1	GPIO_83	BT_CTL
GPIO_2	NFC_SPI_ESE_CS_N	GPIO_43	ALSP_INT_N	GPIO_84	BT_DATA
GPIO_3	NFC_SPI_ESE_CLK	GPIO_44	MAG_DRDY_INT	GPIO_85	KEY_VOL_UP_N
GPIO_4	UART_MSM_TX	GPIO_45	GYRO_INT	GPIO_86	
GPIO_5	UART_MSM_RX	GPIO_46	SCAM_D_ELDO_EN	GPIO_87	
GPIO_6		GPIO_47	SENSOR_SPI_CS2_N	GPIO_88	
GPIO_7		GPIO_48	FP_INT_N	GPIO_89	
GPIO_8		GPIO_49	UIM_BATT_ALARM	GPIO_90	
GPIO_9		GPIO_50	WCD_ELDO_EN	GPIO_91	
GPIO_10	TP_I2C_SDA	GPIO_51	UIM1_DATA	GPIO_92	
GPIO_11	TP_I2C_SCL	GPIO_52	UIM1_CLK	GPIO_93	SCAM_ID
GPIO_12		GPIO_53	UIM1_RESET	GPIO_94	
GPIO_13		GPIO_54		GPIO_95	
GPIO_14	SENSOR_I2C_SDA	GPIO_55	UIM2_DATA	GPIO_96	WSA_EN
GPIO_15	SENSOR_I2C_SCL	GPIO_56	UIM2_CLK	GPIO_97	
GPIO_16	NFC_DISABLE	GPIO_57	UIM2_RESET	GPIO_98	
GPIO_17	NFC_IRQ	GPIO_58		GPIO_99	
GPIO_18	NFC_I2C_SDA	GPIO_59		GPIO_100	GRFC0_SEL
GPIO_19	NFC_I2C_SCL	GPIO_60	GP_PDM_A0	GPIO_101	GRFC1_SEL
GPIO_20	SENSOR_SPI_MOSI	GPIO_61	LCD_RST_N	GPIO_102	GRFC2_SEL
GPIO_21	SENSOR_SPI_MISO	GPIO_62	NFC_DWL_REQ	GPIO_103	GRFC3_SEL
GPIO_22	SENSOR_SPI_CS0_N	GPIO_63		GPIO_104	GRFC4_SEL
GPIO_23	SENSOR_SPI_CLK	GPIO_64	TP_RST_N	GPIO_105	GRFC5_SEL
GPIO_24	LCD_TE0	GPIO_65	TP_INT_N	GPIO_106	WDOG_DISABLE
GPIO_25		GPIO_66		GPIO_107	GRFC7_SEL
GPIO_26	CAM_MCLK0	GPIO_67	WCD_RST_N	GPIO_108	GRFC8_SEL
GPIO_27	CAM_MCLK1	GPIO_68		GPIO_109	GRFC9_SEL
GPIO_28		GPIO_69	WCD_MSM_MCLK	GPIO_110	
GPIO_29	CAM_I2C_SDA0	GPIO_70	SLIMBUS_CLK	GPIO_111	
GPIO_30	CAM_I2C_SCL0	GPIO_71	SLIMBUS_DATA0	GPIO_112	
GPIO_31	CAM_I2C_SDA1	GPIO_72		GPIO_113	
GPIO_32	CAM_I2C_SDA1	GPIO_73	WCD_INTR1	GPIO_114	
GPIO_33		GPIO_74	WCD_INTR2	GPIO_115	
GPIO_34	FLASH_STROBE_NOW	GPIO_75	BT_SSBI	GPIO_116	EXT_GPS_LNA_EN
GPIO_35		GPIO_76	WL_CMD_DATA_2	GPIO_117	CH0_GSM_TX_PHASE_D0
GPIO_36		GPIO_77	WL_CMD_DATA_1	GPIO_118	RFPE1_CLK
GPIO_37	FORCE_USB_BOOT	GPIO_78	WL_CMD_DATA_0	GPIO_119	RFPE1_DATA
GPIO_38		GPIO_79	WL_CMD_SET	GPIO_120	RFPE2_CLK
GPIO_39	MCAM_PWD_N	GPIO_80	WL_CMD_CLK	GPIO_121	RFPE2_DATA
GPIO_40	MCAM_RST_N	GPIO_81	FM_SSBI	GPIO_122	RFPE4_CLK

GPIO_123	RFPE4_DATA	GPIO_134	
GPIO_124		GPIO_135	FP_SPI_CLK
GPIO_125		GPIO_136	FP_SPI_CS
GPIO_126	RFPE3_CLK	GPIO_137	FP_SPI_MOSI
GPIO_127	RFPE3_DATA	GPIO_138	FP_SPI_MISO
GPIO_128		GPIO_139	USB_SS_SEL
GPIO_129	SCAM_RST_N	GPIO_140	FP_RST_N
GPIO_130	SCAM_PWD_N	GPIO_141	NFC_ESE_PWR_REQ
GPIO_131			
GPIO_132			
GPIO_133	SDCARD_DET_N		

PMI8952 GPIO/MPP Configuration For QRD8953

GPIO_1		MPP_1	
GPIO_2		MPP_2	GREEN_LED
		MPP_3	
		MPP_4	FLASH_STROBE_NOW

PM8953 GPIO/MPP Configuration For QRD8953

GPIO_1	CODEC_DIV_CLK	MPP_1	VDD_PX_BIAS_MPP_1
GPIO_2	NFC_CLK_REQ (SDCARD_DET_N)		
GPIO_3	UIM_BATT_ALARM	MPP_3	VREF_DAC_MPP_3
GPIO_4		MPP_4	QUIET_THERM
GPIO_5			
GPIO_6			
GPIO_7	VBUS_USB_IN		
GPIO_8	USB_ID		

GPIO TABLE

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER RESTRICTIONS, DIVERSION, CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.	QUALCOMM CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.	QUALCOMM Technologies, Inc. 5775 Morehouse Drive San Diego, CA 92121-1714 U.S.A.								
		<table><tr><td colspan="2">Title</td></tr><tr><td colspan="2">SCHEMATIC, CCA, MARK, QRD8953_2-2, DVT1.1</td></tr><tr><td>Date</td><td>Rev</td></tr><tr><td>12/28/12</td><td>1</td></tr></table>	Title		SCHEMATIC, CCA, MARK, QRD8953_2-2, DVT1.1		Date	Rev	12/28/12	1
Title										
SCHEMATIC, CCA, MARK, QRD8953_2-2, DVT1.1										
Date	Rev									
12/28/12	1									