

iREPAIR



Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Friday, January 26, 2018		Sheet 1 of 47	

iREPAIR




Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date:	Friday, January 26, 2018	Sheet 2 of 47	


iREPAIR



Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Friday, January 26, 2018		Sheet 3 of 47	

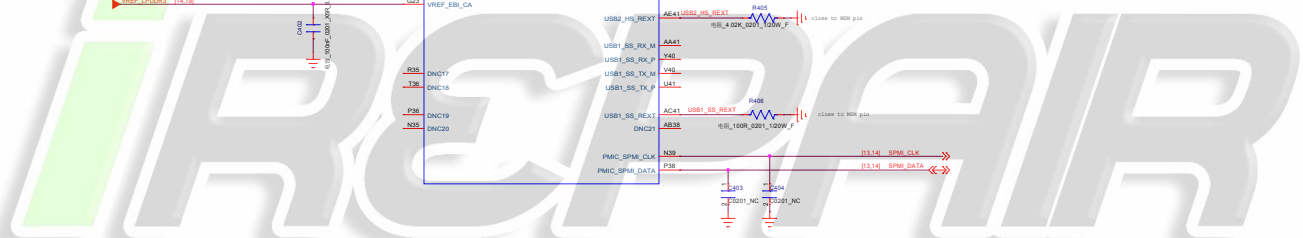MSM8953
Control


File			<Title>		
Size	Document Number				Rev
D	<Doc>				<Rev Code>
Date:	Friday, January 26, 2018		Sheet	4 of 47	

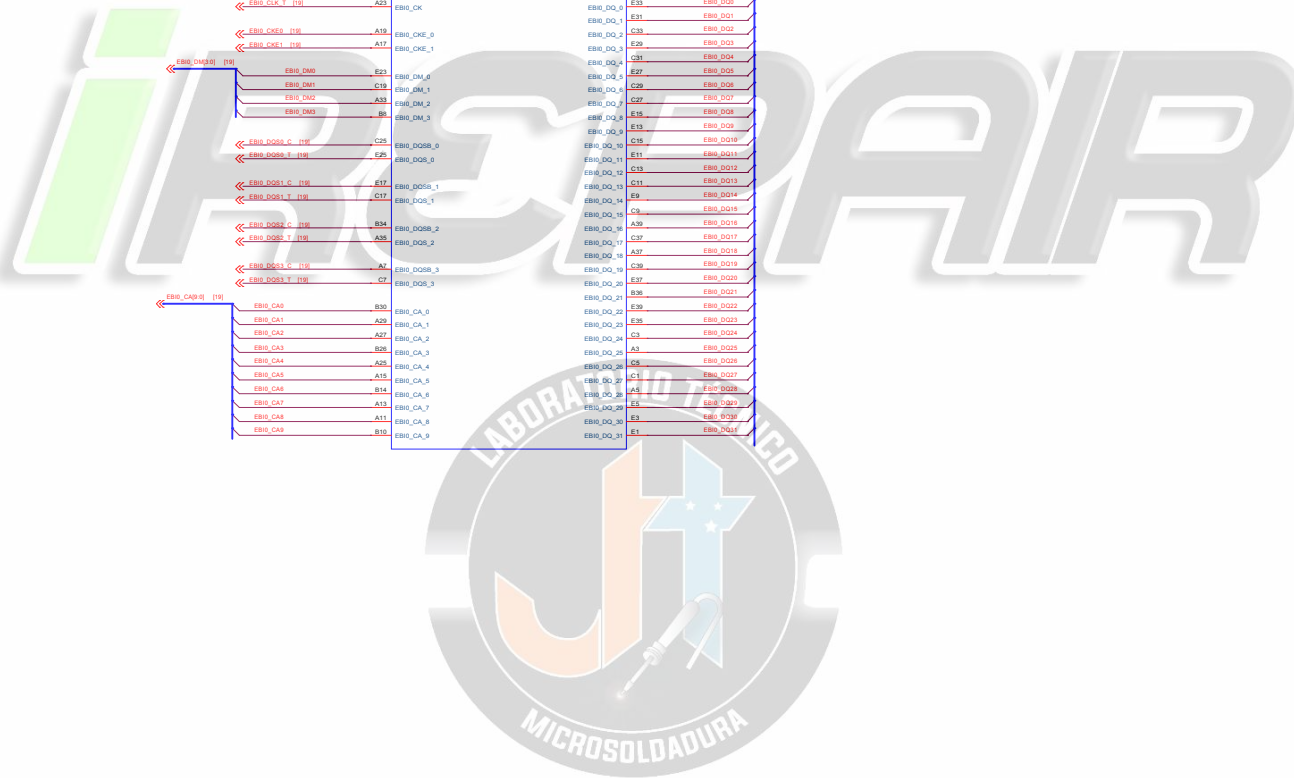


MSM8953
EBI

Title <Title>			
Size D	Document Number <Doc>	Rev <Rev Code>	
Date	Friday, January 24, 2018	Sheet	5 of 47


NOTE:
Asterisks (*) indicate modem power management (MPM) wake-up pins

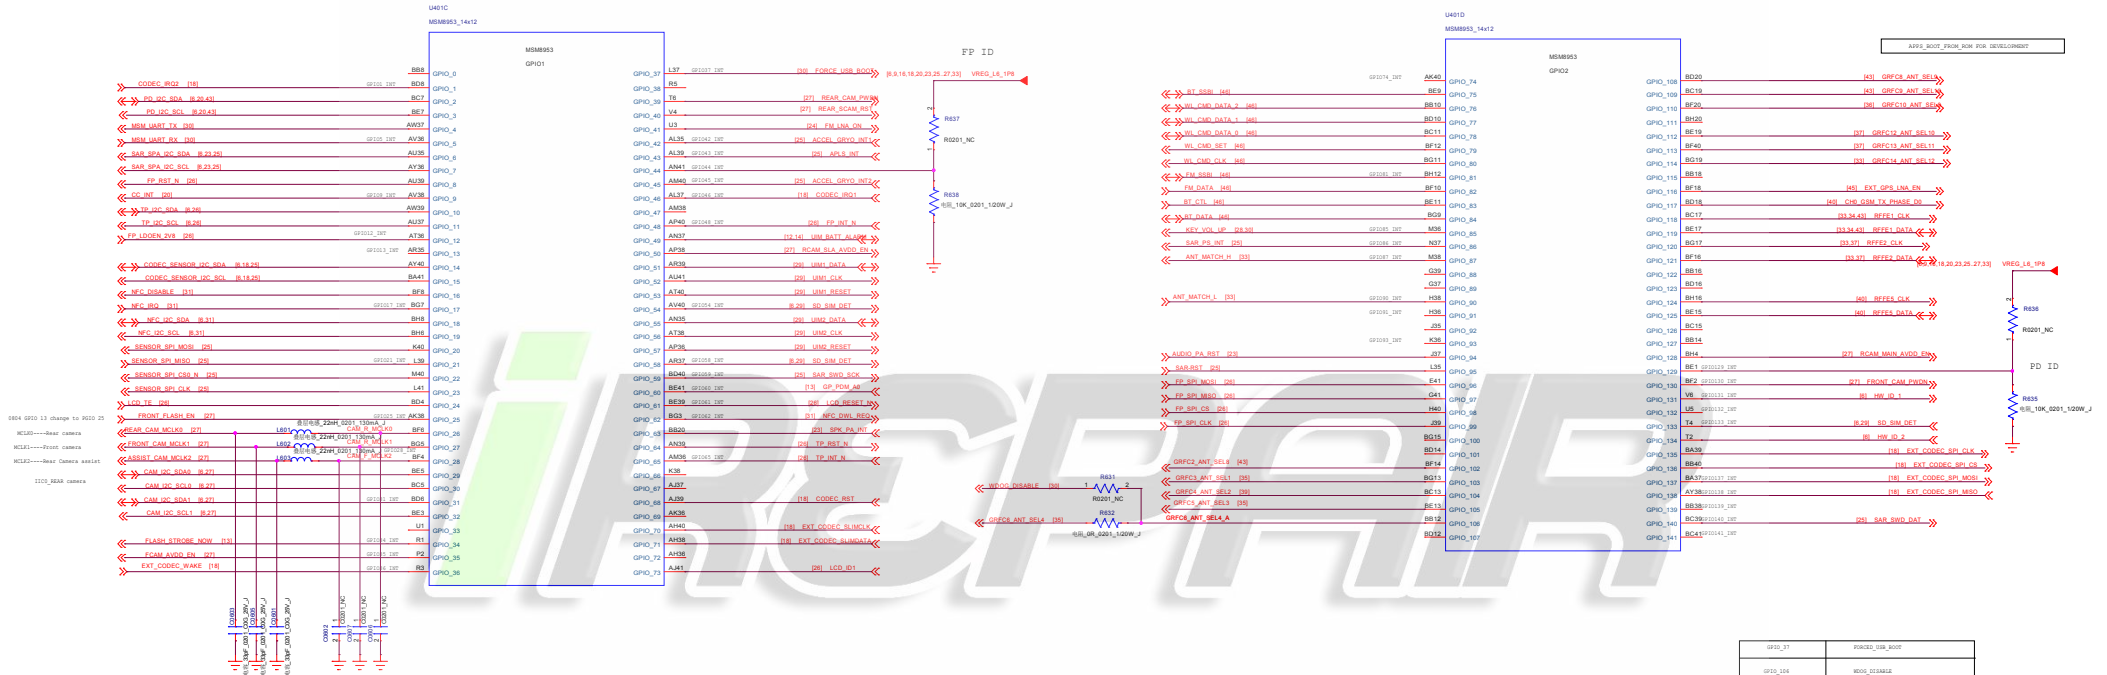


I2C PULL-UP

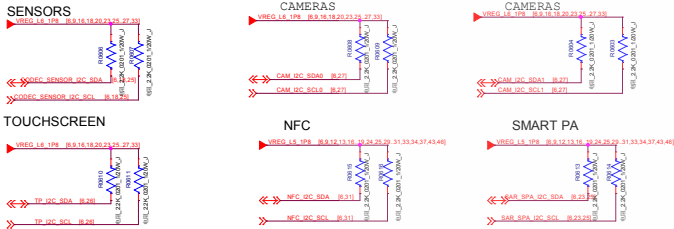

NOTE:
Ensure SW sets these GPIOs (Sensor, CTP and Camera I2C bus) to input pull down when the peripherals are powered off to eliminate leakage.



HW Board ID




GPIO_37	POWER_USB_BOOT
GPIO_104	MODEM_CAMERA
GPIO_108	APPS_BOOT_POWER

BOOT_CONFIG(111)	BOOT_CONFIG
GPIO_37	GPIO_37 -> GPIO_37 -> GPIO_37
GPIO_104	GPIO_104 -> GPIO_104 -> GPIO_104
GPIO_108	GPIO_108 -> GPIO_108 -> GPIO_108

Default Boot Config (GPIO) is GPIO_108

MSM8953 GPIO

Pin	Function
Pin D	Function Number
Pin	Function Name



WTR0 PRX IQ


WTR0 DRX IQ

WTR1 PRX IQ

WTR1 DRX IQ

WLAN IQ

NOTE:
Unused BBRX_IQ need to be GND if don't use

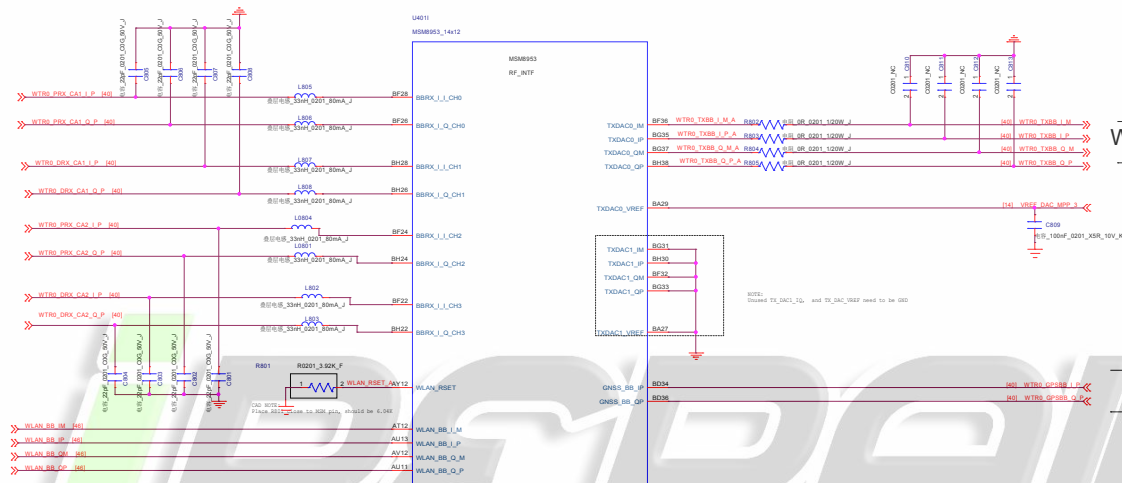


WTR0 TXIQ

GPS IQ




MSM8953
RF

Rev	<Title>	Rev
Doc	Document Number	Doc
D	<Doc>	D
Rev	2019-01-28 10:00	Rev

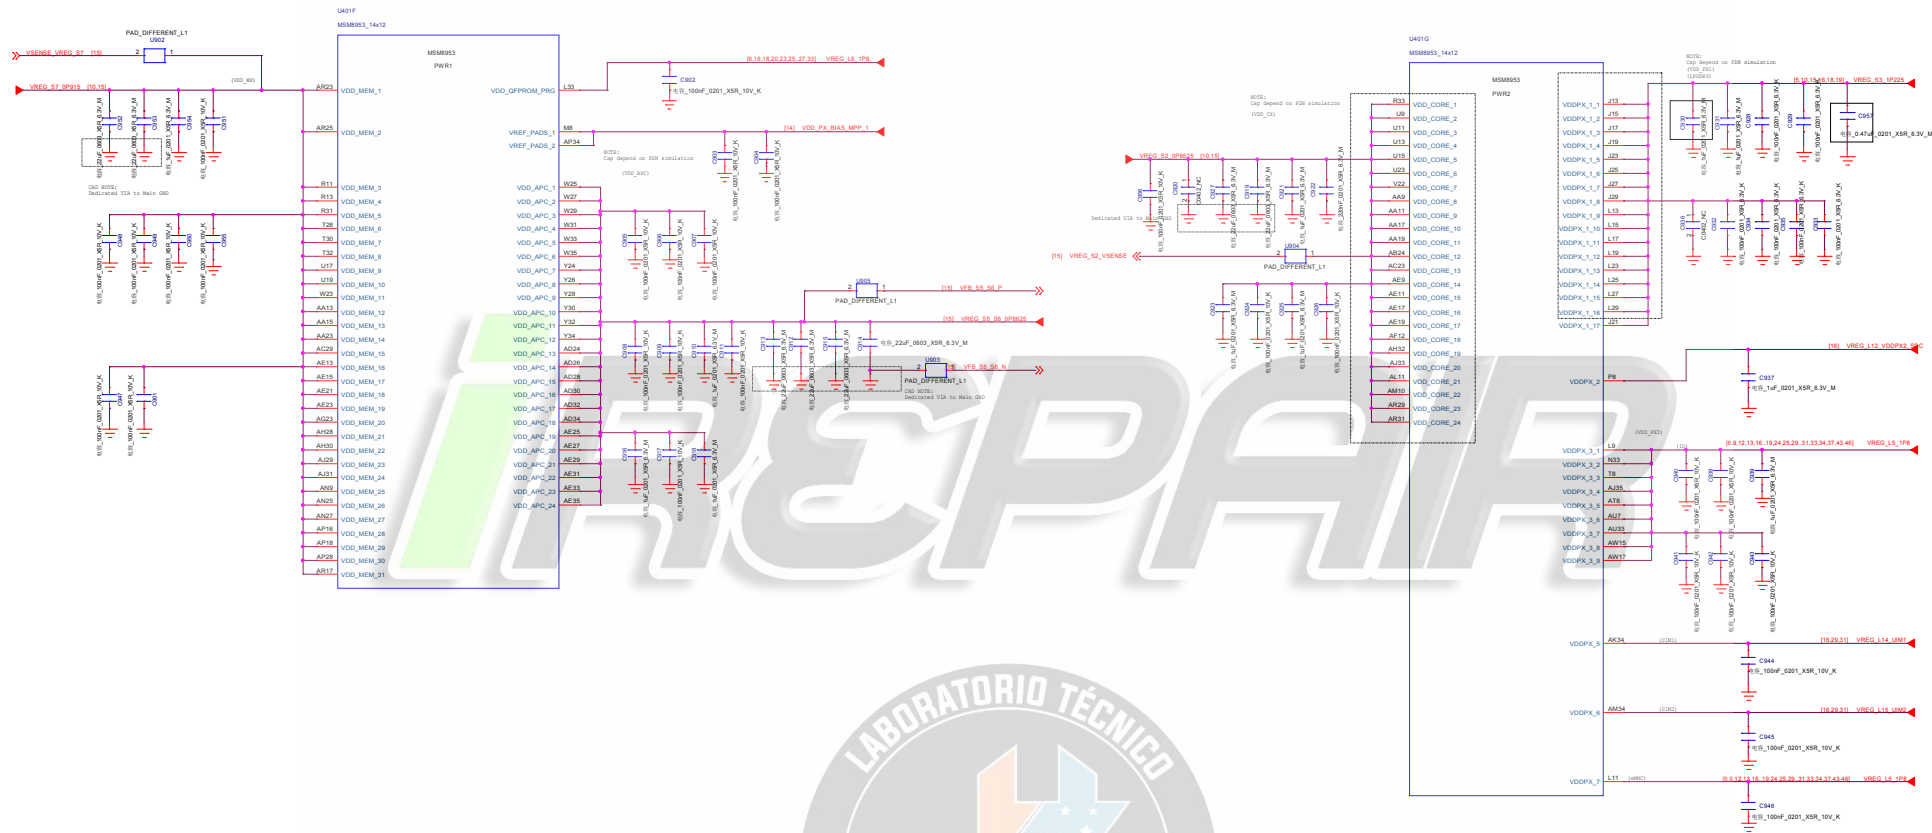


MSM8953
POWER1


Rev	<Title>	Rev
Rev	<Document Number>	Rev
D	<Doc>	Rev
Rev	1.000	Rev

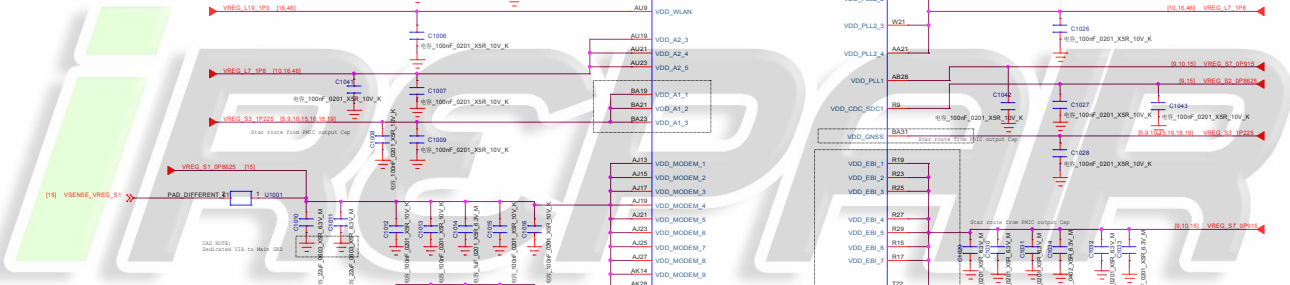MSM8953
POWER2

File					
<Title>					
Size	Document Number			Rev	
D	<Doc>			<Rev>	<Doc>
Date:	Friday, January 26, 2015			Sheet	10 of 47

U001J
MEM8953_14x12

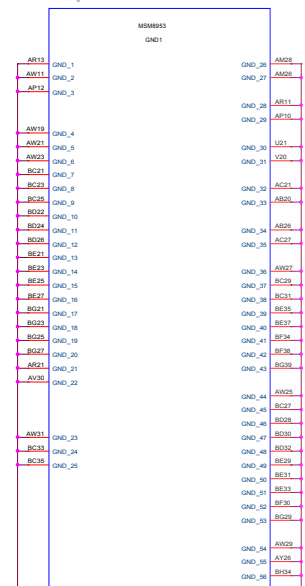

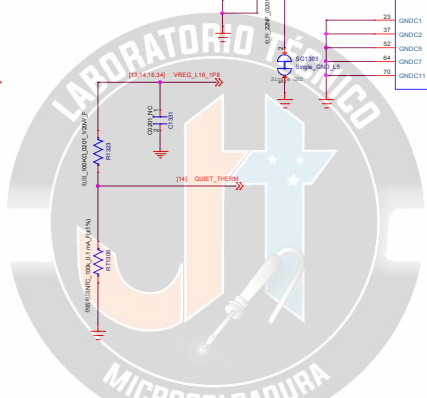

File			
<Title>			
Size D	Document Number <Doc>		Rev <Rev>
Date:	Friday, January 28, 2012		Sheet 13 of 47

L1	PMOS LDO	1.0	1.0	0.375-1.5375	800	N	RFICs	
L2	PMOS LDO	1.708	1.708	0.375-1.5375	1200	N	Camera + Digital	
L3	PMOS LDO	0.925	0.925	0.375-1.5375	800	Y	MMIO DSI PLL, USB	
L4	PMOS LDO	1.800	1.800	1.750-3.3375	450	N	RFICs and GPS vLNB	
L5	PMOS LDO	1.800	1.800	1.750-3.3375	600	Y	Most digital ICs, MMIO and group 1, 2, LPDDR, and eMMC	
L6	PMOS LDO	1.800	1.800	1.750-3.3375	700	N	MMIO GPIOs, camera, touchscreen, display, and sensors	
L7	PMOS LDO	1.800	1.800	1.750-3.3375	300	Y	MMIO analog, USB, and PLLs, WCN SOC, and PMU based on block driver	
L8	PMOS LDO	2.900	2.900	1.750-3.3375	800	Y	eMMC	
L9	PMOS LDO	Vout = 3.3 V for VBAT = 3.075 V, Vout = 3 V for VBAT = 3.075 V		3.000-3.300	1.750-3.3375	800	N	WCN

Partnumber	Circuit type	Default V (V)	Specified range (V)	Programmable range (V)	Rated current (mA)	Default ON	Expected use (REMARKS)
L10	PMOS LDO	3.0	3.0	1.750-3.3375	100	N	Sensors and touchscreen
L11	PMOS LDO	2.900	2.900	1.750-3.3375	400	Y	Mass SD
L12	PMOS LDO	2.900	1.800-2.900	1.750-3.3375	50	Y	MMIO per group 2 and SOC2
L13	PMOS LDO	3.125	3.125	1.750-3.3375	100	Y	MMIO USB type C port PMIC and external codec audio
L14	PMOS LDO	1.800	1.800	1.750-3.3375	50	N	MMIO per group 6: dual voltage USB1, and NFC
L15	PMOS LDO	1.800	1.800	1.750-3.3375	50	N	MMIO per group 6: dual voltage USB2
L16	PMOS LDO	1.800	1.800	1.750-3.3375	5	N	PMIC HI/AC
L17	PMOS LDO	2.900	2.900	1.750-3.3375	300	N	Camera and display
L18	PMOS LDO	3.700	2.700	1.750-3.3375	100	N	Q1: RF front-end
L19	PMOS LDO	1.300	1.300	0.375-1.5375	600	N	MMIO analog, WCN, and WGR
L20	Low-noise LDO	1.7A	1.7A	1.7A-3.3375	5	Y	PMIC SOC mode
L21	Low-noise LDO	1.7A	1.7A	1.7A-3.3375	5	N	PMIC RF stack buffer
L22	PMOS LDO	2.800	2.800	1.750-3.3375	150	N	Camera - analog
L23	PMOS LDO	1.10	1.10	0.375-1.5375	800	N	Camera - digital

VREG_S3_1P225作为输入电压太低



VREG_S3_1P225 [0.9,10,15,16,18,19]

VREG_S3_1P225 [0.9,10,15,16,18,19]

VREG_S4_2P05 [14,15,17]

VPH_PWR [12,15,17,18,20,23,25,27,31,33,34,43,44]


Nonlinear routing to each VIO group

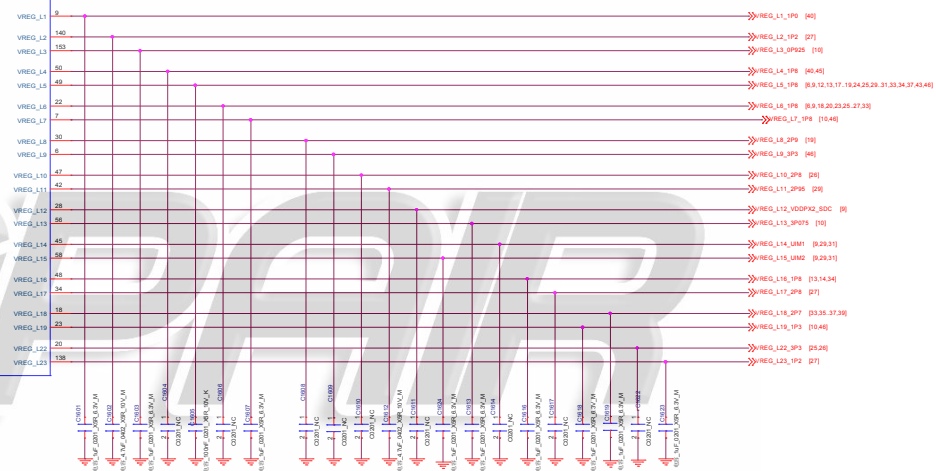



PM8953
LDO

Rev	01	Docu	01	Rev	01
Docu	01	Docu	01	Rev	01
Docu	01	Docu	01	Rev	01


REPAIR

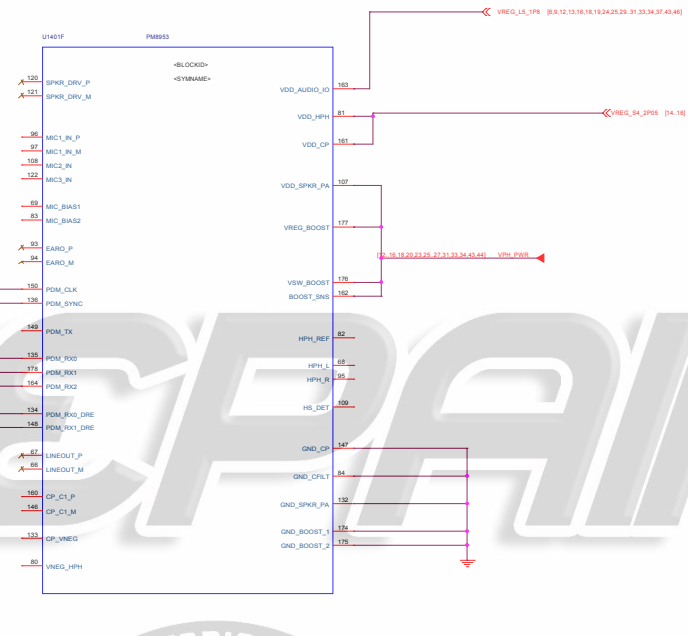

2.2uf use 10V,PN:HQ11710052000

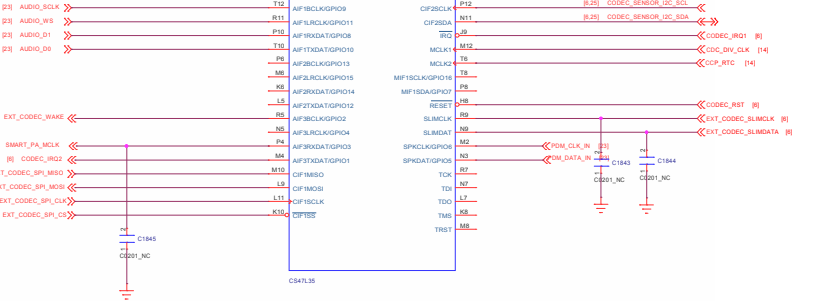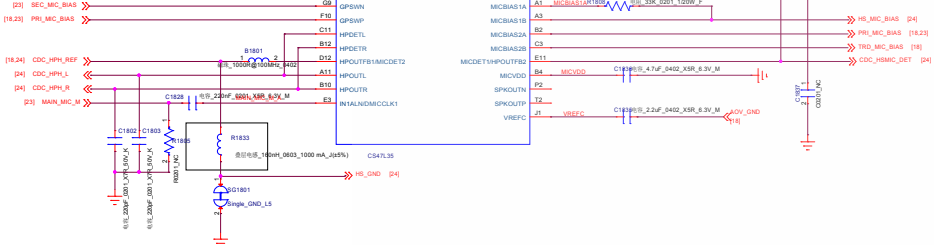


Company: Husejin	
Block Title	Test Points
Project	Teller
Date:	Friday, January 26, 2018
Rev	1.0
Sheet	18 of 47

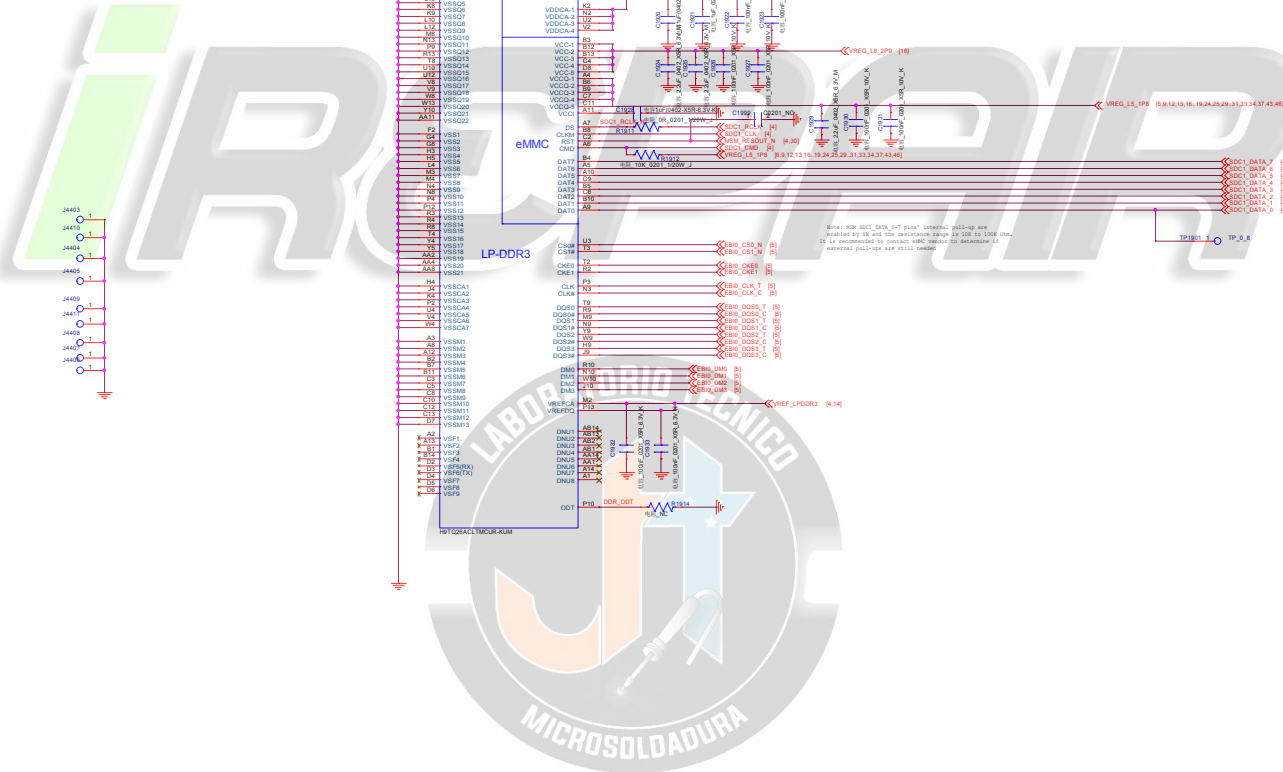

MEMORY(LPDDR3+EMMC V5

Rev		<Title>	
Rev	D	Document Number	
D		<Doc>	
Date		2024-01-26 10:00	Rev. 1.0

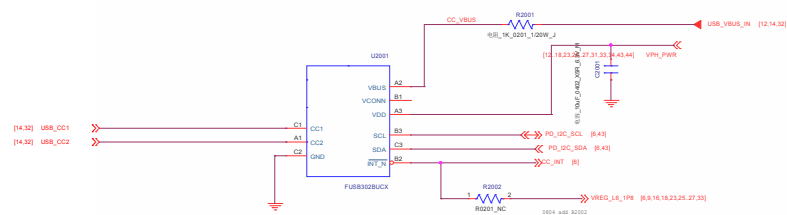

iREPAIR



File		<Title>
ID		Document Number
Rev		<Rev>
Date		2024-01-26 10:00
Sheet		10 of 17

iREPAIR





iREPAIR




Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date:	Friday, January 26, 2018	Sheet 22 of 1	

SMART PA

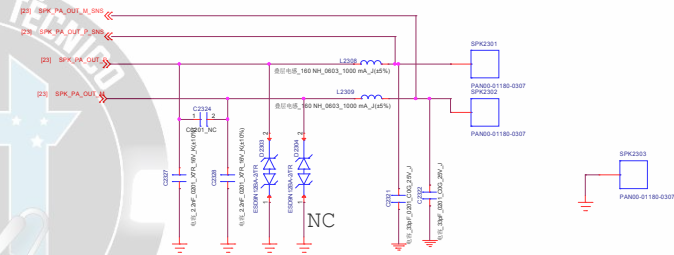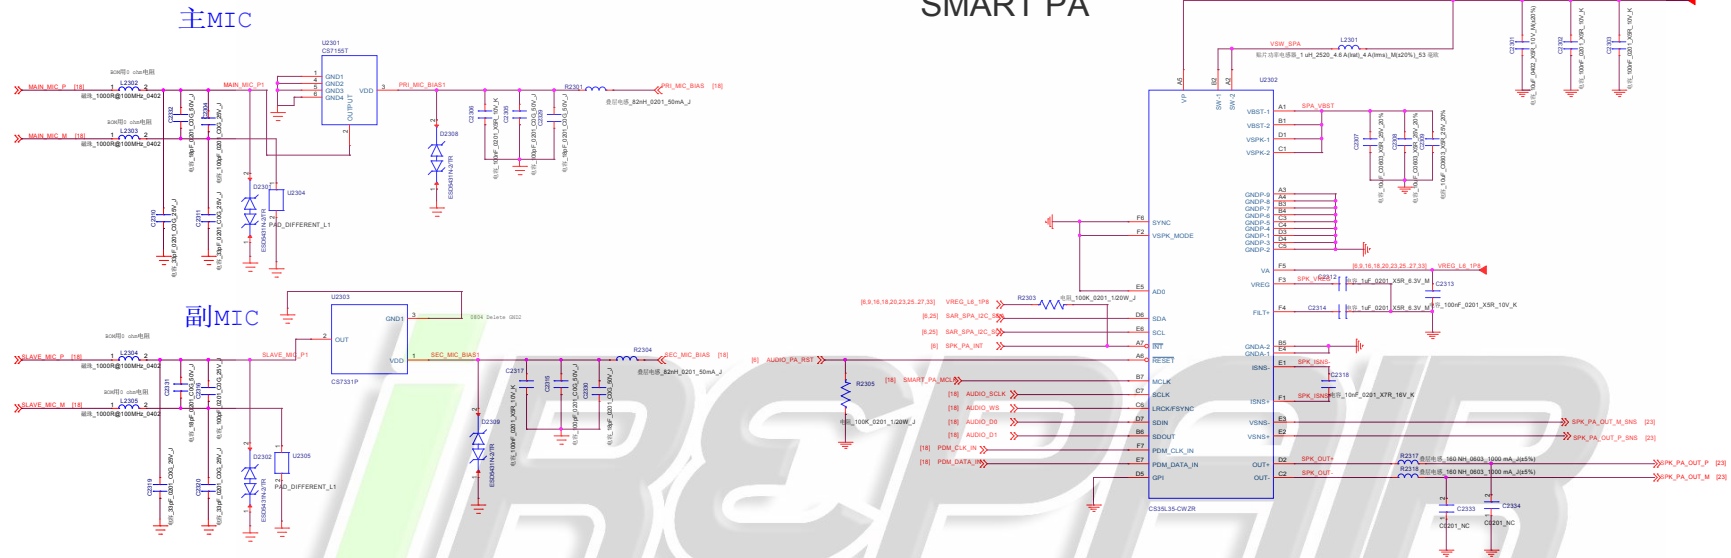


RCV_MIC_Headphone

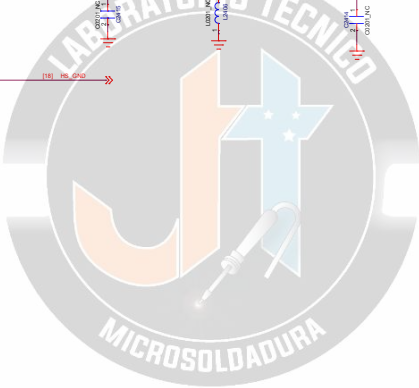


File: <Title>			
Size D	Document Number <Doc>		Rev <Rev C>
Date: Friday, January 23, 2015 Sheet 24 of 47			

ACCELEROMETER+GYRO


I2C ADDRESS 0X68 0b1101000

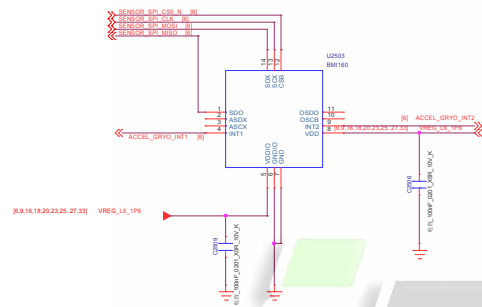


Magnetic Sensor
address of AK09918 is 0Ch

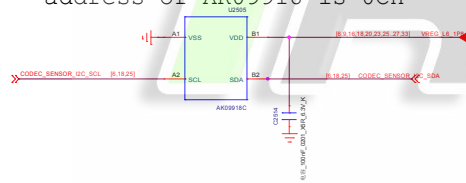


address of AK09918 is 0Ch

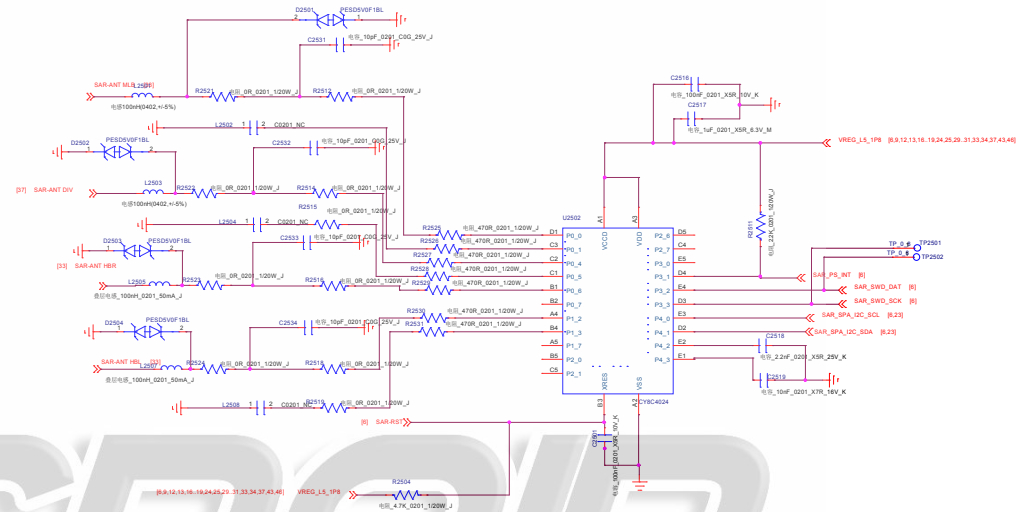

ALS/P SENSOR+Front Flash+Charge LED CONN


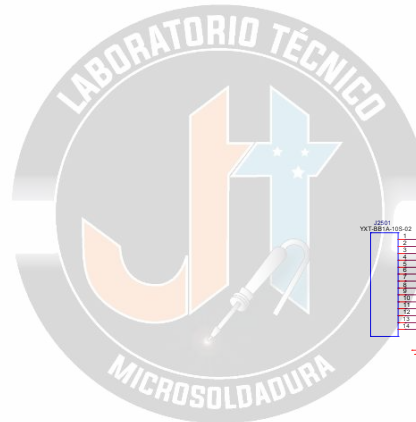


LED change to A-SP194W1D-C01-4T-AR2.4



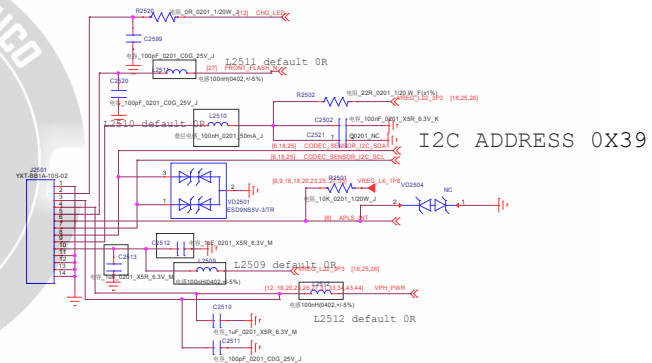


I2C ADDRESS 0X39



LCD MIPI Common Mode Filter

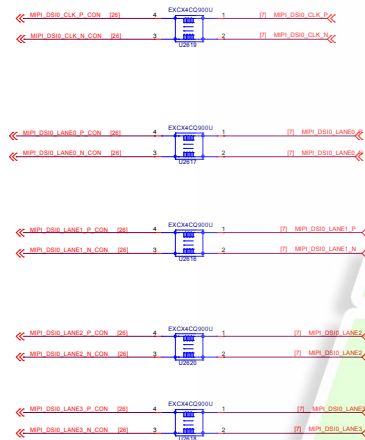


LCD/TP-Connector

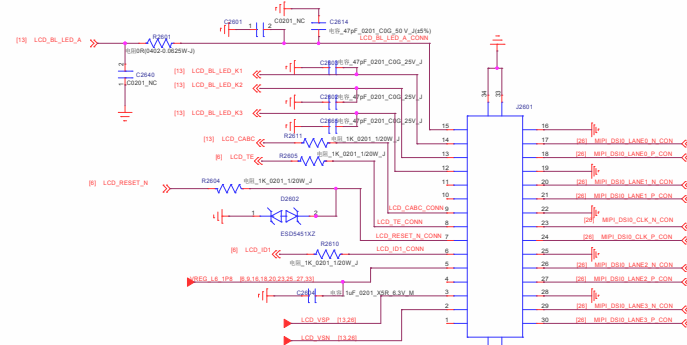


FPS-Connector

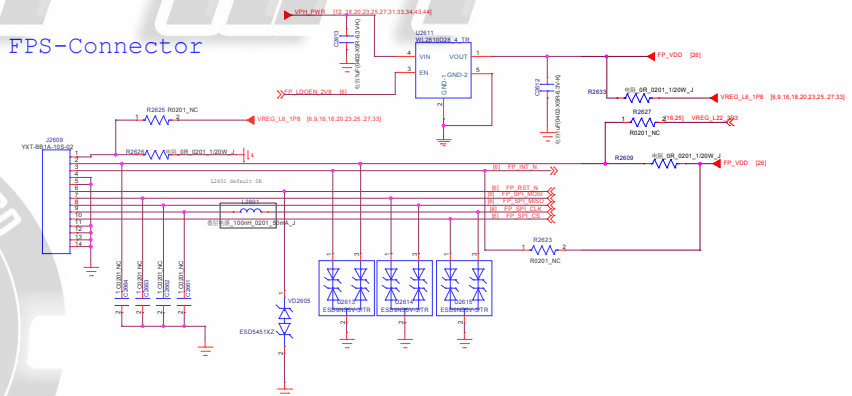


LDO should be WL2810D18-4/TR

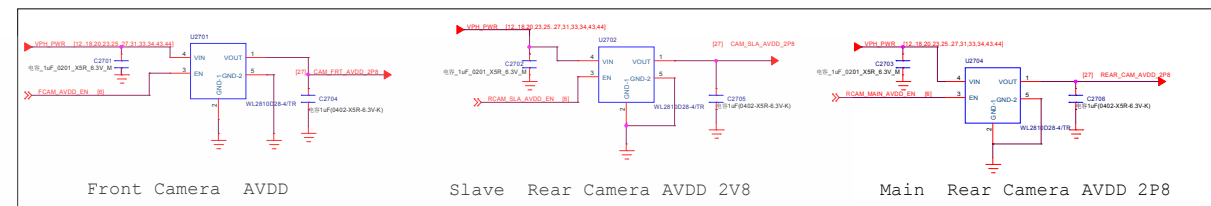



前闪

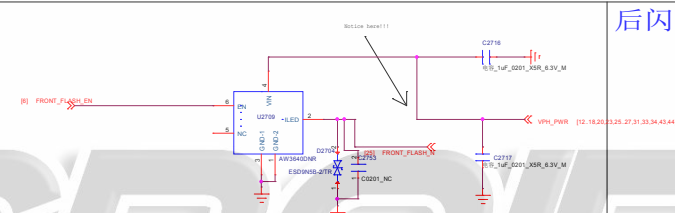

后闪

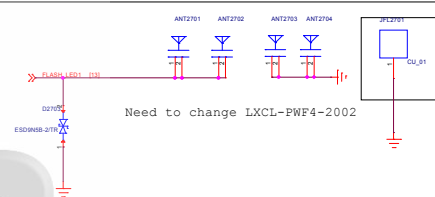







Main Camera

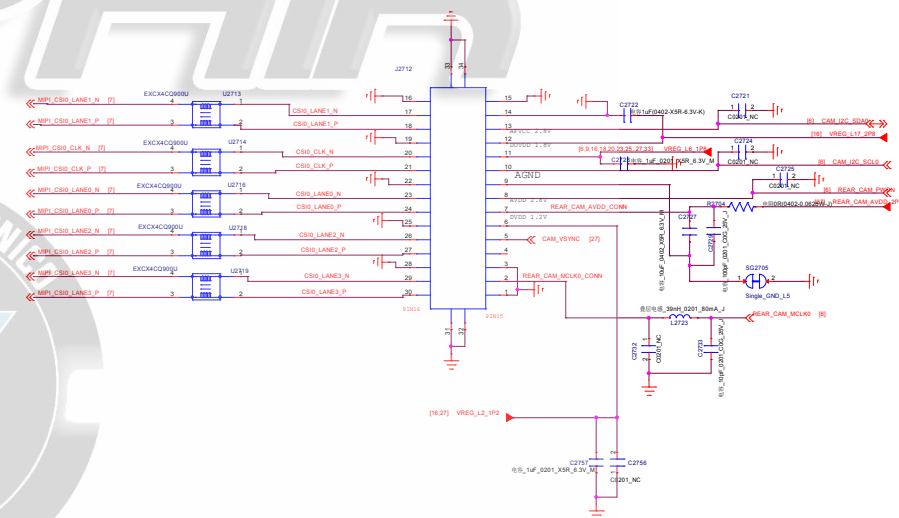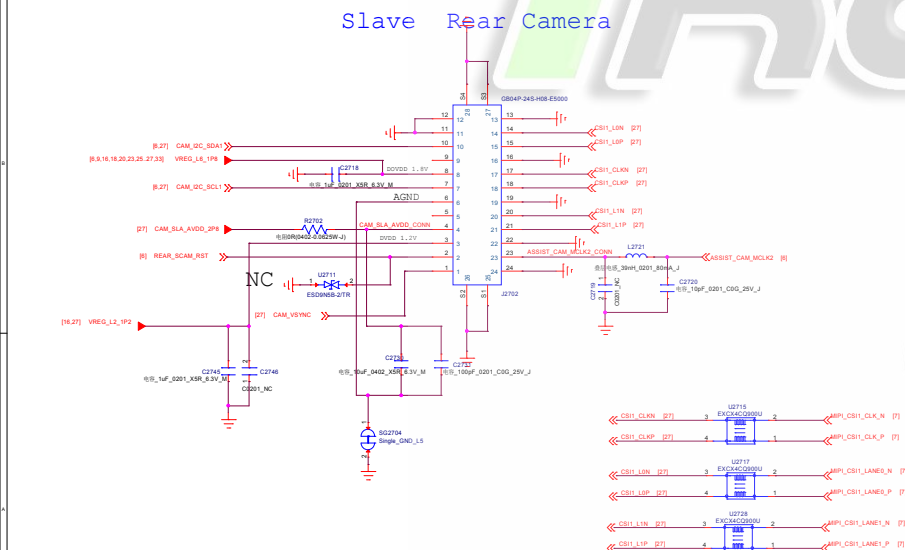

.Main/Slave Camera and Flash

File			
<Title>			
Site ID	Document Number		Rev
	<Doc>		<Rev>
Date:	Friday, January 26, 2018		Sheet 27 of 47



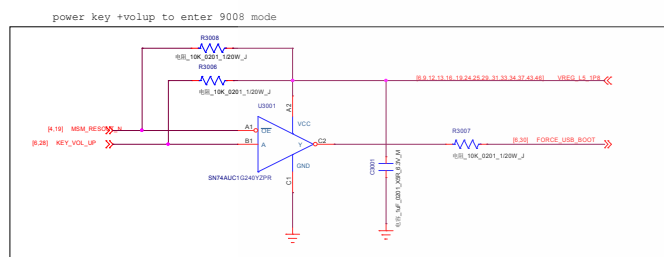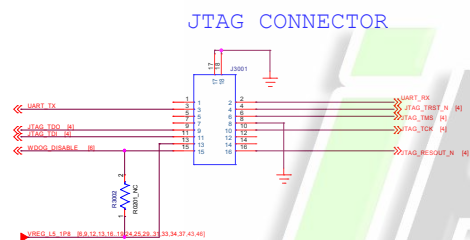

PCBA AUTOMATIC TEST point

接地弹片 TOP


接地弹片 BOT

TP/GND/Shielding



File	<Title>	Rev
ID	Document Number	<Doc>
Ver	1.0	1.0


The purpose of this chapter is to propose several application schematics for: NQ310 and NQ330 chips in VF8GA package

DCDC POWER FOR NFC


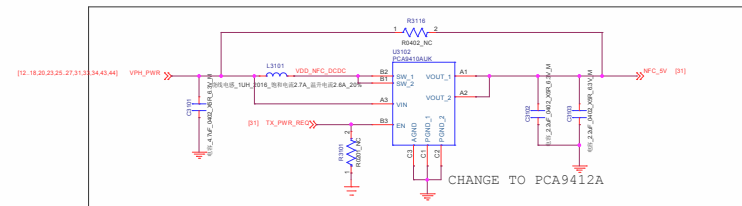


27.12MHz Crystal

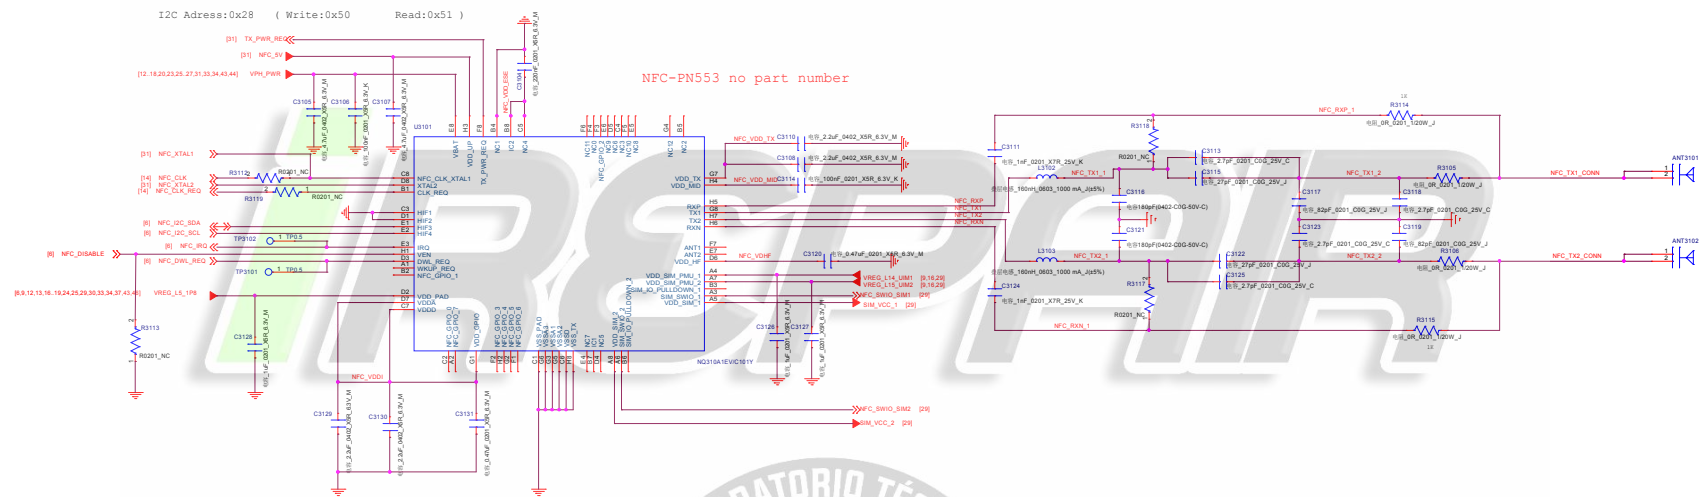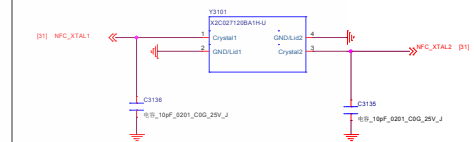

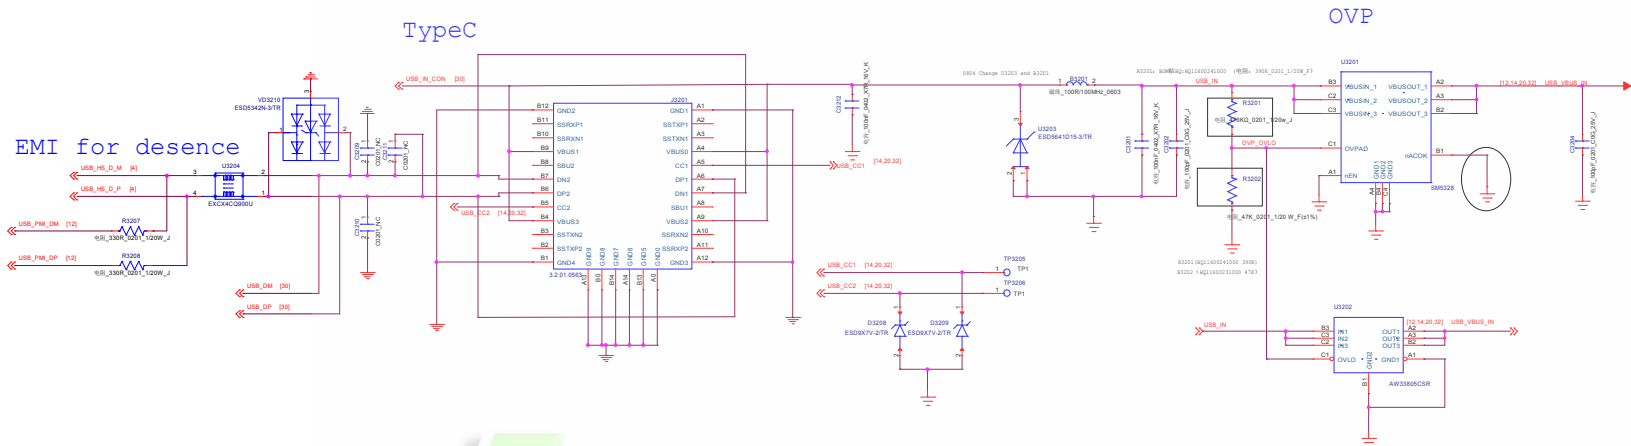


Battery Connector

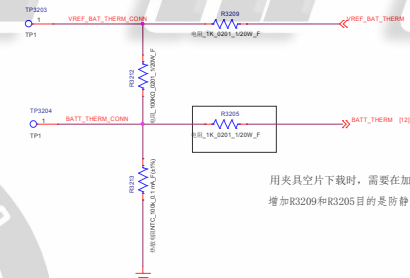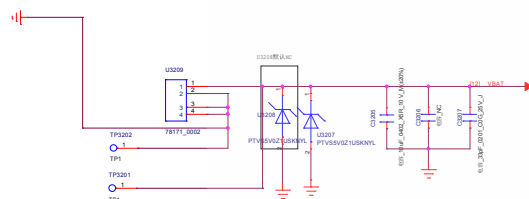


用夹具空片下载时，需要在夹具上将TP3203和TP3204短接。这样，软件可以识别为电池不在位。
增加K3209和K3205目的是防静电，和防VREF_BAT_THERM在夹具上误短路。



File	-T8a-
Document Number	-Doc-
Rev	-Rev-
Date	2023-03-20
Page	31 of 41

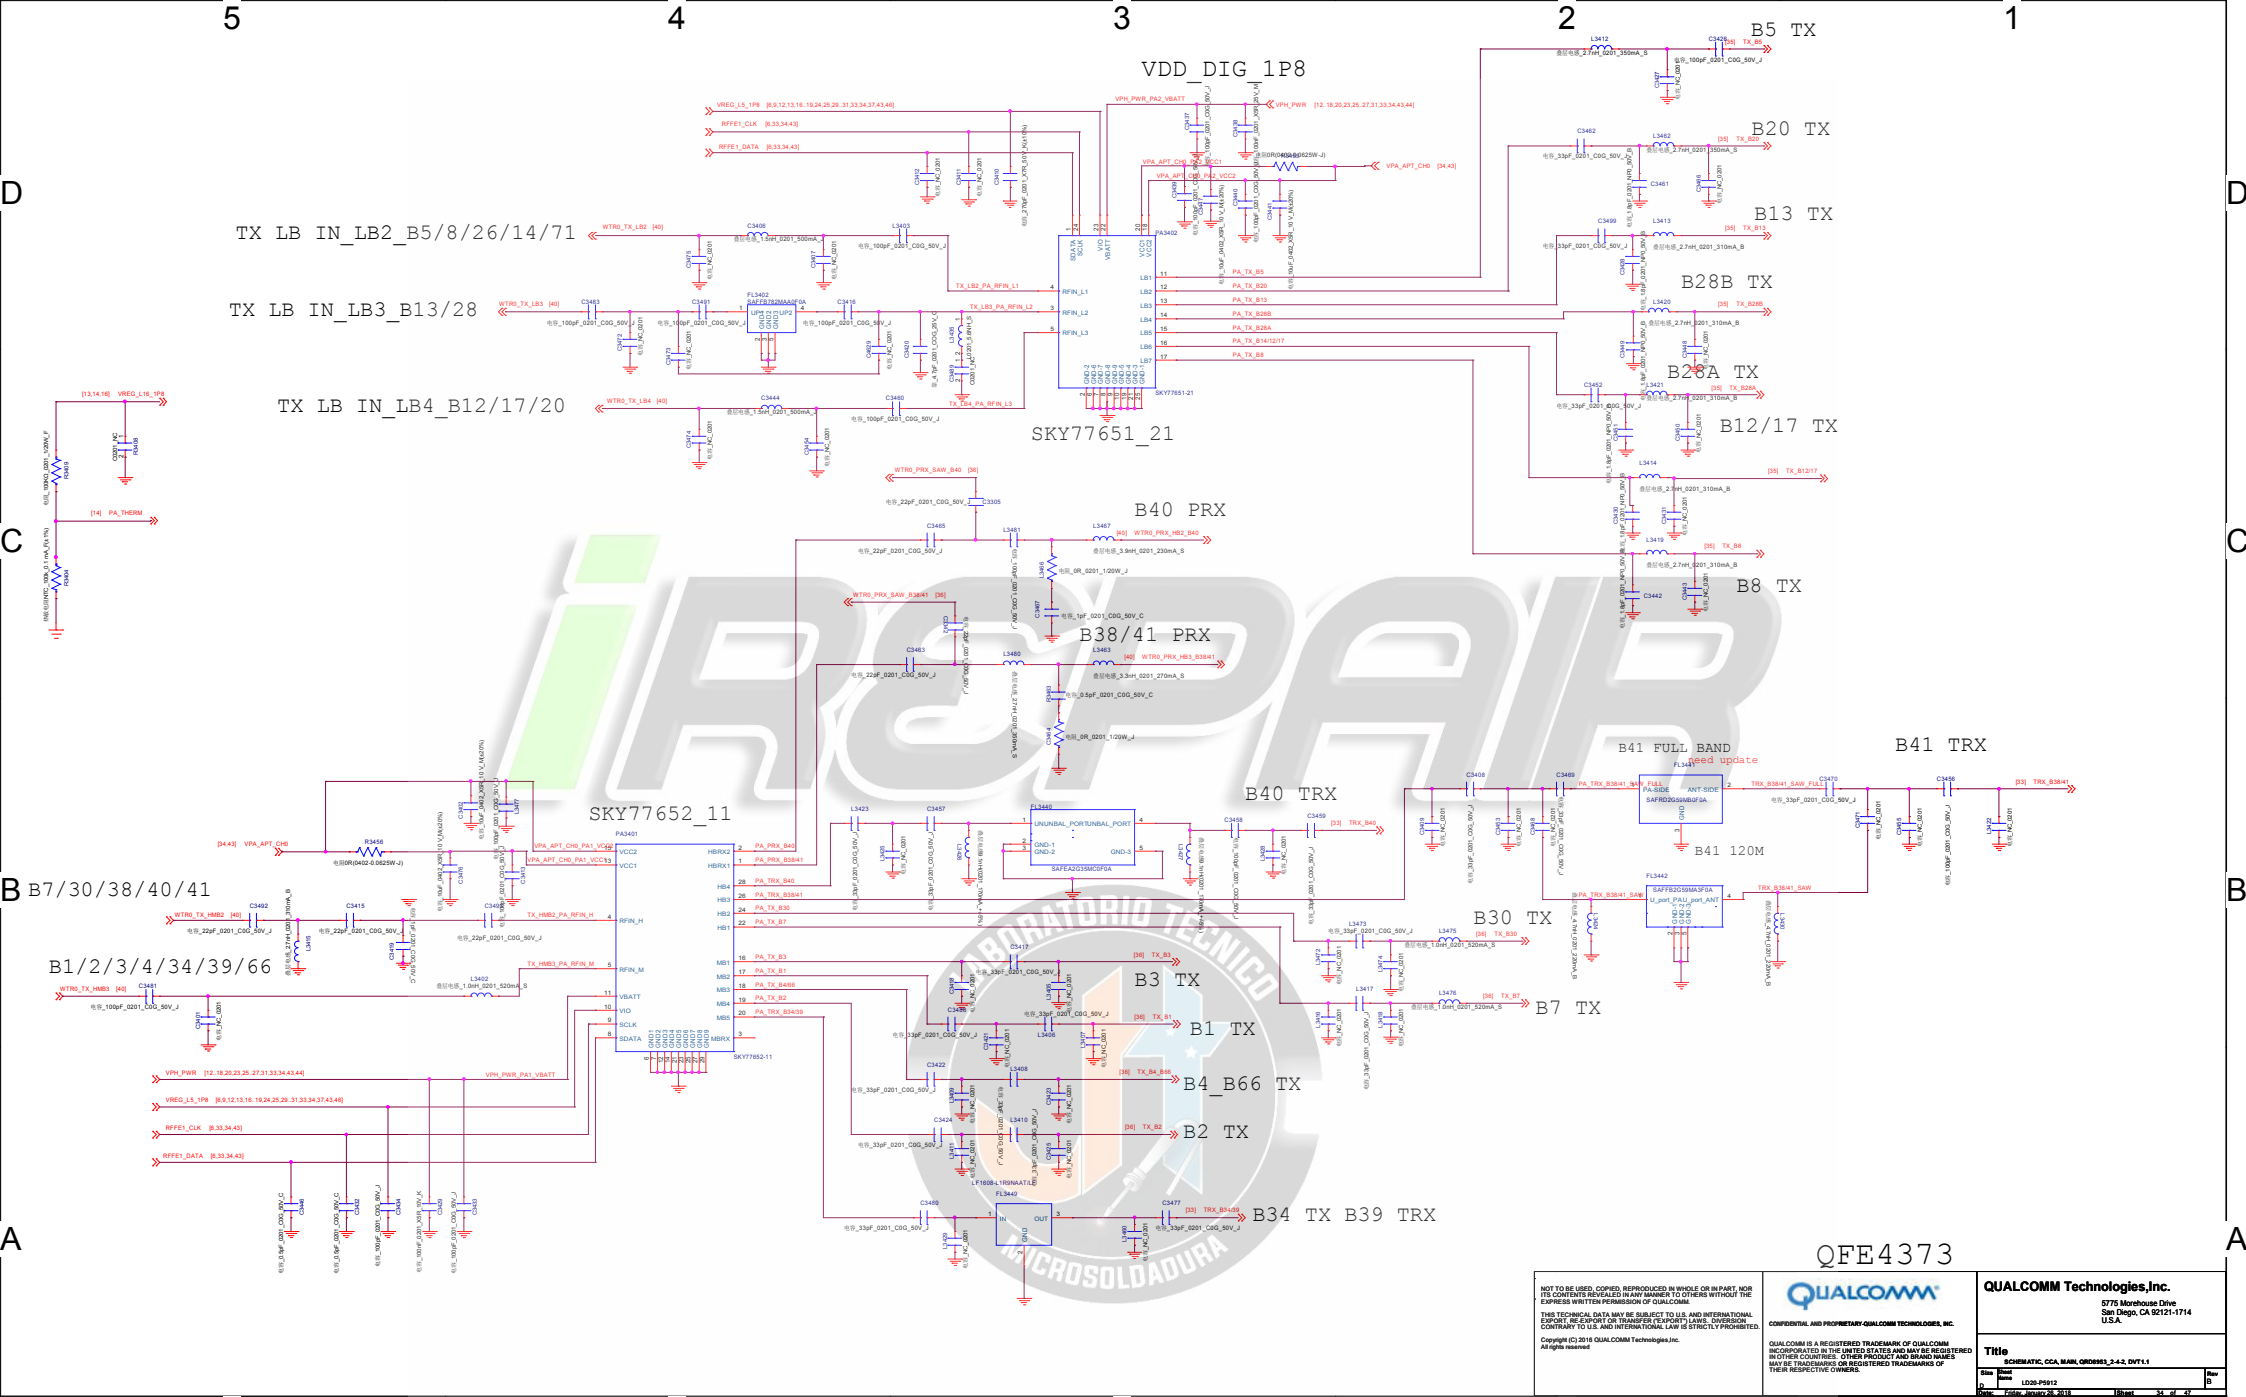



Size	Sheet
------	-------

TX B3
TX B1

B1 DPX

B1/B3 QPX

B3 DPX

B2 DPX

B25/66 QPX

B4 PPX

B4:D6DA2G132K2D4
B66:D6DA2G155K2T2

PRX B25

PRX B66

B40 PRx

B30 DRX saw: SAFFB2G35KA1F0A

B30 DPX

B38/41 PRx SAFRD2G59MA0F0A

B7 DPX

change to D6HQ2G65DP01


B34/39 PRx


NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART NOR
THE CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE
EXPRESS WRITTEN PERMISSION OF QUALCOMM.
THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL
EXPORT, REEXPORT OR TRANSFER RESTRICTIONS, DIVERSION,
CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED.
Copyright (C) 2018 QUALCOMM Technologies, Inc.
All rights reserved.

QUALCOMM
CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.
QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM
INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED
IN OTHER COUNTRIES. OTHER TRADEMARKS AND SERVICE MARKS
MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF
THEIR RESPECTIVE OWNERS.









QUALCOMM Technologies, Inc.
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Title
SCHEMATIC: CCA: M84L QRM813_2-42 DVT1.1
Rev
0 L200-P5812
Rev 01/01/2018 01/01/2018 01/01/2018

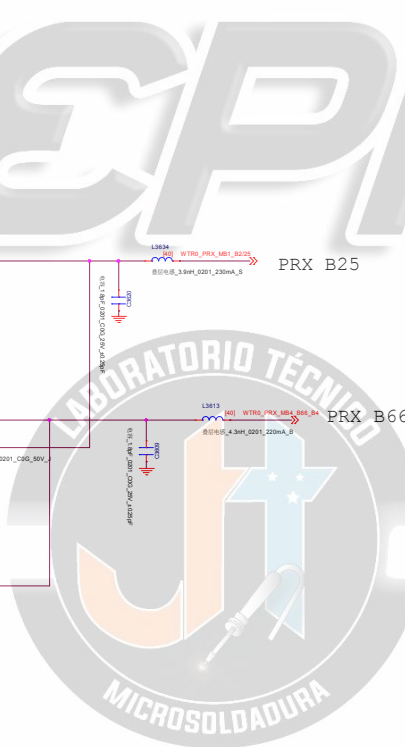


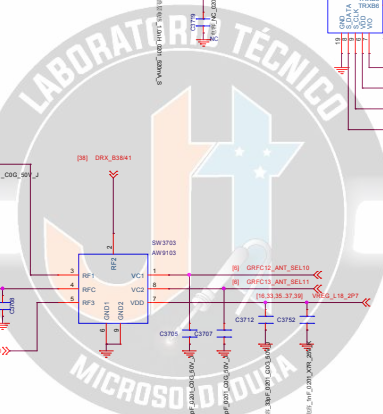


QUALCOMM Technologies, Inc.			
5775 Morehouse Drive San Diego, CA 92121-1714 U.S.A.			
Title			
SCHEMATIC, CCA, MAIN, GDS9851_2-4-2, DVT1.1			
Size	Sheet		Rev
11x17	1	LD25-P3812	B
Date	Drawn	Sheet	
01/28/98	Prasad, January 28, 2008	1 of 47	

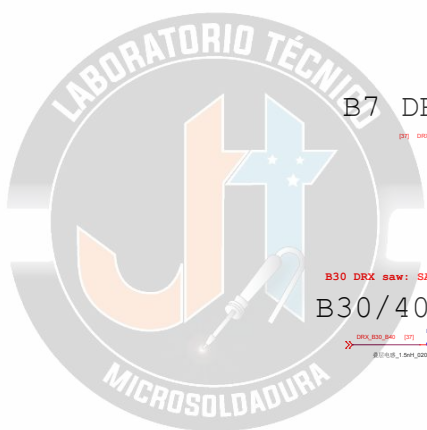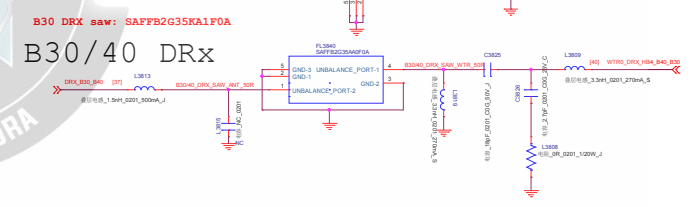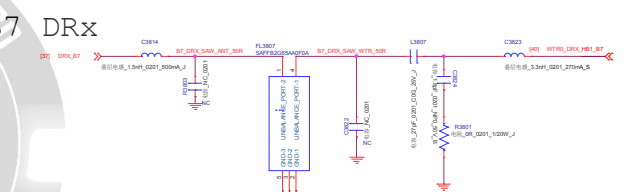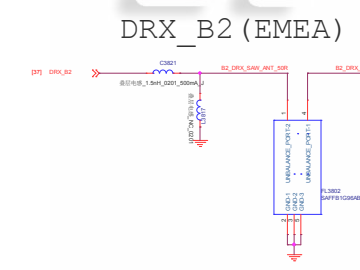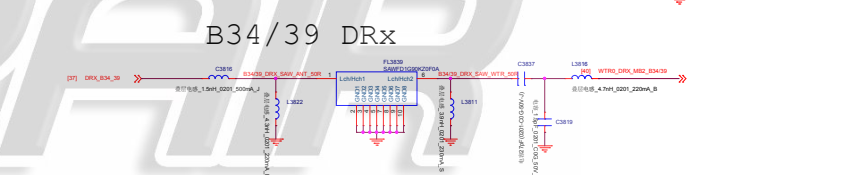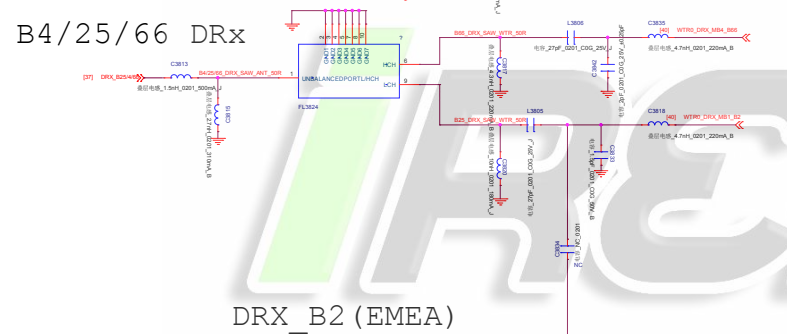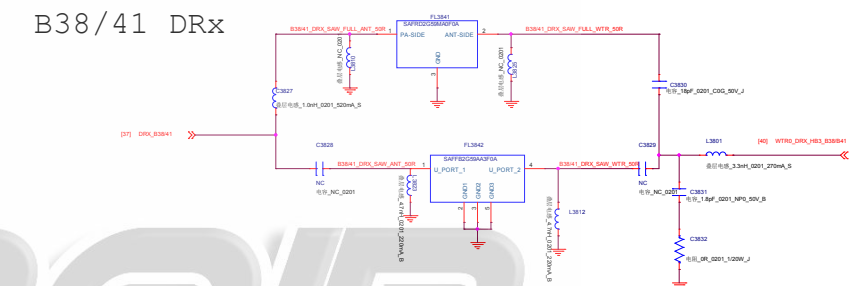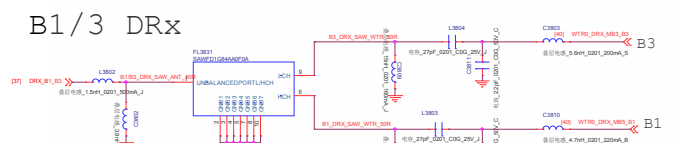


B12/17/13 DRX

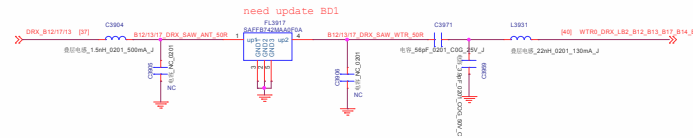


B20 DRX




B8 DRX



B5/26/29 DRX

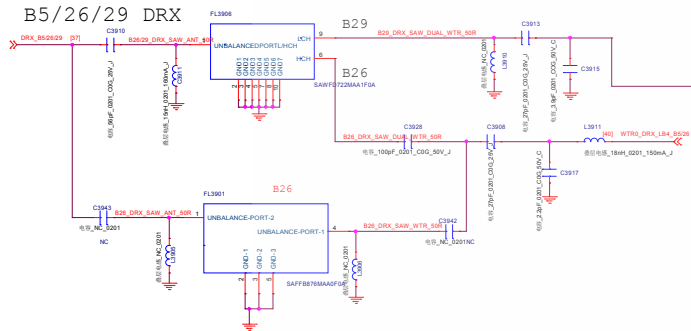

B28 DRX

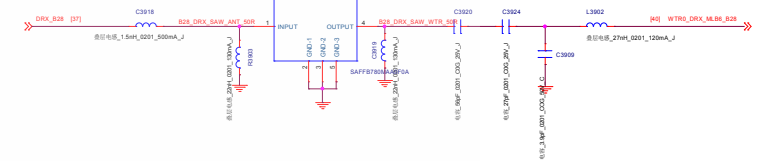

DRX LB

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL PATENT, TRADE SECRET OR OTHER PROTECTABLE RIGHTS. QUALCOMM DISCLAIMS ANY LIABILITY FOR INFRINGEMENT OF ANY PATENT, TRADE SECRET OR OTHER PROTECTABLE RIGHTS. QUALCOMM DISCLAIMS ANY LIABILITY FOR INFRINGEMENT OF ANY PATENT, TRADE SECRET OR OTHER PROTECTABLE RIGHTS. Copyright © 2018 QUALCOMM Technologies, Inc. All rights reserved.		QUALCOMM Technologies, Inc. 5775 Montrose Drive San Diego, CA 92121-1714 U.S.A.	
QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.		TH0 SCHEMATIC, CCA, M888, 3-4-2, DVT1.1	
Rev 1.0 Date: Friday, January 26, 2018		Rev 1.0 Date: Friday, January 26, 2018	

iREPAIR




Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Friday, January 26, 2018		Sheet 41 of 47	

iREPAIR



Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date: Friday, January 26, 2018		Sheet 42 of 47	

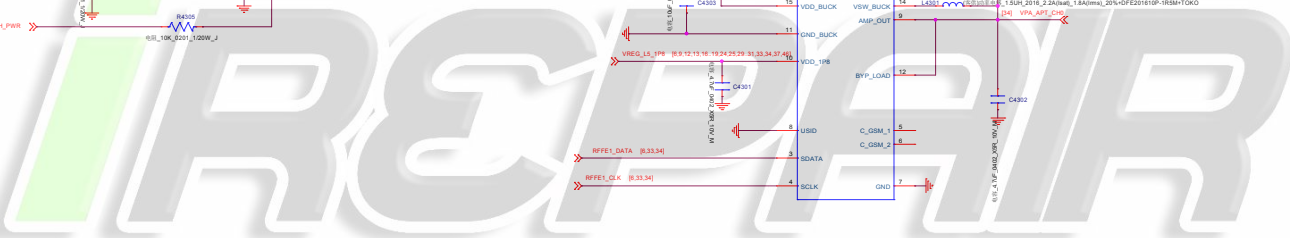

Copyright (C) 2016 QUALCOMM Technologies, Inc.
All rights reserved


CONFIDENTIAL AND PROPRIETARY-QUALCOMM TECHNOLOGIES, INC.

QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

QUALCOMM Technologies, Inc.
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Title	
SCHEMATIC, CCA, MAIN, ORD9953_2-4-2, DVT1.1	
Size	Sheet Name
0	LD20-PS012
Date: Friday, January 28, 2018	Sheet: 43 of 47

GPS

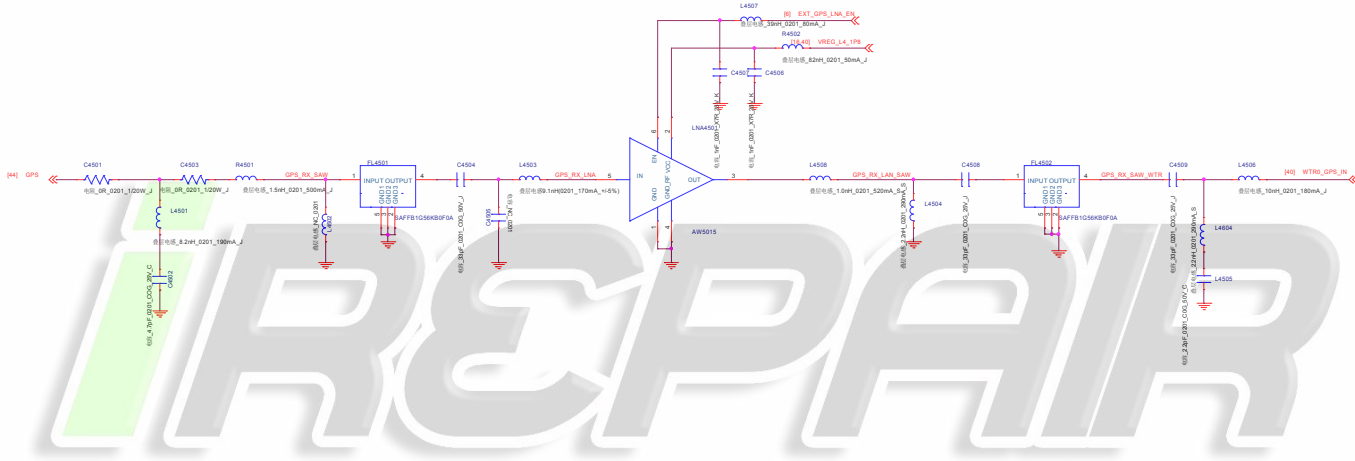

WLAN_FEM

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.

THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, RE-EXPORT OR TRANSFER ("EXPORT") LAWS. DIVERSION CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED.

Copyright (C) 2016 QUALCOMM Technologies, Inc.
All rights reserved




CONFIDENTIAL AND PROPRIETARY-QUALCOMM TECHNOLOGIES, INC.

QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

QUALCOMM Technologies, Inc.
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Title		SCHEMATIC, CCA, MAIN, QRD8953_2-4-2, DVT1.1	
Size	Sheet Name		
D	LD20-P5912		
Date: Friday, January 28, 2018		Sheet	45 of 47

WCN3660B

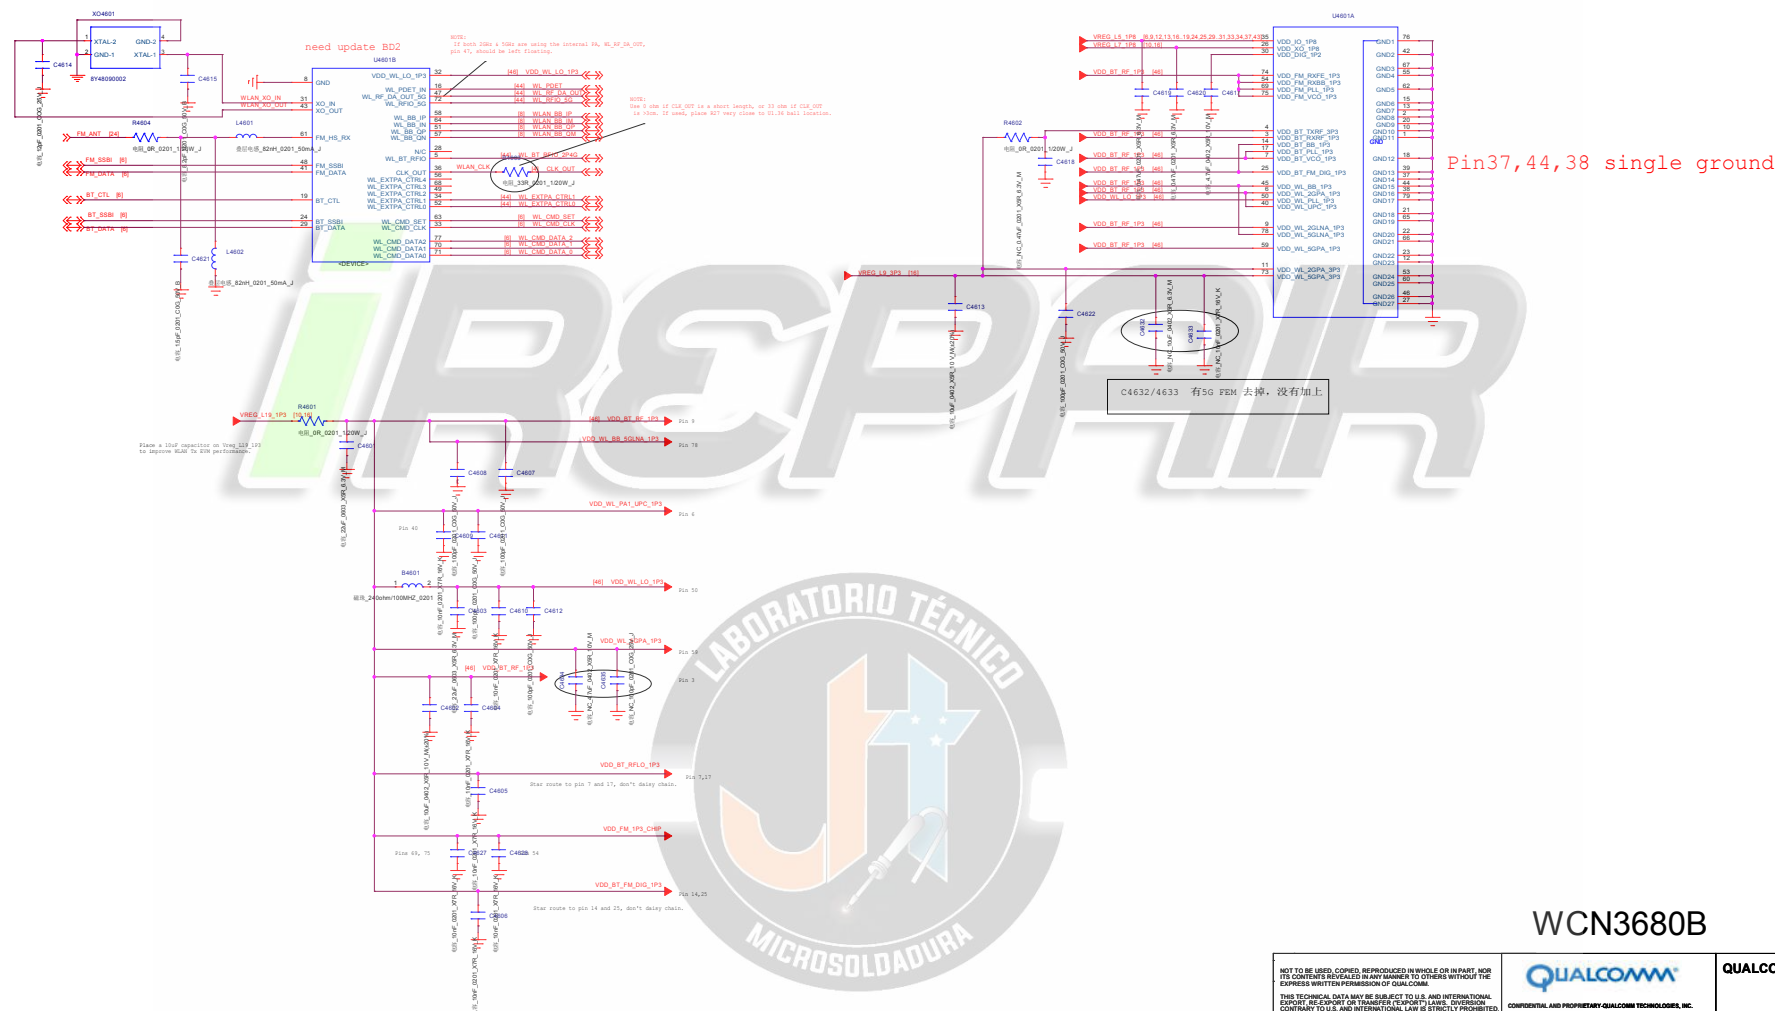

WCN3680B

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER (EXPORT) LAWS, DIVISION CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.	QUALCOMM QUALCOMM is a registered trademark of QUALCOMM INCORPORATED in the UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS. CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.	QUALCOMM Technologies, Inc. 8775 Morehouse Drive San Diego, CA 92121-1714 U.S.A. Title SCHEMATIC, CCA, MARM, QCN913_2-2, DVT1.1 Rev 0 Rev B Date Friday, January 26, 2018 Sheet 58 of 47
--	---	---

MSM8953 GPIO Configuration For QRD8953

GPIO_0	NFC_SPI_ESE_MOSI	GPIO_41		GPIO_82	FM_DATA
GPIO_1	NFC_SPI_ESE_MISO	GPIO_42	ACCL_INT1	GPIO_83	BT_CTL
GPIO_2	NFC_SPI_ESE_CS_N	GPIO_43	ALSP_INT_N	GPIO_84	BT_DATA
GPIO_3	NFC_SPI_ESE_CLK	GPIO_44	MAG_DRDY_INT	GPIO_85	KEY_VOL_UP_N
GPIO_4	UART_MSM_TX	GPIO_45	GYRO_INT	GPIO_86	
GPIO_5	UART_MSM_RX	GPIO_46	SCAM_D_ELDO_EN	GPIO_87	
GPIO_6		GPIO_47	SENSOR_SPI_CS2_N	GPIO_88	
GPIO_7		GPIO_48	FP_INT_N	GPIO_89	
GPIO_8		GPIO_49	UIM_BATT_ALARM	GPIO_90	
GPIO_9		GPIO_50	WCD_ELDO_EN	GPIO_91	
GPIO_10	TP_I2C_SDA	GPIO_51	UIM1_DATA	GPIO_92	
GPIO_11	TP_I2C_SCL	GPIO_52	UIM1_CLK	GPIO_93	SCAM_ID
GPIO_12		GPIO_53	UIM1_RESET	GPIO_94	
GPIO_13		GPIO_54		GPIO_95	
GPIO_14	SENSOR_I2C_SDA	GPIO_55	UIM2_DATA	GPIO_96	WSA_EN
GPIO_15	SENSOR_I2C_SCL	GPIO_56	UIM2_CLK	GPIO_97	
GPIO_16	NFC_DISABLE	GPIO_57	UIM2_RESET	GPIO_98	
GPIO_17	NFC_IRQ	GPIO_58		GPIO_99	
GPIO_18	NFC_I2C_SDA	GPIO_59		GPIO_100	GRFC0_SEL
GPIO_19	NFC_I2C_SCL	GPIO_60	GP_PDM_A0	GPIO_101	GRFC1_SEL
GPIO_20	SENSOR_SPI_MOSI	GPIO_61	LCD_RST_N	GPIO_102	GRFC2_SEL
GPIO_21	SENSOR_SPI_MISO	GPIO_62	NFC_DWL_REQ	GPIO_103	GRFC3_SEL
GPIO_22	SENSOR_SPI_CS0_N	GPIO_63		GPIO_104	GRFC4_SEL
GPIO_23	SENSOR_SPI_CLK	GPIO_64	TP_RST_N	GPIO_105	GRFC5_SEL
GPIO_24	LCD_TE0	GPIO_65	TP_INT_N	GPIO_106	WDOG_DISABLE
GPIO_25		GPIO_66		GPIO_107	GRFC7_SEL
GPIO_26	CAM_MCLK0	GPIO_67	WCD_RST_N	GPIO_108	GRFC8_SEL
GPIO_27	CAM_MCLK1	GPIO_68		GPIO_109	GRFC9_SEL
GPIO_28		GPIO_69	WCD_MSM_MCLK	GPIO_110	
GPIO_29	CAM_I2C_SDA0	GPIO_70	SLIMBUS_CLK	GPIO_111	
GPIO_30	CAM_I2C_SCL0	GPIO_71	SLIMBUS_DATA0	GPIO_112	
GPIO_31	CAM_I2C_SDA1	GPIO_72		GPIO_113	
GPIO_32	CAM_I2C_SDA1	GPIO_73	WCD_INTR1	GPIO_114	
GPIO_33		GPIO_74	WCD_INTR2	GPIO_115	
GPIO_34	FLASH_STROBE_NOW	GPIO_75	BT_SSBI	GPIO_116	EXT_GPS_LNA_EN
GPIO_35		GPIO_76	WL_CMD_DATA_2	GPIO_117	CH0_GSM_TX_PHASE_D0
GPIO_36		GPIO_77	WL_CMD_DATA_1	GPIO_118	RFEE1_CLK
GPIO_37	FORCE_USB_BOOT	GPIO_78	WL_CMD_DATA_0	GPIO_119	RFEE1_DATA
GPIO_38		GPIO_79	WL_CMD_SET	GPIO_120	RFEE2_CLK
GPIO_39	MCAM_PWD_N	GPIO_80	WL_CMD_CLK	GPIO_121	RFEE2_DATA
GPIO_40	MCAM_RST_N	GPIO_81	FM_SSBI	GPIO_122	RFEE4_CLK

GPIO_123	RFEE4_DATA	GPIO_134	
GPIO_124		GPIO_135	FP_SPI_CLK
GPIO_125		GPIO_136	FP_SPI_CS
GPIO_126	RFEE3_CLK	GPIO_137	FP_SPI_MOSI
GPIO_127	RFEE3_DATA	GPIO_138	FP_SPI_MISO
GPIO_128		GPIO_139	USB_SS_SEL
GPIO_129	SCAM_RST_N	GPIO_140	FP_RST_N
GPIO_130	SCAM_PWD_N	GPIO_141	NFC_ESE_PWR_REQ
GPIO_131			
GPIO_132			
GPIO_133	SDCARD_DET_N		

PMI8952 GPIO/MPP Configuration For QRD8953

GPIO_1		MPP_1	
GPIO_2		MPP_2	GREEN_LED
		MPP_3	
		MPP_4	FLASH_STROBE_NOW

PM8953 GPIO/MPP Configuration For QRD8953

GPIO_1	CODEC_DIV_CLK	MPP_1	VDD_PX_BIAS_MPP_1
GPIO_2	NFC_CLK_REQ (SDCARD_DET_N)		
GPIO_3	UIM_BATT_ALARM	MPP_3	VREF_DAC_MPP_3
GPIO_4		MPP_4	QUIET_THERM
GPIO_5			
GPIO_6			
GPIO_7	VBUS_USB_IN		
GPIO_8	USB_ID		

GPIO TABLE

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER RESTRICTIONS, VIOLATION OF WHICH IS CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.		QUALCOMM CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.		QUALCOMM Technologies, Inc. 5775 Morehouse Drive San Diego, CA 92121-1714 U.S.A.
Title SCHEMATIC, CCA, MARK QRD8953_2-2, DVT1.1		Size 1200-PS12		Rev 1
Date 1/26/2018		Author 1/26/2018		Rev 1