SM-R895U_REV06

SM-R895U/F
Common

2021. 05. 13

ID : 11

sheet01 : RF, TRANCEIVER, L-FEMiD
sheet02 : BT / WiFi, GPS, NFC
sheet03 : AP, PMIC
sheet04 : WPC, INTERFACE
sheet05 : DISPLAY, SENSOR

TITLE	NOBLESSE			
SIZE A3	DWG NO	PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET	Sheet0-Cover	Date Drawing Date	

RF

L-FEMiD (QFM5515)

U1006
QFM5515

MMPA(QPA5580)

U1019
QPA5580

E-SIM

U1004
HERCULESWLCSP-N6

PA-DCDC

U1002
S2ABA01X01-6030

PA_THERM

Ext-SIM

SHANNON915

U1011
S5M9150X01-L030

TITLE	GALILEO_SMALL
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet1-RF
DATE	Drawing Date

CONNECTIVITY

U2002
BCM430132HKUBG

BT / WIFI

BT / WIFI Ant.

GPS

GND_SW

NFC

U2004
SN110UV4

LTE / BT ALL PB-SHORT

NFC_CLK_REQ DELETED

NFC_CLK_26M DELETED

NFC Load Switch NC

TITLE	NOBLESSE
SIZE	A2
DWG NO	PDM NUMBER
REV	Rev
SHEET	Sheet2-Connectivity
DRAWN BY	User Name
Drawing Date	

AP / PMIC

JTAG



BOOT MODE

SKU CHECK





HW ID : 11



VER	R1	R2	R3	R4	PCB VERSION
00	100K	100K	OPEN	OPEN	WISE_Large_REV00
01	33K	100K	100K	OPEN	WISE_Large_REV01
02	100K	100K	100K	OPEN	WISE_Large_REV02
03	300K	100K	100K	OPEN	WISE_Large_REV03
04	OPEN	100K	100K	OPEN	WISE_Large_REV04
05	100K	33K	OPEN	100K	
06	33K	33K	100K	100K	
07	100K	33K	100K	100K	
08	300K	33K	100K	100K	
09	OPEN	33K	100K	100K	
10	100K	100K	OPEN	100K	WISE_Large_REV05
11	33K	100K	100K	100K	WISE_Large_REV06
12	100K	100K	100K	100K	
13	300K	100K	100K	100K	
14	OPEN	100K	100K	100K	
15	100K	300K	OPEN	100K	
16	33K	300K	100K	100K	
17	100K	300K	100K	100K	
18	300K	300K	100K	100K	
19	OPEN	300K	100K	100K	
21	100K	OPEN	OPEN	100K	
22	33K	OPEN	100K	100K	
23	100K	OPEN	100K	100K	
24	300K	OPEN	100K	100K	

UCP3000

SC55515XBA-B030

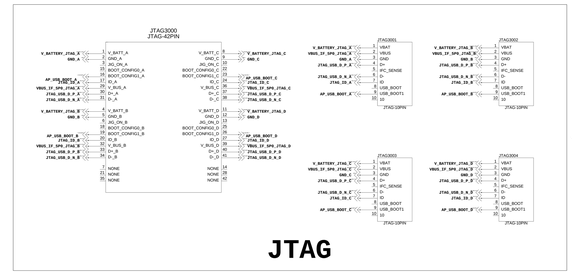

JTAG

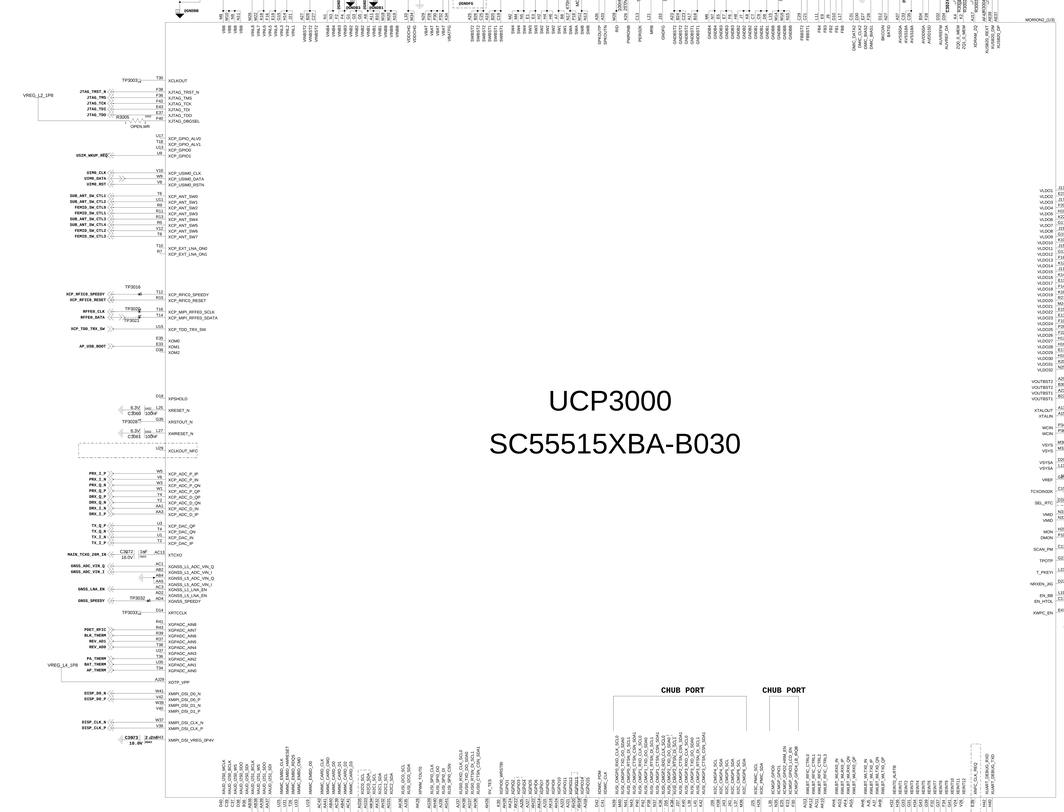

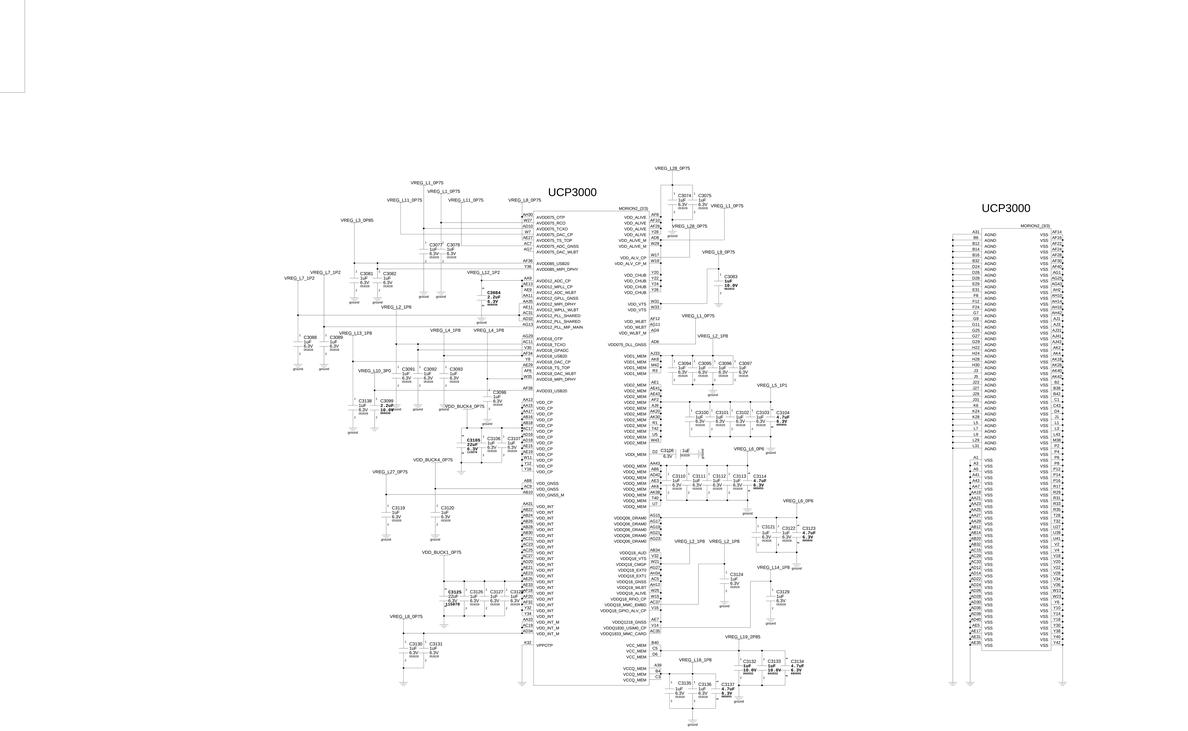

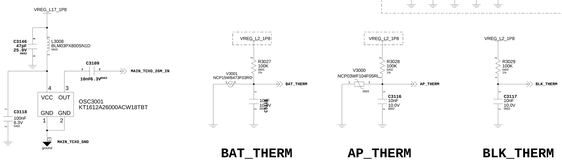



TITLE	NOBLESSE
SIZE	A1
DOCUMENT NUMBER	PCM_NUMBER
REV	Rev
SHEET	Sheet1 of
DRAWN BY	User Name
DATE	Drawing Date

POWER & IF INTERFACE

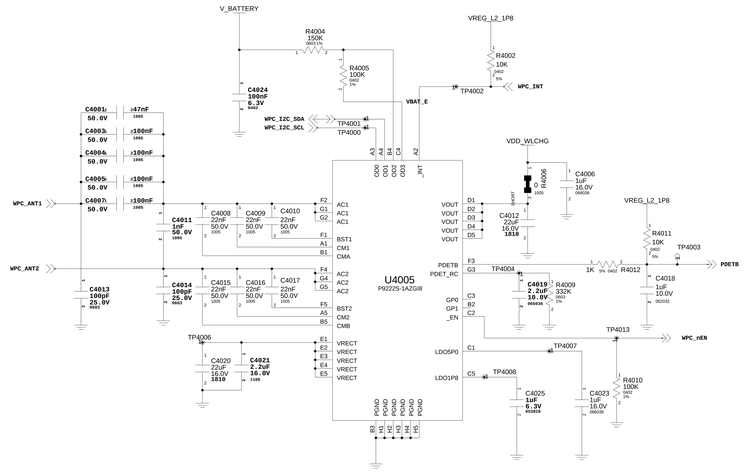

WPC

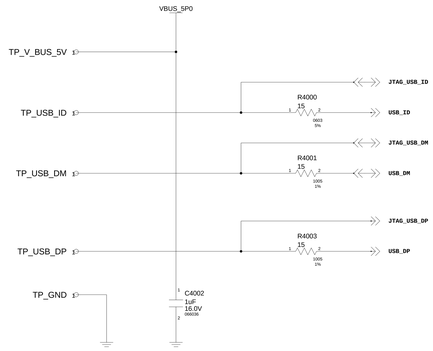

POGO

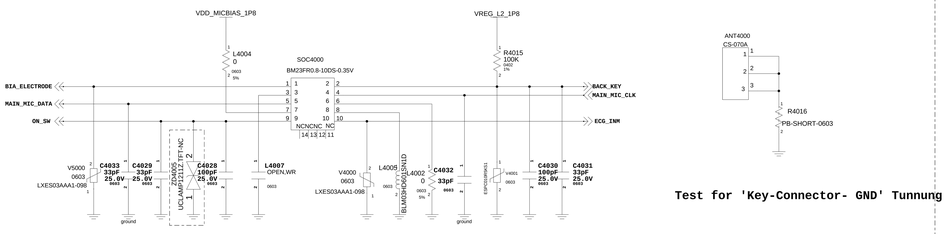

Test for 'Key-Connector- GND' Tunnung



KEY ECG BIA MIC FPCB



SPEAKER



BATTERY

TITLE	NOBLESSE		
SIZE A1	DWG NO PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET Sheet3.PM	DATE Drawing Date	

DISPLAY & SENSOR

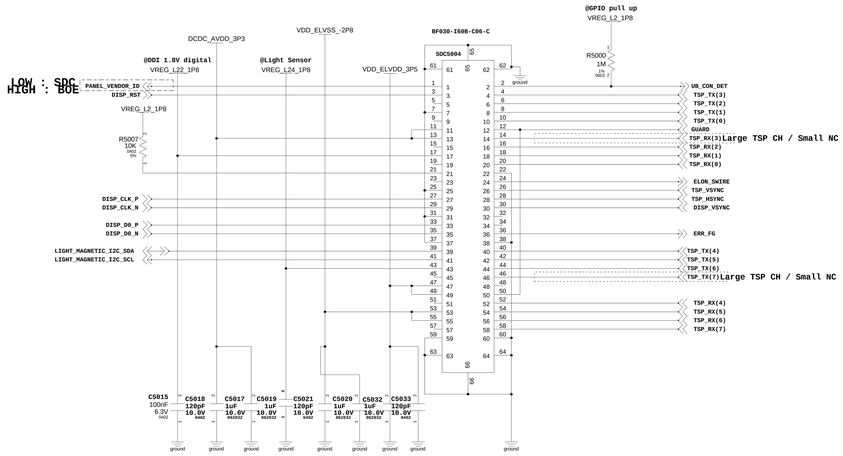

UB CONNECTOR

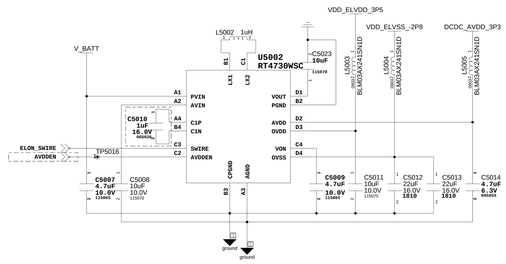

UB DC-DC

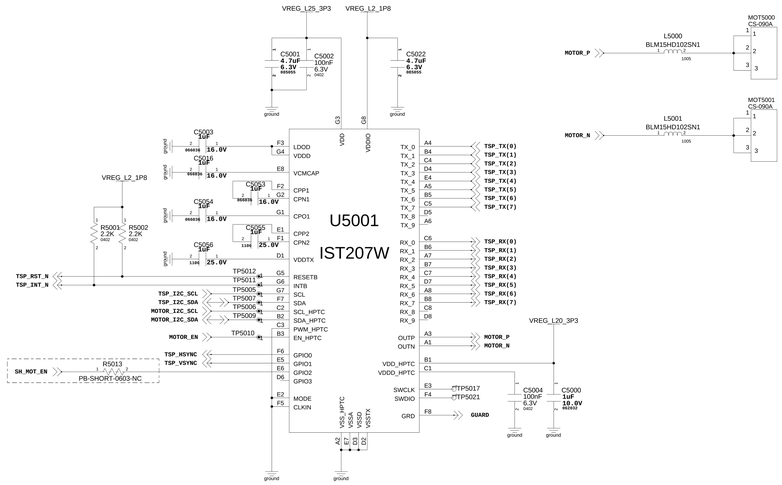

TSP & MOTOR IC

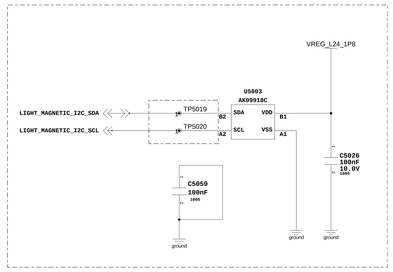

MAGNETIC (WISE)



BARO FPCB

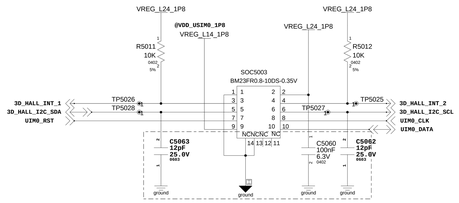

HALL IC (WISE)

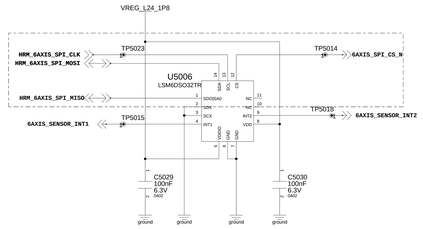

6-AXIS

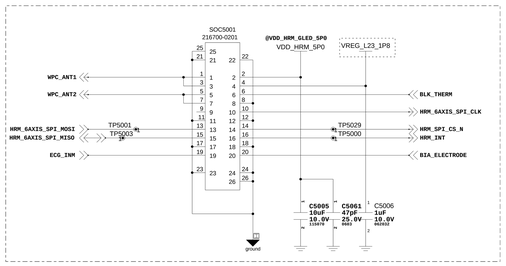

HRM Connector

TITLE	NOBLESSE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet5_Display
DATE	Drawing Date

SM-R890_REV06

2021. 05. 14

ID : 11

sheet01 : RF, TRANCEIVER, L-FEMiD
sheet02 : BT / WiFi, GPS, NFC
sheet03 : AP, PMIC
sheet04 : WPC, INTERFACE
sheet05 : DISPLAY, SENSOR

TITLE	NOBLESSE			
SIZE A3	DWG NO	PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET	Sheet0-Cover	Date Drawing Date	

RF

L-FEMiD (QFM5515)

U1006

QFM5515-NC

MMPA(QPA5580)

U1019

QPA5580-NC

E-SIM

U1004

HERCULESWLCSP-NC

PA-DCDC

U1002

SZABA01X01-6030-NC

PA_THERM

Ext-SIM

SHANNON915

U1011

S5M9150X01-L030

TITLE	GALILEO_SMALL
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
SHEET	Sheet1 -
DRAWN BY	User Name
DATE	Drawing Date

CONNECTIVITY

U2002
BCM430132HKUBG

BT / WIFI

BT / WIFI Ant.

GPS

NFC

GND_SW

U2004
SN110TV2

LTE / BT ALL PB-SHORT

NFC_CLK_REQ DELETED

NFC_CLK_26M DELETED

NFC Load Switch NC

TITLE	NOBLESSE
SIZE	A2
DWG NO	PDM NUMBER
REV	Rev
SHEET	Sheet2-Connectivity
DRAWN BY	User Name
Drawing Date	

AP / PMIC

JTAG



BOOT MODE

SKU CHECK

UCP3000
SC55515XBA-B030

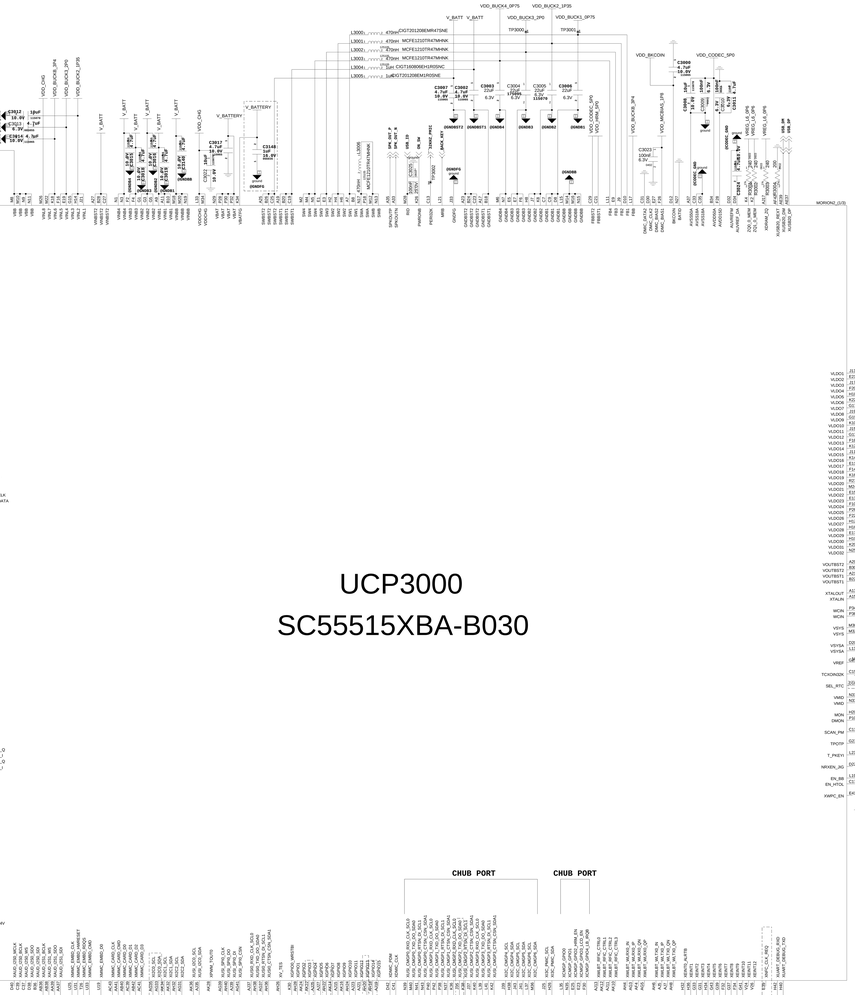

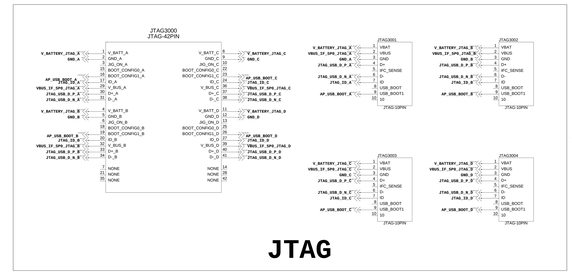

JTAG



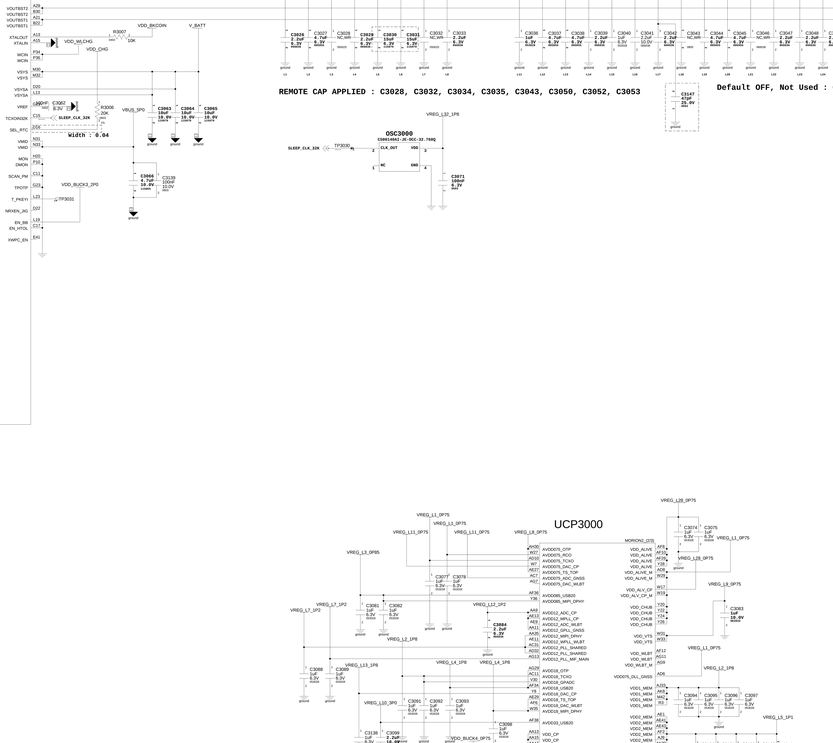



HW ID : 11

VER	R1	R2	R3	R4	PCB VERSION
00	100K	100K	OPEN	OPEN	WISE_Large_REV00
01	33K	100K	100K	OPEN	WISE_Large_REV01
02	100K	100K	100K	OPEN	WISE_Large_REV02
03	300K	100K	100K	OPEN	WISE_Large_REV03
04	OPEN	100K	100K	OPEN	WISE_Large_REV04
05	100K	33K	OPEN	100K	
06	33K	33K	100K	100K	
07	100K	33K	100K	100K	
08	300K	33K	100K	100K	
09	OPEN	33K	100K	100K	
10	100K	100K	OPEN	100K	WISE_Large_REV05
11	33K	100K	100K	100K	WISE_Large_REV06
12	100K	100K	100K	100K	
13	300K	100K	100K	100K	
14	OPEN	100K	100K	100K	
15	100K	300K	OPEN	100K	
16	33K	300K	100K	100K	
17	100K	300K	100K	100K	
18	300K	300K	100K	100K	
19	OPEN	300K	100K	100K	
21	100K	OPEN	OPEN	100K	
22	33K	OPEN	100K	100K	
23	100K	OPEN	100K	100K	
24	300K	OPEN	100K	100K	

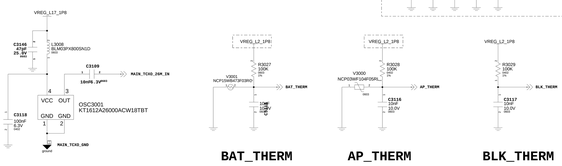



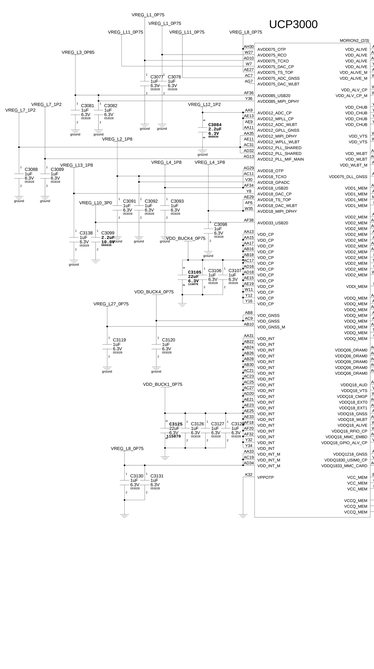

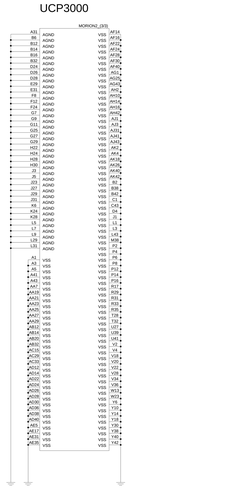

POWER & IF INTERFACE

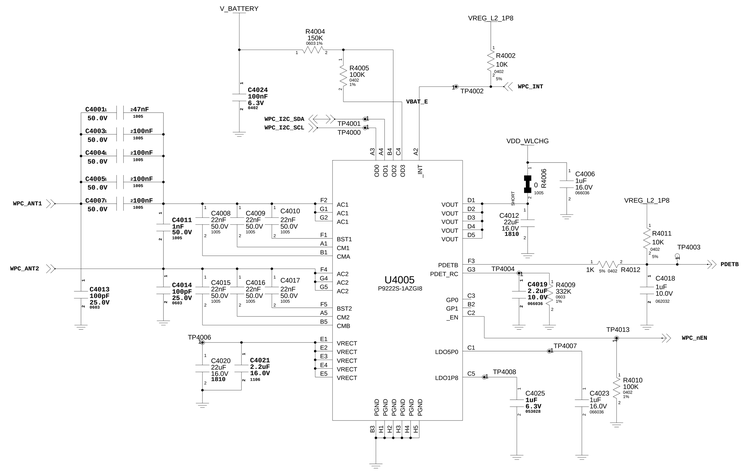

WPC

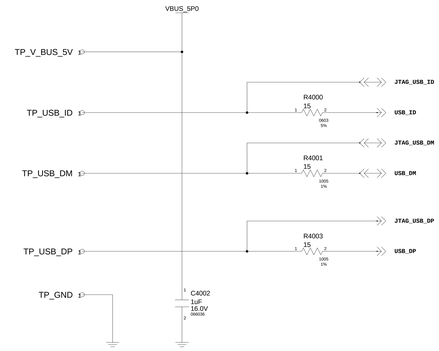

POGO

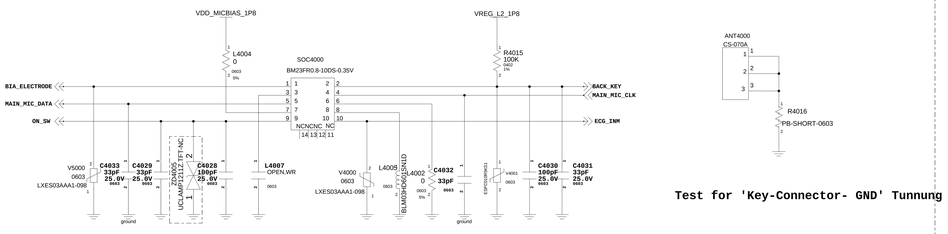

Test for 'Key-Connector- GND' Tunnung

KEY ECG BIA MIC FPCB



SPEAKER



BATTERY

TITLE	NOBLESSE		
SIZE A1	DWG NO PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET 3 OF 4	DATE Drawing Date	

DISPLAY & SENSOR

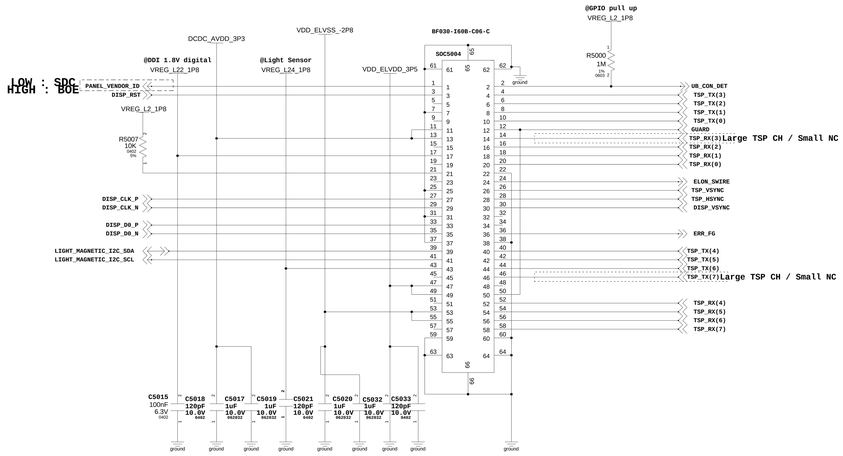

UB CONNECTOR

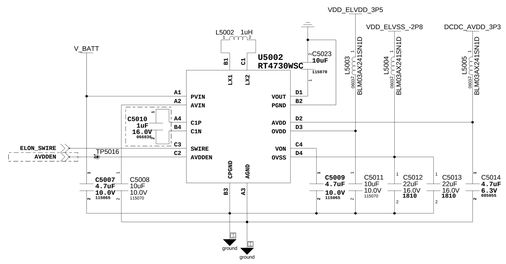

UB DC-DC

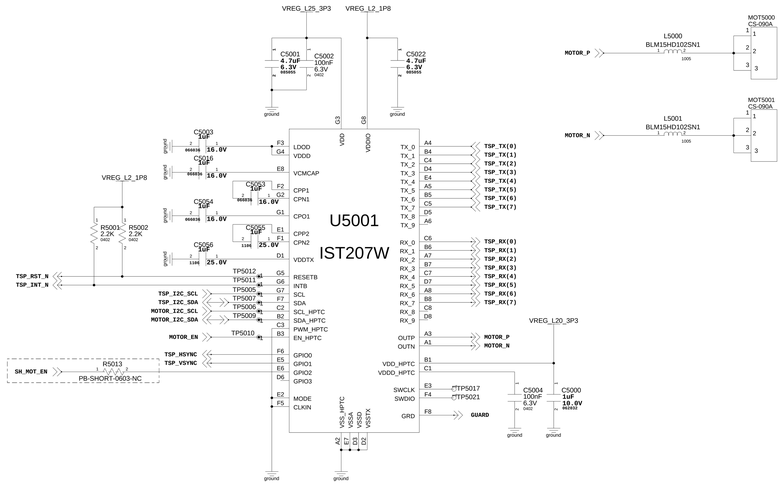

TSP & MOTOR IC

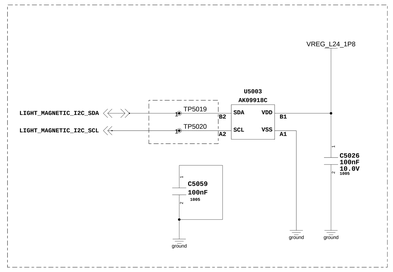

MAGNETIC (WISE)



BARO FPCB

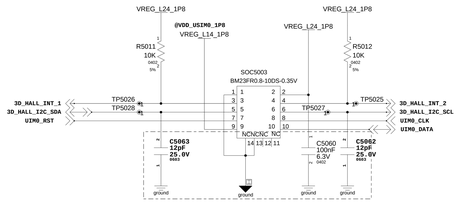

HALL IC (WISE)

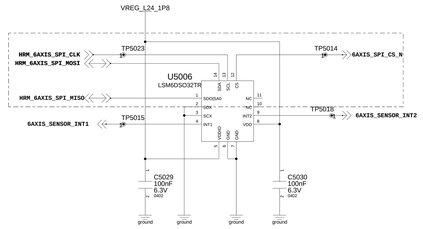

6-AXIS

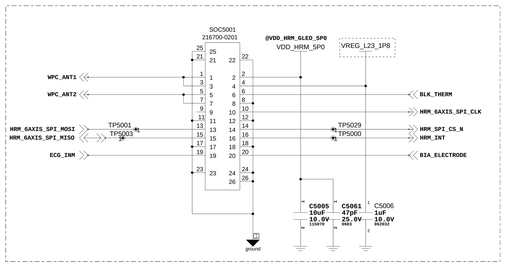

HRM Connector

TITLE	NOBLESSE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet5_Display
DATE	Drawing Date

SM-R8950_REV06

2021. 05. 13

ID : 11

sheet01 : RF, TRANCEIVER, L-FEMiD
sheet02 : BT / WiFi, GPS, NFC
sheet03 : AP, PMIC
sheet04 : WPC, INTERFACE
sheet05 : DISPLAY, SENSOR

TITLE	NOBLESSE			
SIZE A3	DWG NO	PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET	Sheet0-Cover	Date Drawing Date	

RF

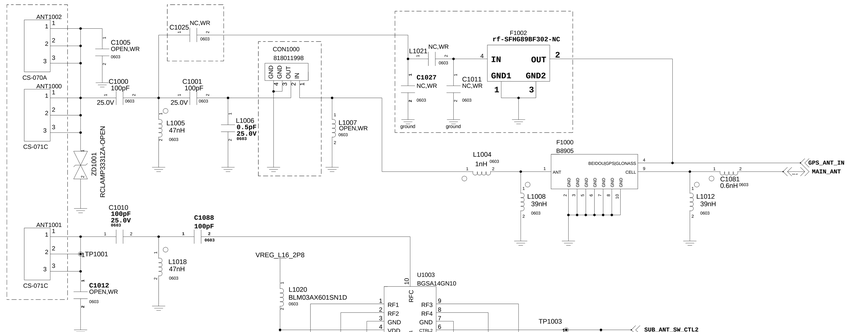

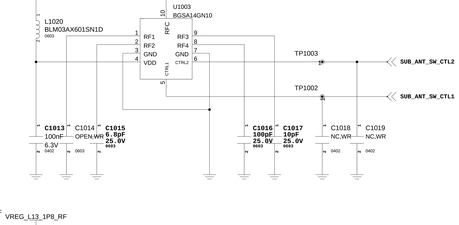



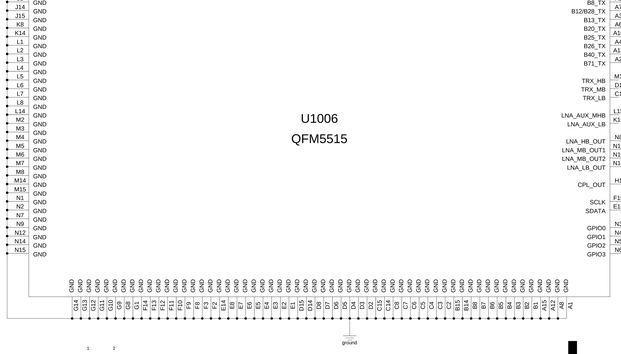

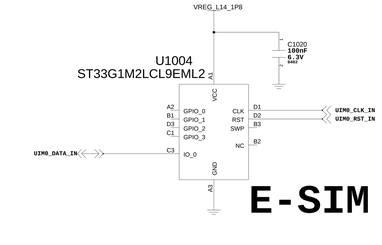

E-SIM

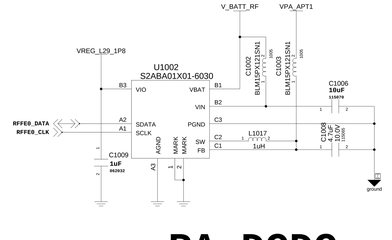

PA-DCDC



PA_THERM

Ext-SIM

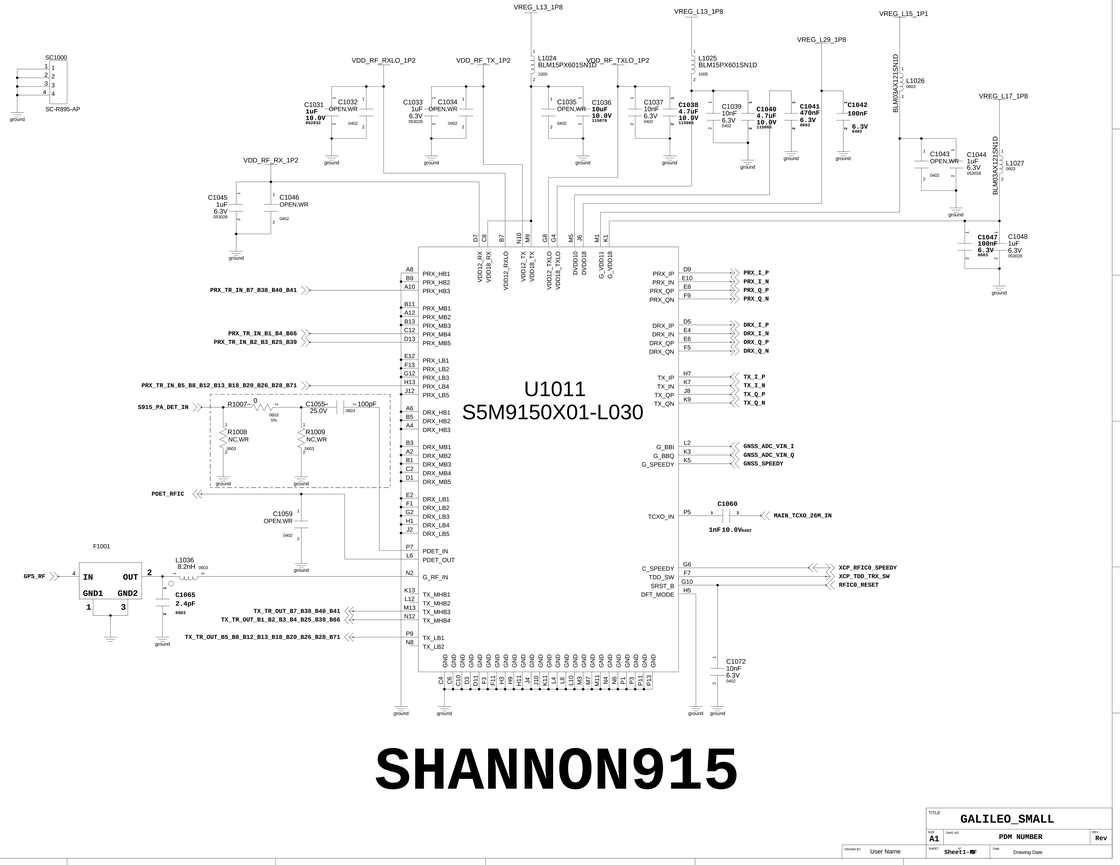

SHANNON915

U1011
S5M9150X01-L030

L-FEMiD (QFM5515)

MMPA(QPA5580)

CONNECTIVITY

U2002
BCM430132HKUBG

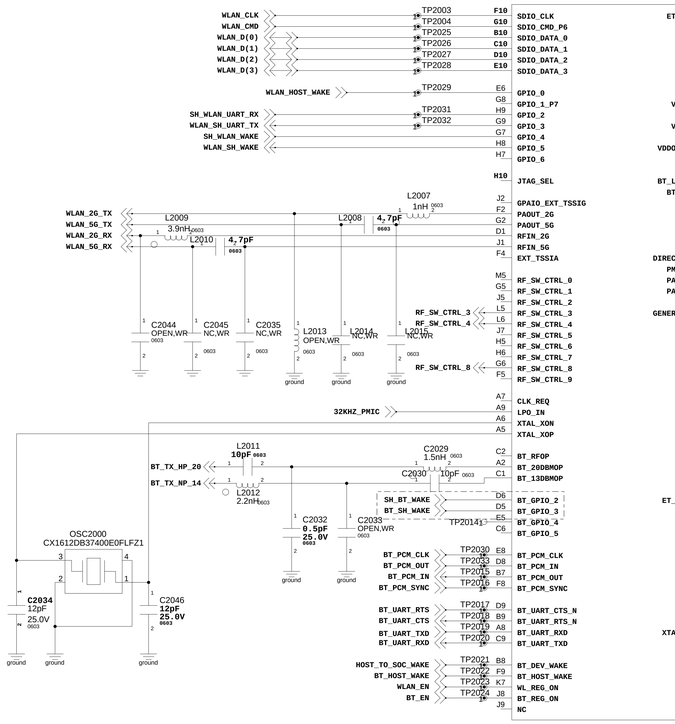

BT / WIFI Ant.

BT / WIFI

GND_SW

GPS

NFC

TITLE	NOBLESSE
SIZE	A2
DWG NO	PDM NUMBER
REV	Rev
SHEET	Sheet2-Connectivity
DRAWN BY	User Name
Drawing Date	

AP / PMIC

JTAG



BOOT MODE

SKU CHECK





HW ID : 11

VER	R1	R2	R3	R4	PCB VERSION
00	100K	100K	OPEN	OPEN	WISE_Large_REV00
01	33K	100K	100K	OPEN	WISE_Large_REV01
02	100K	100K	100K	OPEN	WISE_Large_REV02
03	300K	100K	100K	OPEN	WISE_Large_REV03
04	OPEN	100K	100K	OPEN	WISE_Large_REV04
05	100K	33K	OPEN	100K	
06	33K	33K	100K	100K	
07	100K	33K	100K	100K	
08	300K	33K	100K	100K	
09	OPEN	33K	100K	100K	
10	100K	100K	OPEN	100K	WISE_Large_REV05
11	33K	100K	100K	100K	WISE_Large_REV06
12	100K	100K	100K	100K	
13	300K	100K	100K	100K	
14	OPEN	100K	100K	100K	
15	100K	300K	OPEN	100K	
16	33K	300K	100K	100K	
17	100K	300K	100K	100K	
18	300K	300K	100K	100K	
19	OPEN	300K	100K	100K	
21	100K	OPEN	OPEN	100K	
22	33K	OPEN	100K	100K	
23	100K	OPEN	100K	100K	
24	300K	OPEN	100K	100K	

UCP3000
SC55515XBA-B030

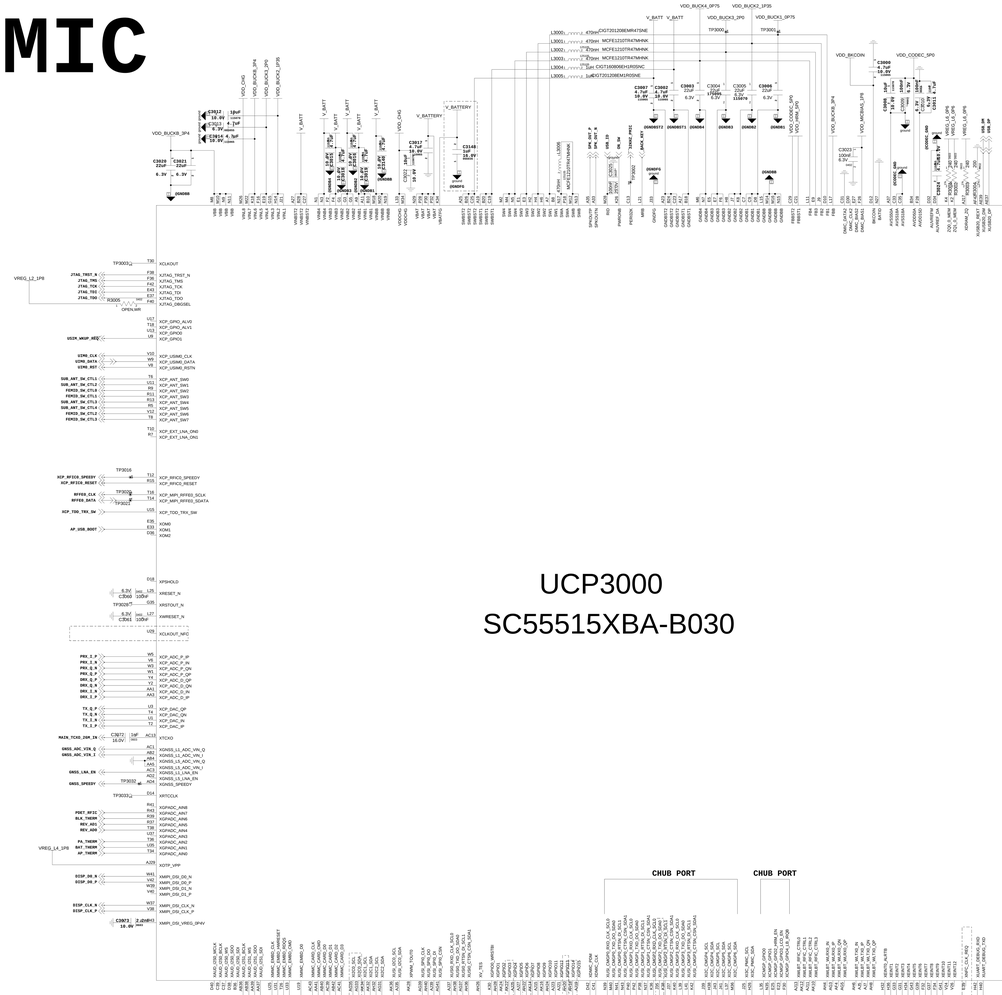

POWER & IF INTERFACE

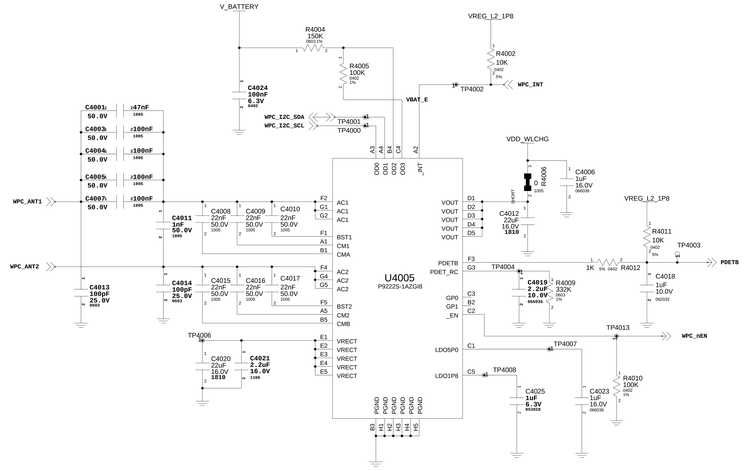

WPC

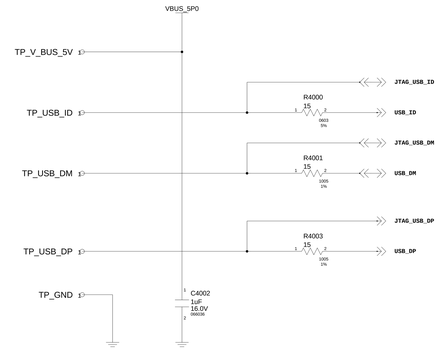

POGO

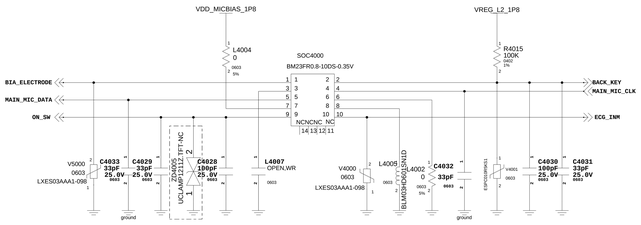

KEY ECG BIA MIC FPCB

Test for 'Key-Connector- GND' Tunnung



SPEAKER



BATTERY

TITLE: NOBLESSE			
SIZE: A1	DWG NO: PDM NUMBER		REV: Rev
DRAWN BY: User Name	SHEET: Sheet3.SM	DATE: Drawing Date	

DISPLAY & SENSOR

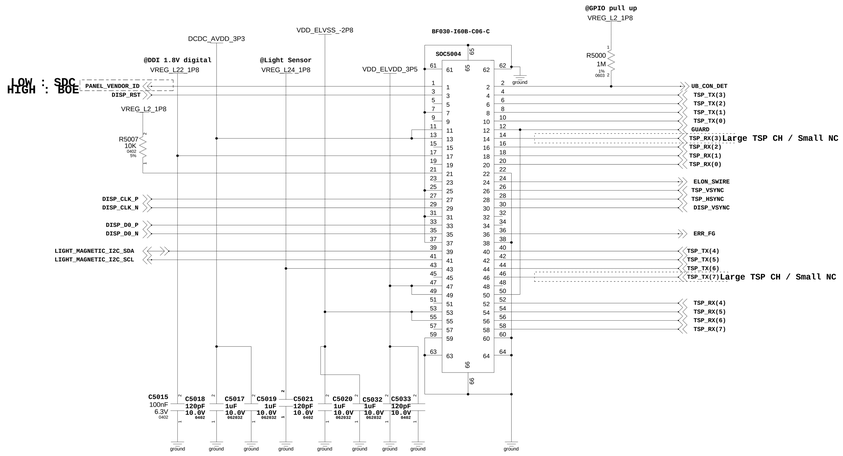

UB CONNECTOR

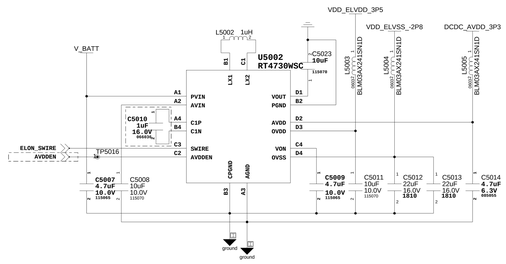

UB DC-DC

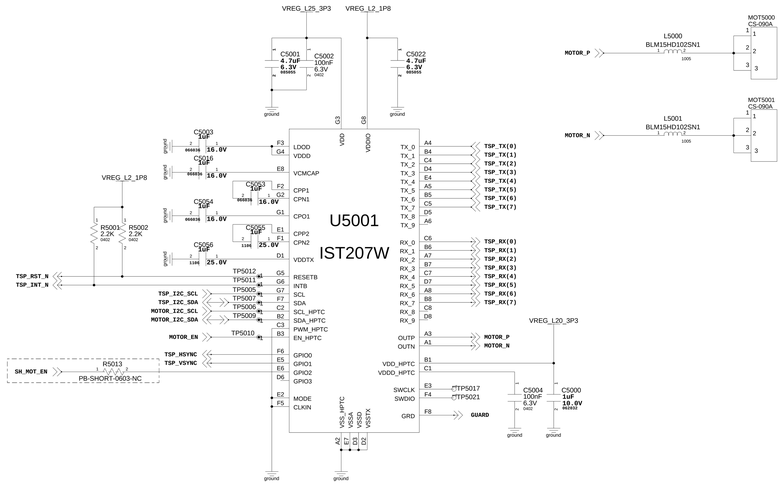

TSP & MOTOR IC

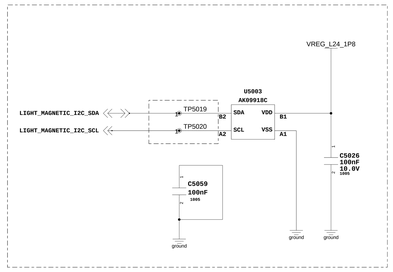

MAGNETIC (WISE)



BARO FPCB

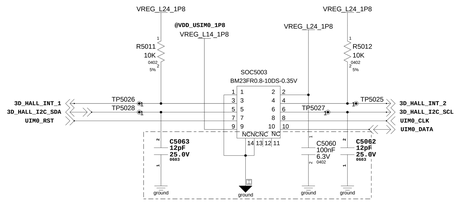

HALL IC (WISE)

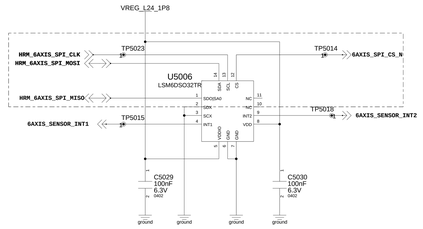

6-AXIS

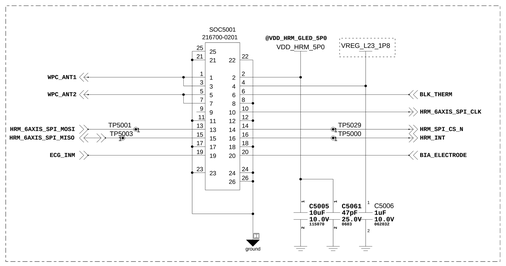

HRM Connector

TITLE	NOBLESSE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet5_Display
DATE	Drawing Date

SM-R895U/F/R8950/R890
Common

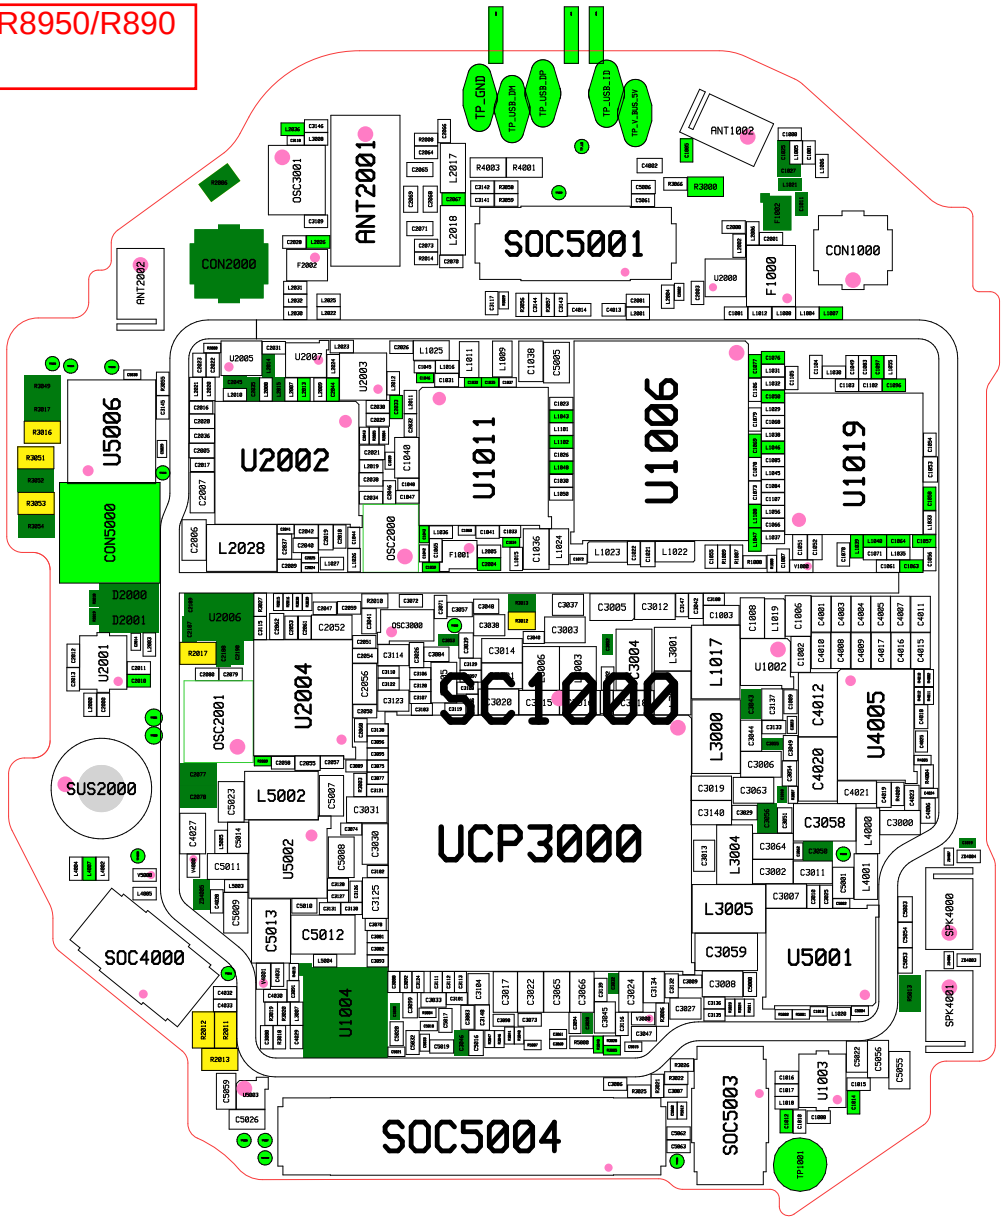

SM-R895U/F/R8950/R890
Common

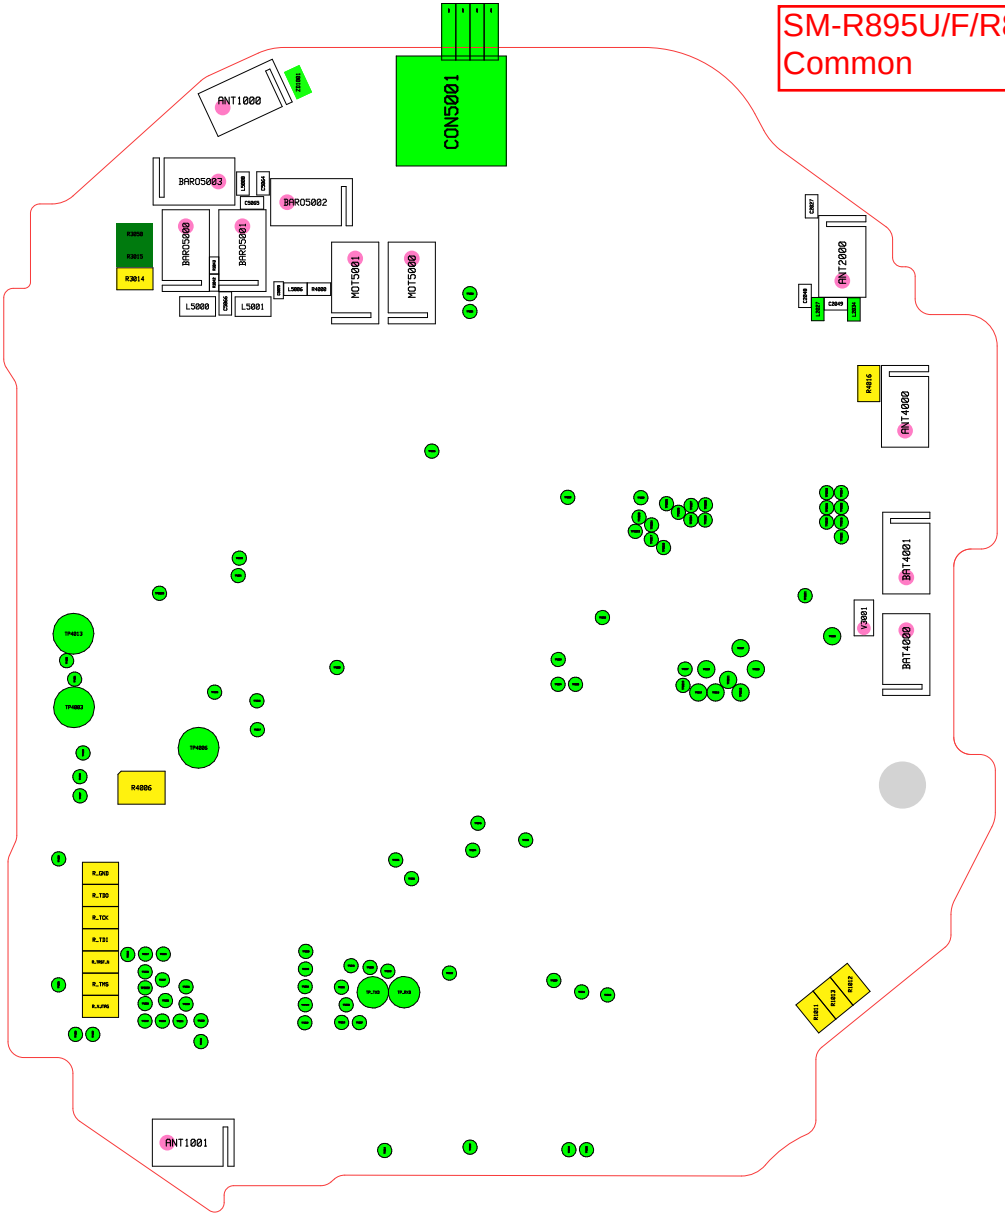

SM-R885U_REV0.6_BOM

SM-R885U/F
Common

2021. 05. 25
HW ID : 06

sheet01 : RF, TRANCEIVER, L-FEMiD
sheet02 : BT / WiFi, GPS, NFC
sheet03 : AP, PMIC
sheet04 : WPC, MIC, INTERFACE
sheet05 : DISPLAY, SENSOR

TITLE	WISE			
SIZE A3	DWG NO	PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET	Sheet0-Cover	Date Drawing Date	

RF

RFS1000 LTE : 3705-002268
RFS1000 BT : 0202-002125(PB-Short)

F1002 need change to NC lms when you make SMD data

Rear Ant C-Clip
Front Ant C-Clip
Front Ant C-Clip
ANT1000 CS-070A
ANT1001 CS-116A
ANT1002 CS-116A
C1000 OPEN,WR
C1003 100pF 25.0V
C1004 3.9nH
C1008 47nH
C1012 47nH
C1009 OPEN,WR
C1010 22nH
C1011 18nH
C1006 0.6nH
C1082 OPEN,WR
C1084 OPEN,WR
C1085 OPEN,WR
C1056 OPEN,WR
C1100 OPEN,WR
RFS1000 81801998
F1000 88905
F1002 rf-SFHG058BF302-NC
ZD1000 PESD4V0W1BSF-OPEN
GPS_ANT_IN
MAIN_ANT
C1009 100pF
C1010 100pF
TP1000
C1012 47nH
C1013 OPEN,WR
VREG_L16_2P8
L1017 BLM03AX601SN1D
U1001 BGSA14GN10
TP1002
TP1004
SUB_ANT_SW_CTL2
SUB_ANT_SW_CTL1
C1015 100nF 6.3V
C1016 OPEN,WR
C1017 0.5pF 25.0V
C1018 100pF 25.0V
C1019 10pF 25.0V
C1020 OPEN,WR
C1021 OPEN,WR

PA-DCDC

VREG_L29_1P8
U1000 S2ABA01X01-6030
V_BATT_RF
VPA_APT1
L1002 BLM15PX221SN1
L1003 BLM15PX221SN1
RFFE0_DATA
RFFE0_CLK
C1001 10uF 10.0V
C1005 4.7uF 10.0V
C1006 1uF 10.0V
C1086 OPEN,WR
L1013 1uH
VREG_L12_1P2
VDD_RF_RXLO_1P2
VDD_RF_TXLO_1P2
VDD_RF_TX_1P2
VDD_RF_RX_1P2
L1009 BLM03AX121SN1D
L1007 BLM03AX121SN1D
L1014 BLM15PX330SN1D

PA_THERM

VREG_L29_1P8
U1000
NCP03WF104F05RL
PA_THERM
R1001 100K
C1002 10nF 10.0V

GND_SW

SUS1000
C1081 OPEN,WR
L1016 47nH
C1011 100pF 25.0V
VREG_L16_2P8
L1018 BLM03AX601SN1D
U1002
TP1001
TP1003
SUB_ANT_SW_CTL4
SUB_ANT_SW_CTL3
C1028 100nF 6.3V
C1024 1.8pF
C1025 10pF
C1026 100pF
C1027 6.8pF
C1022 OPEN,WR
C1023 OPEN,WR

E-SIM

VREG_L14_1P8
R1002 PB-SHORT-0603-NC
U1003 HERCULES WLCSP-NC
C1014 OPEN,WR
R1003 PB-SHORT-0603-NC
R1004 PB-SHORT-0603-NC
R1005 PB-SHORT-0603-NC
UIM0_CLK
UIM0_RST
UIM0_DATA
GPIO_0
GPIO_1
GPIO_2
GPIO_3
IO_0
CLK
RST
SWP
NC
VCC
GND

L-FEMiD

U1004
QFM5515

L1019 33ohm,1005,REAL,60(Typ.),710(Typ.) BLM15PX330SN1D
L1020 33ohm,1005,REAL,60(Typ.),710(Typ.) BLM15PX330SN1D
VREG_L29_1P8
VREG_L29_1P8_RF
VREG_L13_1P8_RF
C1029 2.2uF 6.3V
C1030 100nF 6.3V
MAIN_ANT
TX_PA_OUT_B1
TX_PA_OUT_B2
TX_PA_OUT_B3_B4_B39_B66
TX_PA_OUT_B5_B18_B26
TX_PA_OUT_B7_B38_B41
TX_PA_OUT_B8
TX_PA_OUT_B12_B28
TX_PA_OUT_B13
TX_PA_OUT_B20
TX_PA_OUT_B40
TX_PA_OUT_B71
PRX_TR_IN_B2_B3_B25_B39
PRX_TR_IN_B1_B4_B66
PRX_TR_IN_B5_B8_B12_B13_B18_B20_B26_B28_B71
S915_PA_DET_IN
RFFE0_CLK
RFFE0_DATA
FEMID_SW_CTL0
FEMID_SW_CTL1
FEMID_SW_CTL2
FEMID_SW_CTL3

MMPA

QPA5580
U1006
VREG_L29_1P8
V_BATT_RF
VPA_APT1
C1056 2.2uF 6.3V
C1057 2.2uF 10.0V
C1054 2.2uF 10.0V
C1055 100pF 25.0V
C1087 OPEN,WR
C1088 OPEN,WR
RFFE0_DATA
RFFE0_CLK
TX_TR_OUT_B5_B8_B12_B13_B18_B20_B26_B28_B71
TX_TR_OUT_B1_B2_B3_B4_B25_B39_B66
TX_TR_OUT_B7_B38_B40_B41
C1064 100pF
C1067 OPEN,WR
C1068 OPEN,WR
C1070 82pF
C1071 OPEN,WR
C1072 0.5pF
C1076 33pF
C1077 1.8nH
C1078 0.5pF
L1041 1.8nH
L1044 1.8nH
L1051 OPEN,WR
L1031 2.2nH
L1032 0.5pF
L1033 OPEN,WR
L1035 2.2nH
C1059 0.5pF
C1060 1.8nH
L1037 3.9nH
C1062 0.5pF
L1039 OPEN,WR
L1029 1.8nH
C1053 1.2pF
L1030 10nH
L1034 27pF
C1058 10nH
L1036 0.5pF
L1038 1.2nH
C1063 OPEN,WR
L1040 OPEN,WR
L1043 3.3nH
L1045 1pF
L1046 OPEN,WR
L1049 100pF
C1075 6.2nH
L1050 OPEN,WR
L1053 1.2nH
L1054 4.7nH
L1055 OPEN,WR
L1047 1nH
C1073 0.5pF
L1048 4.7nH
L1052 2.2nH
C1079 0.5pF
C1080 OPEN,WR

SHANNON915

U1005
S5M9150X01-L030
VREG_L13_1P8
VREG_L15_1P1
VREG_L17_1P8
VREG_L29_1P8
VDD_RF_TXLO_1P2
L1024 BLM15PX601SN1D
L1025 BLM15PX601SN1D
L1027 BLM03AX121SN1D
L1028 BLM03AX121SN1D
C1035 1uF 10.0V
C1036 OPEN,WR
C1037 1uF 6.3V
C1038 OPEN,WR
C1083 4.7uF 6.3V
C1039 OPEN,WR
C1040 10uF 10.0V
C1041 10nF 6.3V
C1042 4.7uF 10.0V
C1043 10nF 6.3V
C1044 4.7uF 6.3V
C1045 470nF 6.3V
C1046 100nF 6.3V
C1047 OPEN,WR
C1048 1uF 6.3V
C1049 1uF 6.3V
C1050 OPEN,WR
C1051 100nF 6.3V
C1052 1uF 6.3V
C1061 100pF 25.0V
R1006 0
R1007 OPEN,WR
R1008 OPEN,WR
C1065 OPEN,WR
C1066 1nF 10.0V
C1074 10nF 6.3V
L1042 8.2nH
C1069 2.4pF 25.0V
F1001
PRX_TR_IN_B7_B38_B40_B41
PRX_TR_IN_B1_B4_B66
PRX_TR_IN_B2_B3_B25_B39
PRX_TR_IN_B5_B8_B12_B13_B18_B20_B26_B28_B71
S915_PA_DET_IN
PDET_RFIC
TX_TR_OUT_B7_B38_B40_B41
TX_TR_OUT_B1_B2_B3_B4_B25_B39_B66
TX_TR_OUT_B5_B8_B12_B13_B18_B20_B26_B28_B71
PRX_I_P
PRX_I_N
PRX_Q_P
PRX_Q_N
DRX_I_P
DRX_I_N
DRX_Q_P
DRX_Q_N
TX_I_P
TX_I_N
TX_Q_P
TX_Q_N
GNSS_ADC_VIN_I
GNSS_ADC_VIN_Q
GNSS_SPEEDY
MAIN_TCXO_26M_IN
RFIC0_SPEEDY
XCP_TO0_TRX_SW
RFIC0_RESET

TITLE	WISE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
SHEET	Sheet1-1
DRAWN BY	User Name
Date	Drawing Date

CONNECTIVITY

U2001
BCM430132HKUBG

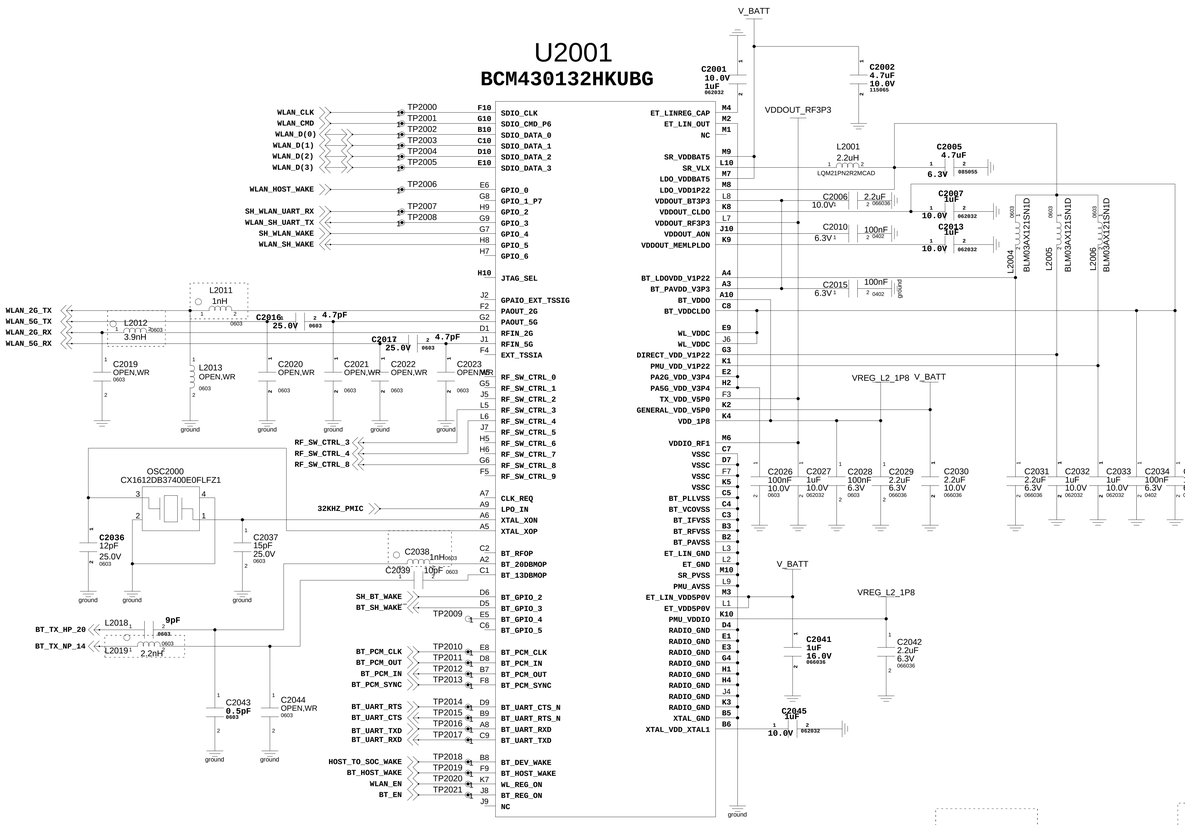

BT / WIFI

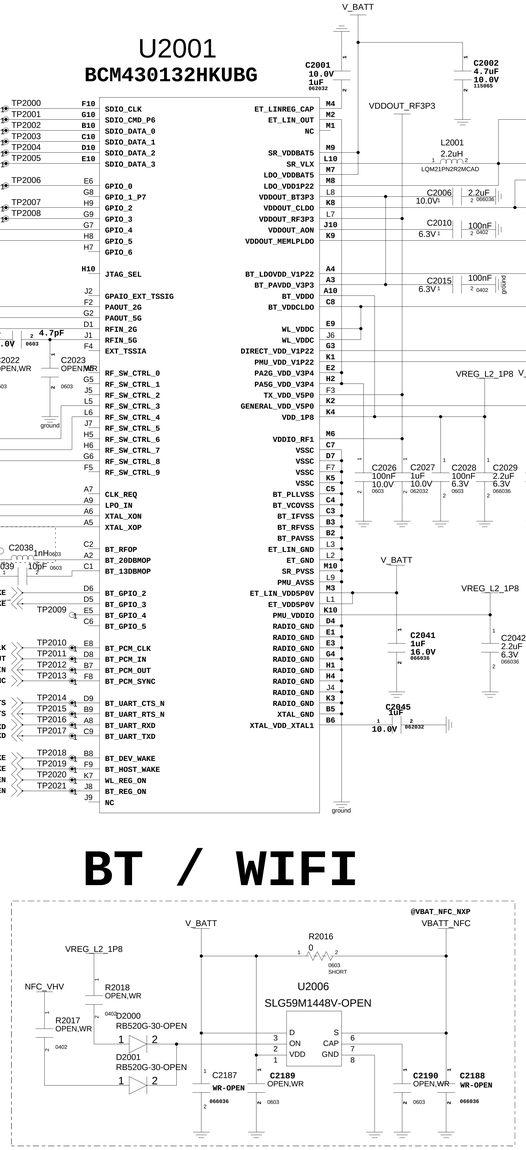

NFC Load Switch

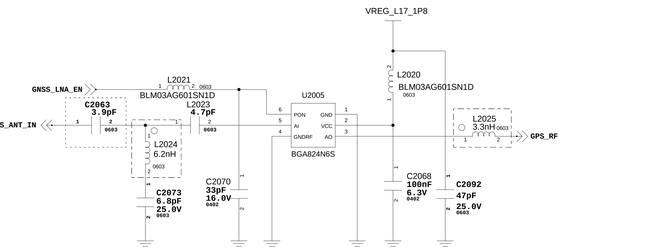

GPS

@MORION+S915

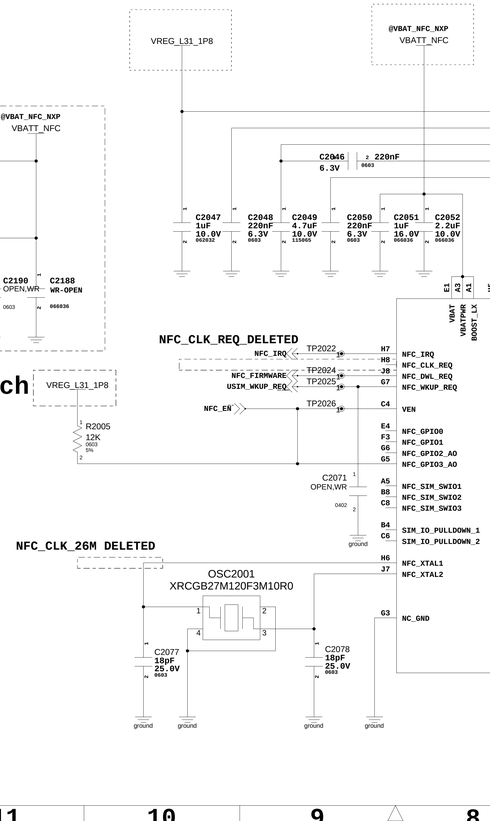

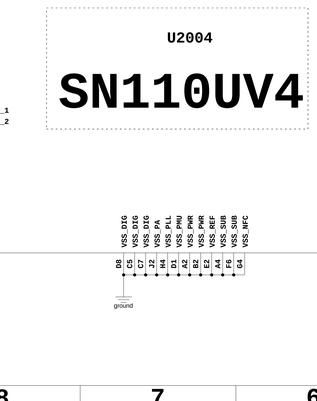

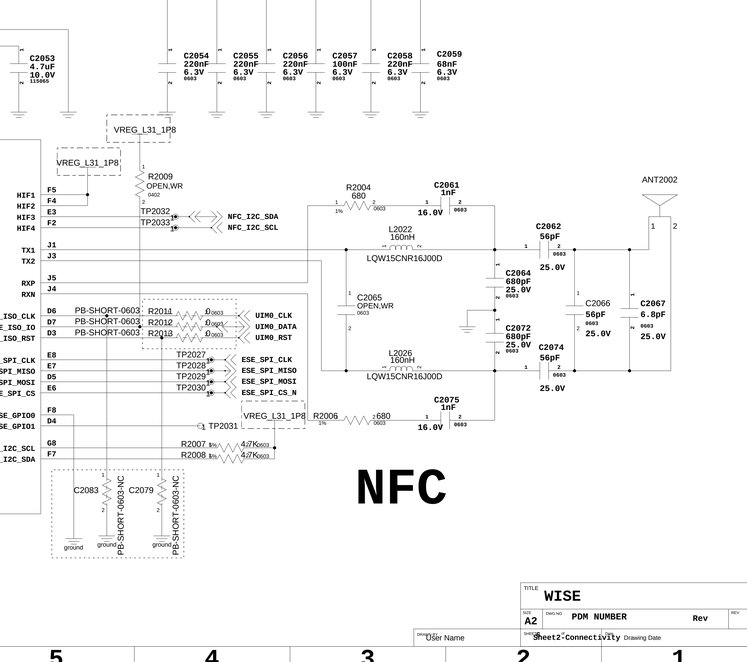

NFC

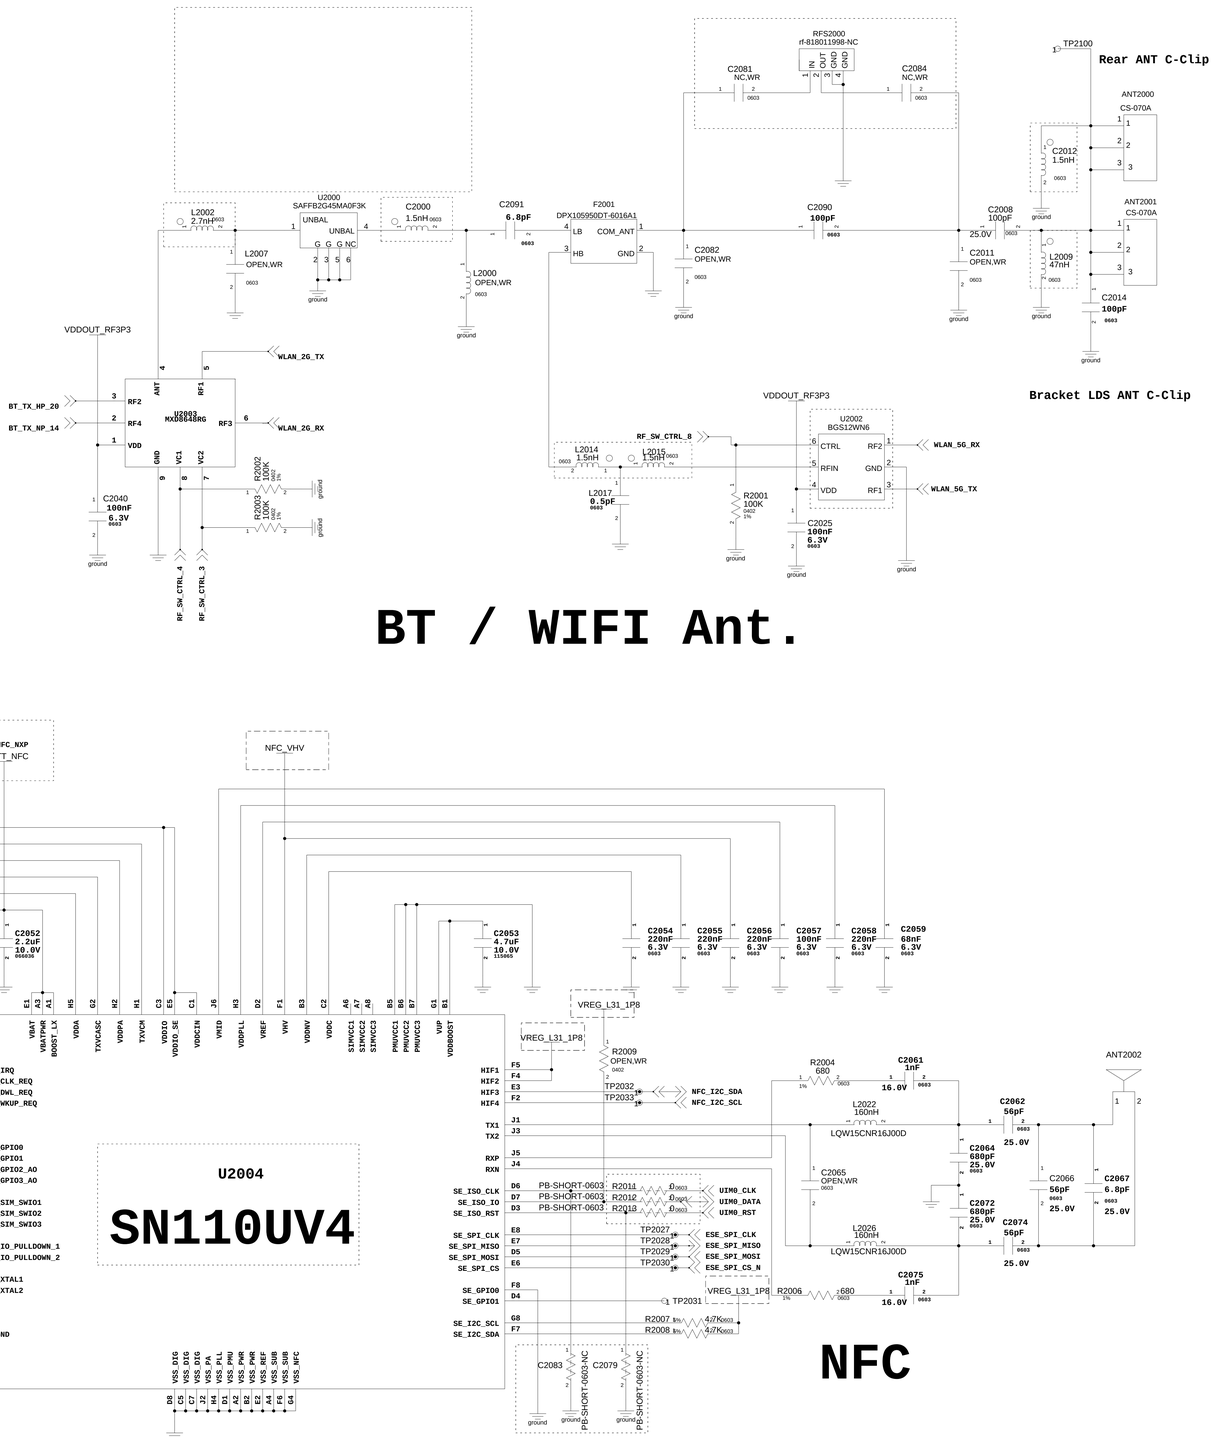

BT / WIFI Ant.

AP / PMIC

JTAG

LTE/BT MODEL CHECK



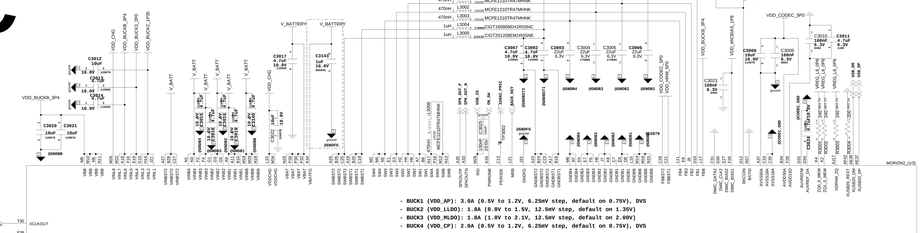

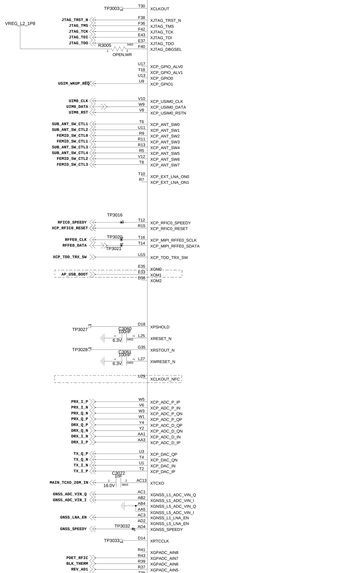
VREG_L2_1P8
XCXOUT
XJTAG_TRST_N
XJTAG_TMS
XJTAG_TCK
XJTAG_TDI
XJTAG_TDO
XJTAG_OBGSEL
XCP_GPIO_ALV0
XCP_GPIO_ALV1
XCP_GPIO0
XCP_GPIO_
XCP_USIM0_CLK
XCP_USIM0_DATA
XCP_USIM0_RSTN
XCP_ANT_SW0
XCP_ANT_SW1
XCP_ANT_SW2
XCP_ANT_SW3
XCP_ANT_SW4
XCP_ANT_SW5
XCP_ANT_SW6
XCP_ANT_SW7
XCP_EXT_LNA_GND
XCP_EXT_LNA_ORG
XCP_RFCS_SPEEDY
XCP_MIPI_RFFED_SCLK
XCP_MIPI_RFFED_SDATA
XCP_TDO_TRX_SW
XOM0
XOM1
XOM2
XPSHOLD
XRESET_N
XRSTOUT_N
XWRESET_N
XCLKOUT_NFC
XCP_ADC_P_IP
XCP_ADC_P_IN
XCP_ADC_P_QP
XCP_ADC_P_QN
XCP_ADC_D_QP
XCP_ADC_D_QN
XCP_ADC_D_IN
XCP_ADC_D_IP
XCP_DAC_QP
XCP_DAC_QN
XCP_DAC_IN
XCP_DAC_IP
XTCXO
XGNSS_LL_ADC_VIN_Q
XGNSS_LL_ADC_VINI_
XGNSS_LA_ADC_VIN_Q
XGNSS_LS_ADC_VINI_
XGNSS_LS_LNA_EN
XGNSS_SPEEDY
XRTCCLK
XGPADC_AIN0
XGPADC_AIN1
XGPADC_AIN2
XGPADC_AIN3
XGPADC_AIN4
XGPADC_AIN5
XGPADC_AIN6
XGPADC_AIN7
XGPADC_AIN8
XGPADC_AIN9
XGPADC_AIN10
XGPADC_AIN11
XGPADC_AIN12
XGPADC_AIN13
XGPADC_AIN14
XGPADC_AIN15
XGPADC_AIN16
XGPADC_AIN17
XGPADC_AIN18
XGPADC_AIN19
XGPADC_AIN20
XGPADC_AIN21
XGPADC_AIN22
XGPADC_AIN23
XGPADC_AIN24
XGPADC_AIN25
XGPADC_AIN26
XGPADC_AIN27
XGPADC_AIN28
XGPADC_AIN29
XGPADC_AIN30
XGPADC_AIN31
XGPADC_AIN32
XGPADC_AIN33
XGPADC_AIN34
XGPADC_AIN35
XGPADC_AIN36
XGPADC_AIN37
XGPADC_AIN38
XGPADC_AIN39

POWER & IF INTERFACE

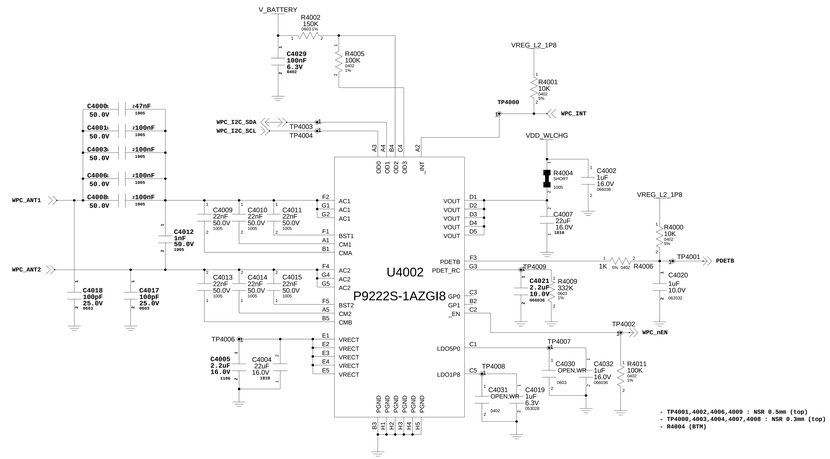

WPC



POGO

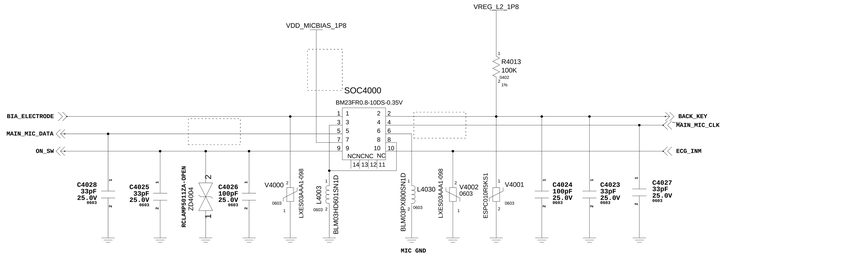



KEY ECG BIA Mic FPCB

Key FPCB Connector - GND contact for GPS tunning

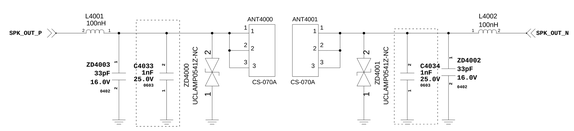

SPEAKER



BATTERY

TITLE: WISE			
SIZE: A1	DWG NO: PDM NUMBER		REV: Rev
DRAWN BY: User Name	SHEET: Sheet3.SM	DATE: Drawing Date	

DISPLAY & SENSOR

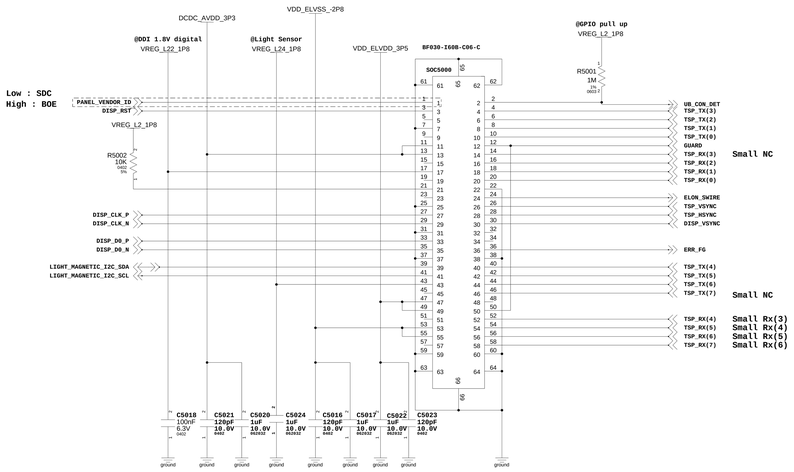

UB CONNECTOR

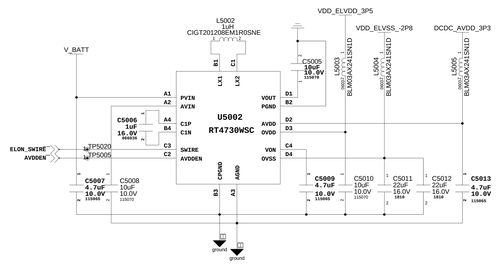

UB DC-DC

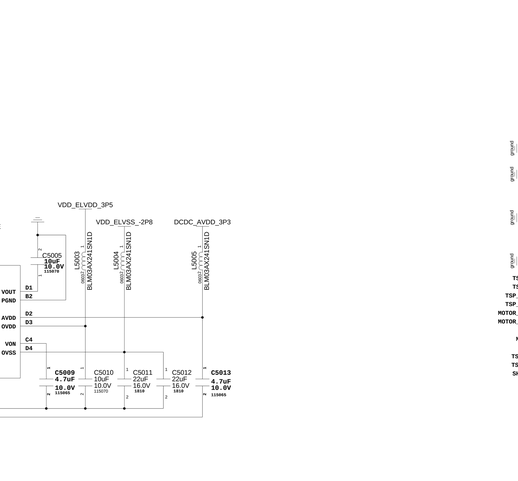

TSP & MOTOR IC



SHIELD CAN

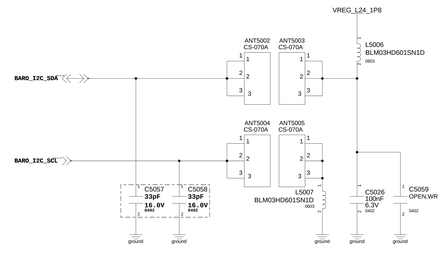

BARO FPCB

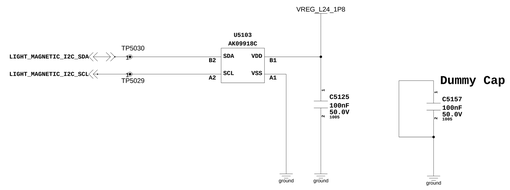

MAGNETIC SENSOR

CON5000
CON5001

QR-CODE

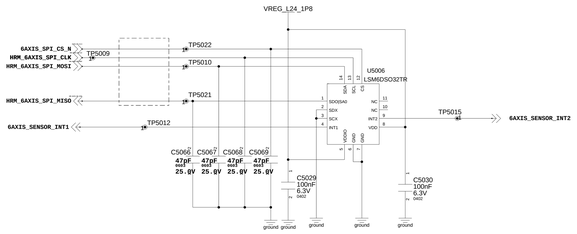

6-AXIS

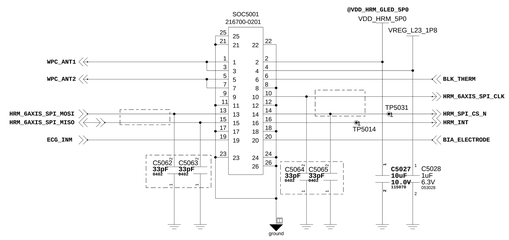

HRM Connector

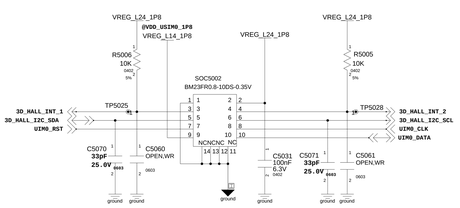

HALL IC (WISE)

TITLE	WISE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet5-Display
DATE	Drawing Date

SM-R885U/F
Common

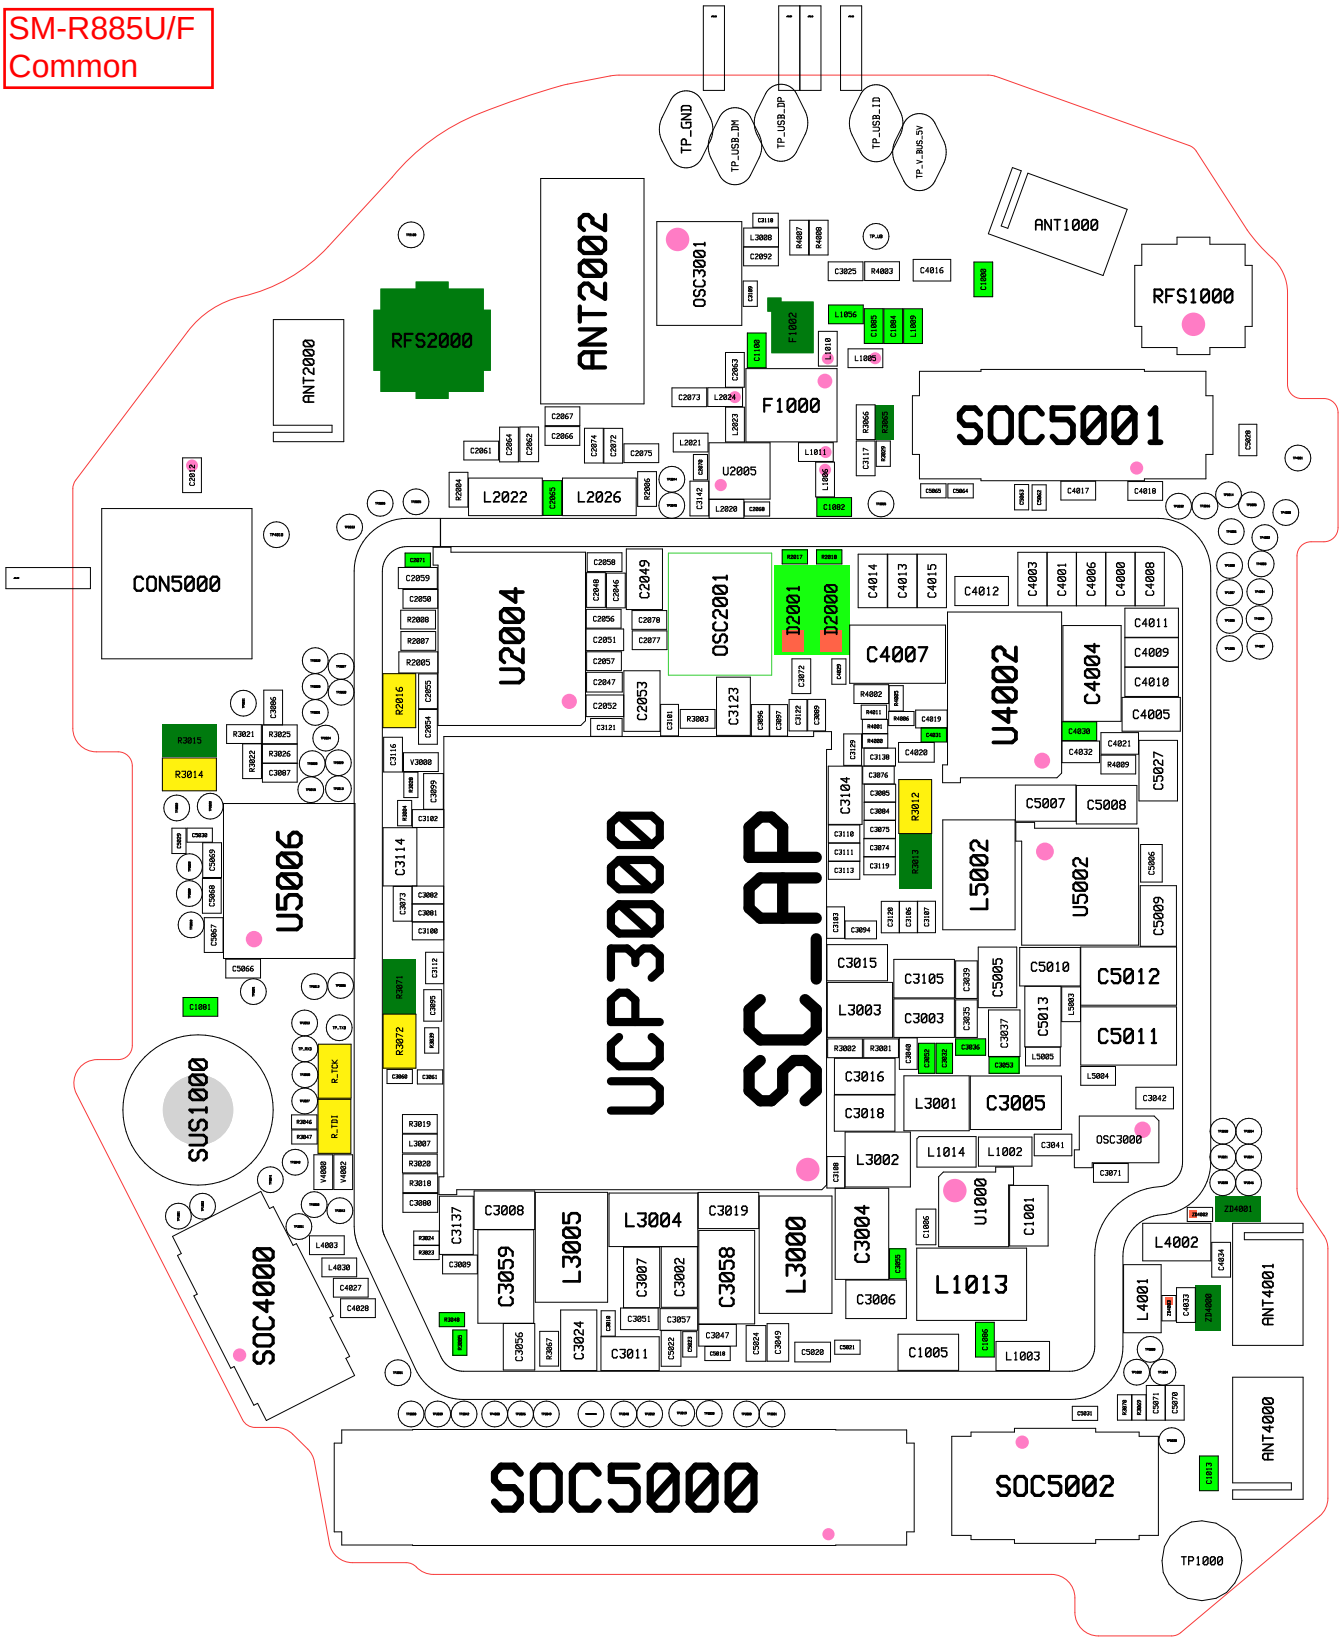

SM-R885U/F
Common

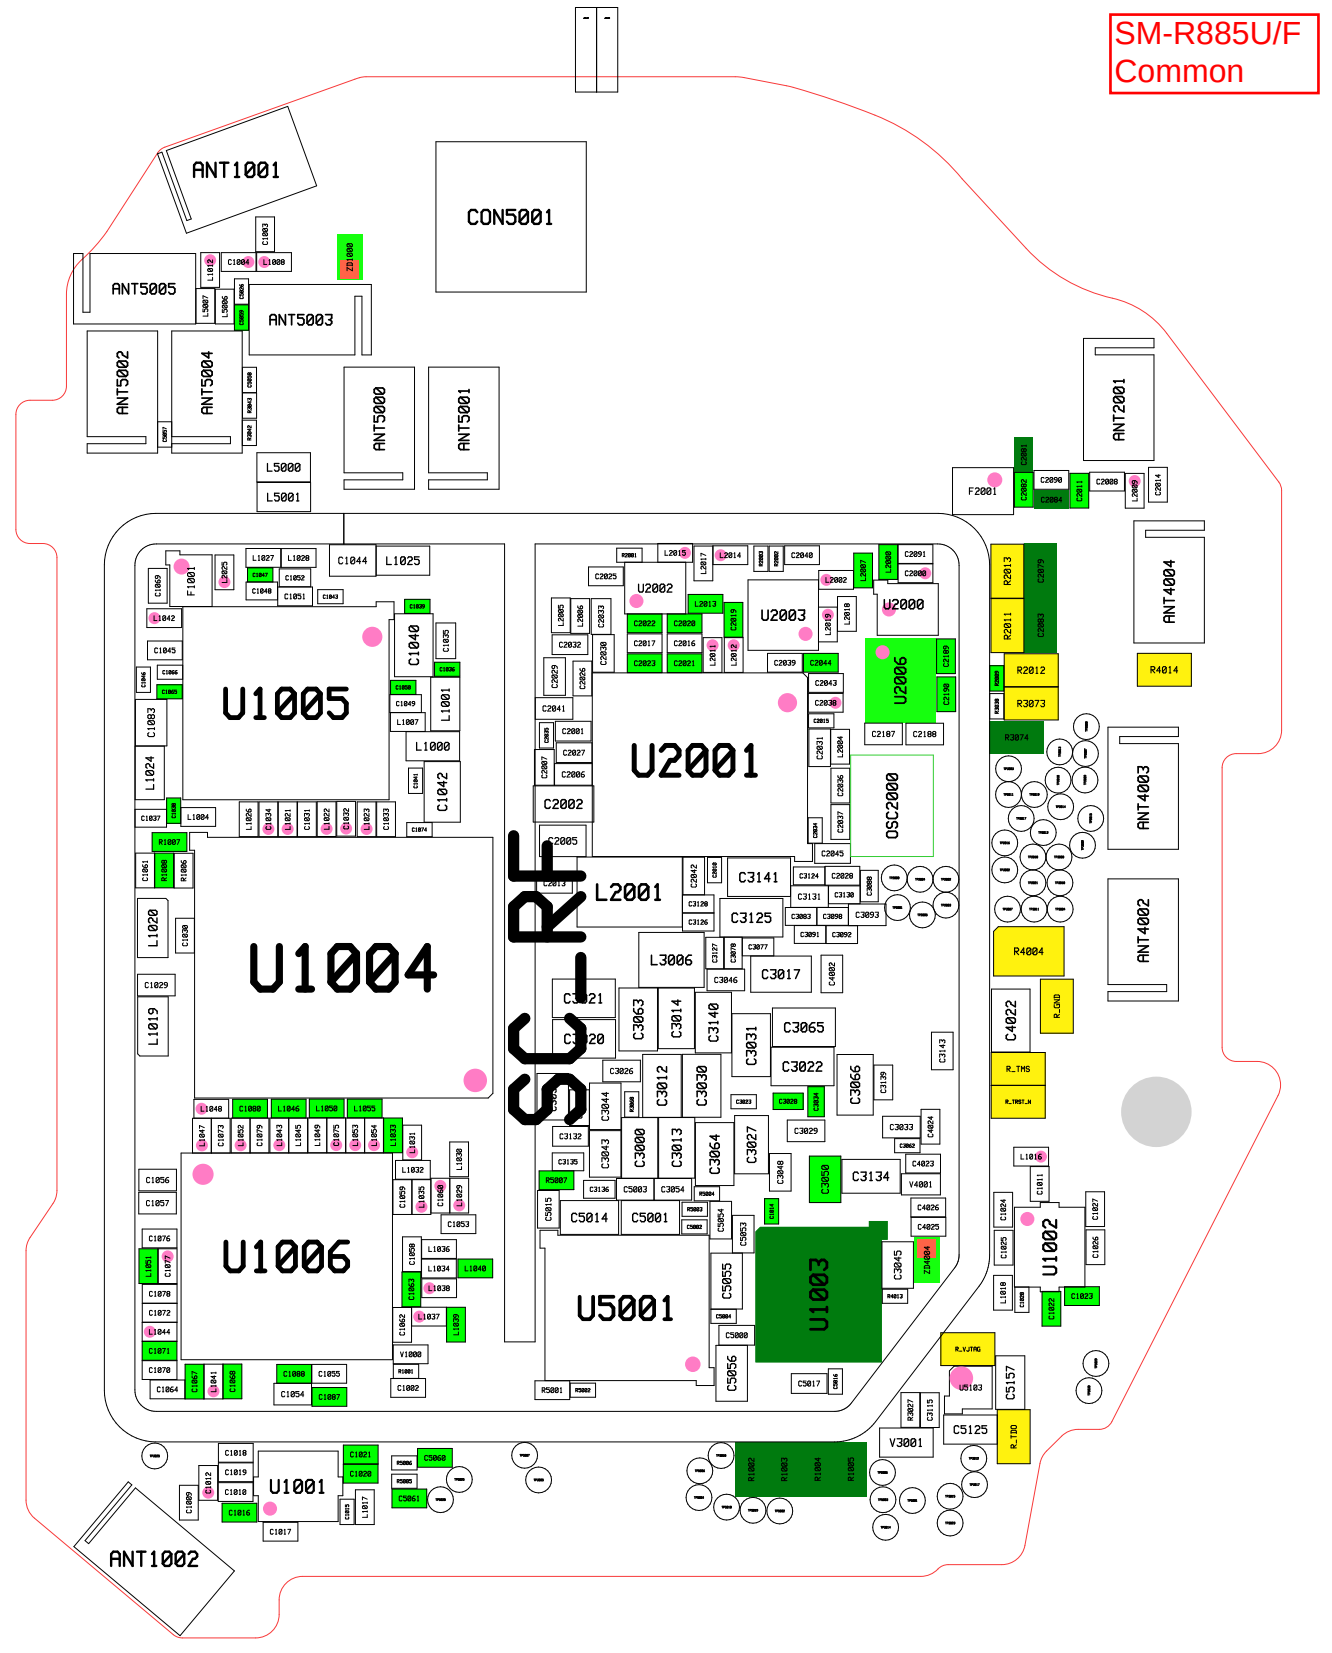

SM-R880_REV0.6_BOM

2021. 05. 25
HW ID : 06

sheet01 : RF, TRANCEIVER, L-FEMiD
sheet02 : BT / WiFi, GPS, NFC
sheet03 : AP, PMIC
sheet04 : WPC, MIC, INTERFACE
sheet05 : DISPLAY, SENSOR

TITLE	WISE			
SIZE A3	DWG NO	PDM NUMBER		REV Rev
DRAWN BY User Name	SHEET	Sheet0-Cover	Date Drawing Date	

RF

RFS1000 LTE : 3705-002268
RFS1000 BT : 0202-002125(PB-Short)

Rear Ant C-Clip
Front Ant C-Clip
ZD 1000 LTE : open
ZD 1000 BT : 0406-001809

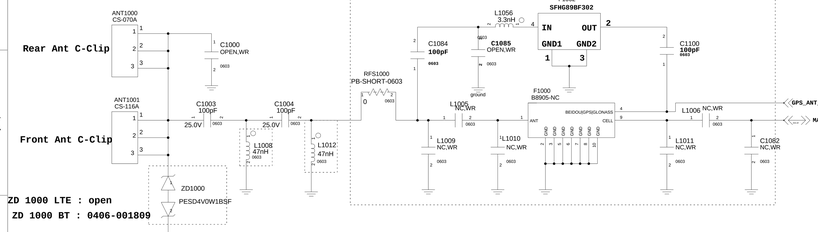

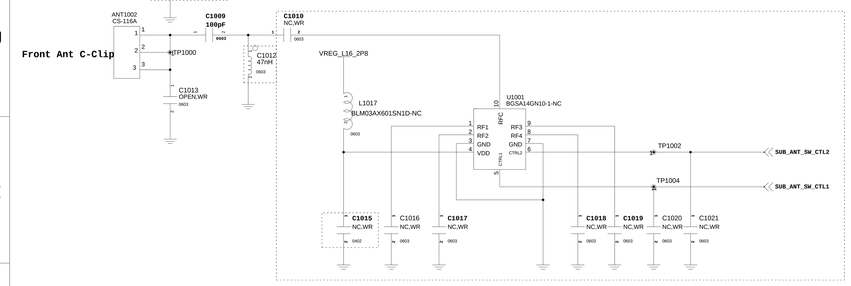

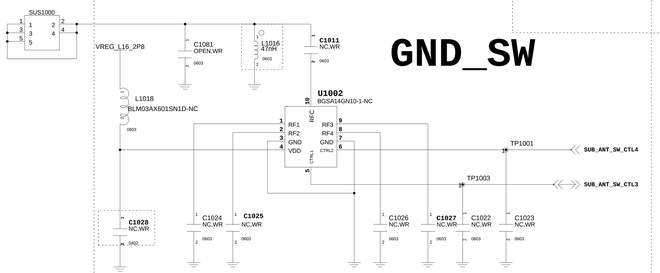

GND_SW

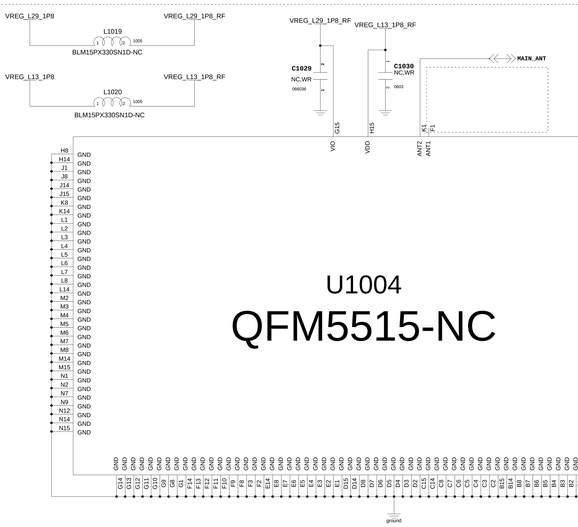

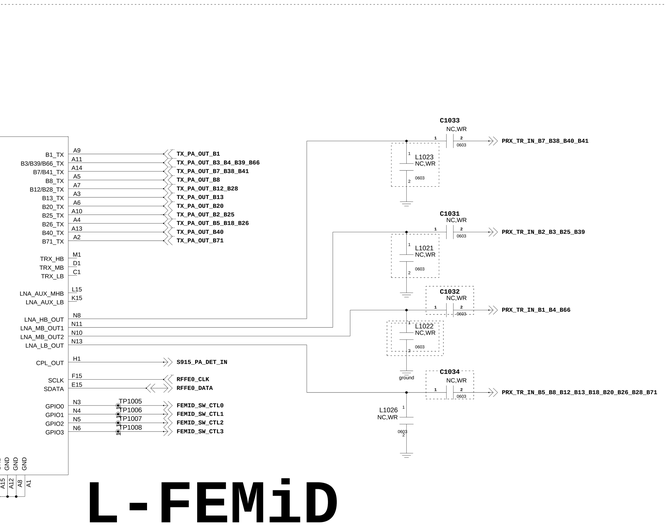

L-FEMiD

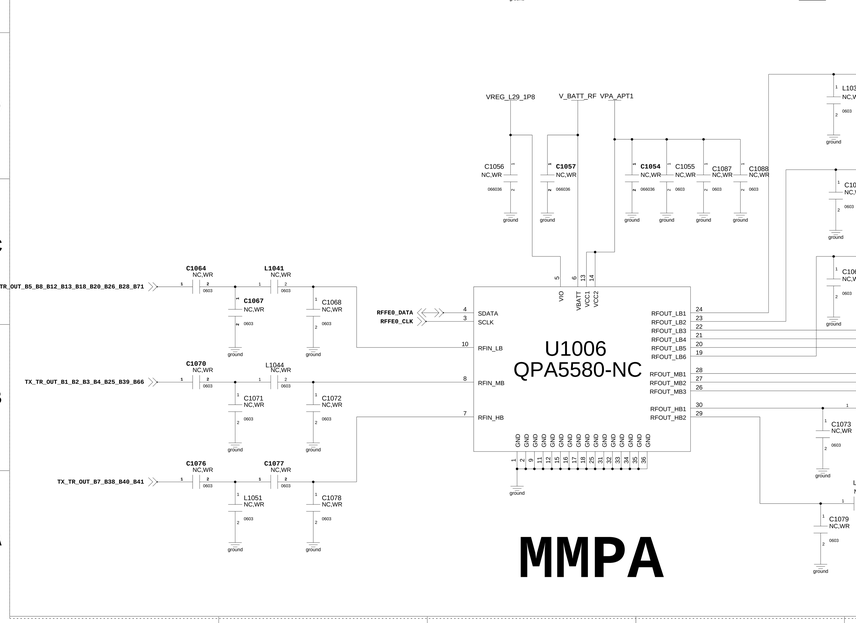

MMPA

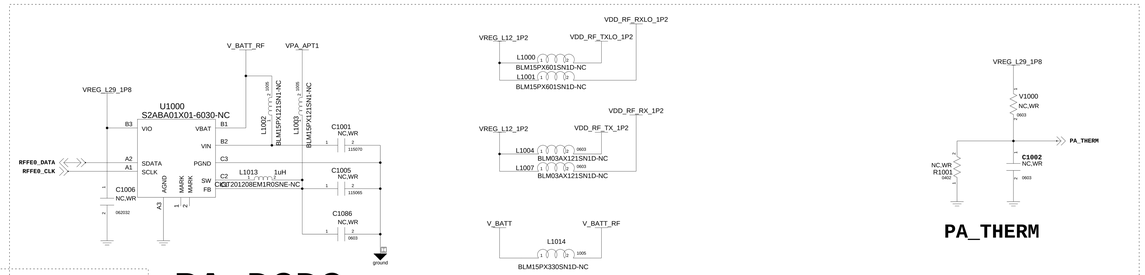

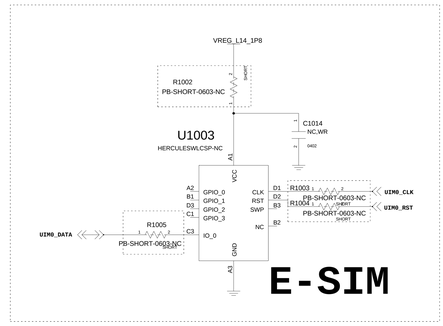

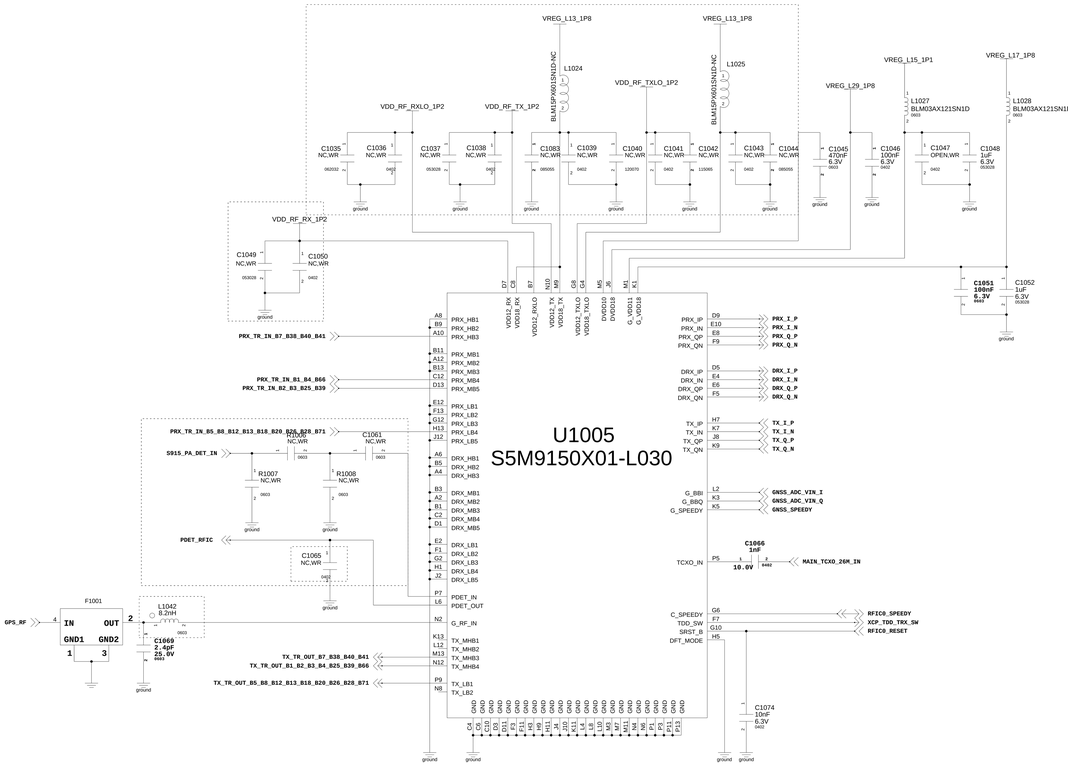

TITLE	WISE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet1-RF
Date	Drawing Date

CONNECTIVITY

U2001
BCM430132HKUBG

WLAN_CLK — TP2000 — F10 — SDIO_CLK
WLAN_CMD — TP2001 — G10 — SDIO_CMD_P6
WLAN_D(0) — TP2002 — B10 — SDIO_DATA_0
WLAN_D(1) — TP2003 — C10 — SDIO_DATA_1
WLAN_D(2) — TP2004 — D10 — SDIO_DATA_2
WLAN_D(3) — TP2005 — E10 — SDIO_DATA_3
WLAN_HOST_WAKE — TP2006 — E6 — GPIO_0
G8 — GPIO_1_P7
SH_WLAN_UART_RX — TP2007 — H9 — GPIO_2
WLAN_SH_UART_TX — TP2008 — G9 — GPIO_3
G7 — GPIO_4
SH_WLAN_WAKE — H8 — GPIO_5
H7 — GPIO_6
H10 — JTAG_SEL
J2 — GPAIO_EXT_TSSIG
F2 — PAOUT_2G
G2 — PAOUT_5G
D1 — RFIN_2G
J1 — RFIN_5G
F4 — EXT_TSSIA
G5 — RF_SW_CTRL_0
J5 — RF_SW_CTRL_1
L5 — RF_SW_CTRL_2
L6 — RF_SW_CTRL_3
J7 — RF_SW_CTRL_4
H5 — RF_SW_CTRL_5
H6 — RF_SW_CTRL_6
G6 — RF_SW_CTRL_7
F5 — RF_SW_CTRL_8
RF_SW_CTRL_9
A7 — CLK_REQ
A9 — LPO_IN
A6 — XTAL_XON
A5 — XTAL_XOP
C2 — BT_RFOP
A2 — BT_20DBMOP
C1 — BT_13DBMOP
D6 — BT_GPIO_2
D5 — BT_GPIO_3
E5 — BT_GPIO_4
C6 — BT_GPIO_5
E8 — BT_PCM_CLK
D8 — BT_PCM_OUT
B7 — BT_PCM_IN
F8 — BT_PCM_SYNC
D9 — BT_UART_RTS_N
B9 — BT_UART_CTS_N
A8 — BT_UART_RTS
C9 — BT_UART_CTS
BT_UART_TXD
BT_UART_RXD
B8 — BT_DEV_WAKE
F9 — BT_HOST_WAKE
K7 — WL_REG_ON
J8 — BT_REG_ON
J9 — NC

M4 — ET_LINREG_CAP
M2 — ET_LIN_OUT
M1 — NC
M9 — SR_VDDBAT5
L10 — SR_VLX
M7 — LDO_VDDBAT5
M8 — LDO_VDD1P22
L8 — VDDOUT_BT3P3
K8 — VDDOUT_CLDO
L7 — VDDOUT_RF3P3
J10 — VDDOUT_AON
K9 — VDDOUT_MEMLPLDO
A4 — BT_LDOVDD_V1P22
A3 — BT_PAVDD_V3P3
A10 — BT_VDDO
C8 — BT_VDDCLDO
E9 — WL_VDDC
J6 — WL_VDDC
G3 — DIRECT_VDD_V1P22
K1 — PMU_VDD_V1P22
E2 — PA2G_VDD_V3P4
H2 — PA5G_VDD_V3P4
F3 — TX_VDD_V5P0
K2 — GENERAL_VDD_V5P0
K4 — VDD_1P8
M6 — VDDIO_RF1
C7 — VSSC
D7 — VSSC
F7 — VSSC
K5 — VSSC
C5 — BT_PLLVSS
C4 — BT_VCOVSS
C3 — BT_IFVSS
B3 — BT_RFVSS
B2 — BT_PAVSS
L3 — ET_LIN_GND
L2 — ET_GND
M10 — SR_PVSS
L9 — PMU_AVSS
M3 — ET_LIN_VDD5P0V
L1 — ET_VDD5P0V
K10 — PMU_VDDIO
D4 — RADIO_GND
E1 — RADIO_GND
E3 — RADIO_GND
G4 — RADIO_GND
H1 — RADIO_GND
H4 — RADIO_GND
J4 — RADIO_GND
K3 — RADIO_GND
B5 — RADIO_GND
B6 — XTAL_GND
XTAL_VDD_XTAL1

V_BATT
C2001 10.0V 1uF 0402032
C2002 4.7uF 10.0V 115665
VDDOUT_RF3P3
L2001 2.2uH LQM21PN2R2MC0AD
C2005 4.7uF 6.3V 085055
C2006 2.2uF 10.0V 060036
C2007 1uF 10.0V 0402032
C2010 100nF 6.3V 0402
C2013 1uF 10.0V 0402032
C2015 100nF 6.3V 0402
L2004 L2005 L2006 BLM03AX121SN1D 0603
ground
VREG_L2_1P8
V_BATT
C2026 100nF 10.0V 0603
C2027 1uF 10.0V 0402032
C2028 100nF 6.3V 0603
C2029 2.2uF 6.3V 0603036
C2030 2.2uF 10.0V 0603036
C2031 2.2uF 6.3V 0603036
C2032 1uF 10.0V 0402032
C2033 1uF 10.0V 0402032
C2034 100nF 6.3V 0402
C2035 100nF 6.3V 0402
V_BATT
VREG_L2_1P8
C2041 1uF 16.0V 0603035
C2042 2.2uF 6.3V 0603036
C2045 1uF 10.0V 0402032
ground

WLAN_2G_TX
WLAN_5G_TX
WLAN_2G_RX
WLAN_5G_RX
L2011 1nH 0603
C2016 4.7pF 25.0V 0603
L2012 3.9nH 0603
C2017 4.7pF 25.0V 0603
C2019 OPEN,WR 0603
L2013 OPEN,WR 0603
C2020 OPEN,WR 0603
C2021 OPEN,WR 0603
C2022 OPEN,WR 0603
C2023 OPEN,WR 0603
ground

RF_SW_CTRL_3
RF_SW_CTRL_4
RF_SW_CTRL_8

OSC2000
CX1612DB37400E0FLFZ1
C2036 12pF 25.0V 0603
C2037 15pF 25.0V 0603
32KHZ_PMIC
C2038 1nH 0603
C2039 10pF 0603
SH_BT_WAKE
BT_SH_WAKE
TP2009
BT_TX_HP_20
BT_TX_NP_14
L2018 9pF 0603
L2019 2.2nH 0603
C2043 0.5pF 0603
C2044 OPEN,WR 0603
ground

BT_PCM_CLK — TP2010
BT_PCM_OUT — TP2011
BT_PCM_IN — TP2012
BT_PCM_SYNC — TP2013
BT_UART_RTS — TP2014
BT_UART_CTS — TP2015
BT_UART_TXD — TP2016
BT_UART_RXD — TP2017
HOST_TO_SOC_WAKE — TP2018
BT_HOST_WAKE — TP2019
WLAN_EN — TP2020
BT_EN — TP2021

BT / WIFI

U2003
MXD8648RG

VDDOUT_RF3P3
WLAN_2G_TX
BT_TX_HP_20
BT_TX_NP_14
WLAN_2G_RX
C2040 100nF 6.3V 0402
R2002 100K 1%
R2003 100K 1%
RF_SW_CTRL_4
RF_SW_CTRL_3
ground

F2001
DPX105950DT-6016A1

L2002 2.7nH 0603
L2007 OPEN,WR 0603
U2000 SAFFB2G45MA0F3K UNBAL UNBAL
C2000 1.5nH 0603
C2091 6.8pF 0603
L2000 OPEN,WR 0603
LB COM_ANT HB GND
C2082 OPEN,WR 0603
C2090 100pF 0603
C2008 100pF 0603
C2011 OPEN,WR 0603
RFS2000 rf-818011998-NC IN OUT GND GND
C2081 NC,WR 0603
C2084 NC,WR 0603
TP2100 Rear ANT C-Clip
ANT2000 CS-070A
C2012 1.5nH 0603
L2009 47nH 0603
ANT2001 CS-070A
C2014 100pF 0603
Bracket LDS ANT C-Clip

VDDOUT_RF3P3
RF_SW_CTRL_8
L2014 1.5nH 0603
L2015 1.5nH 0603
L2017 0.5pF 0603
R2001 100K 0402 1%
U2002 BGS12WN6 CTRL RFIN VDD RF2 GND RF1
WLAN_5G_RX
WLAN_5G_TX
C2025 100nF 6.3V 0603
ground

BT / WIFI Ant.

NFC Load Switch(NC)

@VBAT_NFC_NXP VBATT_NFC
V_BATT
VREG_L2_1P8
R2016 0 0603 SHORT
NFC_VHV
R2018 OPEN,WR 0402
R2017 OPEN,WR 0402
U2006 SLG59M1448V-OPEN D ON VDD S CAP GND
D2000 RB520G-30-OPEN
D2001 RB520G-30-OPEN
C2187 WR-OPEN 0603036
C2189 OPEN,WR 0603
C2190 OPEN,WR 0603
C2188 WR-OPEN 0603036

U2004
SN110TV2

VREG_L31_1P8
@VBAT_NFC_NXP VBATT_NFC
NFC_VHV
C2046 220nF 6.3V 0603
C2047 1uF 10.0V 0402032
C2048 220nF 6.3V 0603
C2049 4.7uF 10.0V 115665
C2050 220nF 6.3V 0603
C2051 1uF 16.0V 0603035
C2052 2.2uF 10.0V 0603036
C2053 4.7uF 10.0V 115665
C2054 220nF 6.3V 0603
C2055 220nF 6.3V 0603
C2056 220nF 6.3V 0603
C2057 100nF 6.3V 0603
C2058 220nF 6.3V 0603
C2059 68nF 6.3V 0603

E1 VBAT
A3 VBATPWR
A1 BOOST_LX
H5 VDDA
G2 TXVCASC
H2 VDDPA
H1 TXVCM
C3 VDDIO
E5 VDDIO_SE
C1 VDDCTN
J6 VMID
K3 VDDPLL
D2 VREF
F1 VHV
B3 VDDNV
C2 VDDC
A6 SIMVCC1
A7 SIMVCC2
A8 SIMVCC3
B5 PMUVCC1
B6 PMUVCC2
B7 PMUVCC3
G1 VIP
B1 VDDBOOST

NFC_CLK_REQ_DELETED
NFC_IRQ — TP2022 — H7 — NFC_IRQ
H8 — NFC_CLK_REQ
NFC_FIRMWARE — TP2024 — J8 — NFC_DWL_REQ
USIM_WKUP_REQ — TP2025 — G7 — NC_GND
NFC_EN — TP2026 — C4 — VEN
E4 — NFC_GPIO0
F3 — NFC_GPIO1
G6 — NFC_GPIO2_AO
G5 — NFC_GPIO3_AO
A5 — NFC_SIM_SWIO1
B8 — NFC_SIM_SWIO2
C8 — NFC_SIM_SWIO3
B4 — SIM_IO_PULLDOWN_1
C6 — SIM_IO_PULLDOWN_2
H6 — NFC_XTAL1
J7 — NFC_XTAL2
G3 — NC_GND
C2071 OPEN,WR 0402
R2005 12K 0603 5%
VREG_L31_1P8

NFC_CLK_26M_DELETED
OSC2001
XRCGB27M120F3M10R0
C2077 18pF 25.0V 0603
C2078 18pF 25.0V 0603
ground

VSS_DIG D8
VSS_DIG C5
VSS_DIG C7
VSS_PA Z2
VSS_PLL W4
VSS_PMU D1
VSS_PWR A2
VSS_PWR B2
VSS_REF E3
VSS_SUB A4
VSS_SUB F6
VSS_NFC G4

VREG_L31_1P8
R2009 OPEN,WR 0402
TP2032 NFC_I2C_SDA
TP2033 NFC_I2C_SCL
HIF1 F5
HIF2 F4
HIF3 E3
HIF4 F2
TX1 J1
TX2 J3
RXP J5
RXN J4
NC_GND D6
NC_FLOATING D7
NC_GND D3
PB-SHORT-0603-NC R2011 UIM0_CLK
PB-SHORT-0603-NC R2012 UIM0_DATA
PB-SHORT-0603-NC R2013 UIM0_RST
SE_SPI_CLK E8 TP2027 ESE_SPI_CLK
SE_SPI_MISO E7 TP2028 ESE_SPI_MISO
SE_SPI_MOSI D5 TP2029 ESE_SPI_MOSI
SE_SPI_CS E6 TP2030 ESE_SPI_CS_N
SE_GPIO0 F8
SE_GPIO1 D4
TP2031
SE_I2C_SCL G8 R2007 4.7K 0603
SE_I2C_SDA F7 R2008 4.7K 0603
C2083 0 0603 PB-SHORT-0603
C2079 0 0603 PB-SHORT-0603
ground

R2004 680 0603 1%
C2061 1nF 0603 16.0V
L2022 160nH LQW15CNR16J00D
C2062 56pF 0603 25.0V
C2064 680pF 25.0V 0603
C2065 OPEN,WR 0603
L2026 160nH LQW15CNR16J00D
C2072 680pF 25.0V 0603
C2074 56pF 0603 25.0V
C2066 56pF 0603 25.0V
C2067 6.8pF 0603 25.0V
ANT2002
VREG_L31_1P8
R2006 680 0603 1%
C2075 1nF 0603 16.0V

NFC

GPS @MORION+S915

VREG_L17_1P8
GNSS_LNA_EN
L2021 BLM03AG601SN1D 0603
C2063 100pF 0603
GPS_ANT_IN
L2023 6.8nH 0603
L2024 OPEN,WR 0603
C2070 33pF 15.0V 0402
U2005 PDN GND AI VCC GNDRF AO BGA824N6S
L2020 BLM03AG601SN1D 0603
L2025 2.7nH 0603
C2068 100nF 6.3V 0402
C2092 47pF 25.0V 0603
GPS_RF

AP / PMIC

JTAG

LTE/BT MODEL CHECK



SKU CHECK

HW ID : 06

VER	R1	R2	R3	R4	PCB VERSION
00	100K	100K	OPEN	OPEN	FRESH_MAIN_REV0.0
01	33K	100K	100K	OPEN	FRESH_MAIN_REV0.1 / WISE MAIN REV0.1
02	100K	100K	100K	OPEN	WISE MAIN REV0.2
03	300K	100K	100K	OPEN	FRESH_MAIN_REV0.2 / WISE MAIN REV0.3
04	OPEN	100K	100K	OPEN	FRESH_MAIN_REV0.3 / WISE MAIN REV0.4
05	100K	33K	OPEN	100K	WISE MAIN REV0.5
06	33K	33K	100K	100K	WISE MAIN REV0.6
07	100K	33K	100K	100K	
08	300K	33K	100K	100K	
09	OPEN	33K	100K	100K	
10	100K	100K	OPEN	100K	
11	33K	100K	100K	100K	
12	100K	100K	100K	100K	
13	300K	100K	100K	100K	
14	OPEN	100K	100K	100K	
15	100K	300K	OPEN	100K	
16	33K	300K	100K	100K	
17	100K	300K	100K	100K	
18	300K	300K	100K	100K	
19	OPEN	300K	100K	100K	
21	100K	OPEN	OPEN	100K	
22	33K	OPEN	100K	100K	
23	100K	OPEN	100K	100K	
24	300K	OPEN	100K	100K	
25	OPEN	OPEN	100K	100K	



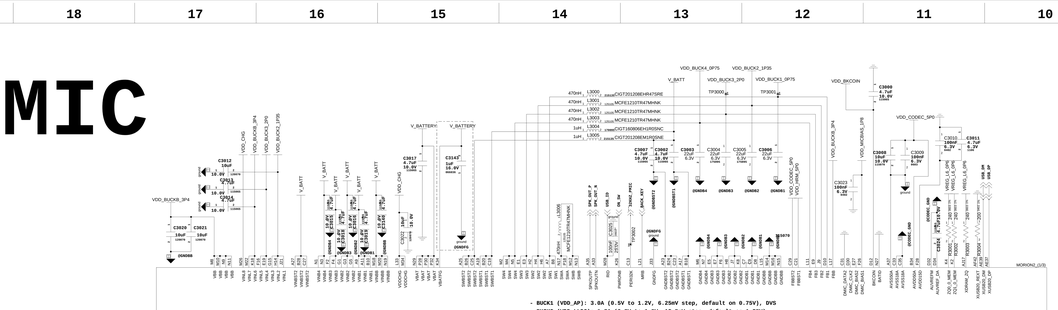
VDD_BUCK4_SPTS
VDD_BUCK2_1P35
VDD_BUCK3_2P0
VDD_BKCOIN
V_BATT
VDD_CODEC_SPO
VDD_BUCK4_3P4
VDD_MICBIAS_1P95
VDD_CHG
VDD_BUCK8_3P4
V_BATTERY
C3012 10uF 10.0V
C3013 10uF 10.0V
C3014 10uF 10.0V
C3017 1uF 10.0V
C3147 1uF 10.0V
C3020 10uF
C3021 10uF
C3060 470nH
C3061 470nH
C3062 470nH
C3063 1uH
C3064 1uH
C3065 470nH
C3066 470nH
C3067 4.7uF 10.0V
C3062 4.7uF 10.0V
C3063 4.7uF 6.3V
C3054 22uF 6.3V
C3055 22uF 6.3V
C3068 10uF 10.0V
C3069 10uF 10.0V
C3070 10uF 10.0V
C3071 10uF 10.0V
C3072 100uF 6.3V
C3073 100uF 6.3V
C3074 4.7uF 6.3V
C3075 4.7uF 6.3V
C3076 4.7uF 6.3V
C3077 4.7uF 6.3V
C3078 4.7uF 6.3V
C3079 4.7uF 6.3V
C3080 4.7uF 6.3V
C3081 4.7uF 6.3V
C3082 4.7uF 6.3V
C3083 4.7uF 6.3V
C3084 4.7uF 6.3V
C3085 4.7uF 6.3V
C3086 4.7uF 6.3V
C3087 4.7uF 6.3V
C3088 4.7uF 6.3V
C3089 4.7uF 6.3V
C3090 4.7uF 6.3V
C3091 4.7uF 6.3V
C3092 4.7uF 6.3V
C3093 4.7uF 6.3V
C3094 4.7uF 6.3V
C3095 4.7uF 6.3V
C3096 4.7uF 6.3V
C3097 4.7uF 6.3V
C3098 4.7uF 6.3V
C3099 4.7uF 6.3V
C3100 4.7uF 6.3V
C3101 4.7uF 6.3V
C3102 4.7uF 6.3V
C3103 4.7uF 6.3V
C3104 4.7uF 6.3V
C3105 4.7uF 6.3V
C3106 4.7uF 6.3V
C3107 4.7uF 6.3V
C3108 4.7uF 6.3V
C3109 4.7uF 6.3V
C3110 4.7uF 6.3V
C3111 4.7uF 6.3V
C3112 4.7uF 6.3V
C3113 4.7uF 6.3V
C3114 4.7uF 6.3V
C3115 4.7uF 6.3V
C3116 4.7uF 6.3V
C3117 4.7uF 6.3V
C3118 4.7uF 6.3V
C3119 4.7uF 6.3V
C3120 4.7uF 6.3V
C3121 4.7uF 6.3V
C3122 4.7uF 6.3V
C3123 4.7uF 6.3V
C3124 4.7uF 6.3V
C3125 4.7uF 6.3V
C3126 4.7uF 6.3V
C3127 4.7uF 6.3V
C3128 4.7uF 6.3V
C3129 4.7uF 6.3V
C3130 4.7uF 6.3V
C3131 4.7uF 6.3V
C3132 4.7uF 6.3V
C3133 4.7uF 6.3V
C3134 4.7uF 6.3V
C3135 4.7uF 6.3V
C3136 4.7uF 6.3V
C3137 4.7uF 6.3V
C3138 4.7uF 6.3V
C3139 4.7uF 6.3V
C3140 4.7uF 6.3V
C3141 10uF 10.0V
C3142 47pF 25.0V
C3143 10uF 10.0V
C3144 10uF 10.0V
C3145 10uF 10.0V
C3146 10uF 10.0V
C3147 10uF 10.0V
C3148 10uF 10.0V
C3149 10uF 10.0V
C3150 10uF 10.0V
C3151 10uF 10.0V
C3152 10uF 10.0V
C3153 10uF 10.0V
C3154 10uF 10.0V
C3155 10uF 10.0V
C3156 10uF 10.0V
C3157 10uF 10.0V
C3158 10uF 10.0V
C3159 10uF 10.0V
C3160 10uF 10.0V
C3161 10uF 10.0V
C3162 10uF 10.0V
C3163 10uF 10.0V
C3164 10uF 10.0V
C3165 10uF 10.0V
C3166 10uF 10.0V
C3167 10uF 10.0V
C3168 10uF 10.0V
C3169 10uF 10.0V
C3170 10uF 10.0V
C3171 10uF 10.0V
C3172 10uF 10.0V
C3173 10uF 10.0V
C3174 10uF 10.0V
C3175 10uF 10.0V
C3176 10uF 10.0V
C3177 10uF 10.0V
C3178 10uF 10.0V
C3179 10uF 10.0V
C3180 10uF 10.0V
C3181 10uF 10.0V
C3182 10uF 10.0V
C3183 10uF 10.0V
C3184 10uF 10.0V
C3185 10uF 10.0V
C3186 10uF 10.0V
C3187 10uF 10.0V
C3188 10uF 10.0V
C3189 10uF 10.0V
C3190 10uF 10.0V
C3191 10uF 10.0V
C3192 10uF 10.0V
C3193 10uF 10.0V
C3194 10uF 10.0V
C3195 10uF 10.0V
C3196 10uF 10.0V
C3197 10uF 10.0V
C3198 10uF 10.0V
C3199 10uF 10.0V
C3200 10uF 10.0V
C3201 10uF 10.0V
C3202 10uF 10.0V
C3203 10uF 10.0V
C3204 10uF 10.0V
C3205 10uF 10.0V
C3206 10uF 10.0V
C3207 10uF 10.0V
C3208 10uF 10.0V
C3209 10uF 10.0V
C3210 10uF 10.0V
C3211 10uF 10.0V
C3212 10uF 10.0V
C3213 10uF 10.0V
C3214 10uF 10.0V
C3215 10uF 10.0V
C3216 10uF 10.0V
C3217 10uF 10.0V
C3218 10uF 10.0V
C3219 10uF 10.0V
C3220 10uF 10.0V
C3221 10uF 10.0V
C3222 10uF 10.0V
C3223 10uF 10.0V
C3224 10uF 10.0V
C3225 10uF 10.0V
C3226 10uF 10.0V
C3227 10uF 10.0V
C3228 10uF 10.0V
C3229 10uF 10.0V
C3230 10uF 10.0V
C3231 10uF 10.0V
C3232 10uF 10.0V
C3233 10uF 10.0V
C3234 10uF 10.0V
C3235 10uF 10.0V
C3236 10uF 10.0V
C3237 10uF 10.0V
C3238 10uF 10.0V
C3239 10uF 10.0V
C3240 10uF 10.0V
C3241 10uF 10.0V
C3242 10uF 10.0V
C3243 10uF 10.0V
C3244 10uF 10.0V
C3245 10uF 10.0V
C3246 10uF 10.0V
C3247 10uF 10.0V
C3248 10uF 10.0V
C3249 10uF 10.0V
C3250 10uF 10.0V
C3251 10uF 10.0V
C3252 10uF 10.0V
C3253 10uF 10.0V
C3254 10uF 10.0V
C3255 10uF 10.0V
C3256 10uF 10.0V
C3257 10uF 10.0V
C3258 10uF 10.0V
C3259 10uF 10.0V
C3260 10uF 10.0V
C3261 10uF 10.0V
C3262 10uF 10.0V
C3263 10uF 10.0V
C3264 10uF 10.0V
C3265 10uF 10.0V
C3266 4.7uF 10.0V
C3267 4.7uF 10.0V
C3268 4.7uF 10.0V
C3269 4.7uF 10.0V
C3270 4.7uF 10.0V
C3271 4.7uF 10.0V
C3272 4.7uF 10.0V
C3273 4.7uF 10.0V
C3274 4.7uF 10.0V
C3275 4.7uF 10.0V
C3276 4.7uF 10.0V
C3277 4.7uF 10.0V
C3278 4.7uF 10.0V

POWER & IF INTERFACE

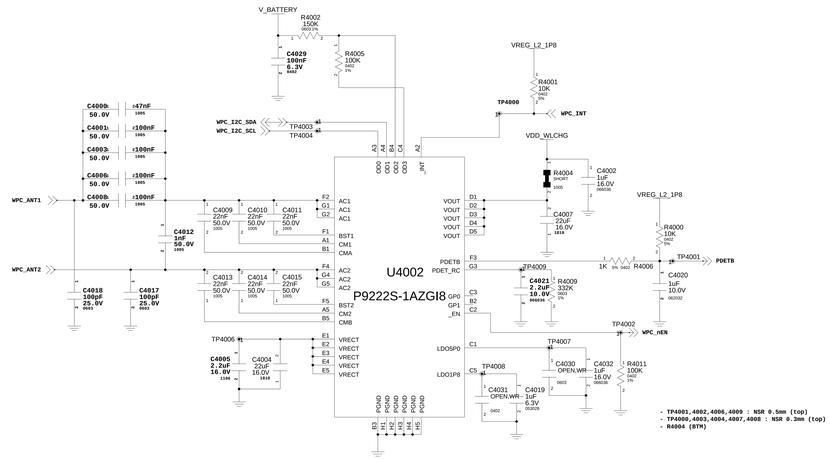

WPC



POGO

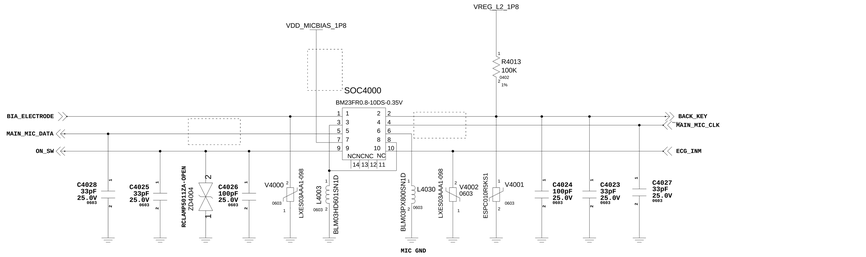



KEY ECG BIA Mic FPCB

Key FPCB Connector - GND contact for GPS tunning

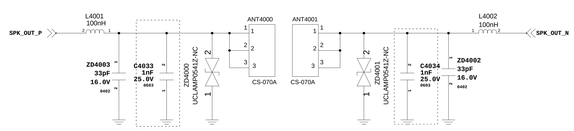

SPEAKER



BATTERY

TITLE: WISE			
SIZE: A1	DWG NO: PDM NUMBER		REV: Rev
DRAWN BY: User Name	SHEET: Sheet3.SM	DATE: Drawing Date	

DISPLAY & SENSOR

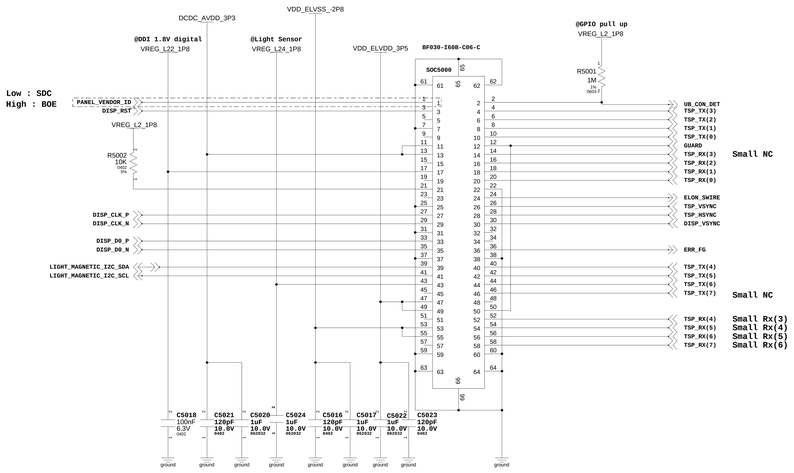

UB CONNECTOR

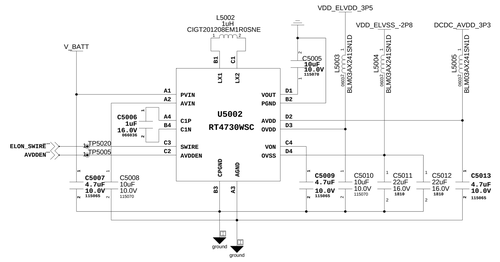

UB DC-DC

TSP & MOTOR IC



SHIELD CAN

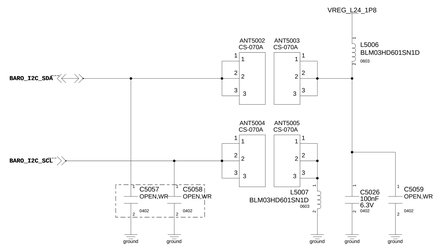

BARO FPCB

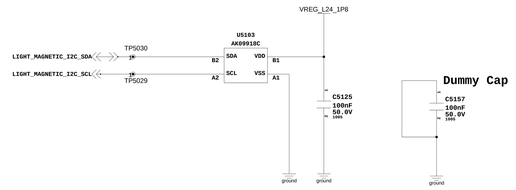

MAGNETIC SENSOR

QR-CODE

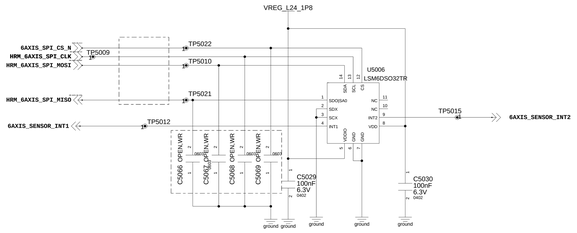

6-AXIS

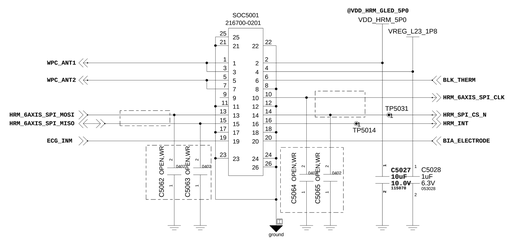

HRM Connector

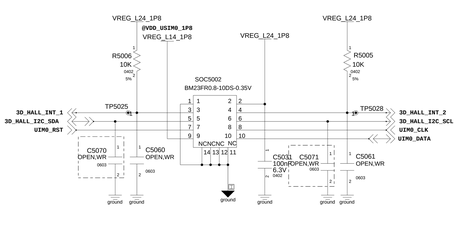

HALL IC (WISE)

TITLE	WISE
SIZE	A1
DWG NO	PDM NUMBER
REV	Rev
DRAWN BY	User Name
SHEET	Sheet5-Display
Drawing Date	

SM-R880

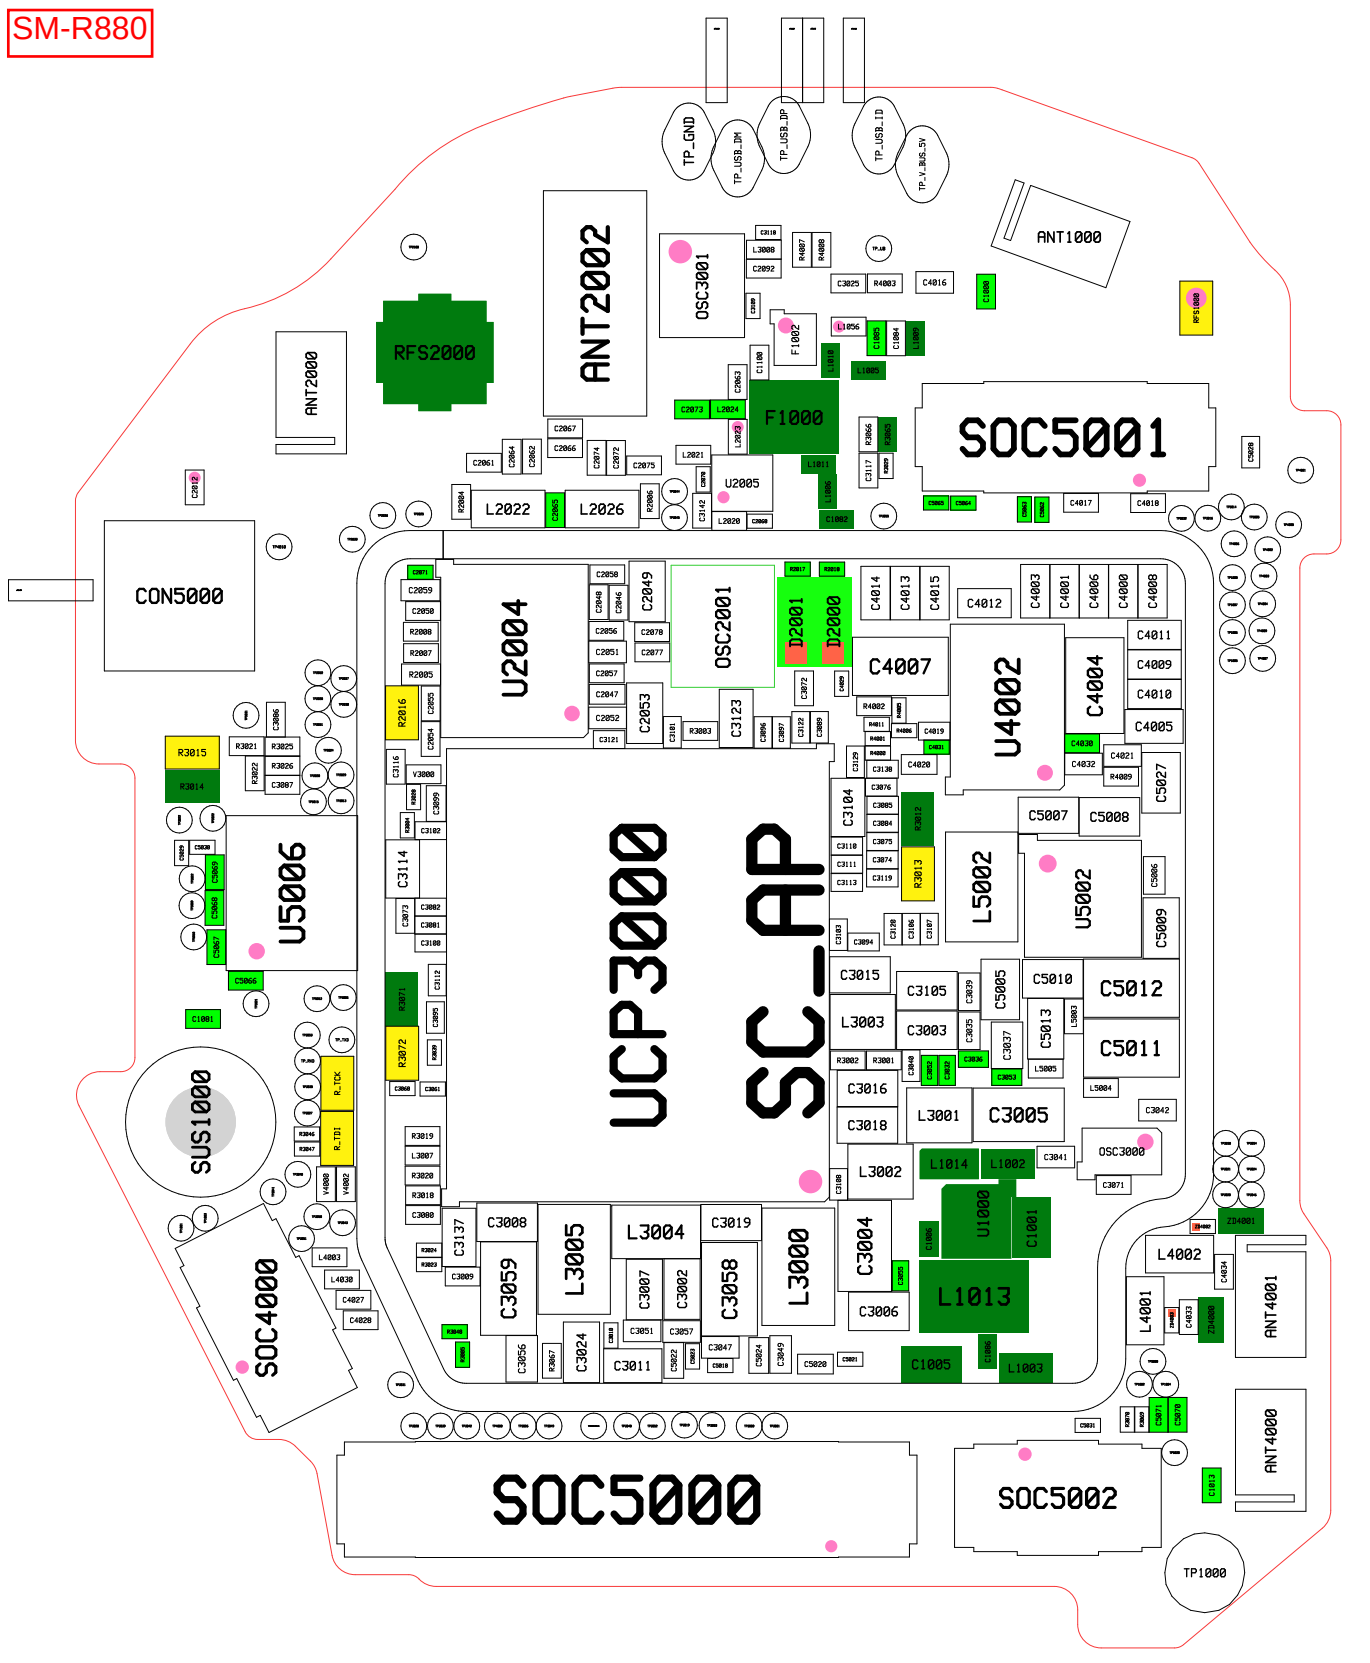
TP_GND
TP_USB_DM
TP_USB_DP
TP_USB_ID
TP_V_BUS_5V
ANT1000
ANT2002
OSC3001
RFS2000
ANT2000
F1002
F1000
SOC5001
U2005
L2022
L2026
CON5000
U2004
OSC2001
D2001
D2000
C4007
U4002
C4004
C4011
C4009
C4010
C4005
C5027
C5007
C5008
L5002
U5002
C5006
C5009
U5006
UCP3000
SC_AP
C3015
C3105
C5005
C5010
C5012
L3003
C3003
C5013
C5011
C3016
L3001
C3005
C3018
L3002
L1014
L1002
OSC3000
U1000
C1001
L1013
L3005
L3004
C3019
L3000
C3004
C3059
C3007
C3002
C3058
C3006
C1005
L1003
SUS1000
SOC4000
L4002
L4001
ANT4001
ANT4000
SOC5000
SOC5002
TP1000

SM-R880

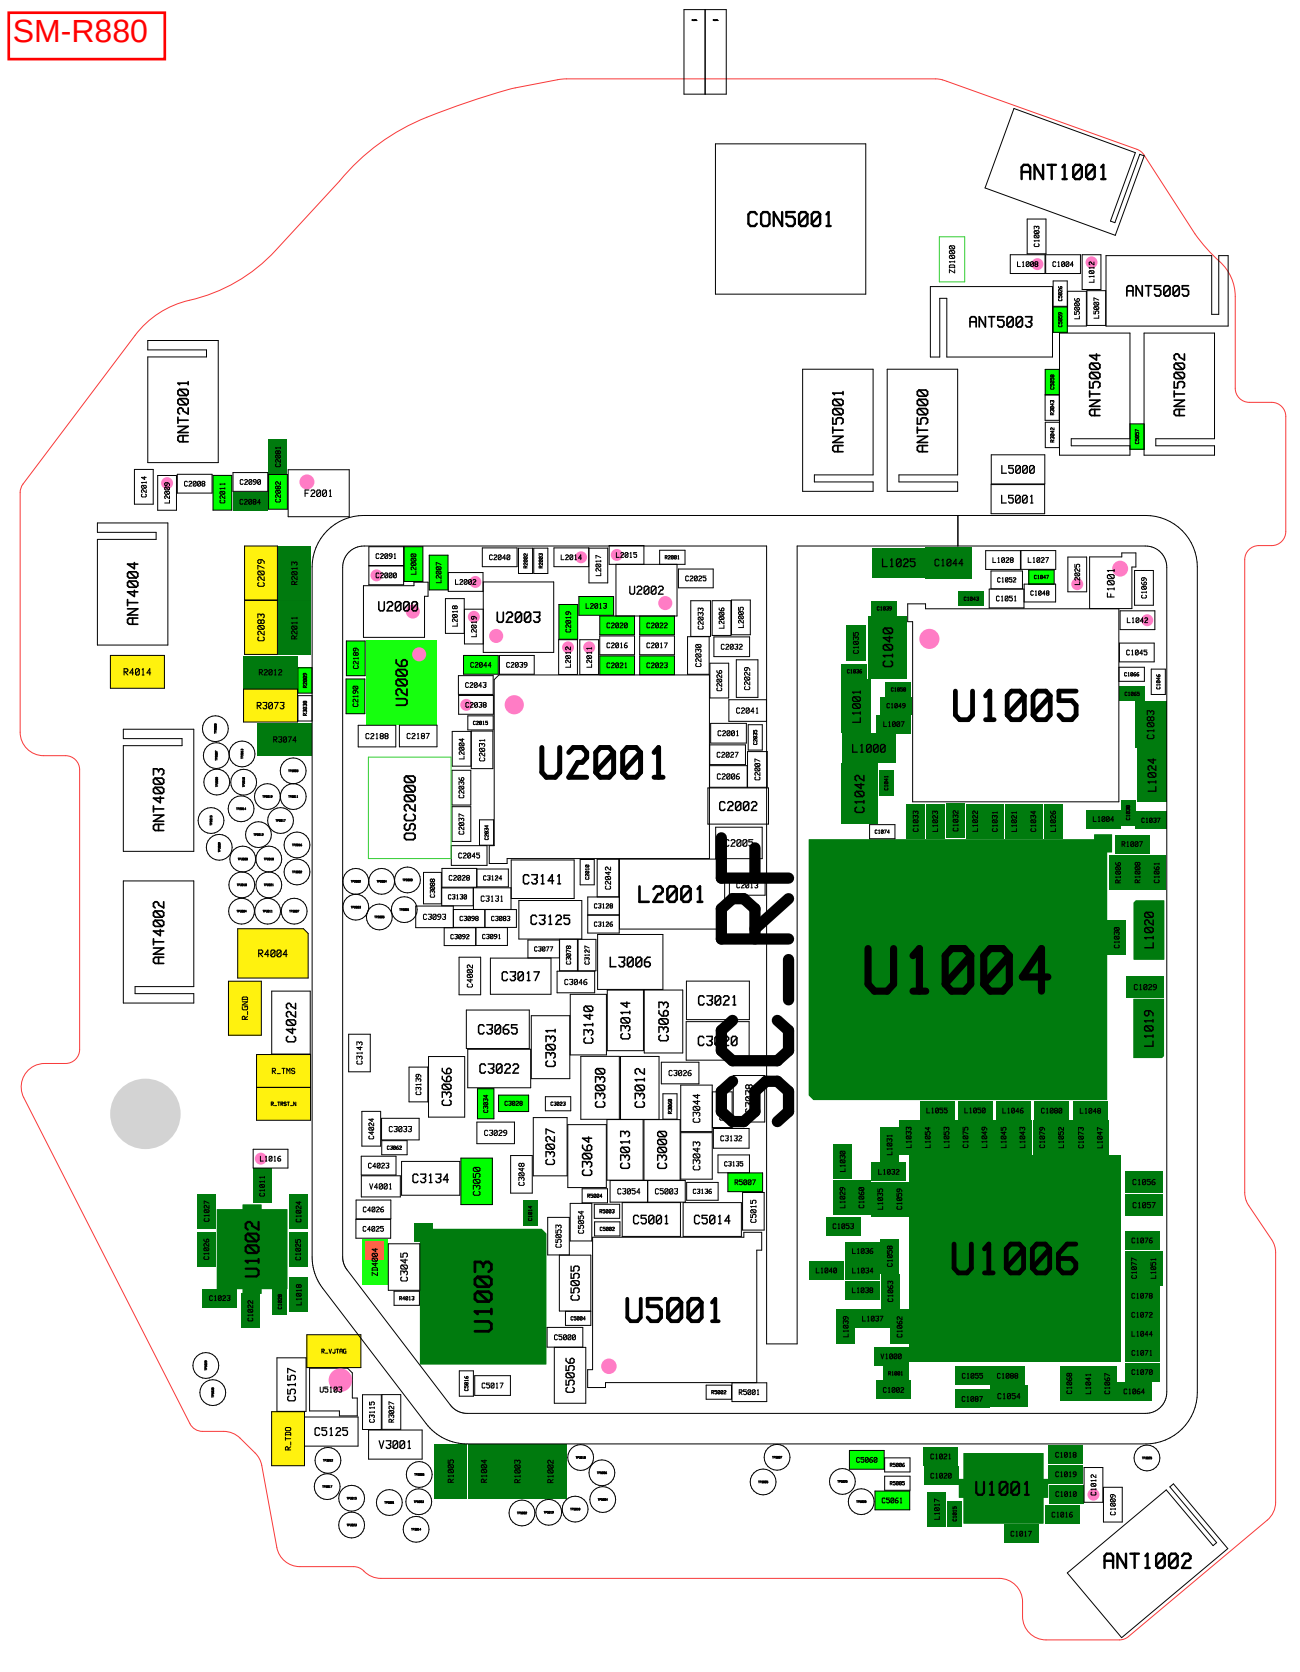
CON5001
ANT1001
ANT5005
ANT5003
ANT5004
ANT5002
ANT5001
ANT5000
ANT2001
ANT4004
ANT4003
ANT4002
L5000
L5001
F2001
F1001
U2000
U2003
U2002
U2006
U2001
OSC2000
U1005
U1004
U1006
U1003
U1002
U1001
U5001
L2001
L3006
SU-RF
ANT1002