


Sheet #	Content	Sheet #	Content	
01.	Table of Content	36.	BAT/B2B Connetor	
02.	Revision History	37.	JTAG/Test Point/Sheild	
03.	Block Diagram	38.	WTR 2965	
04.	GPIO MAP	39.	QPA8685/6	
05.	SDM439 Control	40.	TRX_LB	
06.	SDM439 EBI	41.	QPA8675	
07.	SDM439 GPIO	42.	TRx MB	
08.	SDM439 MIPI	43.	TRx HB	
09.	SDM439 RF	44.	PRX_MATCHING	
10.	SDM439 POWER1	45.	DRX_MATCHING	
11.	RESERVED	46.	DRX_FEM	
12.	SDM439 GND	47.	RESERVED	
13.	PMI632 Charger	48.	FBRX	
14.	PMI632 Control/Interface	49.	QFE4101	
15.	PM439 Control/Interface	50.	ASDIV	
16.	PM439 SMPS	51.	RESERVED	
17.	PM439 LDO	52.	ANT	
18.	PM439 CODEC/Audio PA	53.	WCN3680B	
19.	RESERVED	54.	WLAN_FEM	
20.	RESERVED	55.	GPS	
21.	RESERVED	56.	RESERVED	
22.	RESERVED	57.	RESERVED	
23.	SMB1355	58.	NFC	
24.	RESERVED	59.	Change list	
25.	MEMORY (LPDDR3+EMMC V5.1)			
26.	RESERVED			
27.	Audio DISC Parts			
28.	RESERVED			
29.	WSA			
30.	Display I/F and Backlight			
31.	Front Camera and LDOs			
32.	Rear Camera/Flash			
33.	Sensor			
34.	SIM/TF card			
35.	Keypad and Indicator			

TABLE OF CONTENT			
File	Document Number	Rev	
ID	<Doc>		V1.0
Date	Thursday, June 27, 2013	Sheet	1 of 33

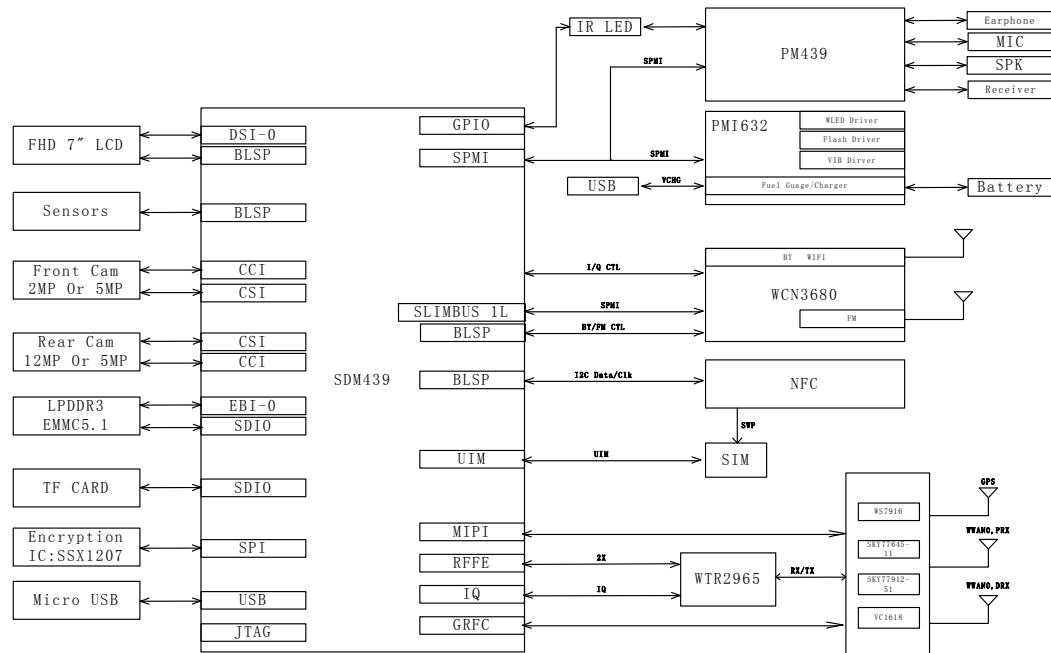

Block
Diagram

SDM439 GPIO Configuration For QRD439+PMI632

GPIO_0	NFC_SPI_ESE_MOSI	GPIO_41		GPIO_82	FM_DATA
GPIO_1	NFC_SPI_ESE_MISO	GPIO_42	ACCL_INT1	GPIO_83	BT_CTL
GPIO_2	NFC_SPI_CS_N_0	GPIO_43	ALSP_INT_N	GPIO_84	BT_DATA
GPIO_3	NFC_SPI_ESE_CLK	GPIO_44	MAG_DRDY_INT	GPIO_85	FP_SPI_MOSI
GPIO_4	QUP_UART_TX_2	GPIO_45	GYRO_INT	GPIO_86	FP_SPI_MISO
GPIO_5	QUP_UART_RX_2	GPIO_46		GPIO_87	FP_SPI_CS
GPIO_6	WSA_SMB_I2C_SDA	GPIO_47	SENSOR_SPI_CS2_N	GPIO_88	FP_SPI_CLK
GPIO_7	WSA_SMB_I2C_SCL	GPIO_48	FP_INT_N1	GPIO_89	
GPIO_8	TP_SPI_MOSI	GPIO_49	UIM_BATT_ALARM	GPIO_90	
GPIO_9	TP_SPI_MISO	GPIO_50		GPIO_91	KEY_VOL_UP_N
GPIO_10	TP_SPI_CS_SDA	GPIO_51	UIM1_DATA	GPIO_92	
GPIO_11	TP_SPI_CLK_SCL	GPIO_52	UIM1_CLK	GPIO_93	NFC_ESE_PWR_REQ
GPIO_12	WSA_INTR	GPIO_53	UIM1_RESET	GPIO_94	WSA_IO_DATA
GPIO_13	LCD_ID	GPIO_54	UIM1_PRESENT	GPIO_95	WSA_IO_CLK
GPIO_14	SENSOR_I2C_SDA	GPIO_55	UIM2_DATA	GPIO_96	WSA_EN
GPIO_15	SENSOR_I2C_SCL	GPIO_56	UIM2_CLK	GPIO_97	HomeKey_FP_INT
GPIO_16	NFC_DISABLE	GPIO_57	UIM2_RESET	GPIO_98	
GPIO_17	NFC_IRQ	GPIO_58	UIM2_PRESENT	GPIO_99	
GPIO_18	NFC_I2C_SDA	GPIO_59		GPIO_100	RFFE1_CLK
GPIO_19	NFC_I2C_SCL	GPIO_60	LCD0_RESET_N	GPIO_101	RFFE1_DATA
GPIO_20	SENSOR_SPI_MOSI	GPIO_61	SMB_INT	GPIO_102	RFFE2_CLK
GPIO_21	SENSOR_SPI_MISO	GPIO_62		GPIO_103	RFFE2_DATA
GPIO_22	SENSOR_SPI_CS0_N	GPIO_63		GPIO_104	
GPIO_23	SENSOR_SPI_CLK	GPIO_64	TP_RST_N	GPIO_105	
GPIO_24	LCD_TE0	GPIO_65	TP_INT_N	GPIO_106	
GPIO_25	WSA_MCLK	GPIO_66		GPIO_107	GRFC3_SEL
GPIO_26	CAM_MCLK0	GPIO_67	SDCARD_DET_N	GPIO_108	
GPIO_27	CAM_MCLK1	GPIO_68		GPIO_109	GRFC5_SEL
GPIO_28		GPIO_69	CDC_PDM_CLK	GPIO_110	GRFC6_SEL
GPIO_29	CAM_I2C_SDA0	GPIO_70	CDC_PDM_SYNC	GPIO_111	GRFC7_SEL
GPIO_30	CAM_I2C_SCL0	GPIO_71	CDC_PDM_TX	GPIO_112	GRFC8_SEL
GPIO_31	CAM_I2C_SDA1	GPIO_72	CDC_PDM_RX0	GPIO_113	GRFC9_SEL
GPIO_32	CAM_I2C_SCL1	GPIO_73	CDC_PDM_RX1	GPIO_114	GRFC10_SEL
GPIO_33		GPIO_74	CDC_PDM_RX2	GPIO_115	
GPIO_34	FLASH_STROBE_NOW	GPIO_75	BT_SSBI	GPIO_116	
GPIO_35	CAM_AVDD_LDO_EN	GPIO_76	WL_CMD_DATA_2	GPIO_117	
GPIO_36	MCAM_RST_N	GPIO_77	WL_CMD_DATA_1	GPIO_118	EXT_GPS_LNA_EN
GPIO_37	FORCE_USB_BOOT	GPIO_78	WL_CMD_DATA_0	GPIO_119	CH0_GSM_TX_PHASE_D0
GPIO_38	SCAM_RST_N	GPIO_79	WL_CMD_SET	GPIO_120	RFFE5_CLK
GPIO_39		GPIO_80	WL_CMD_CLK	GPIO_121	RFFE5_DATA
GPIO_40		GPIO_81	FM_SSBI	GPIO_122	

GPIO_123			
GPIO_124	FP_RESET		
GPIO_125			
GPIO_126			
GPIO_127			
GPIO_128			
GPIO_129			
GPIO_130	NFC_DWL_REQ		
GPIO_131			
GPIO_132	RCM_MARKER1		
GPIO_133	RCM_MARKER2		

PMI632 GPIO/MPP Configuration

GPIO_1	CONNECTOR_THERMAL	GPIO_5	FLASH_STROBE_NOW
GPIO_2	SMB_PARALLEL_CHG_EN	GPIO_6	NEBULA_PWM
GPIO_3	SKIN_THERMAL	GPIO_7	SMB_VCHG_P
GPIO_4	SMB_THERMAL	GPIO_8	SMB_VCHG_M

PM439 GPIO/MPP Configuration

GPIO_1		MPP_1	VDD_PX_BIAS_MPP_1
GPIO_2	NFC_CLK_REQ		
GPIO_3	UIM_BATT_ALARM	MPP_3	VREF_DAC_MPP_3
GPIO_4	WLED_EN	MPP_4	QUIET_THERM_TP_LED_K
GPIO_5			
GPIO_6			
GPIO_7			
GPIO_8	LCM_BL_PWM		

GPIO
TABLE

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER RESTRICTIONS, DIVERSION, CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.		QUALCOMM Technologies, Inc. 5775 Morehouse Drive San Diego, CA 92121-1714 U.S.A. QUALCOMM CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.	
Title	SCHEMATIC, CCA, MARK, QRD439_2-4.2, EVT1.0	Rev	A
Size	1200-PP633	Rev	A
Date	Monday, June 27, 2018	Sheet	3 of 30



SDM439 EBI

NOTE:
Asterisks (*) indicate modem power management (MPM) wake-up pins

GPIO_0	GPIO_0
GPIO_1	GPIO_1
GPIO_2	GPIO_2
GPIO_3	GPIO_3
GPIO_4	GPIO_4
GPIO_5	GPIO_5
GPIO_6	GPIO_6
GPIO_7	GPIO_7
GPIO_8	GPIO_8

GPIO_9	GPIO_9
GPIO_10	GPIO_10
GPIO_11	GPIO_11
GPIO_12	GPIO_12
GPIO_13	GPIO_13
GPIO_14	GPIO_14
GPIO_15	GPIO_15
GPIO_16	GPIO_16
GPIO_17	GPIO_17
GPIO_18	GPIO_18
GPIO_19	GPIO_19
GPIO_20	GPIO_20
GPIO_21	GPIO_21
GPIO_22	GPIO_22
GPIO_23	GPIO_23
GPIO_24	GPIO_24
GPIO_25	GPIO_25
GPIO_26	GPIO_26
GPIO_27	GPIO_27
GPIO_28	GPIO_28
GPIO_29	GPIO_29
GPIO_30	GPIO_30
GPIO_31	GPIO_31
GPIO_32	GPIO_32
GPIO_33	GPIO_33
GPIO_34	GPIO_34
GPIO_35	GPIO_35
GPIO_36	GPIO_36
GPIO_37	GPIO_37
GPIO_38	GPIO_38
GPIO_39	GPIO_39
GPIO_40	GPIO_40
GPIO_41	GPIO_41
GPIO_42	GPIO_42
GPIO_43	GPIO_43
GPIO_44	GPIO_44
GPIO_45	GPIO_45
GPIO_46	GPIO_46
GPIO_47	GPIO_47
GPIO_48	GPIO_48
GPIO_49	GPIO_49
GPIO_50	GPIO_50
GPIO_51	GPIO_51
GPIO_52	GPIO_52
GPIO_53	GPIO_53
GPIO_54	GPIO_54
GPIO_55	GPIO_55
GPIO_56	GPIO_56
GPIO_57	GPIO_57
GPIO_58	GPIO_58
GPIO_59	GPIO_59
GPIO_60	GPIO_60
GPIO_61	GPIO_61
GPIO_62	GPIO_62
GPIO_63	GPIO_63
GPIO_64	GPIO_64
GPIO_65	GPIO_65
GPIO_66	GPIO_66

Default boot config (SD000) is SD01(SD000)




FM_LNA_EN由GPIO87调整到GPIO89

cap_int由GPIO48调整到GPIO46



I2C PULL-UP RESISTORS

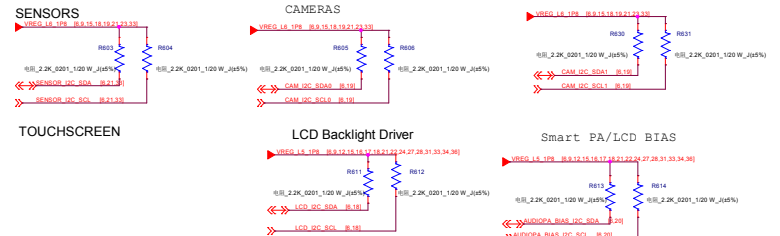

NOTE:
Ensure SW sets these GPIOs (Sensor, CTP and Camera I2C bus) to inout pull down when the peripherals are powered off to eliminate leakage.

SDM439 GPIO


NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART NOR THE CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.

THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER (EXPORT) LAWS, ORDINANCES, REGULATIONS AND RESTRICTIONS. IT IS STRICTLY PROHIBITED TO DISCLOSE OR PROVIDE THIS TECHNICAL DATA TO ANY OTHER PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.

Copyright (C) 2018 QUALCOMM Technologies, Inc.
All rights reserved.


QUALCOMM Technologies, Inc.
8775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

SCHEMATIC: QCA, BARK, QM388_2-4.2, REV1.0
Rev 1.0
Date: November 27, 2018
Page 8 of 30


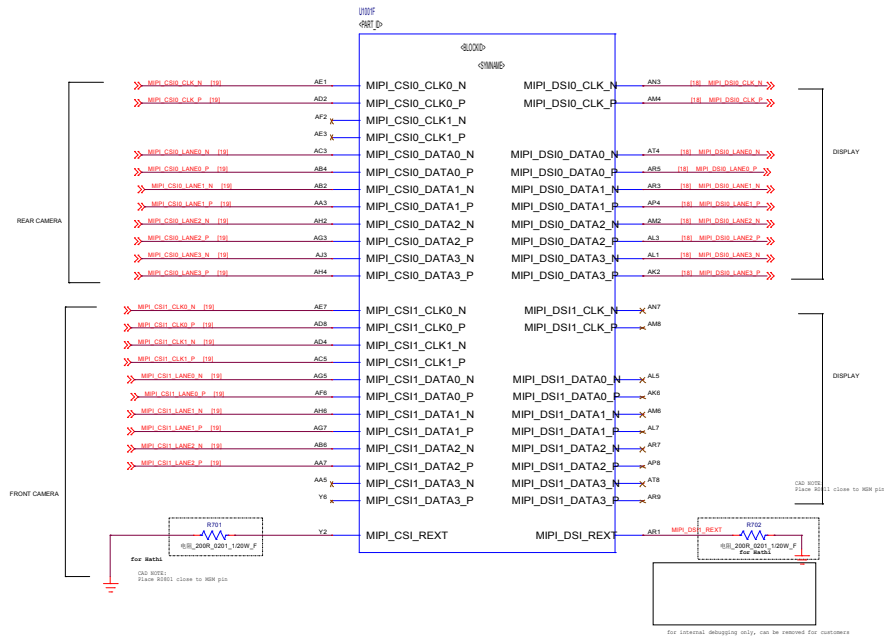


SDM439 MIPI

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR THE CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, REEXPORT OR TRANSFER RESTRICTIONS, LAWS, ORDINANCES, REGULATIONS AND OTHER LEGISLATION. IT IS STRICTLY PROHIBITED TO EXPORT, REEXPORT OR TRANSFER THIS DATA TO U.S. AND INTERNATIONAL, LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.	QUALCOMM CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND FIRM NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.	QUALCOMM Technologies, Inc. 8775 Morehouse Drive San Diego, CA 92121-1714 U.S.A. Title SCHEMATIC, QCA, S4M, QSD439_2-4.2, REV1.0 Rev 1.0 Doc L200-PP033 Date Tuesday, June 27, 2018 Page 1 of 30
--	--	---

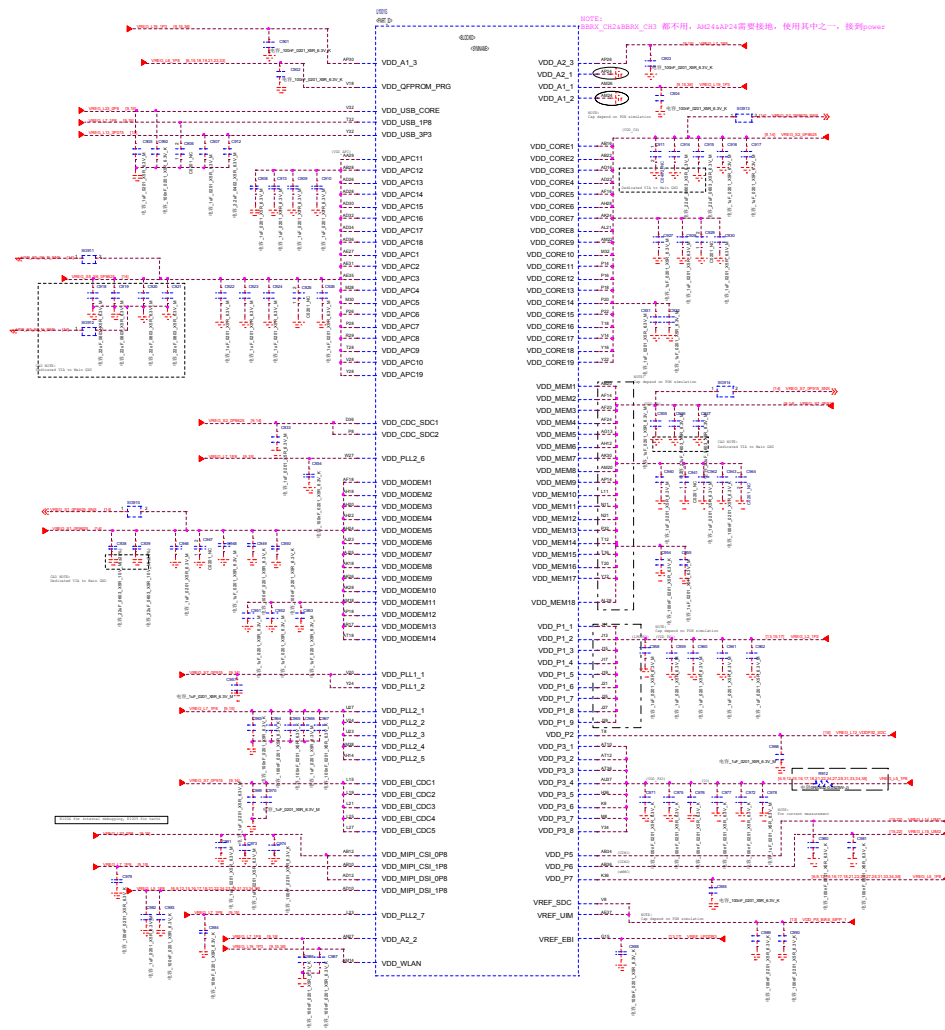


SDM439
POWER1

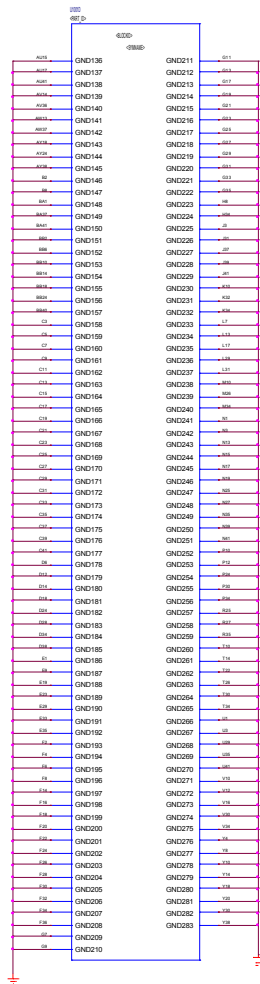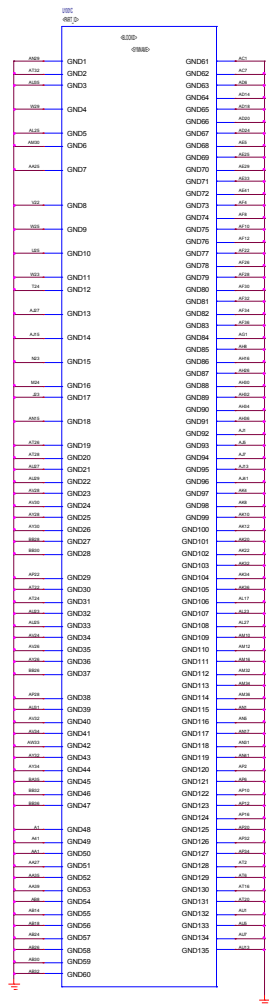



SDM439 GND

QUALCOMM QUALCOMM Technologies, Inc. 3775 La Jolla Village Drive San Diego, CA 92161-1774 U.S.A.	Title Author Check Rev Date
---	--

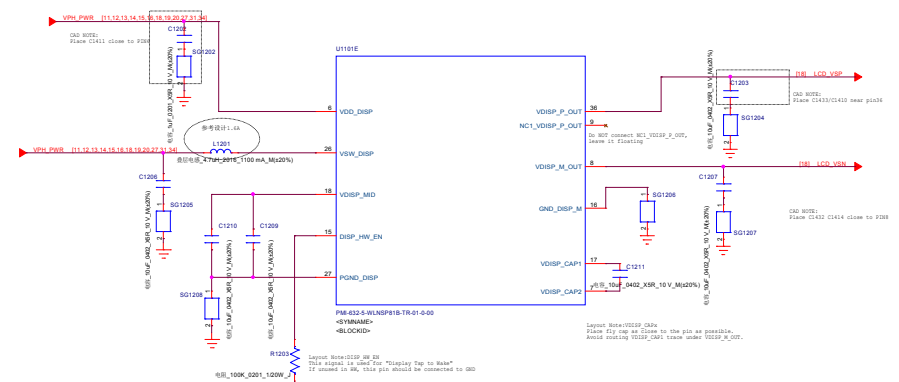


SD Configuration (OPTIONal)	SD Resistance
SWC, uSD	1K
SWC, uSD	22K
SWC, TypeC	510K
SWC, TypeC	1M





PON CONFIGURATIONS	
PON Configuration	Option resistor range
SPM, Micro USB, FMB_DMS	R = (Ground, 1K, 1.2K, 1.5K, 1.8K, and 2.2K)
SPM, Micro USB, FMB_EN	R = (3.3K, 3.9K, 4.7K, and 5.6K)
IC2, Micro USB, FMB_DMS	R = (8.2K, 10K, 12K, and 15K)
IC2, Micro USB, FMB_EN	R = (22K, 27K, 33K, and 39K)
IC2, Type-C, FMB_DMS	R = (56K, 68K, 82K, and 100K)
IC2, Type-C, FMB_EN	R = (150K, 180K, and 220K)
SPM, Type-C, FMB_DMS	R = (33K, 39K, and 47K)
SPM, Type-C, FMB_EN	R = (820K, 1M, 1.2M, and Open)

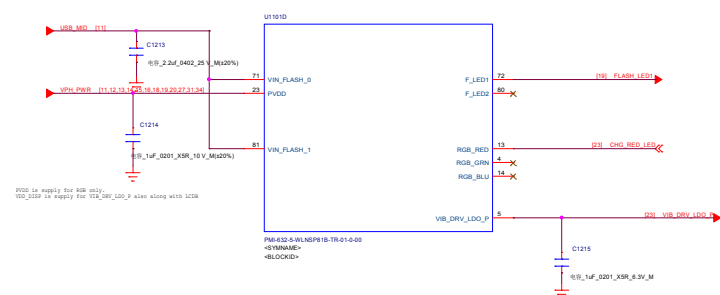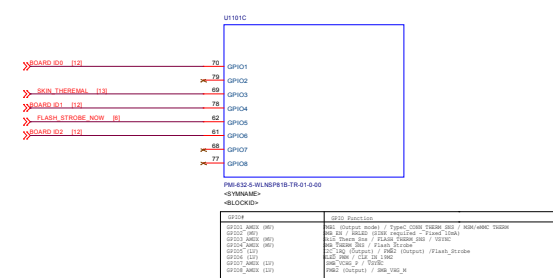

电阻	比例
10K	0.1
15K	0.15
20K	0.2
25K	0.25
30K	0.3
40K	0.4
50K	0.5
60K	0.6
70K	0.7
80K	0.8
90K	0.9

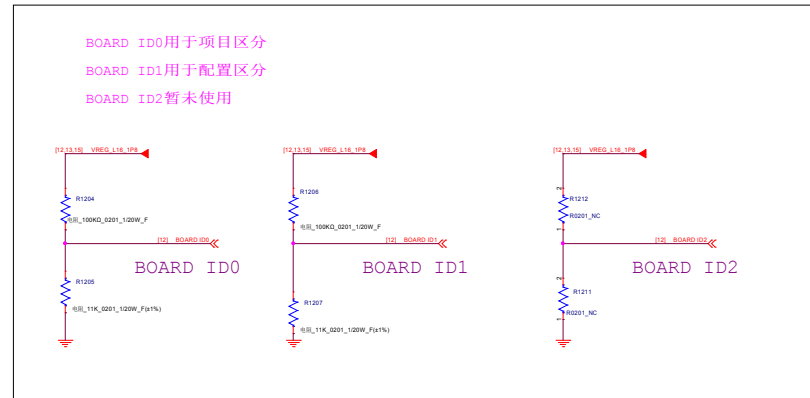PMI632
Control/Interface

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR FOR SCATTER OR FURTHER RELEASE OR QUAL TO CONTINUE WITHOUT THE WRITTEN PERMISSION OF QUALCOMM TECHNOLOGIES, INC. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL PATENT AND OTHER INTELLECTUAL PROPERTY RIGHTS. IT IS UNLAWFUL TO REPRODUCE OR DISSEMINATE THIS INFORMATION IN ANY MANNER CONTRARY TO U.S. AND INTERNATIONAL LAW BE STRICTLY PROTECTED. Copyright © 2014 QUALCOMM Technologies, Inc. All rights reserved.		QUALCOMM CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC. QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND IN MANY OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.		QUALCOMM Technologies, Inc. 5770 Marmondale Drive San Diego, CA 92121-1714 U.S.A.	
Title SC8160, WTA, BSM, GRM3, 3-1.1, RV1.0		Rev Rev 1.0		Rev Rev 1.0	
Doc LD00-PR02		Doc LD00-PR02		Doc LD00-PR02	
Date Monday, June 27, 2015		Date Monday, June 27, 2015		Date Monday, June 27, 2015	

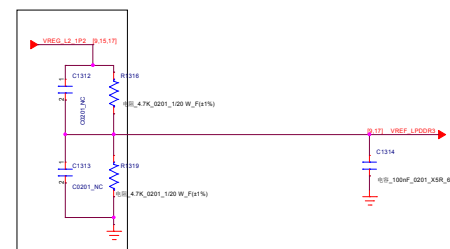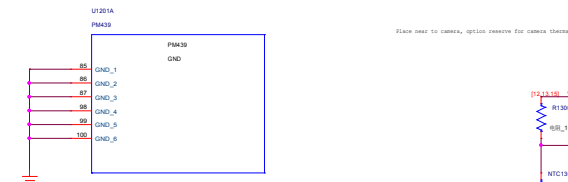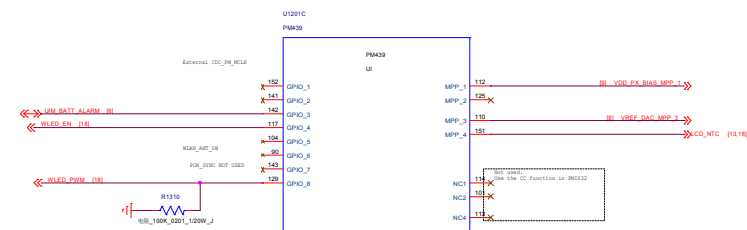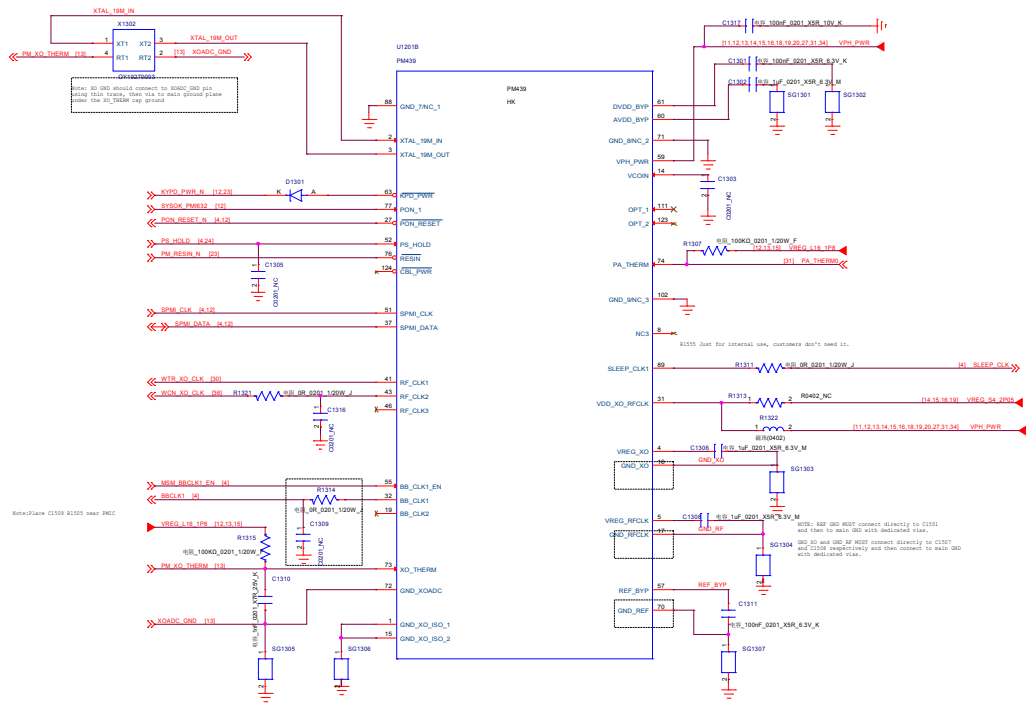

4GB DDR需要将电阻R1316 R1317由4.7k变为3.01K

C3I所有配置同意贴3.01K

PM439 Control/Interface

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM. THIS TECHNICAL DATA MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, RE-EXPORT OR TRANSFER (EMPLOYEES), LAWS, ORDINANCES, CONTRARY TO U.S. AND INTERNATIONAL LAW IS STRICTLY PROHIBITED. Copyright (C) 2018 QUALCOMM Technologies, Inc. All rights reserved.	QUALCOMM QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS. CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.	QUALCOMM Technologies, Inc. 8775 Morehouse Drive San Diego, CA 92121-1714 U.S.A. Title SCHEMATIC, CCA, BARK, ORDIN, 2-4.2, REV1.0 Rev 0 Part L200-PP603 Date Tuesday, April 27, 2018 Page 15 of 30
---	---	---

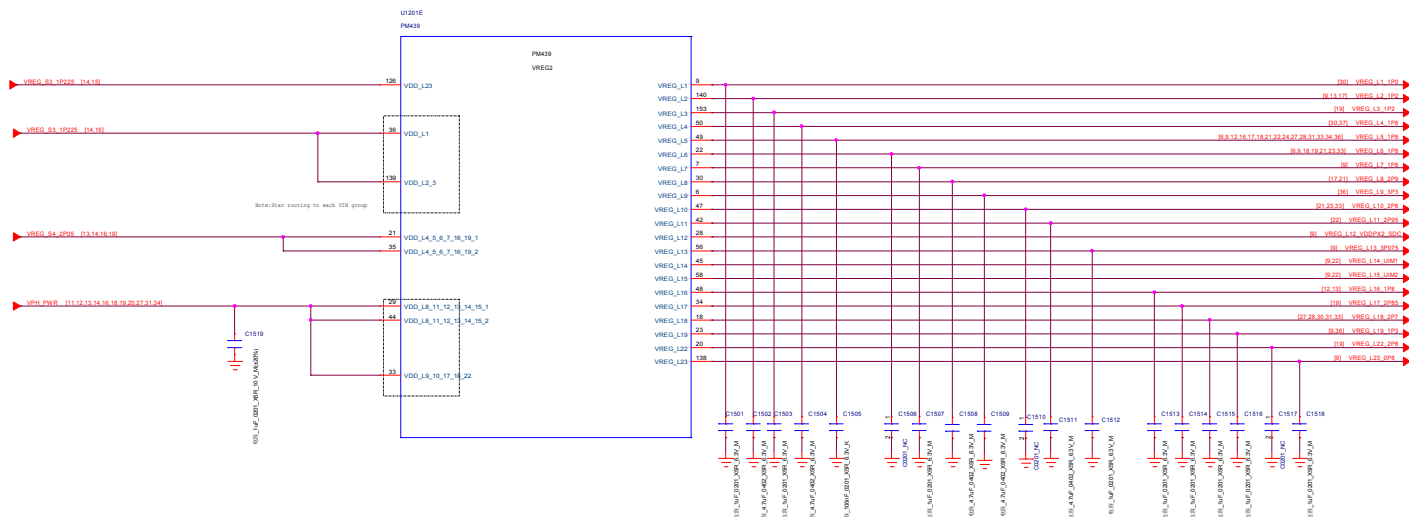


Table 3-6 PM439 regulators and their intended uses for SDM439/SDM429 when paired with PM632

Function	Circuit type	Default voltage (V) ¹	Specified range (V) ¹ (SDM439/SDM429)	Programmable range (V)	Rated current (mA)	Default on	Expected use (SDM439/SDM429)
S1	SMPS	0.744	0.4–1.14	0.33–2.04	3200	N	MSM modem
S2	SMPS	0.744	0.4–1.14	0.32–2.04	4000	Y	MSM core and graphics
S3	SMPS	1.28	1.2–1.25	0.32–2.04	2000	Y	MPI CSI and DSI; Low-voltage LDOs (1, 2, 3, and 23)
S4	SMPS	2.04	1.8–2.04	0.32–2.04	2000	Y	High-voltage LDOs (4, 5, 6, 7, 16, and 19)
S5	SMPS	0.735	0.4–1.14	0.350–1.355	3750	Y	MSM applications processor
S6	SMPS	0.735	0.4–1.14	0.350–1.355	3750	Y	MSM applications processor
S7	SMPS	0.752	0.4–1.14	0.32–2.04	2000	Y	MSM VDD memory rail (VDDMA)
L1	NMOS LDO	1.0 ²	1.0 ³	0.375–1.5375	600	N	RFICs
L2	NMOS LDO	1.2	1.2	0.375–1.5375	1200	Y	VREF generator for LPDDR3
L3	NMOS LDO	1.2	1.2	0.375–1.5375	600	N	Camera digital
L4	PMOS LDO	1.800	1.800	1.750–3.3375	450	N	RFICs and GPS eNANA
L5 ⁴	PMOS LDO	1.800	1.800	1.750–3.3375	600	Y	Most digital VDDs, MSM pad groups 3 and 7, LPDDR, and eMMC
L6	PMOS LDO	1.800	1.800	1.750–3.3375	300	N	MSM GPP/PCIE, camera, touchscreen, display, and sensors
L7	PMOS LDO	1.800	1.800	1.750–3.3375	300	Y	MSM analog, USB and PLLs, WCN XO, and PM baseband clock driver
L8	PMOS LDO	2.900	2.900	1.750–3.3375	600	Y	eMMC
L9	PMOS LDO	$V_{BAT} + 3.375\text{ V}$ for $V_{BAT} > 3.575\text{ V}$ $V_{BAT} + 3\text{ V}$ for $V_{BAT} < 3.575\text{ V}$	3.000–3.300	1.750–3.3375	600	N	WCN
L10	PMOS LDO	3.0	3.0	1.750–3.3375	150	N	Sensors and touchscreen
L11 ⁵	PMOS LDO	2.950	2.950	1.750–3.3375	800	Y	Micro SD



Table 3-6 PM439 regulators and their intended uses for SDM439/SDM429 when paired with PM632 (cont.)

Function	Circuit type	Default voltage (V) ¹	Specified range (V) ¹ (SDM439/SDM429)	Programmable range (V)	Rated current (mA)	Default on	Expected use (SDM439/SDM429)
L12 ⁴	PMOS LDO	2.950	1.800/2.950	1.750–3.3375	50	Y	MSM pad group 2
L13	PMOS LDO	3.075	3.075	1.750–3.3375	150	Y	MSM USB and PMIC and external codec audio
L14 ⁵	PMOS LDO	1.800	1.800	1.750–3.3375	50	N	MSM pad group 5, dual-voltage UIM1, and NFC
L15 ⁵	PMOS LDO	1.800	1.800	1.750–3.3375	50	N	MSM pad group 6 and dual-voltage UIM2
L16	PMOS LDO	1.800	1.800	1.750–3.3375	5	N	PMIC HKADC
L17	PMOS LDO	2.850	2.850	1.750–3.3375	300	N	Camera and display
L18	PMOS LDO	2.700	2.700	1.750–3.3375	150	N	QTI RF front-end
L19	NMOS LDO	1.350	1.350	0.375–1.5375	600	N	MSM analog, WCN, and WGR
L20	Low-noise LDO	1.7625	1.7625	1.74–3.3375	5	Y	PMIC XO circuits
L21	Low-noise LDO	1.7625	1.7625	1.74–3.3375	5	N	PMIC RF clock buffers
L22	PMOS LDO	2.800	2.800	1.750–3.3375	150	N	Camera analog
L23	NMOS LDO	0.8	0.8	0.375–1.5375	600	Y	MPI CSI, DSI, and USB

- All regulators have default voltage settings, whether or not they default on; the voltage and state depends upon the programmable load sequencer (PLS) configuration.
- The specified voltage range is the programmed range for which performance is guaranteed to meet all specifications. For usage outside this range, submit a case to QTI for approval.
NOTE: LDO-rated current specifications are only valid while maintaining their specified headroom.
- LDO1 DC accuracy will be 2% at trimmed voltage (1.05 V) and 3% for other settings. Software configures this LDO1 to 1 V, hence 3% DC accuracy must be factored in.
- L5 powers internal circuits and limited to 1.8 V operation; its programmed voltage should not be changed, and it should not be turned off.
- L1, L14, and L15, as well as all PMOS LDOs have GCP.

PM439 LDO


LCD

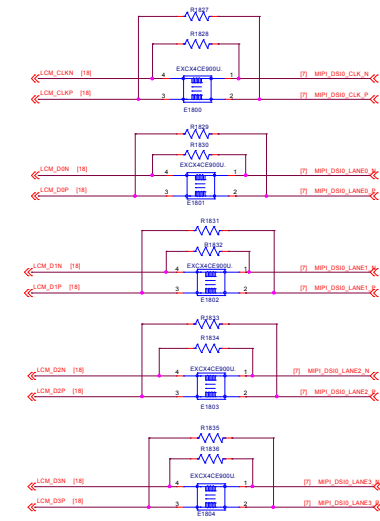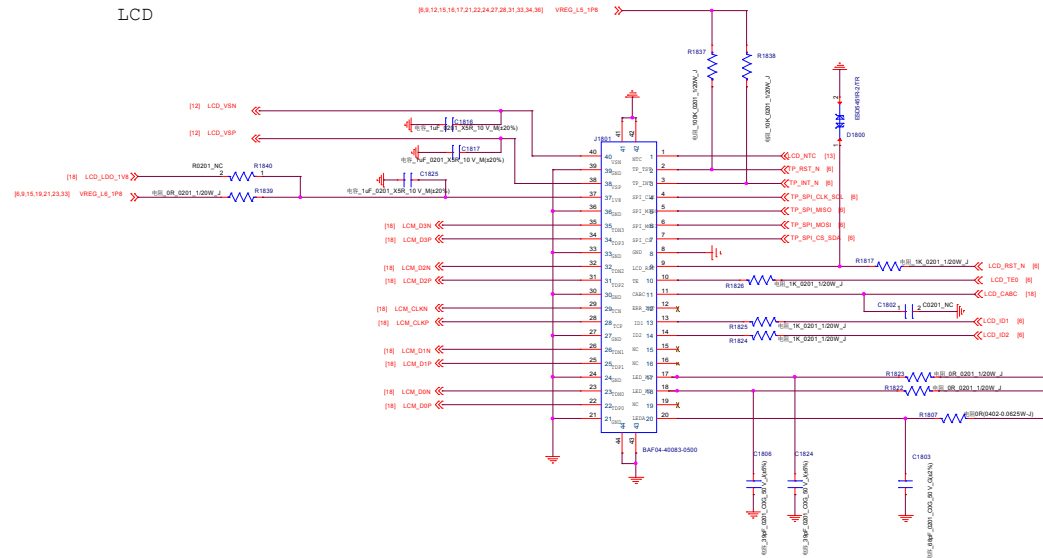


厂家	120 ADDRESS	ADDRESS 10
STD	OK 34-0110510	STD0136
PC	OK 34-0110510	SAC037

CAP tolerance above 50V!!!

NC 预留 1.8V

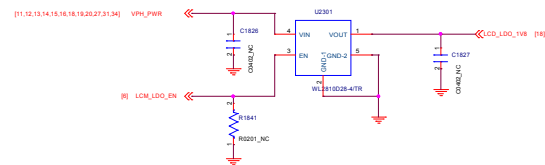


LCD-BACKLIGHT

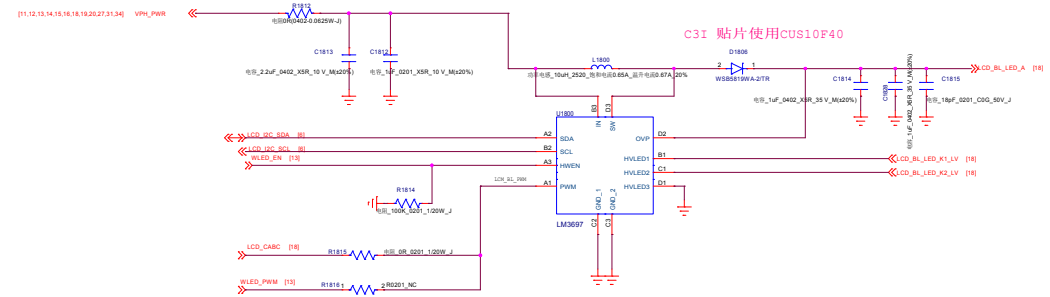


LCD backlight


Main MONO Camera 12M

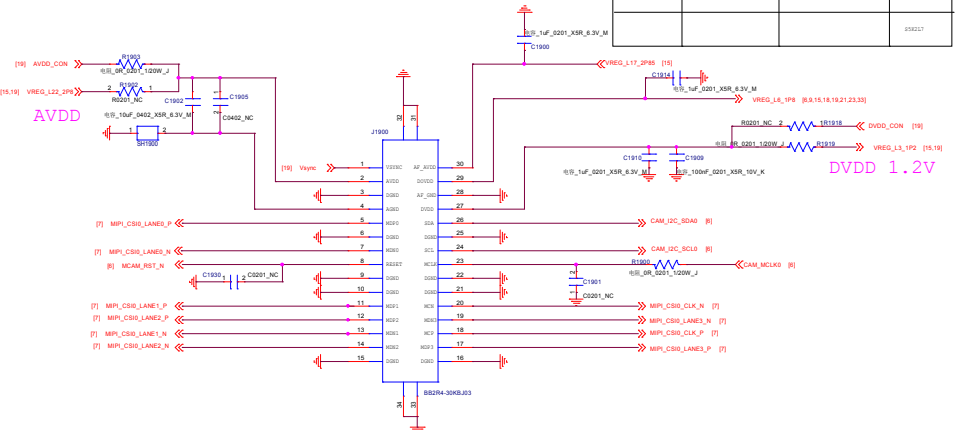


AUX Camera 2M 公用F9 pin定义

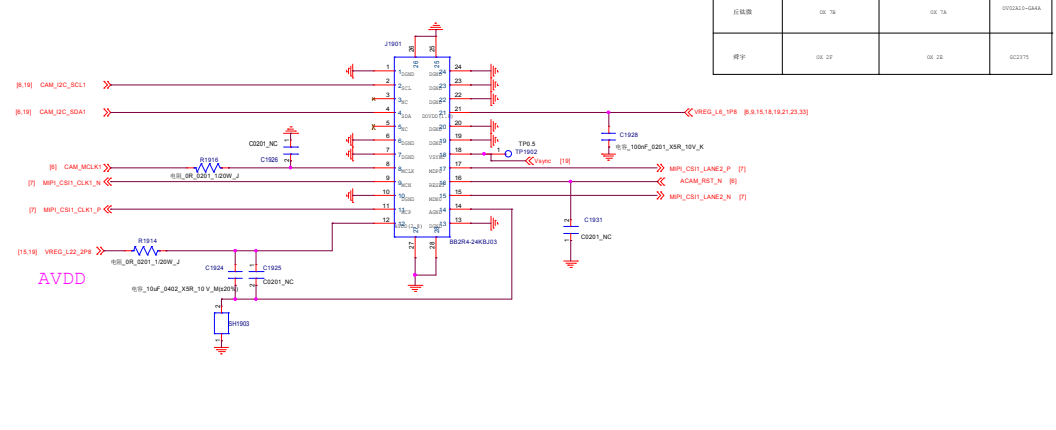

Front Camera 8M

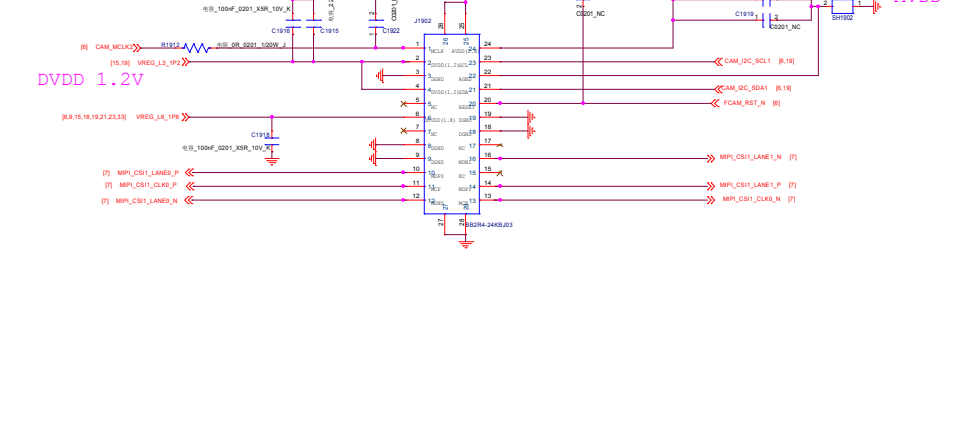


Rear Camera Flash FH15B

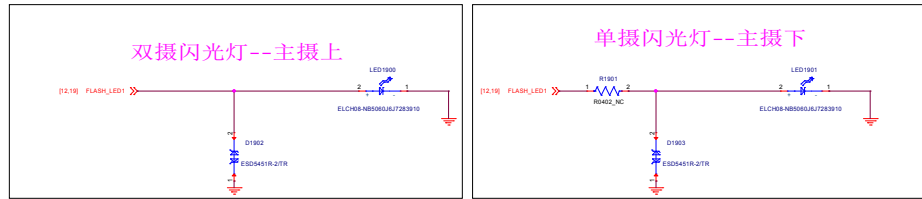


C3I-- 双摄贴此AVDD LDO

贴片使用WL2820D28-4/TR DFN1x1-4L

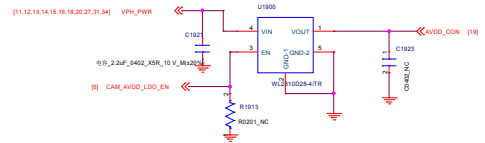


贴片使用WL2820D105-4/TR DFN1x1-4L

此部分硬件做预留，印度版ic imx363和s5k217，贴1.05V LDO

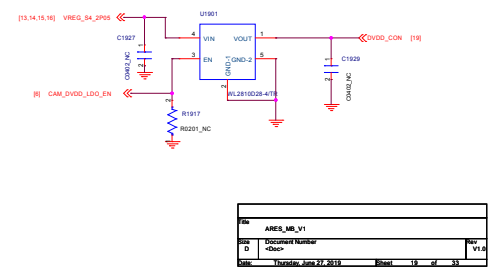


E-compass

厂家	IPC ADDRESS
AKD9916C	5Ch--000100

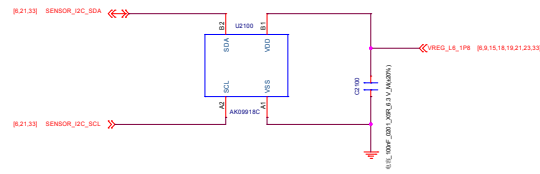


A sensor

厂家	I2C ADDRESS	
	SDO (SDC)	SDO (SLGH)
LSI26K12	0x1E--0011110b	0x1F--0011101b
SGGA420	0x18--0011100b	0x19--0011101b

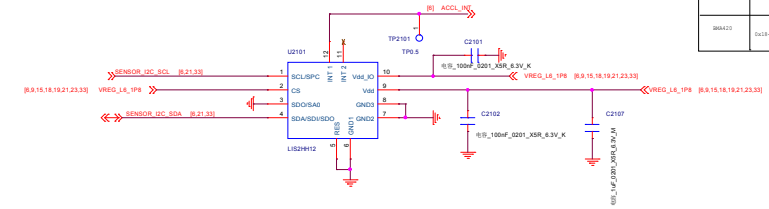


ALS PS LTR2568

厂家	ISO ADDRESS
128-256BALS-80	0x23---0100011

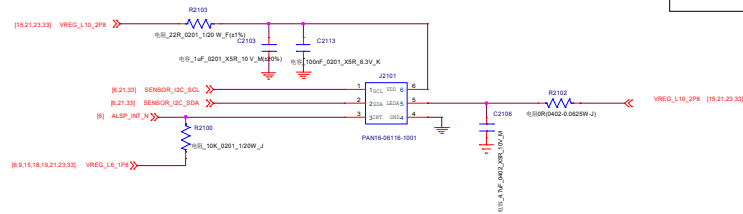


Finger Print

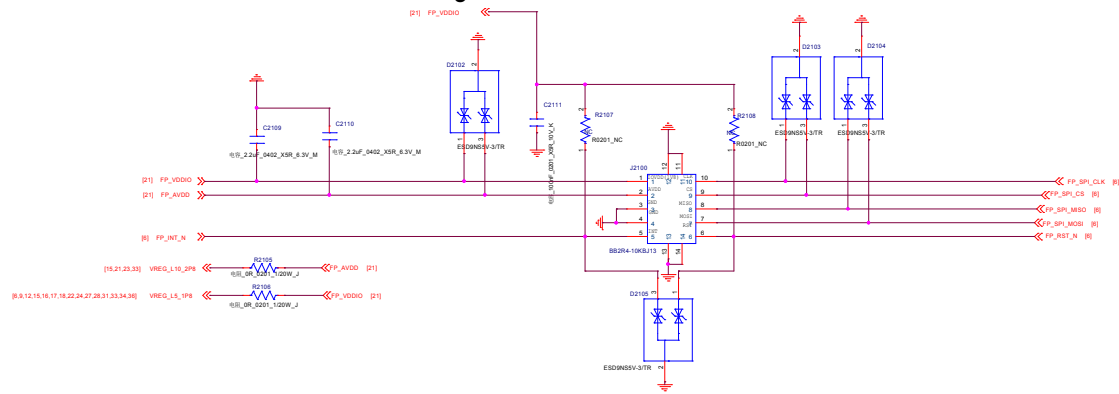


IR

此路电与memory的VCC公用，需要在红外工作的时候长开




File			
ARES_MB_V1			
Size	Document Number	Rev	
D	<Doc>	V1	
Date:	Thursday, June 27, 2019	Sheet	21 of 33


OVP 6.8V ET9552L
OVP 10.5V ET9552

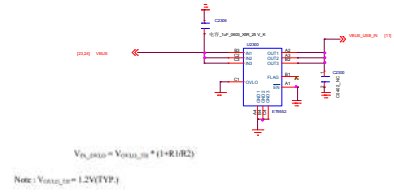

MAIN FPC BTB


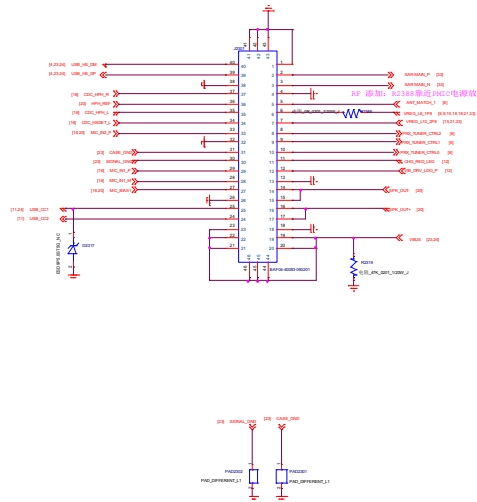


KEY BTB

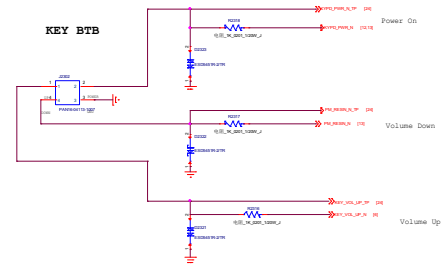

Signal	Description
KEY_VOL_UP_N	Volume Up
PM_RESIN_N	Volume Down
KEYF_PWR_N	PWR_ON
KEY_AI	XIACMI_AI

Battery Connector

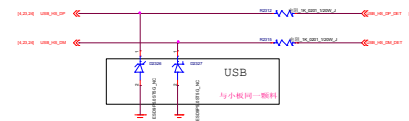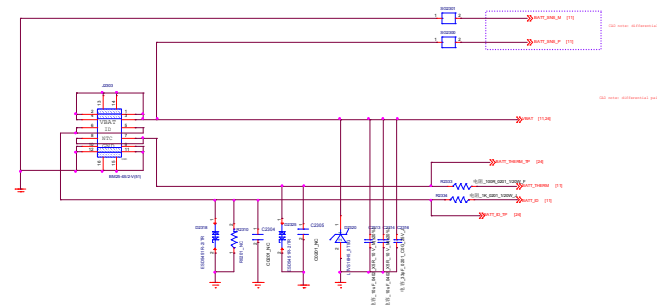

Rev	1.0
Date	2023.08.01
Author	Wang, J.
Checker	Wang, J.
Version	1.0

Test Points

VBAT TEST POINT



USB TEST POINT



CC TEST POINT




KEY TEST point




UART TEST point






Force USB boot


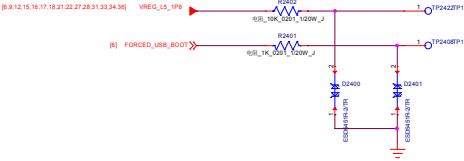


Company Hsien		
Block Title	Test Points	
Project	<Doc>	Rev 1.0
Date	Tuesday, June 27, 2018 1:58 PM	Page 23 of 31

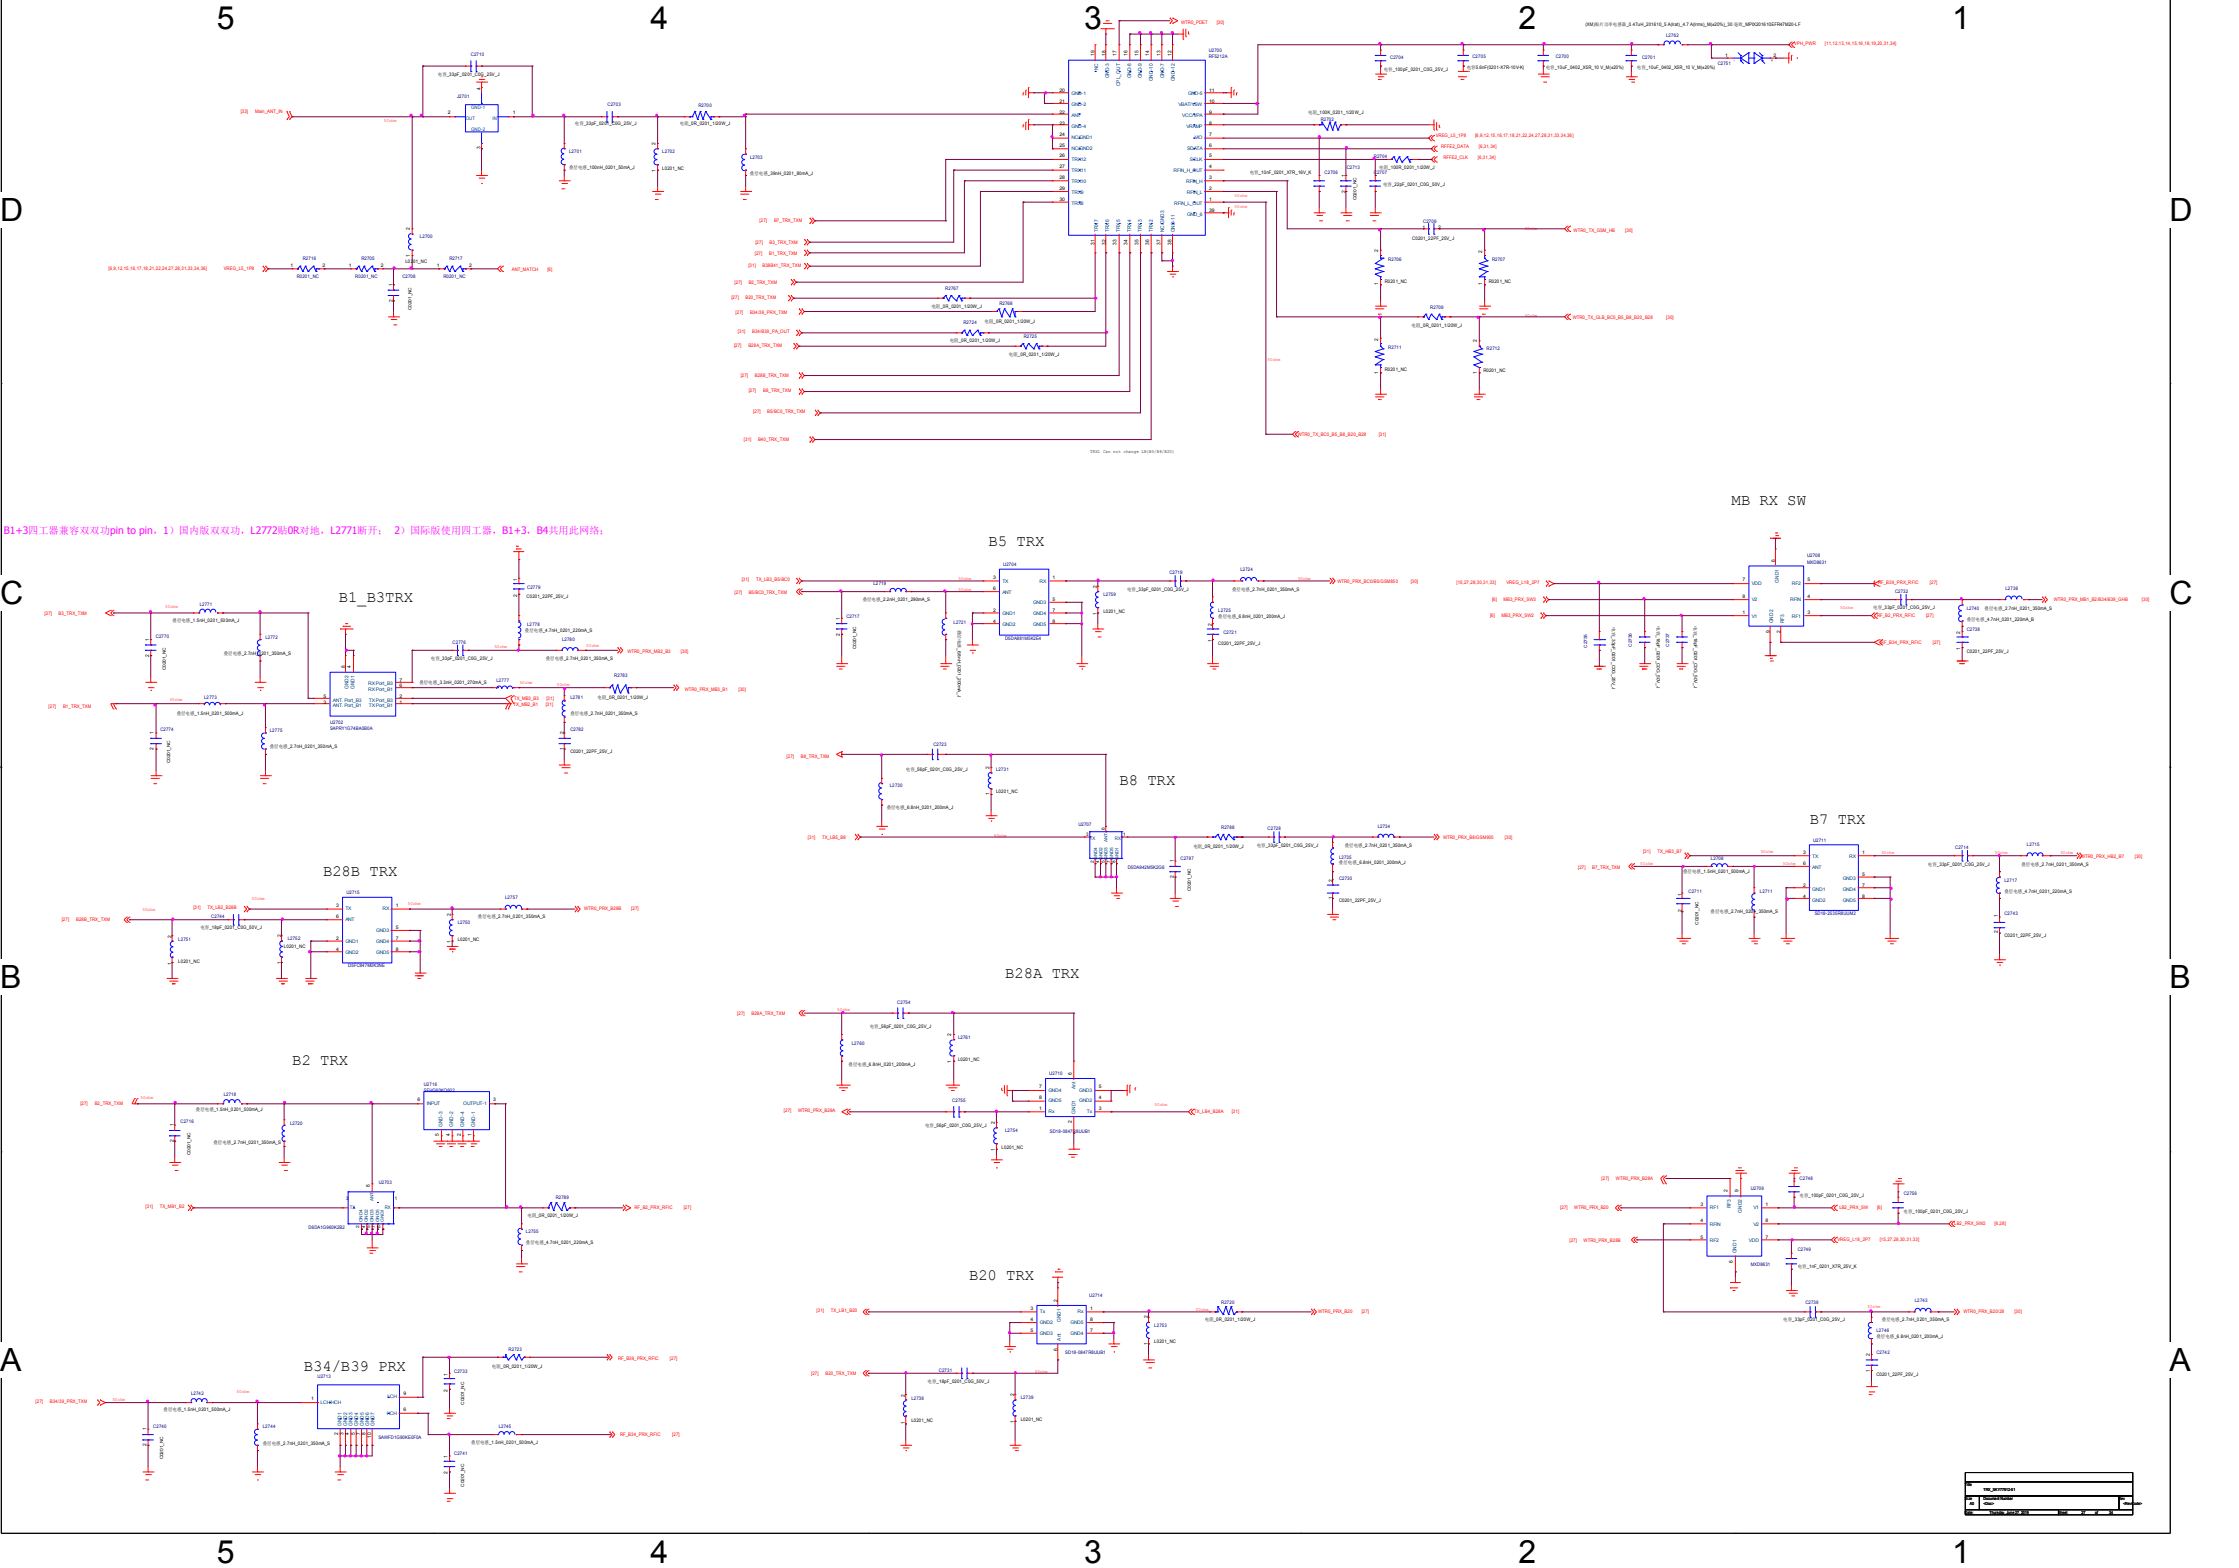

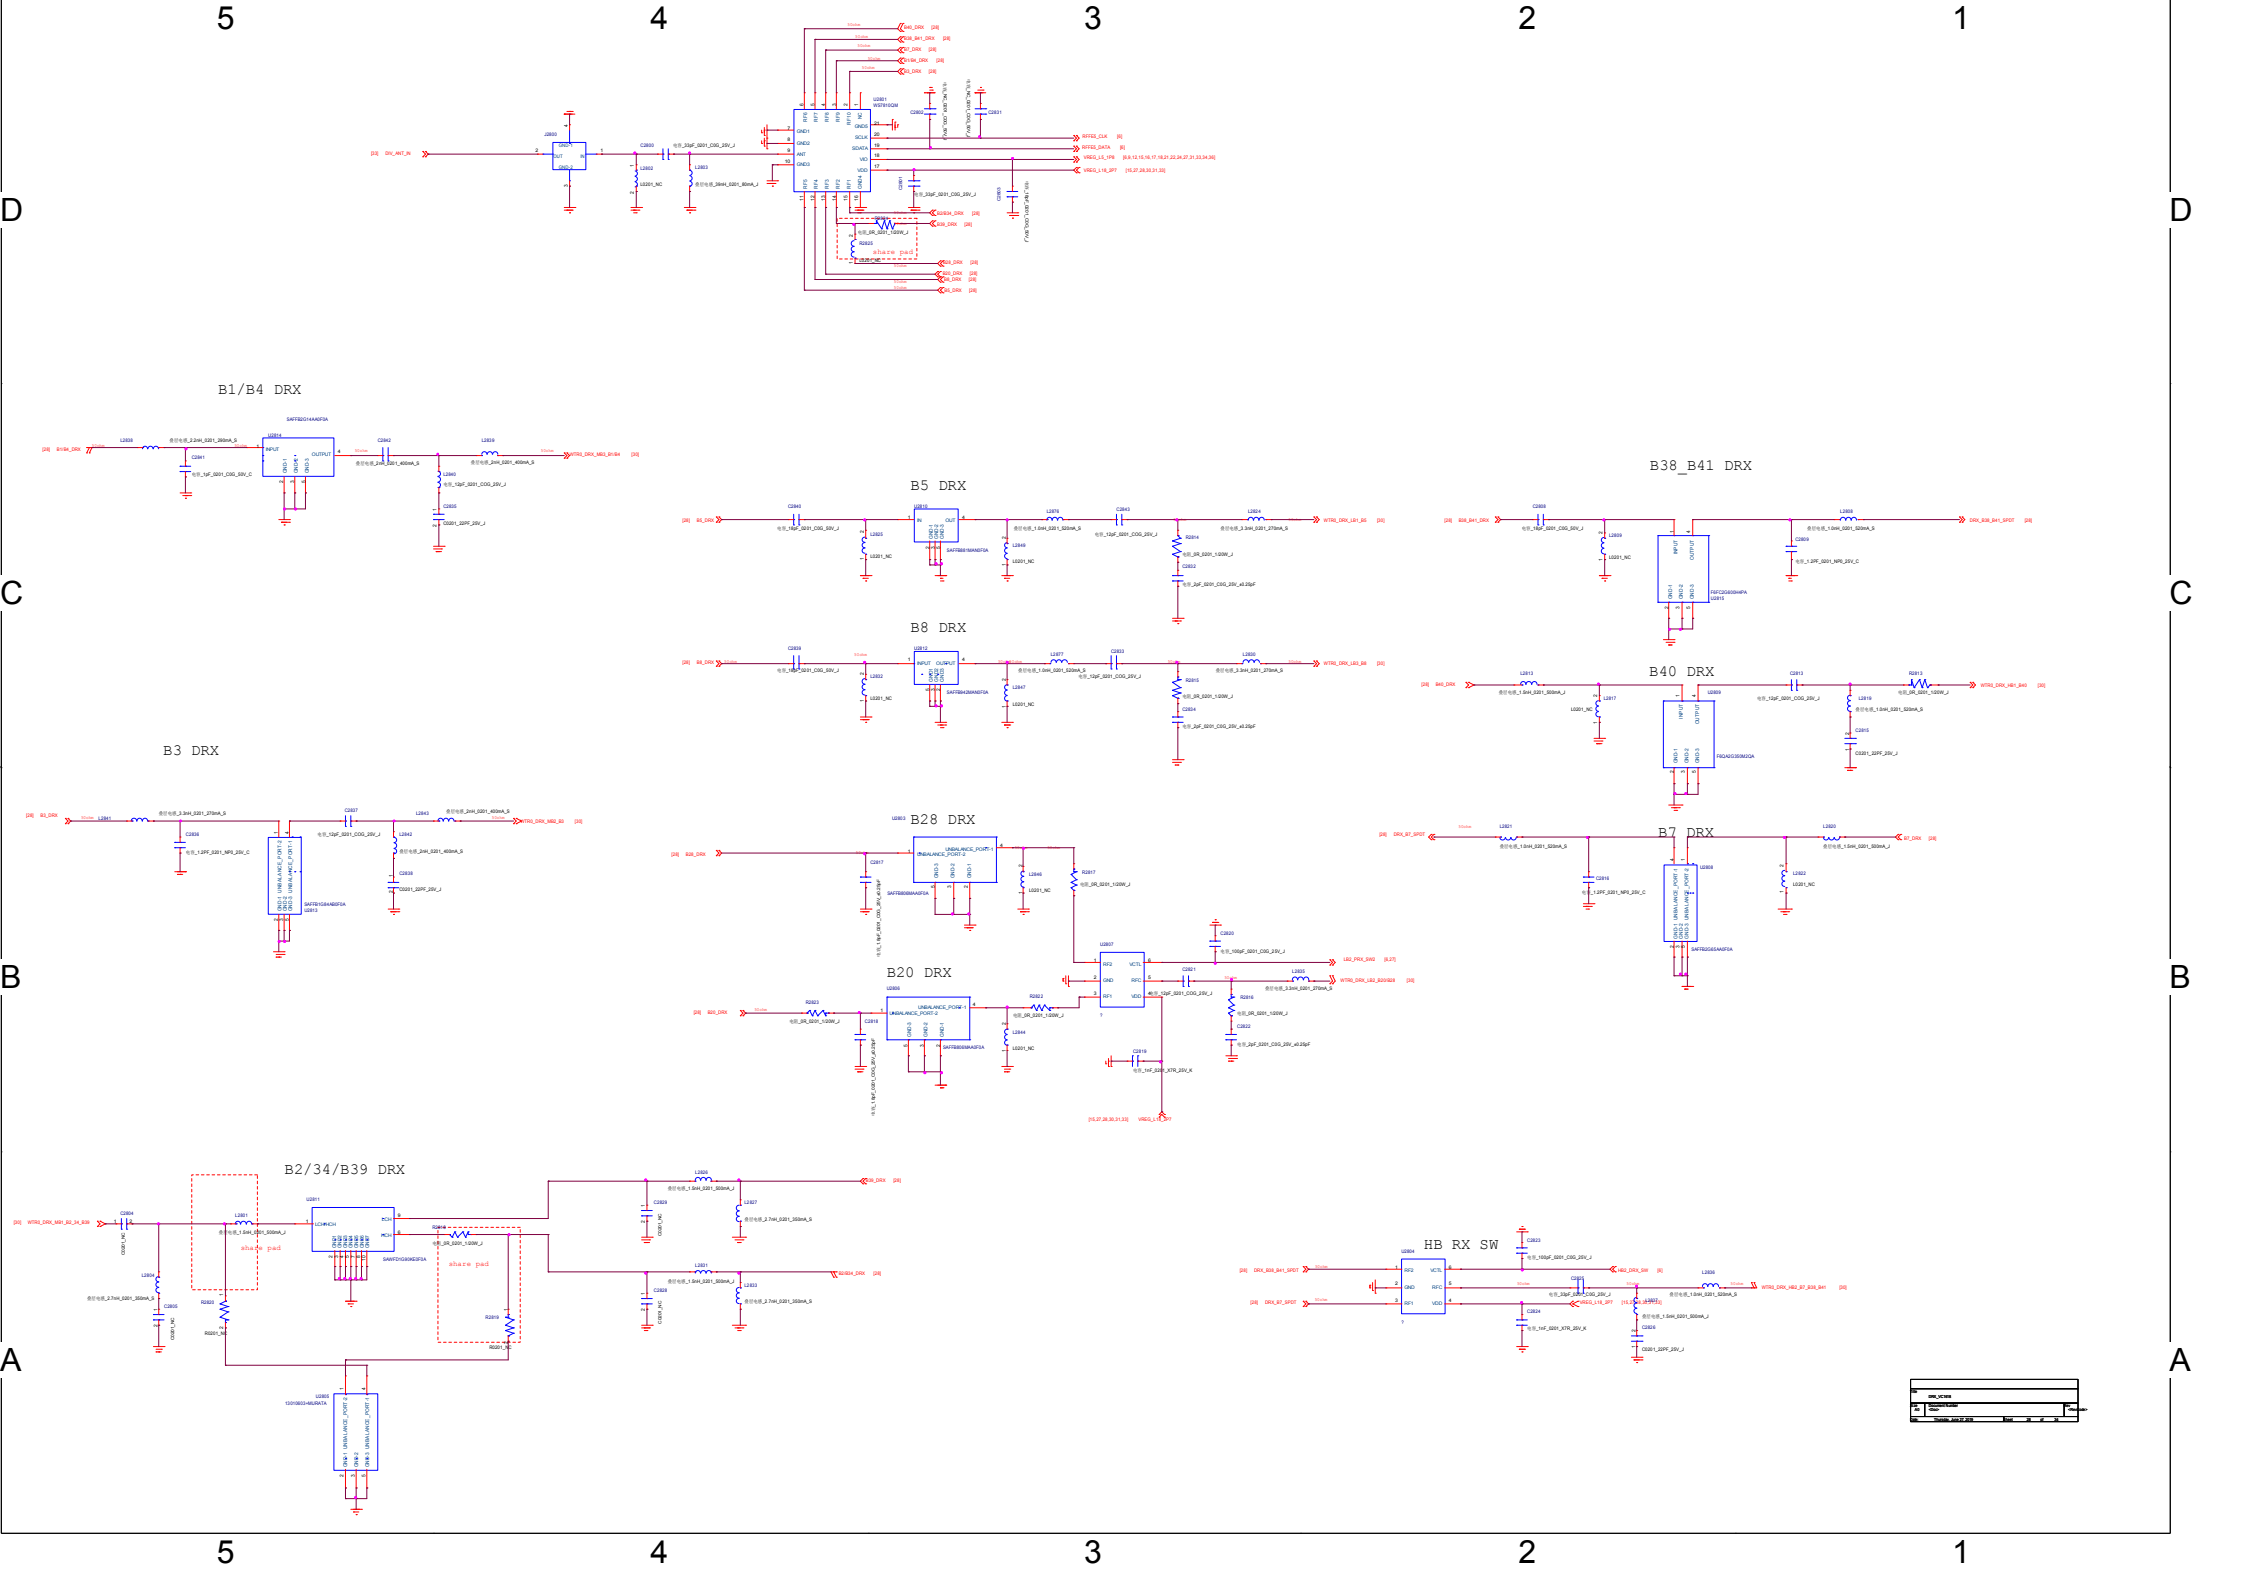

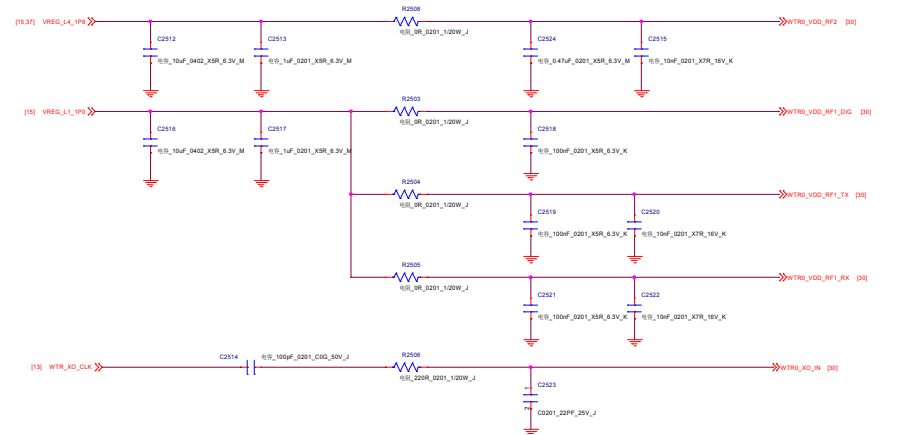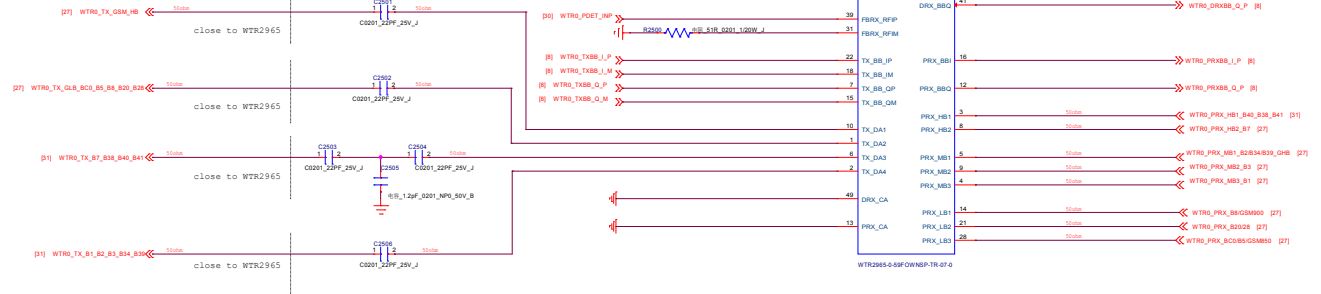

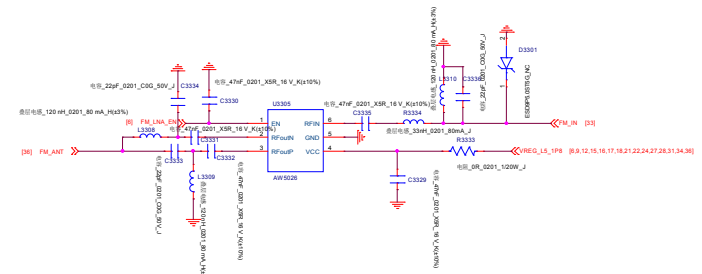[illegible]

L3323 必须贴电感

NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART NOR ITS CONTENTS REVEALED, IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.		QUALCOMM Technologies, Inc.						
THE FOLLOWING INFORMATION MAY BE SUBJECT TO U.S. AND INTERNATIONAL EXPORT, RE-EXPORT AND TRANSFER (RESTRICTION) LAWS AND REGULATIONS GOVERNING U.S. AND INTERNATIONAL LAWS STRICTLY PROHIBITED.	CONFIDENTIAL AND PROPRIETARY QUALCOMM TECHNOLOGIES, INC.	5775 Morsehead Drive San Diego, CA 92121-1714 U.S.A.						
Copyright (C) 2010 QUALCOMM Technologies, Inc. All rights reserved	QUALCOMM IS A REGISTERED TRADEMARK OF QUALCOMM INCORPORATED IN THE UNITED STATES AND MAY BE REGISTERED IN OTHER COUNTRIES. OTHER PRODUCT AND BRAND NAMES MAY BE TRADEMARKS OR REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.	<table border="1"> <tr> <td data-bbox="1944 1256 2036 1260"> Title </td> <td data-bbox="2036 1256 2143 1260"> SCHEMATIC, CAA, MMR, QRDAS 2-42, EVL1.8 </td> </tr> <tr> <td data-bbox="1944 1260 2036 1262"> Date </td> <td data-bbox="2036 1260 2143 1262"> <Doc> </td> </tr> <tr> <td data-bbox="1944 1262 2036 1265"> Rev </td> <td data-bbox="2036 1262 2143 1265"> A </td> </tr> </table>	Title	SCHEMATIC, CAA, MMR, QRDAS 2-42, EVL1.8	Date	<Doc>	Rev	A
Title	SCHEMATIC, CAA, MMR, QRDAS 2-42, EVL1.8							
Date	<Doc>							
Rev	A							

