

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A	SAMSUNG CONFIDENTIAL THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS SAMSUNG ELECTRONICS CO.'S PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY SAMSUNG.																
B																	
C																	
D																	
E																	
F																	
G																	
H																	
I																	
J																	
K																	
L																	

M53 5G REV04

2022.1




- sheet01 : GSM / WCDMA / LTE / 5G sub6 RF
- sheet02 : N78, N79, DRX
- sheet03 : APT, TRANCEIVER
- sheet04 : SENSORS,CONNECTIVITY
- sheet05 : AP(MT6877)
- sheet06 : PMIC(Main,IF), KEY, UFS
- sheet07 : AUDIO, SD/SIM, SHIELD CAN, IF CON
- sheet08 : CAMERA, DISPLAY

	M53_5G_RF_feature	
NR	n1/n3/n5/n7/n8/n20/n28 n38/n40/n41/n78/n79	
FDD	1/2/3/4/5/7/8/12/13/17/20/26/28/66	
TDD	38/ 40/ 41	4X4 MIMO 1/3/7/41/n78/n79
3G	1/2/4/5/8	SRS n41/n78/n79
2G	850/ 900/ 1800/ 1900	Mid-Mid ENDC n1/n3




Engineer:		
Drawn by:		
RED CHK:		
DOC CTRL CHK:		
MFG ENGR CHK:		
TITLE: M53 5G		Size:

Changed by: jess83	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number:	Page: 8
--------------------	---------------	---------------	---------	------	-----------------	---------


LMB_PRX

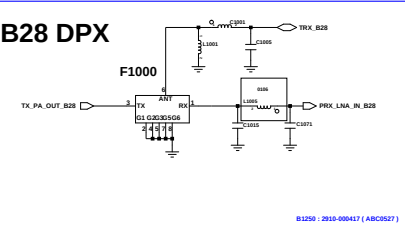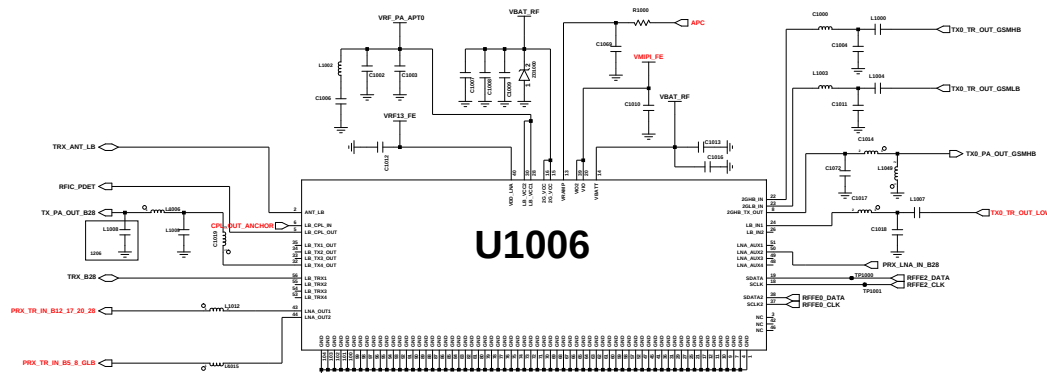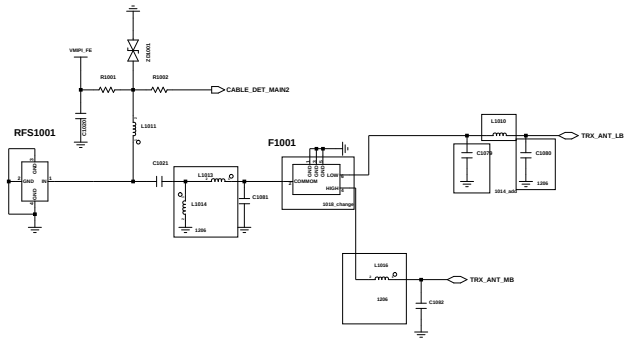

HB_PRX

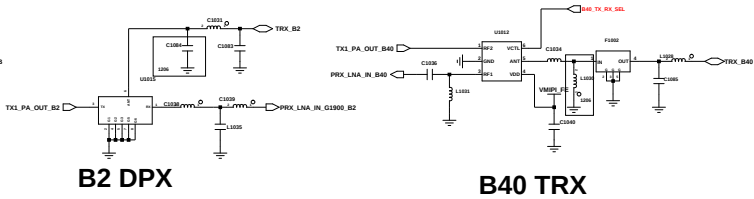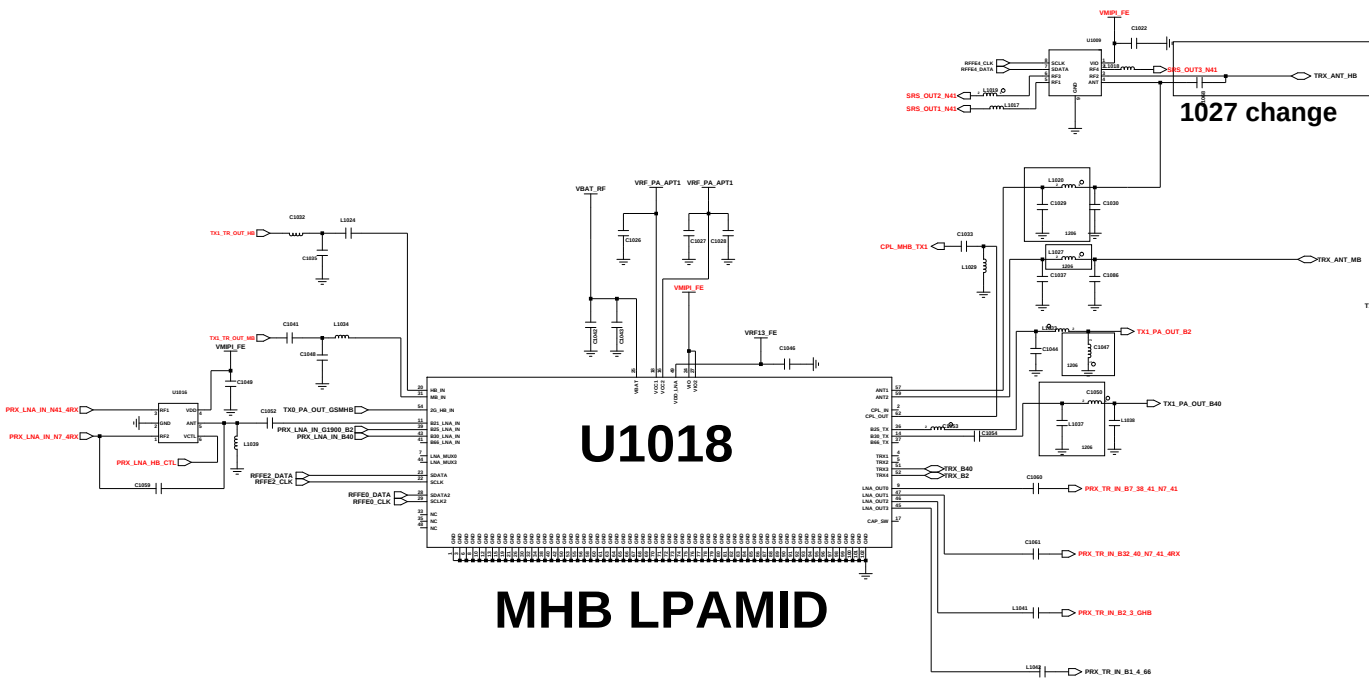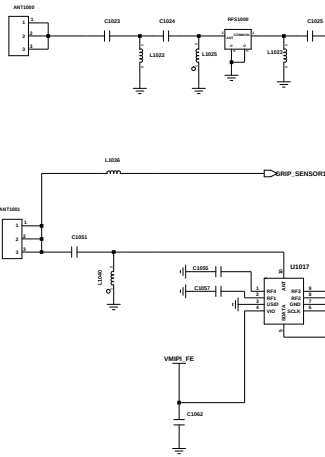

n7/n41 PRX MIMO

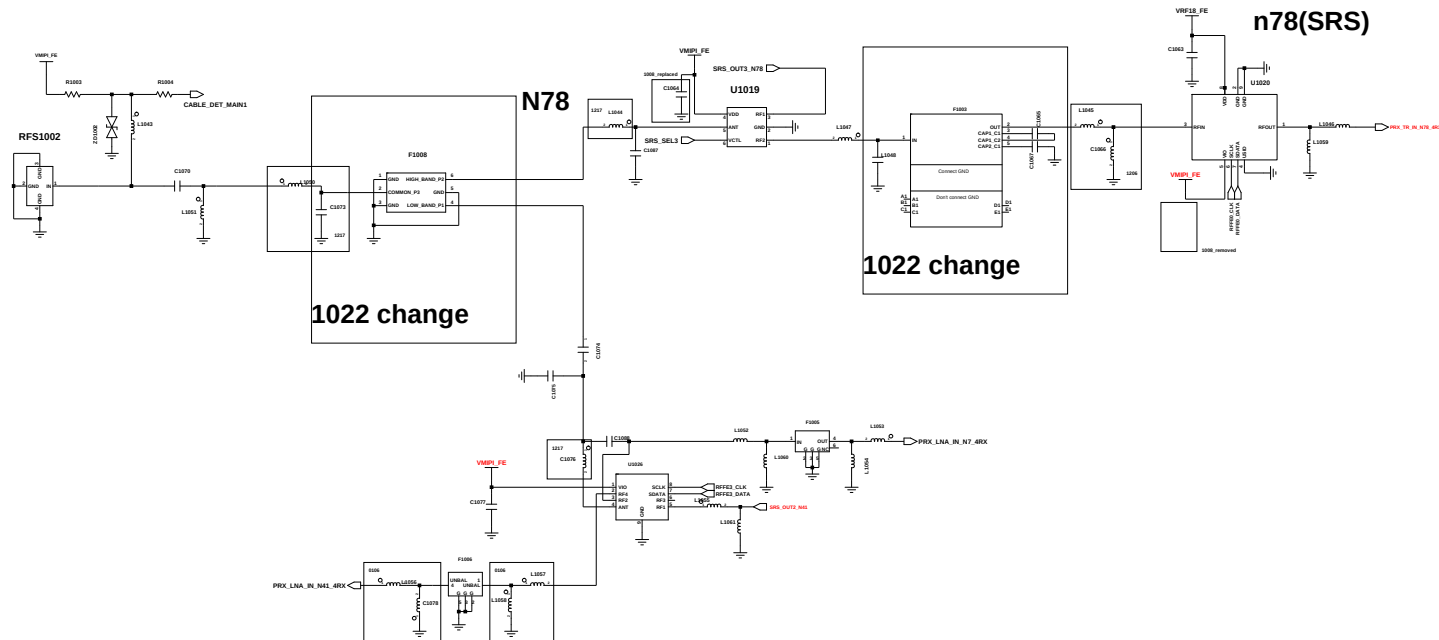




KOR_ONLY



MST




Timing diagram for KOR_ONLY MST. The signal is high from t0 to t1, then low from t1 to t2, and high again from t2 to t3. A horizontal arrow points from t1 to t2, indicating the duration of the low pulse.




MT6877

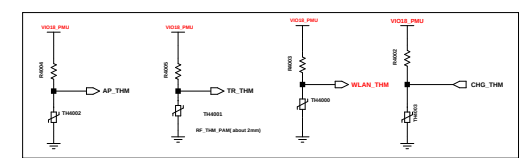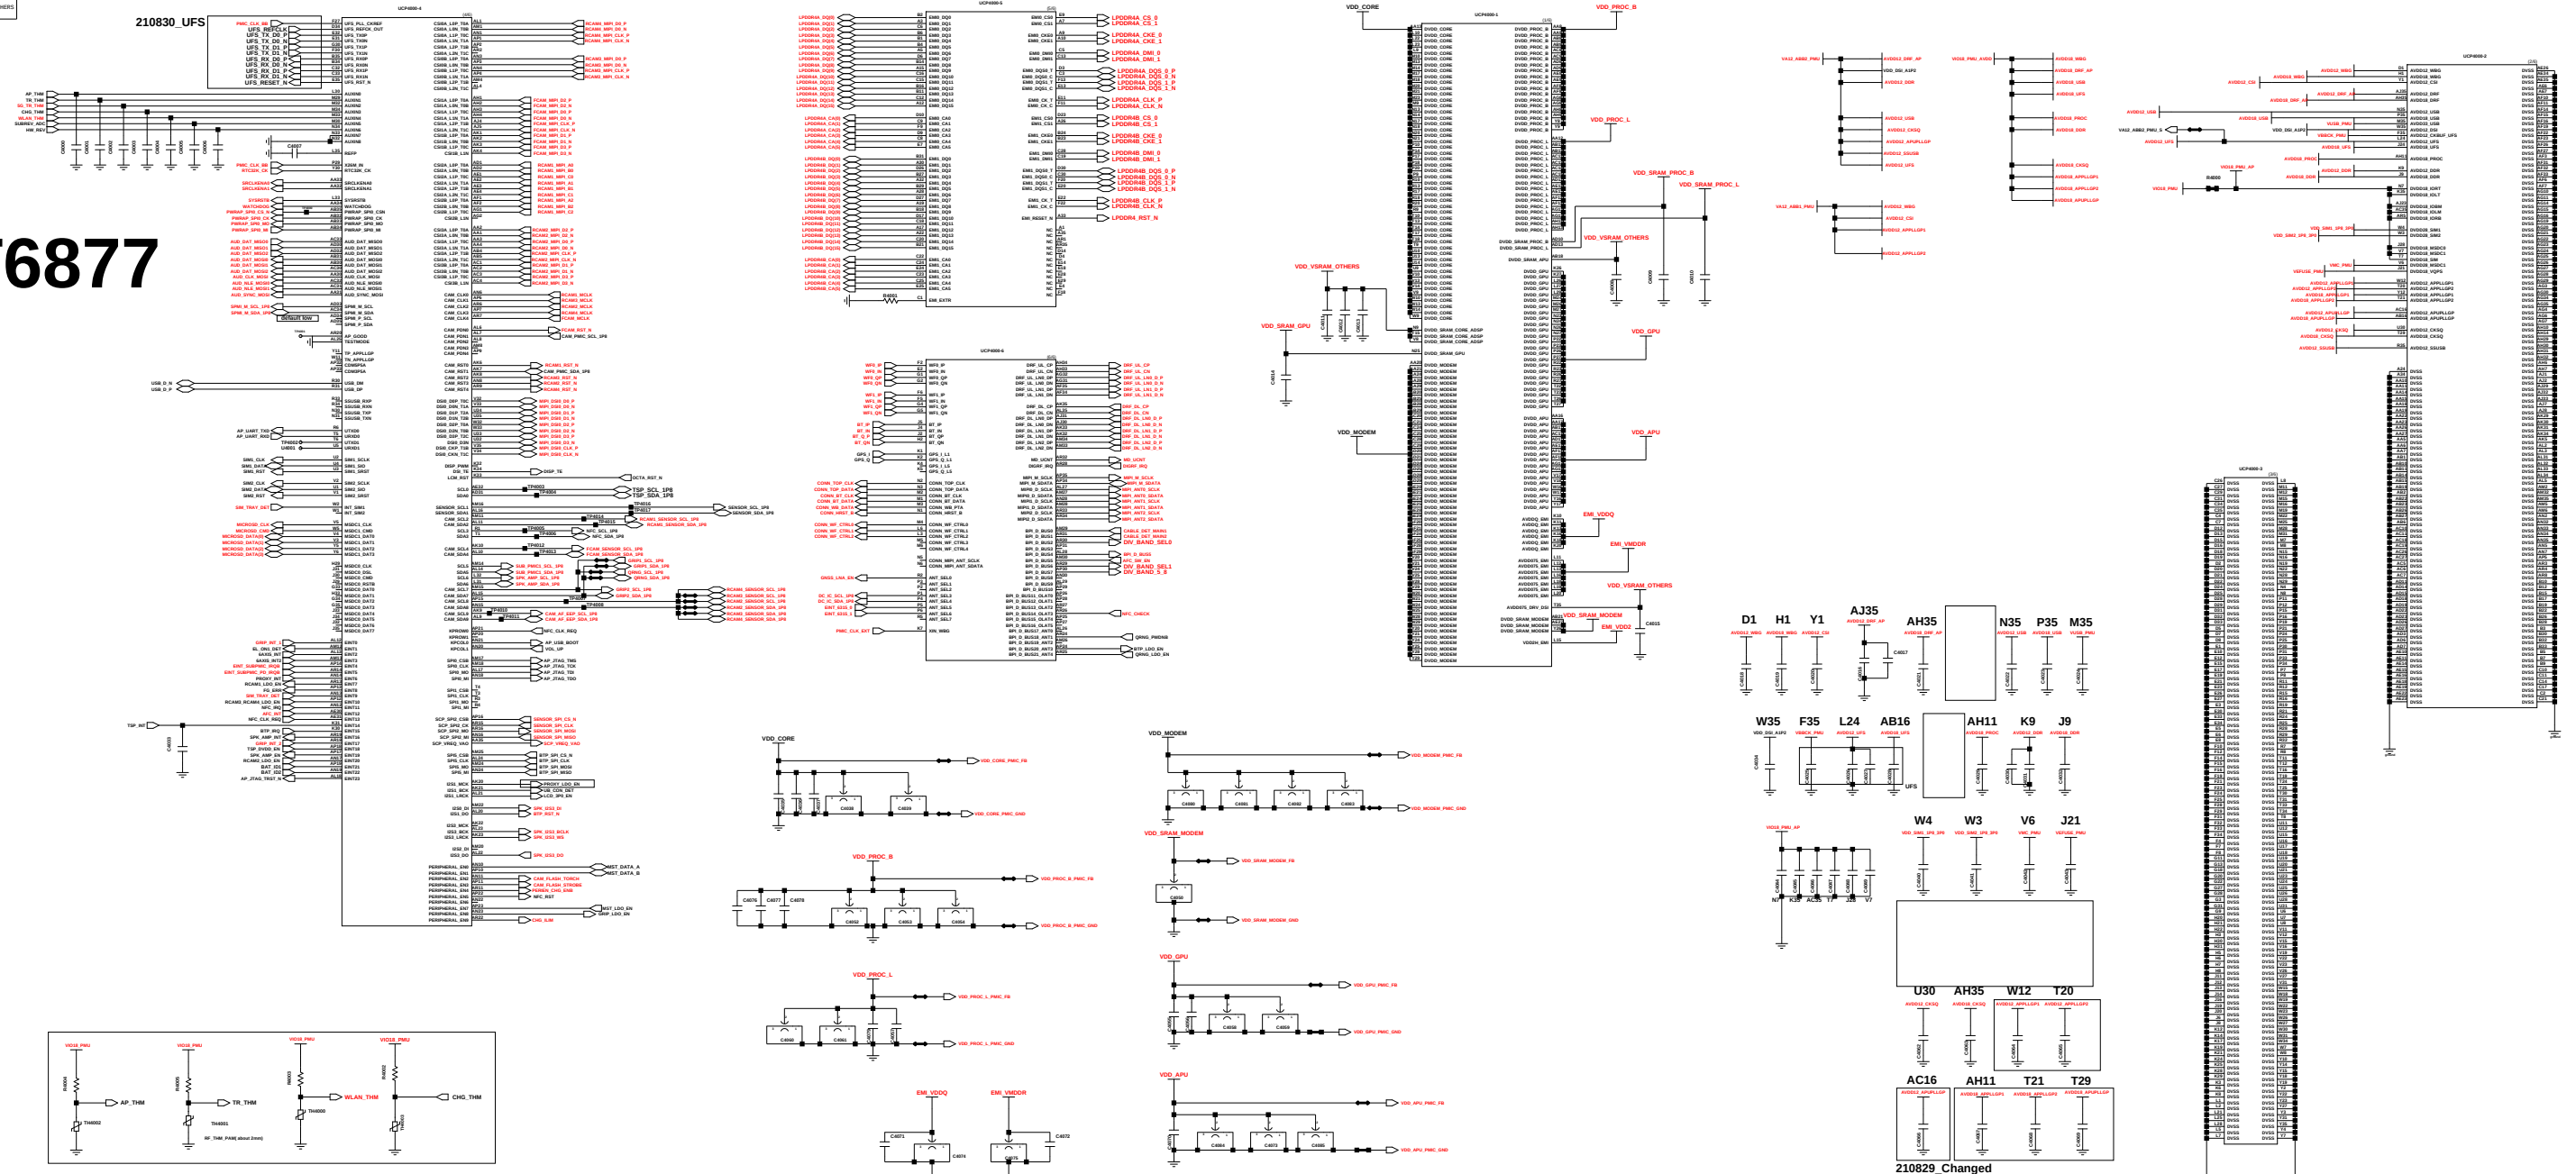


H/W ID TABLE				
HW ID	PU	PD	DIVIDE Voltage	Comment
00	DNP	0	0	Bringup
01	430K	30K	0.117	REV00
02	390K	62K	0.247	REV01
03	360K	91K	0.363	REV01-2
04	330K	120K	0.480	REV02
05	300K	150K	0.600	REV03
06	270K	180K	0.720	REV04
07	240K	210K	0.841	
08	210K	240K	0.96	
09	180K	270K	1.080	
10	150K	300K	1.2	

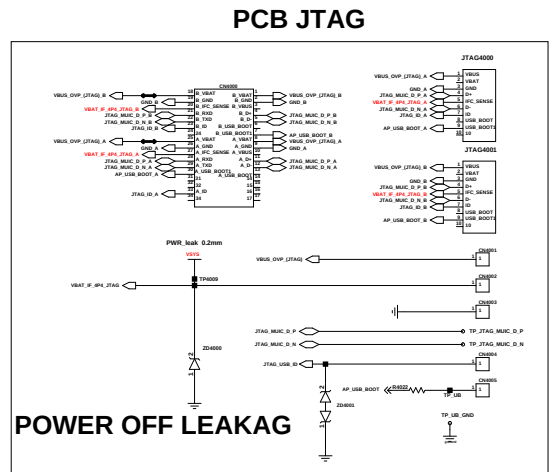


POWER OFF LEAKAG



AP JTAG

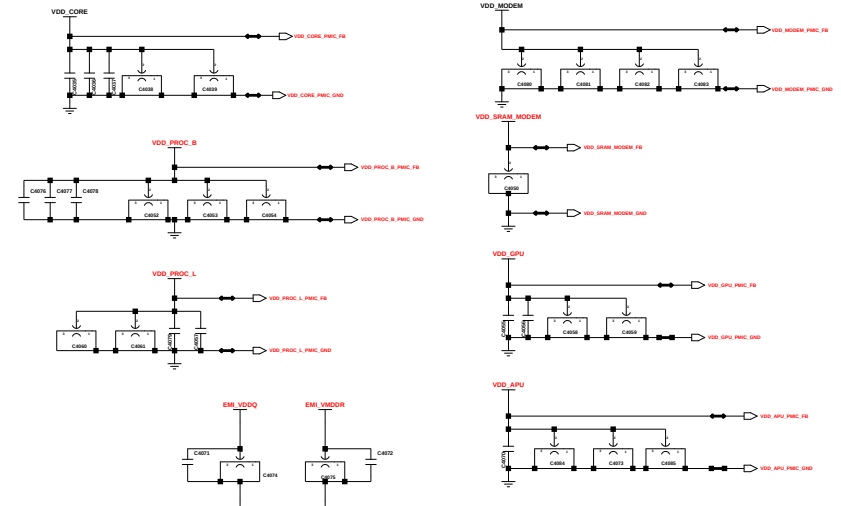

BOSS HOLE NFC OPTION



Region	NFC
Global	M536B
KOR	M536S

NFC
SHORT : enable, OPEN : disable

MEMORY
6G/128G
8G/128G
8G/256G

Default meaning is AP internal setting, so no need external PU/PD			
PWRAP_SPI0_CSN	AUD_DAT_MOSI0	AP JTAG	MODEM JTAG
H (Default)	L (Default)	N/A	N/A
H	H (by external PU)	SPI0 + EINT23	N/A
L (by external PD)	L	SPI0 + EINT23	TDM
L (by external PD)	H (by external PU)	MSDC1	N/A


AUD_NLE_MOSI0	Storage Booting
L (Default)	only UFS boot
H (by external PU)	only eMMC boot

AUD_DAT_MOSI1	AUD_DAT_MOSI2	DDR
L (Default)	L (Default)	LP5-MCP
L	H (by external PU)	LP4x-Discrete
H (by external PU)	L	LP4x-MCP (4266)
H (by external PU)	H (by external PU)	LP4x-MCP (3733)


AUD_NLE_MOSI1	USB_JTAG
L (Default)	USB 2.0
H (by external PU)	DPIDM output JTAG

AUD_DAT_MOSI1	VEMC Voltage
L (Default)	VEMC=3.0V for UFS2.2 device
H (by external PU)	VEMC=2.5V for UFS3.0/3.1


MAIN_PMIC

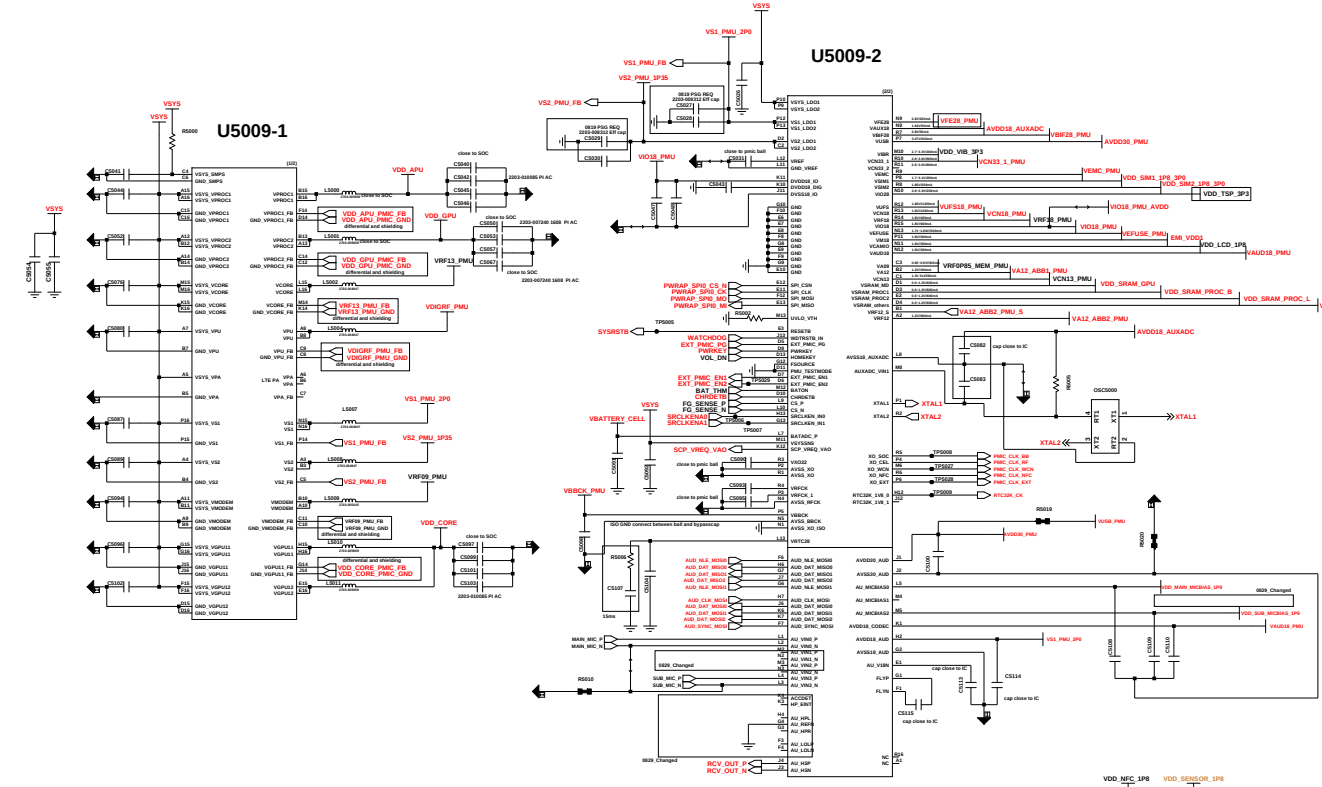

BUCKPMIC_MT6315 (CPU)

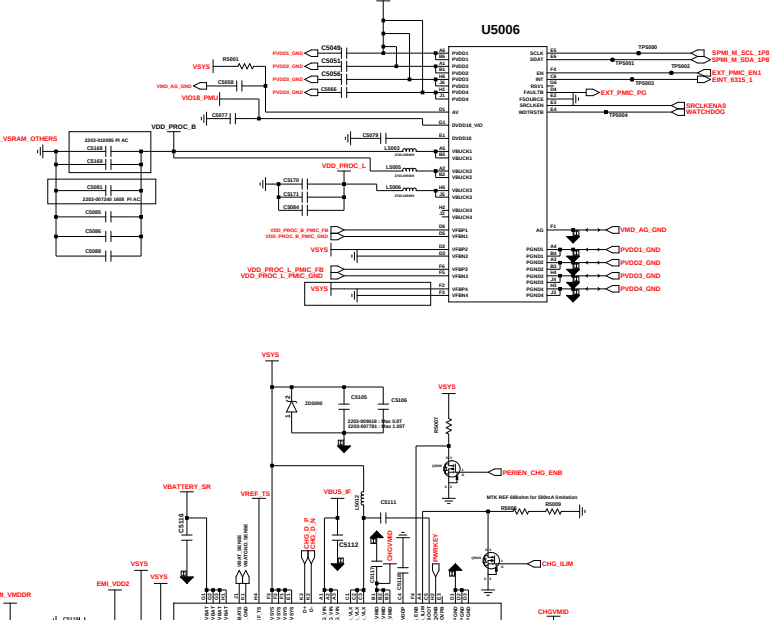


MEMORY (uMCP)

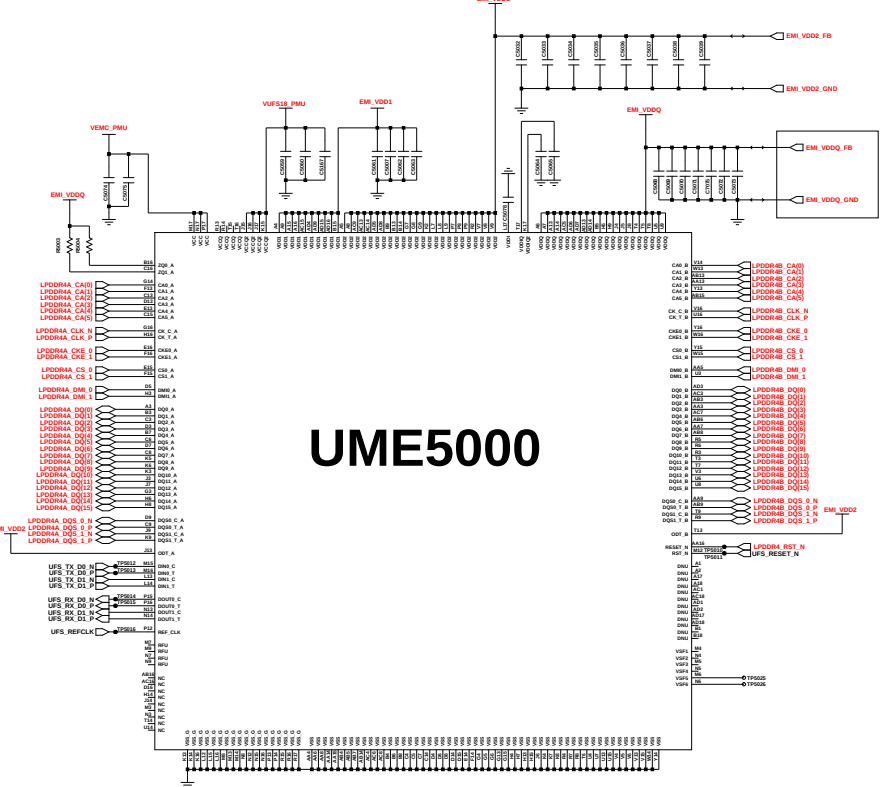


UME5000

6GB + 128GB uMCP

6GB + 128GB uMCP : 1108-000714 (SEC)
6GB + 128GB uMCP : TBD (HYNIX)
8GB + 128GB uMCP : 1108-000721 (SEC)
8GB + 128GB uMCP : TBD (HYNIX)

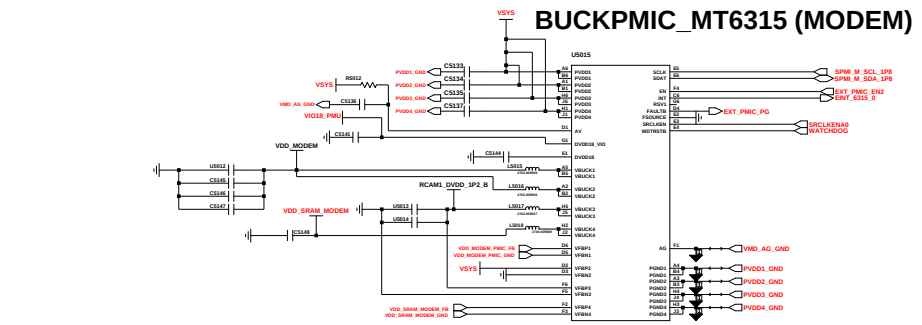

SUB_PMIC

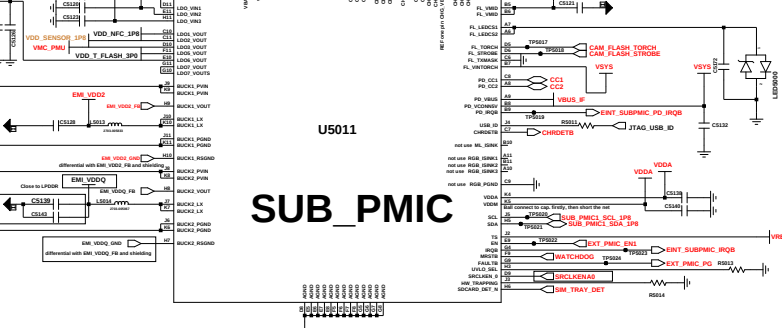

Volume Key


BTP & Power Key





BTP LDO

BATTERY CON





OVP_IC

DC_IC

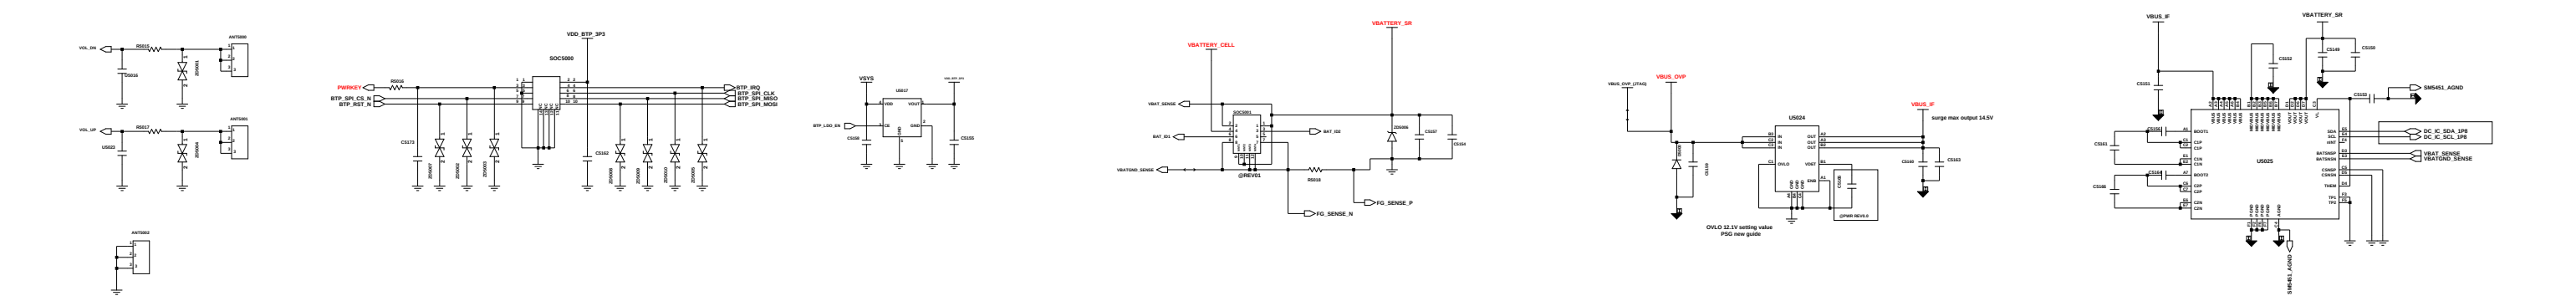


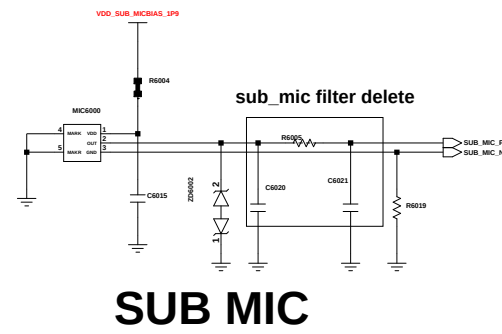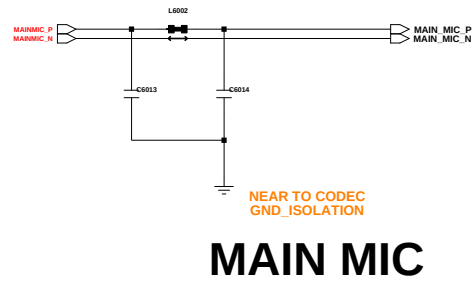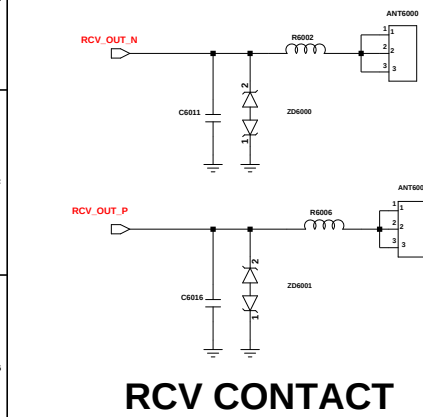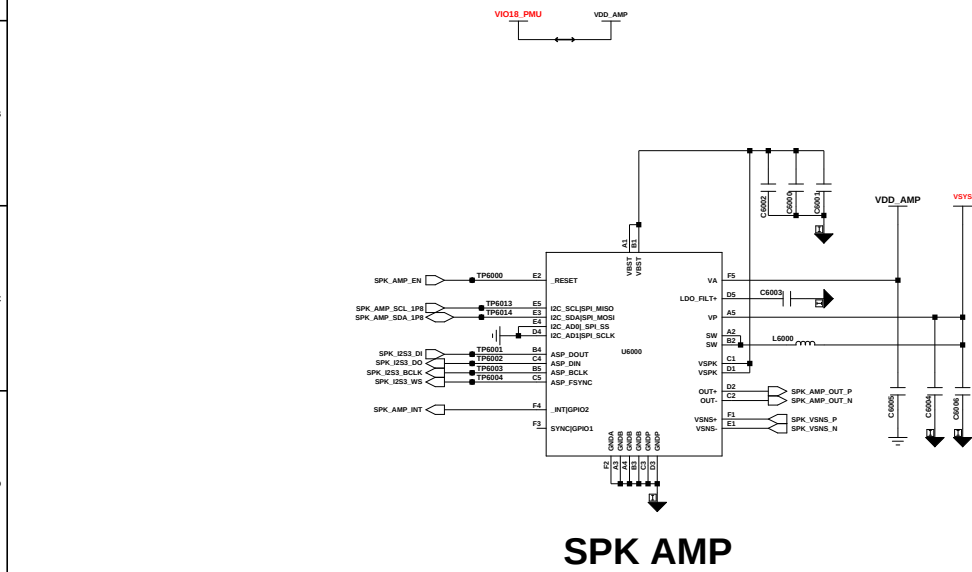

MAIN FPCB

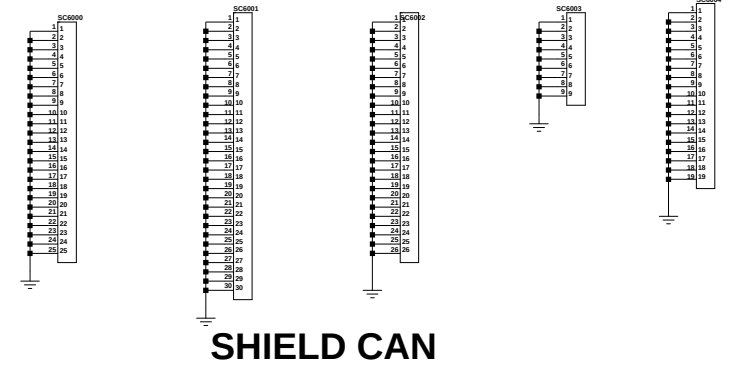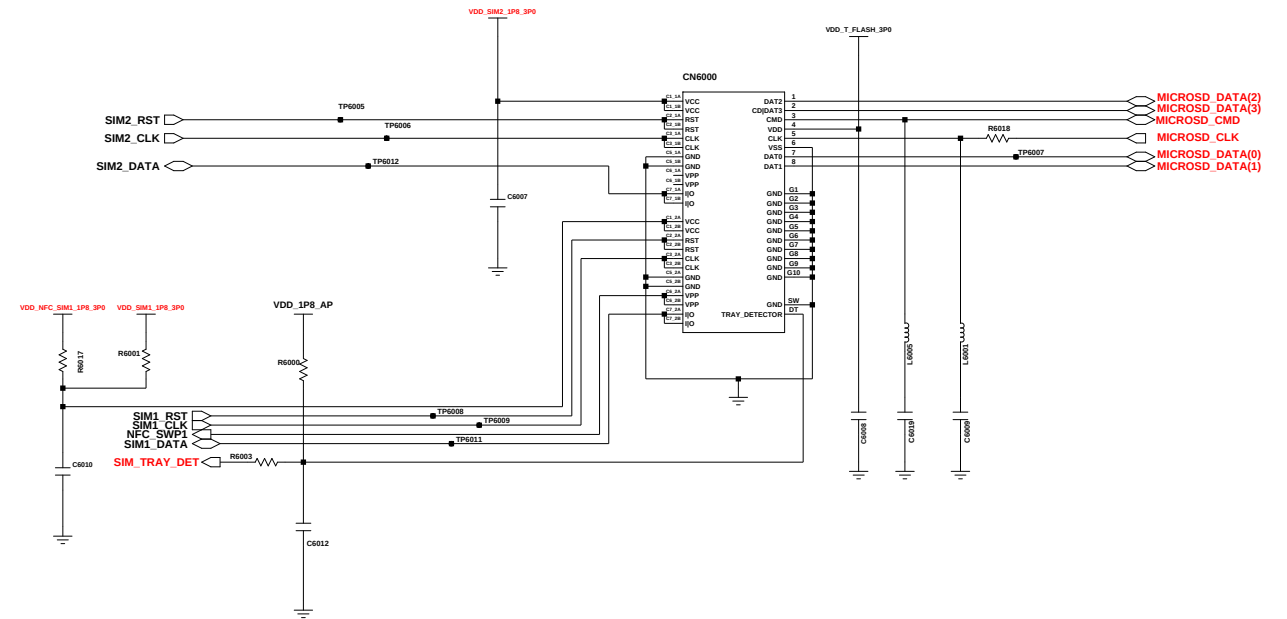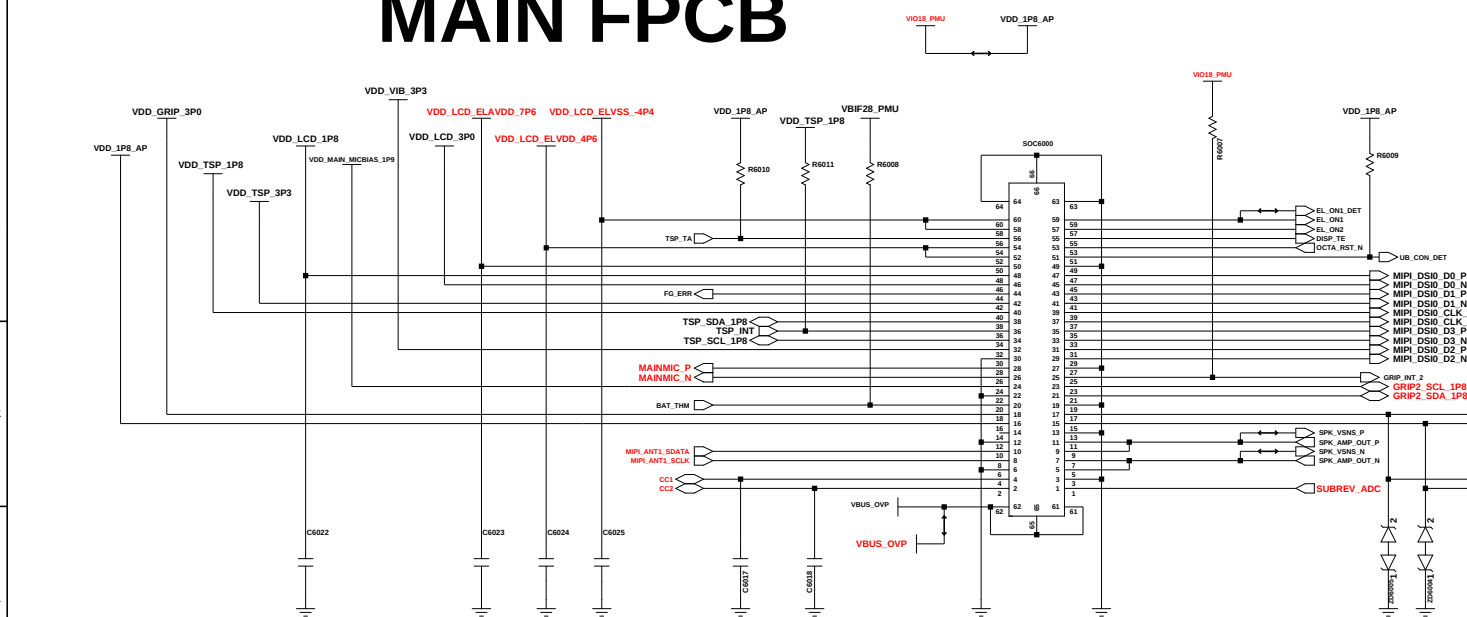

Engineer:	AUDIO, SIM/SD, SHIELD CAN				
Drawn by:					
R&D CHK:				TITLE:	Size:
DOC CTRL CHK:					
MFG ENGR CHK:					
QA CHK:	REV	Drawing Number:	Page:6/7		



DISPLAY PMIC



CAM PMIC

