SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

A35 5G MEA REV05

2023.12.21

Sheet01 : GSM / WCDMA / LTE / NR(N41) RF

Sheet02 : TRANSCEIVER, SUB ANT

Sheet03 : CONNECTIVITY(BT/WIFI/FM), NFC

Sheet04 : AP(QUARTZ-INTERFACE,GPIO)

Sheet05 : AP(POWER), MEM(uMCP)

Sheet06 : PMIC/SUB PMIC, IF PMIC

Sheet07 : AUDIO Codec, SENSOR, SIM, SD

Sheet08 : CAMERA

Sheet09 : DISPLAY PMIC, C2C, mmW

				Engineer:			
				Drawn by:			
				R&D CHK:	TITLE:		Size:
				DOC CTRL CHK:		A54	
				MFG ENGR CHK:			
Changed by:	Date Changed:		Time Changed:	QA CHK:	REV:	Drawing Number:	Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

RF PART 1

MAIN ANT1

LB TRX

LB L-PAMiD

THERMISTER

B28

B29 Only for US/CAN

B13/14

B71

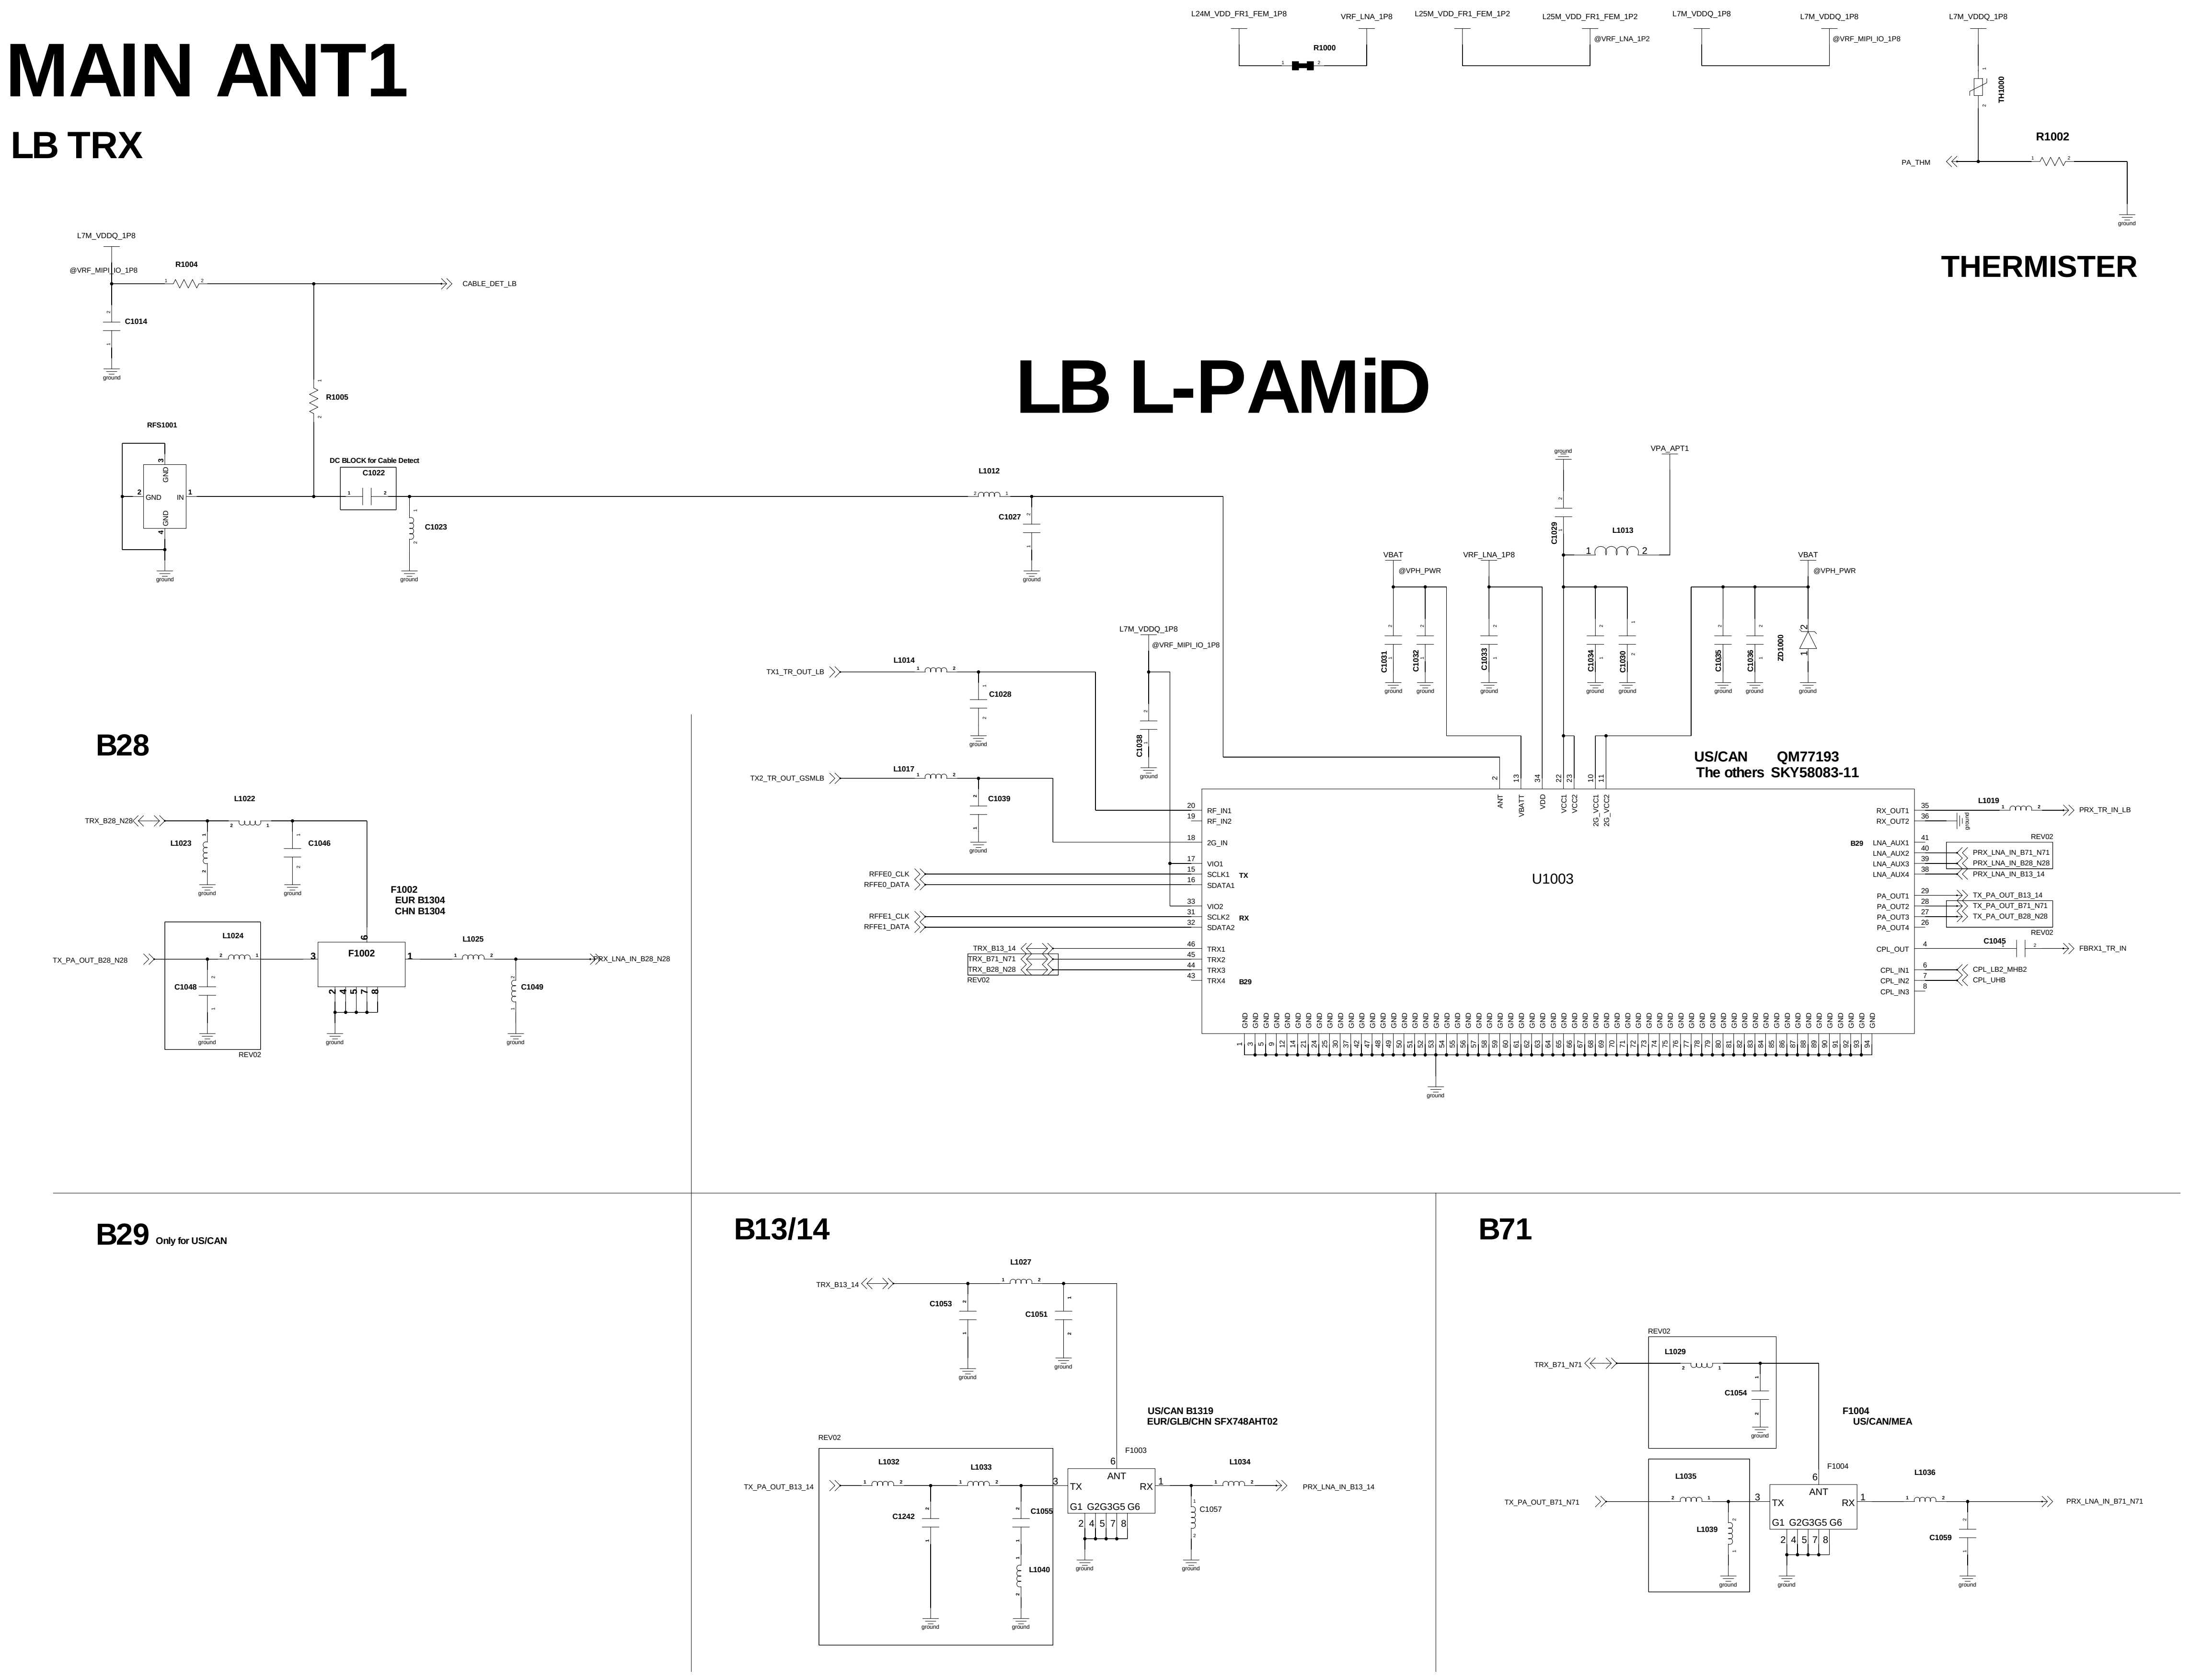
L24M_VDD_FR1_FEM_1P8
VRF_LNA_1P8
R1000
L25M_VDD_FR1_FEM_1P2
@VRF_LNA_1P2
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
TH1000
R1002
PA_THM
R1004
C1014
CABLE_DET_LB
R1005
RFS1001
DC BLOCK for Cable Detect
C1022
C1023
L1012
C1027
VPA_APT1
C1029
L1013
VBAT
@VPH_PWR
C1031
C1032
C1033
C1034
C1030
C1035
C1036
ZD1000
L1014
TX1_TR_OUT_LB
C1028
L1017
TX2_TR_OUT_GSMLB
C1039
C1038
RFFE0_CLK
RFFE0_DATA
RFFE1_CLK
RFFE1_DATA
TRX_B13_14
TRX_B71_N71
TRX_B28_N28
REV02
US/CAN QM77193
The others SKY58083-11
U1003
RF_IN1
RF_IN2
2G_IN
VIO1
SCLK1
SDATA1
TX
VIO2
SCLK2
SDATA2
RX
TRX1
TRX2
TRX3
TRX4
B29
ANT
VBATT
VDD
VCC1
VCC2
2G_VCC1
2G_VCC2
RX_OUT1
RX_OUT2
L1019
PRX_TR_IN_LB
LNA_AUX1
LNA_AUX2
LNA_AUX3
LNA_AUX4
PRX_LNA_IN_B71_N71
PRX_LNA_IN_B28_N28
PRX_LNA_IN_B13_14
PA_OUT1
PA_OUT2
PA_OUT3
PA_OUT4
TX_PA_OUT_B13_14
TX_PA_OUT_B71_N71
TX_PA_OUT_B28_N28
CPL_OUT
C1045
FBRX1_TR_IN
CPL_IN1
CPL_IN2
CPL_IN3
CPL_LB2_MHB2
CPL_UHB
GND
ground
TRX_B28_N28
L1022
L1023
C1046
F1002
EUR B1304
CHN B1304
TX_PA_OUT_B28_N28
L1024
C1048
L1025
C1049
PRX_LNA_IN_B28_N28
L1027
C1053
C1051
US/CAN B1319
EUR/GLB/CHN SFX748AHT02
F1003
L1032
L1033
C1242
C1055
L1040
L1034
C1057
PRX_LNA_IN_B13_14
TX_PA_OUT_B13_14
TX
ANT
RX
G1 G2G3G5 G6
TRX_B71_N71
L1029
C1054
F1004
US/CAN/MEA
L1035
L1039
L1036
C1059
TX_PA_OUT_B71_N71
PRX_LNA_IN_B71_N71

MAIN ANT2

M/HB TRX, n77_78/n79 DRX

B30 Only for US/CAN

B32

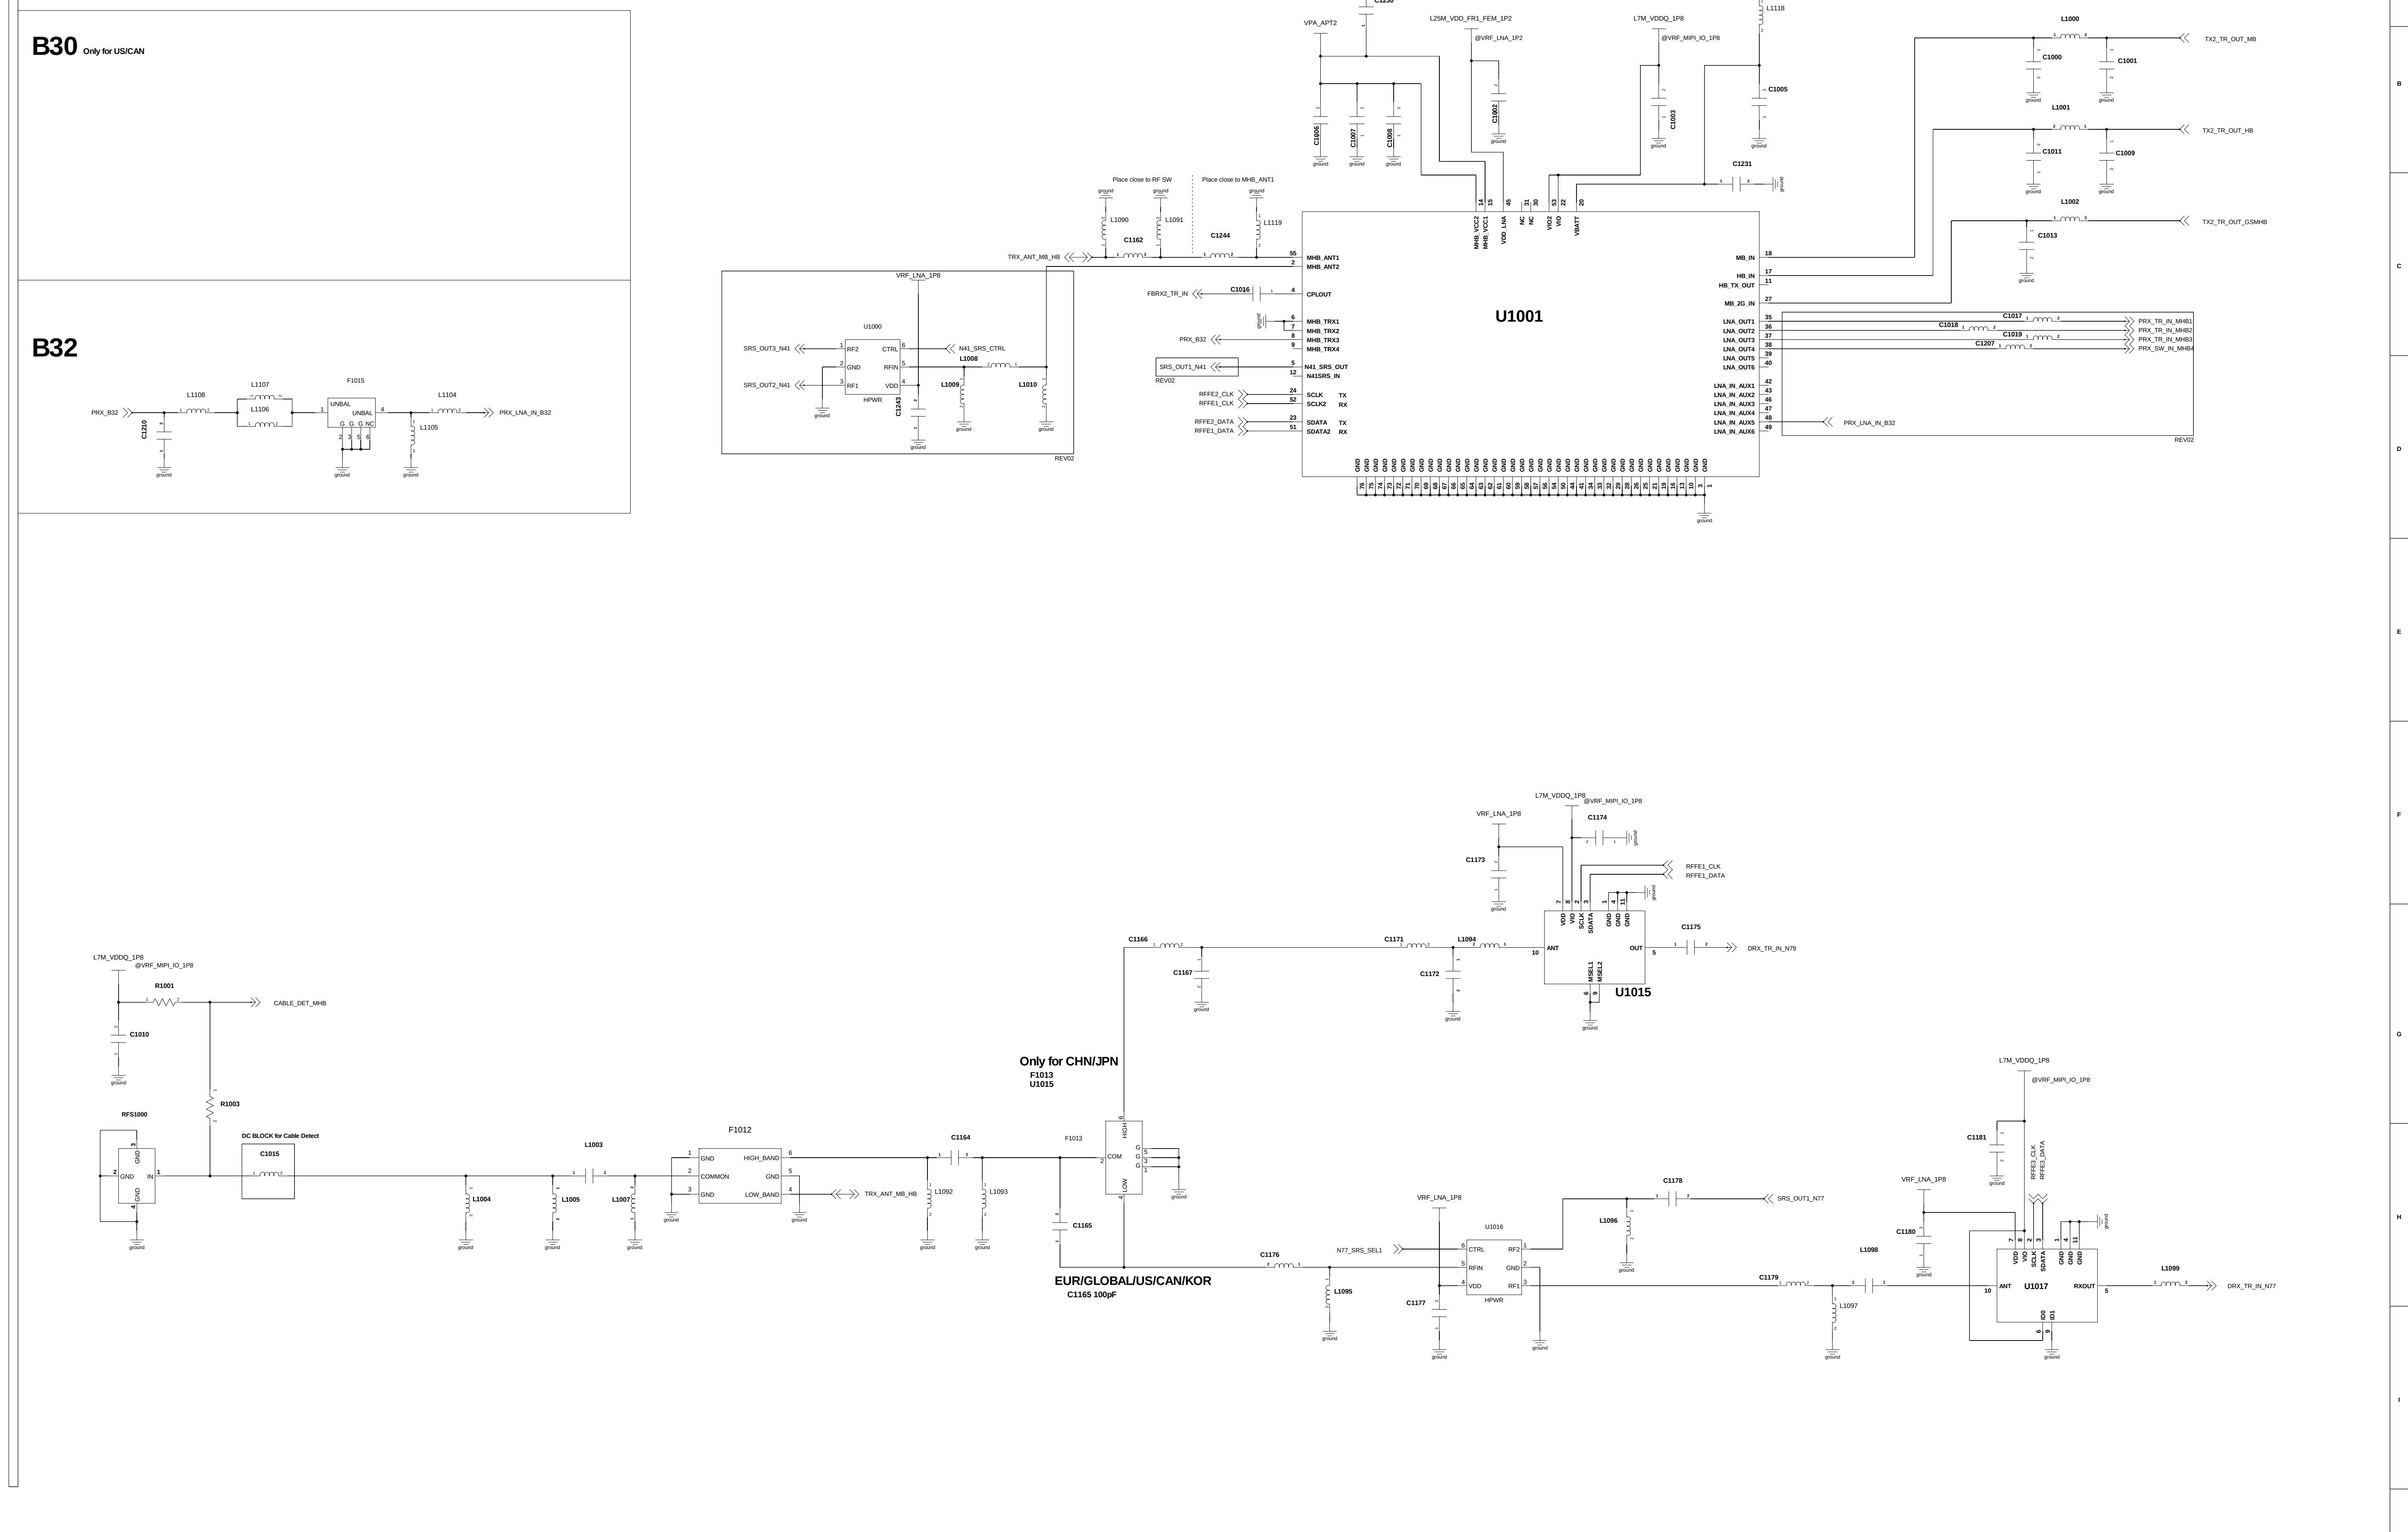
PRX_B32
L1108
C1210
L1107
L1106
F1015
UNBAL
L1104
L1105
PRX_LNA_IN_B32
TRX_ANT_MB_HB
VRF_LNA_1P8
U1000
SRS_OUT3_N41
SRS_OUT2_N41
RF2
GND
RF1
CTRL
RFIN
VDD
HPWR
N41_SRS_CTRL
L1008
L1009
L1010
C1243
REV02
Place close to RF SW
Place close to MHB_ANT1
L1090
L1091
C1162
C1244
L1119
VPA_APT2
C1230
C1006
C1007
C1008
L25M_VDD_FR1_FEM_1P2
@VRF_LNA_1P2
C1002
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C1003
VBAT
@VPH_PWR
L1118
C1005
C1231
U1001
MHB_ANT1
MHB_ANT2
CPLOUT
FBRX2_TR_IN
C1016
MHB_TRX1
MHB_TRX2
MHB_TRX3
MHB_TRX4
PRX_B32
N41_SRS_OUT
N41SRS_IN
SRS_OUT1_N41
SCLK
SCLK2
SDATA
SDATA2
RFFE2_CLK
RFFE1_CLK
RFFE2_DATA
RFFE1_DATA
MHB_VCC2
MHB_VCC1
VDD_LNA
NC
VIO2
VIO
VBATT
MB_IN
HB_IN
HB_TX_OUT
MB_2G_IN
LNA_OUT1
LNA_OUT2
LNA_OUT3
LNA_OUT4
LNA_OUT5
LNA_OUT6
LNA_IN_AUX1
LNA_IN_AUX2
LNA_IN_AUX3
LNA_IN_AUX4
LNA_IN_AUX5
LNA_IN_AUX6
L1000
C1000
C1001
TX2_TR_OUT_MB
L1001
C1011
C1009
TX2_TR_OUT_HB
L1002
C1013
TX2_TR_OUT_GSMHB
C1017
C1018
C1019
C1207
PRX_TR_IN_MHB1
PRX_TR_IN_MHB2
PRX_TR_IN_MHB3
PRX_SW_IN_MHB4
PRX_LNA_IN_B32
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
R1001
C1010
CABLE_DET_MHB
R1003
RFS1000
DC BLOCK for Cable Detect
C1015
L1004
L1005
L1003
L1007
F1012
HIGH_BAND
COMMON
LOW_BAND
TRX_ANT_MB_HB
C1164
L1092
L1093
Only for CHN/JPN
F1013
U1015
COM
HIGH
LOW
C1165
EUR/GLOBAL/US/CAN/KOR
C1165 100pF
C1166
C1167
C1171
C1172
L1094
VRF_LNA_1P8
C1173
C1174
RFFE1_CLK
RFFE1_DATA
ANT
OUT
MSEL1
MSEL2
C1175
DRX_TR_IN_N79
C1176
L1095
N77_SRS_SEL1
U1016
C1177
L1096
C1178
SRS_OUT1_N77
C1179
L1097
L1098
C1180
C1181
RFFE3_CLK
RFFE3_DATA
U1017
RXOUT
ID0
ID1
L1099
DRX_TR_IN_N77
ground

SUB ANT1

LB DRX, HB DRX MIMO, N79_PRX MIMO

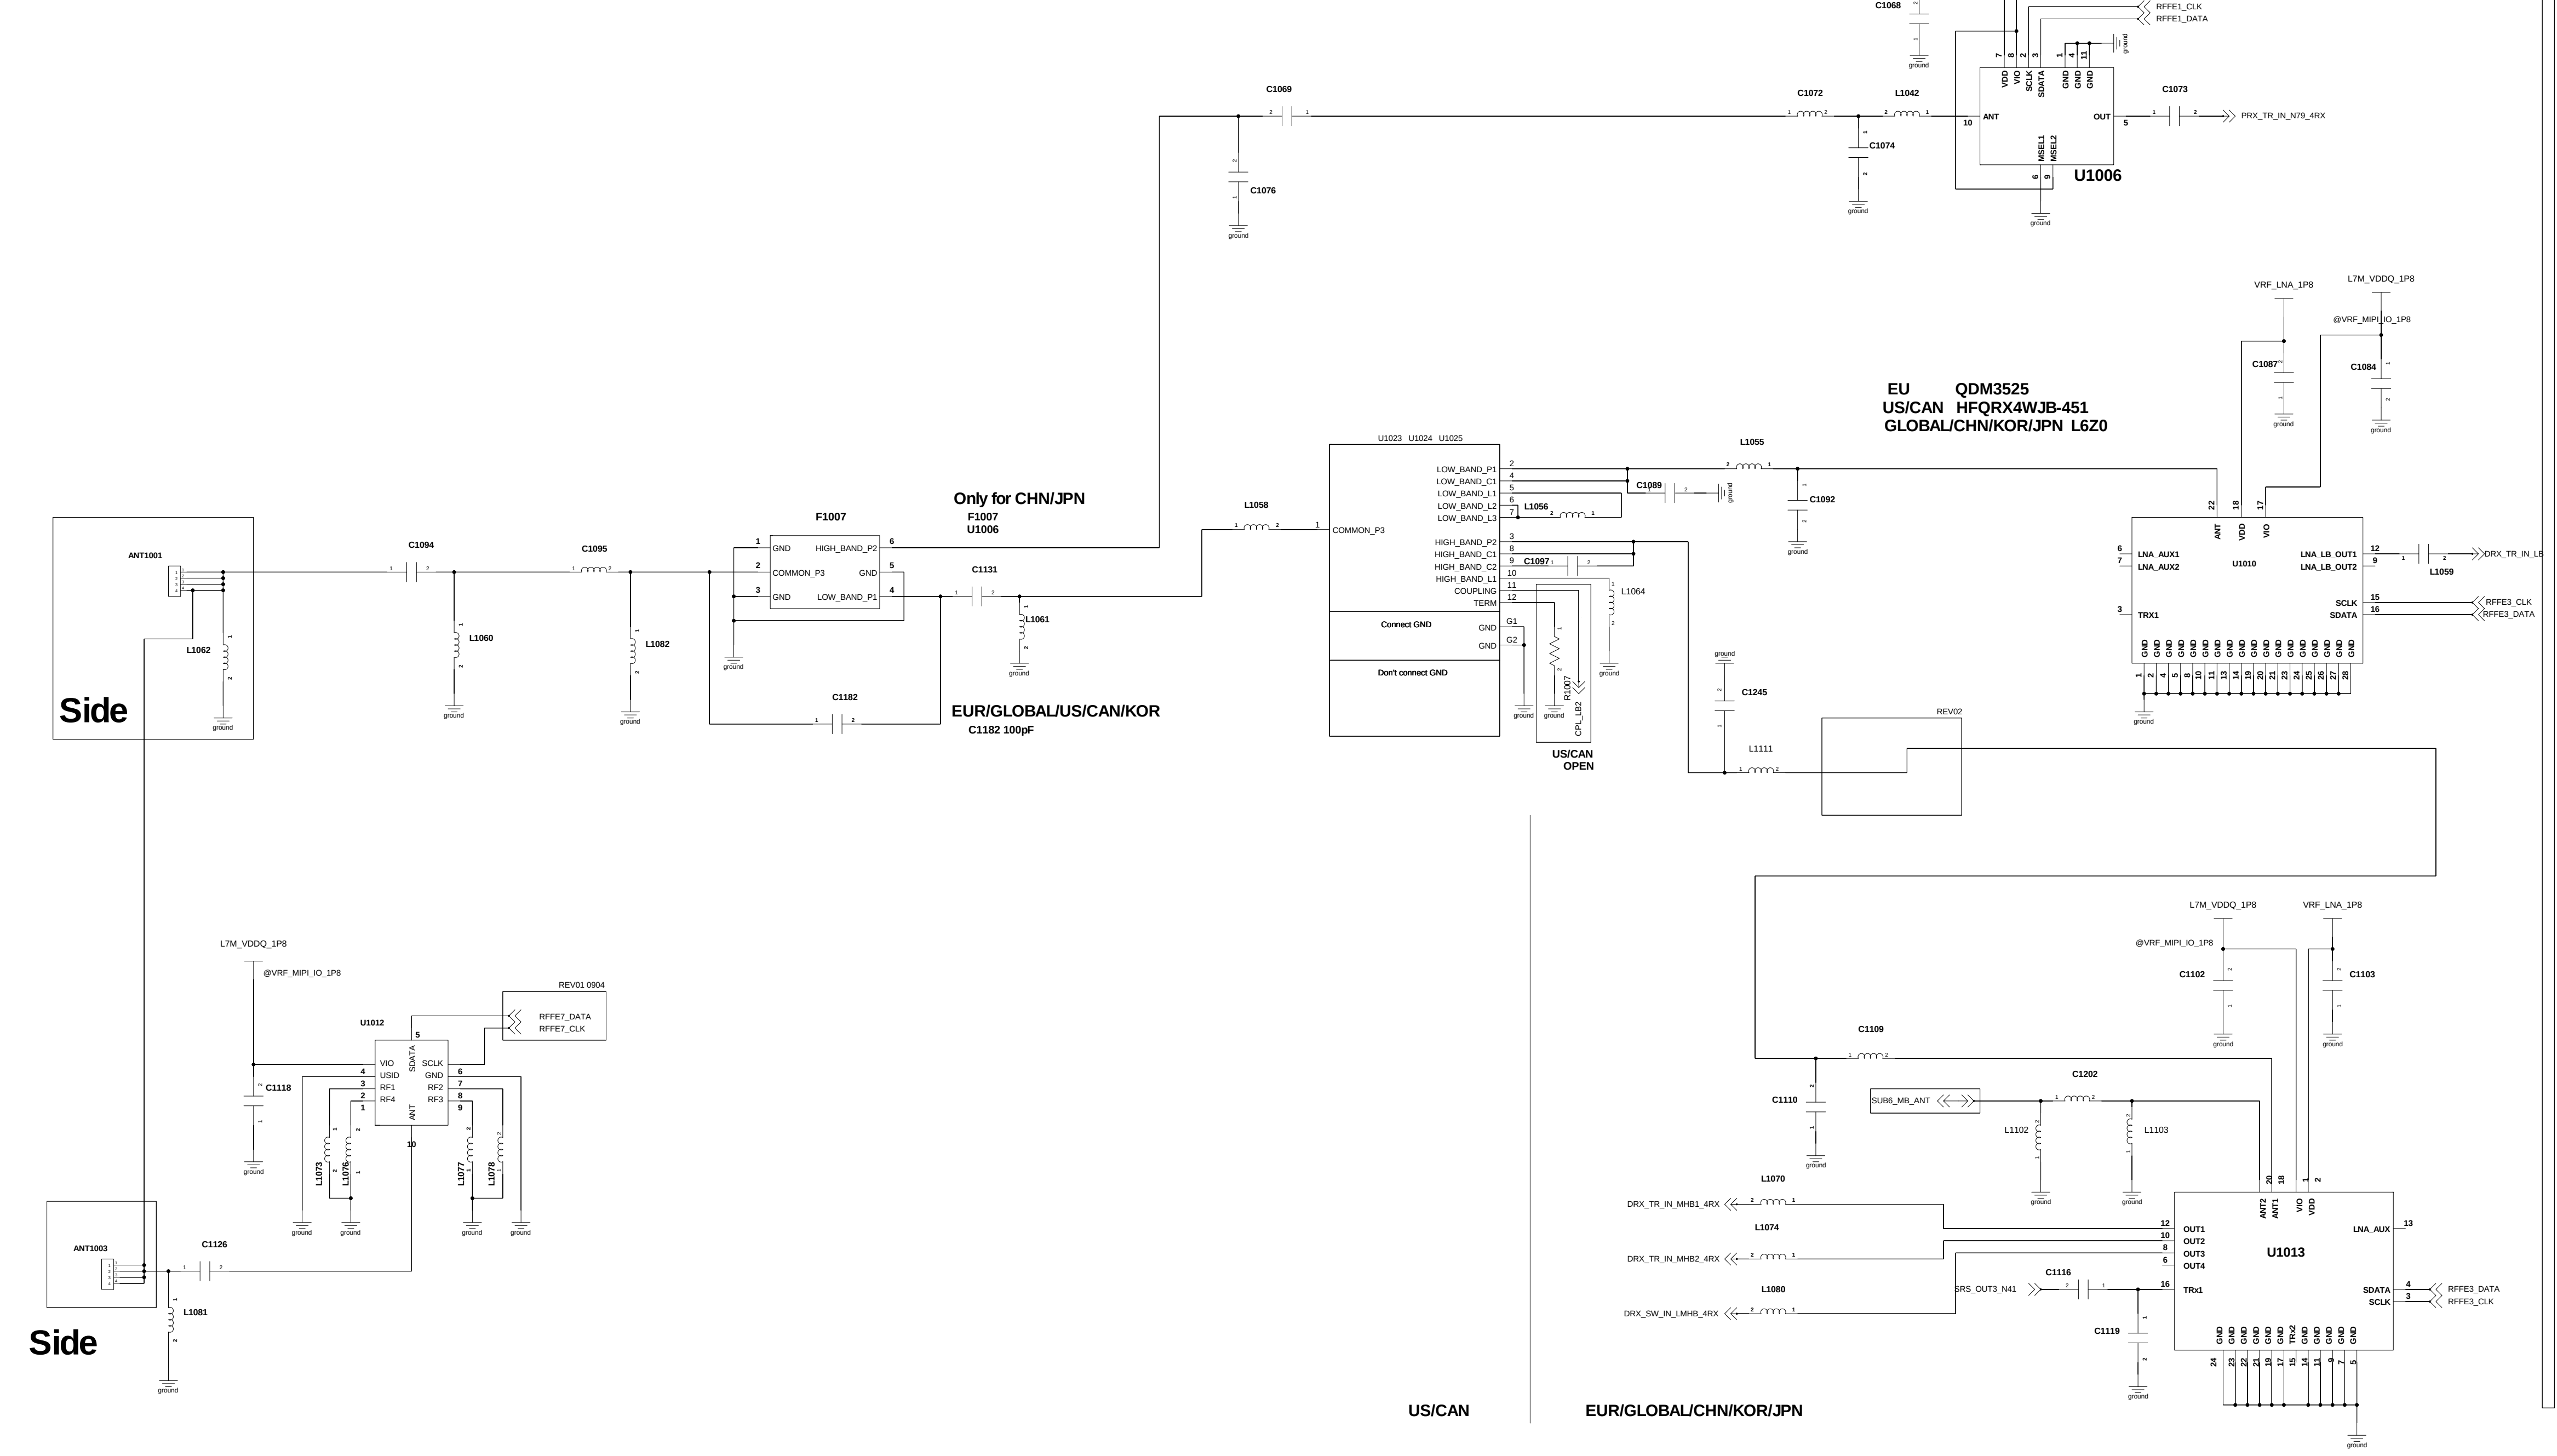
ANT1001
Side
L1062
C1094
L1060
C1095
L1082
F1007
GND
HIGH_BAND_P2
COMMON_P3
LOW_BAND_P1
Only for CHN/JPN
F1007
U1006
C1131
L1061
C1182
EUR/GLOBAL/US/CAN/KOR
C1182 100pF
C1069
C1076
C1072
L1042
C1074
VRF_LNA_1P8
C1068
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C1063
RFFE1_CLK
RFFE1_DATA
U1006
ANT
OUT
C1073
PRX_TR_IN_N79_4RX
L1058
U1023 U1024 U1025
COMMON_P3
LOW_BAND_P1
LOW_BAND_C1
LOW_BAND_L1
LOW_BAND_L2
LOW_BAND_L3
HIGH_BAND_P2
HIGH_BAND_C1
HIGH_BAND_C2
HIGH_BAND_L1
COUPLING
TERM
Connect GND
Don't connect GND
L1056
C1089
C1097
L1064
R1007
CPL_LB2
US/CAN
OPEN
L1055
C1092
C1245
L1111
REV02
EU QDM3525
US/CAN HFQRX4WJB-451
GLOBAL/CHN/KOR/JPN L6Z0
C1087
C1084
U1010
LNA_AUX1
LNA_AUX2
TRX1
LNA_LB_OUT1
LNA_LB_OUT2
L1059
DRX_TR_IN_LB
RFFE3_CLK
RFFE3_DATA
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
U1012
VIO
USID
RF1
RF4
SCLK
SDATA
RF2
RF3
C1118
L1073
L1076
L1077
L1078
REV01 0904
RFFE7_DATA
RFFE7_CLK
ANT1003
Side
C1126
L1081
C1109
C1110
SUB6_MB_ANT
C1202
L1102
L1103
C1102
C1103
U1013
ANT2
ANT1
OUT1
OUT2
OUT3
OUT4
TRx1
LNA_AUX
L1070
L1074
L1080
DRX_TR_IN_MHB1_4RX
DRX_TR_IN_MHB2_4RX
DRX_SW_IN_LMHB_4RX
SRS_OUT3_N41
C1116
C1119
RFFE3_DATA
RFFE3_CLK
US/CAN
EUR/GLOBAL/CHN/KOR/JPN
ground

SUB ANT2

MHB DRX, N79 TRX

GPS

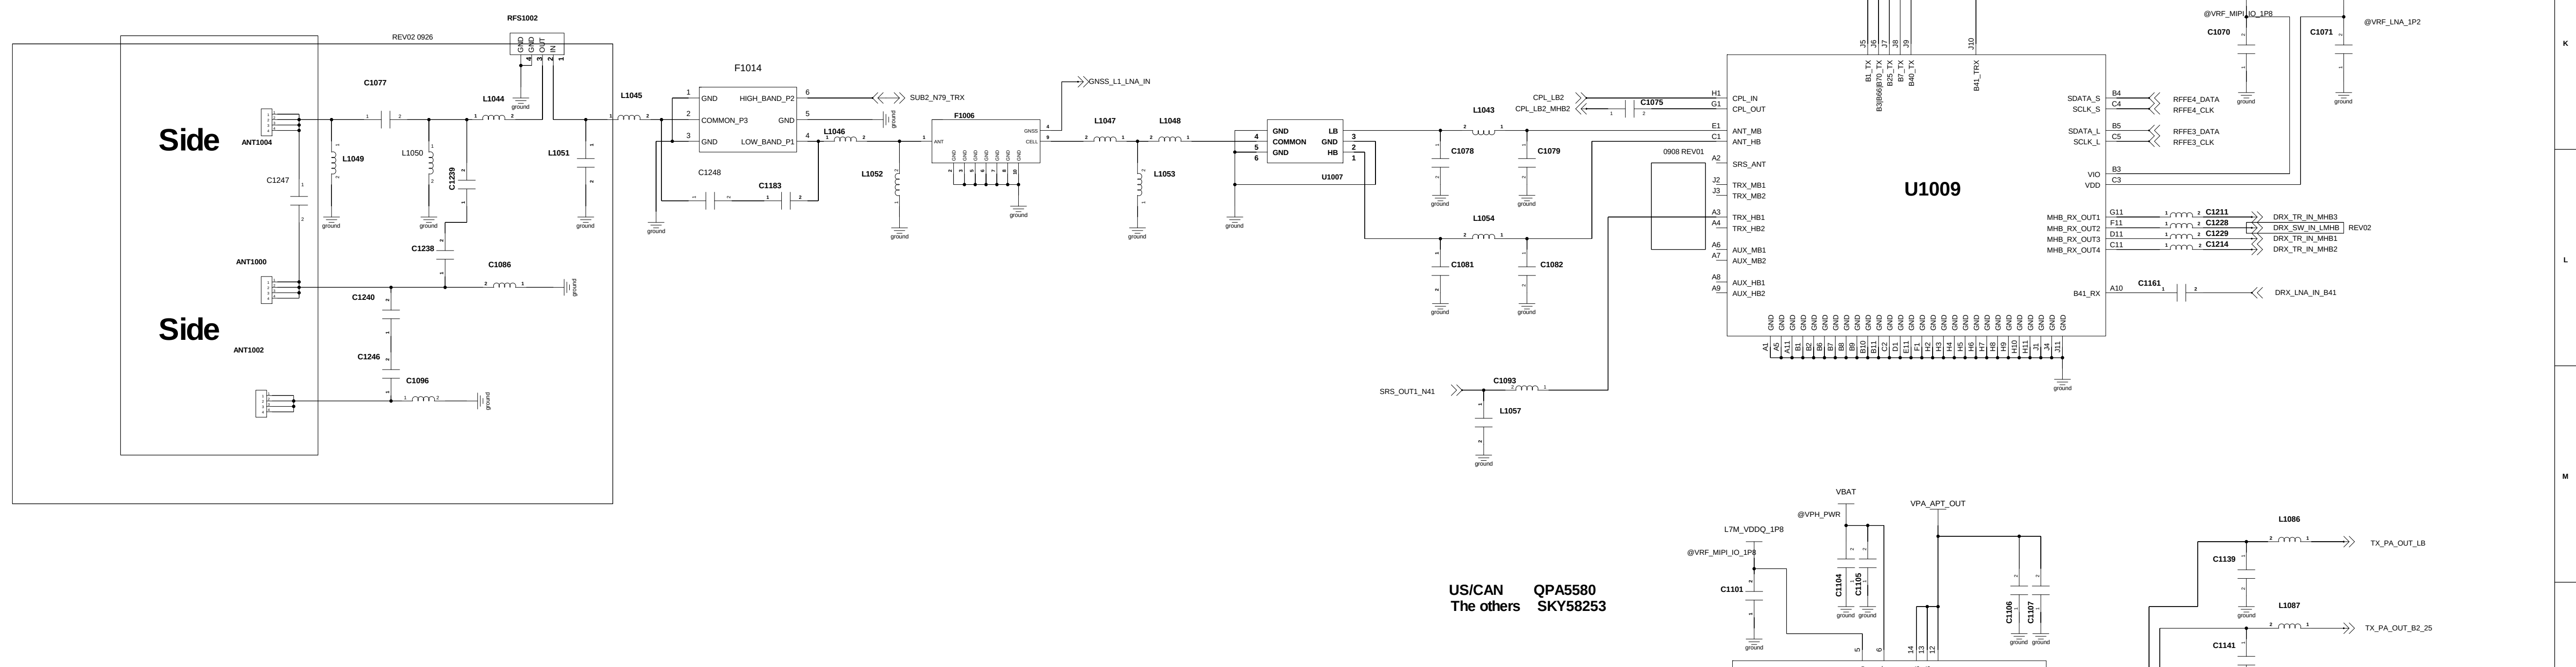
REV02 0926
RFS1002
ANT1004
Side
ANT1000
Side
ANT1002
C1077
L1044
L1049
L1050
C1239
L1051
C1247
C1238
C1086
C1240
C1246
C1096
L1045
F1014
GND
HIGH_BAND_P2
COMMON_P3
LOW_BAND_P1
SUB2_N79_TRX
C1248
C1183
L1046
L1052
F1006
GNSS
CELL
GNSS_L1_LNA_IN
L1047
L1048
L1053
U1007
LB
COMMON
HB
L1043
C1078
C1079
L1054
C1081
C1082
0908 REV01
TX_TRX_B41
TX_PA_OUT_B40
TX_PA_OUT_B7
TX_PA_OUT_B2_25
TX_PA_OUT_B3_B66
TX_PA_OUT_B1
CPL_LB2
CPL_LB2_MHB2
C1075
U1009
CPL_IN
CPL_OUT
ANT_MB
ANT_HB
SRS_ANT
TRX_MB1
TRX_MB2
TRX_HB1
TRX_HB2
AUX_MB1
AUX_MB2
AUX_HB1
AUX_HB2
B1_TX
B3|B66|B70_TX
B25_TX
B7_TX
B40_TX
B41_TRX
SDATA_S
SCLK_S
SDATA_L
SCLK_L
VIO
VDD
RFFE4_DATA
RFFE4_CLK
RFFE3_DATA
RFFE3_CLK
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
L25M_VDD_FR1_FEM_1P2
@VRF_LNA_1P2
C1070
C1071
MHB_RX_OUT1
MHB_RX_OUT2
MHB_RX_OUT3
MHB_RX_OUT4
C1211
C1228
C1229
C1214
DRX_TR_IN_MHB3
DRX_SW_IN_LMHB
DRX_TR_IN_MHB1
DRX_TR_IN_MHB2
REV02
B41_RX
C1161
DRX_LNA_IN_B41
SRS_OUT1_N41
C1093
L1057
ground

N79 TRX

Only for CHN/JPN

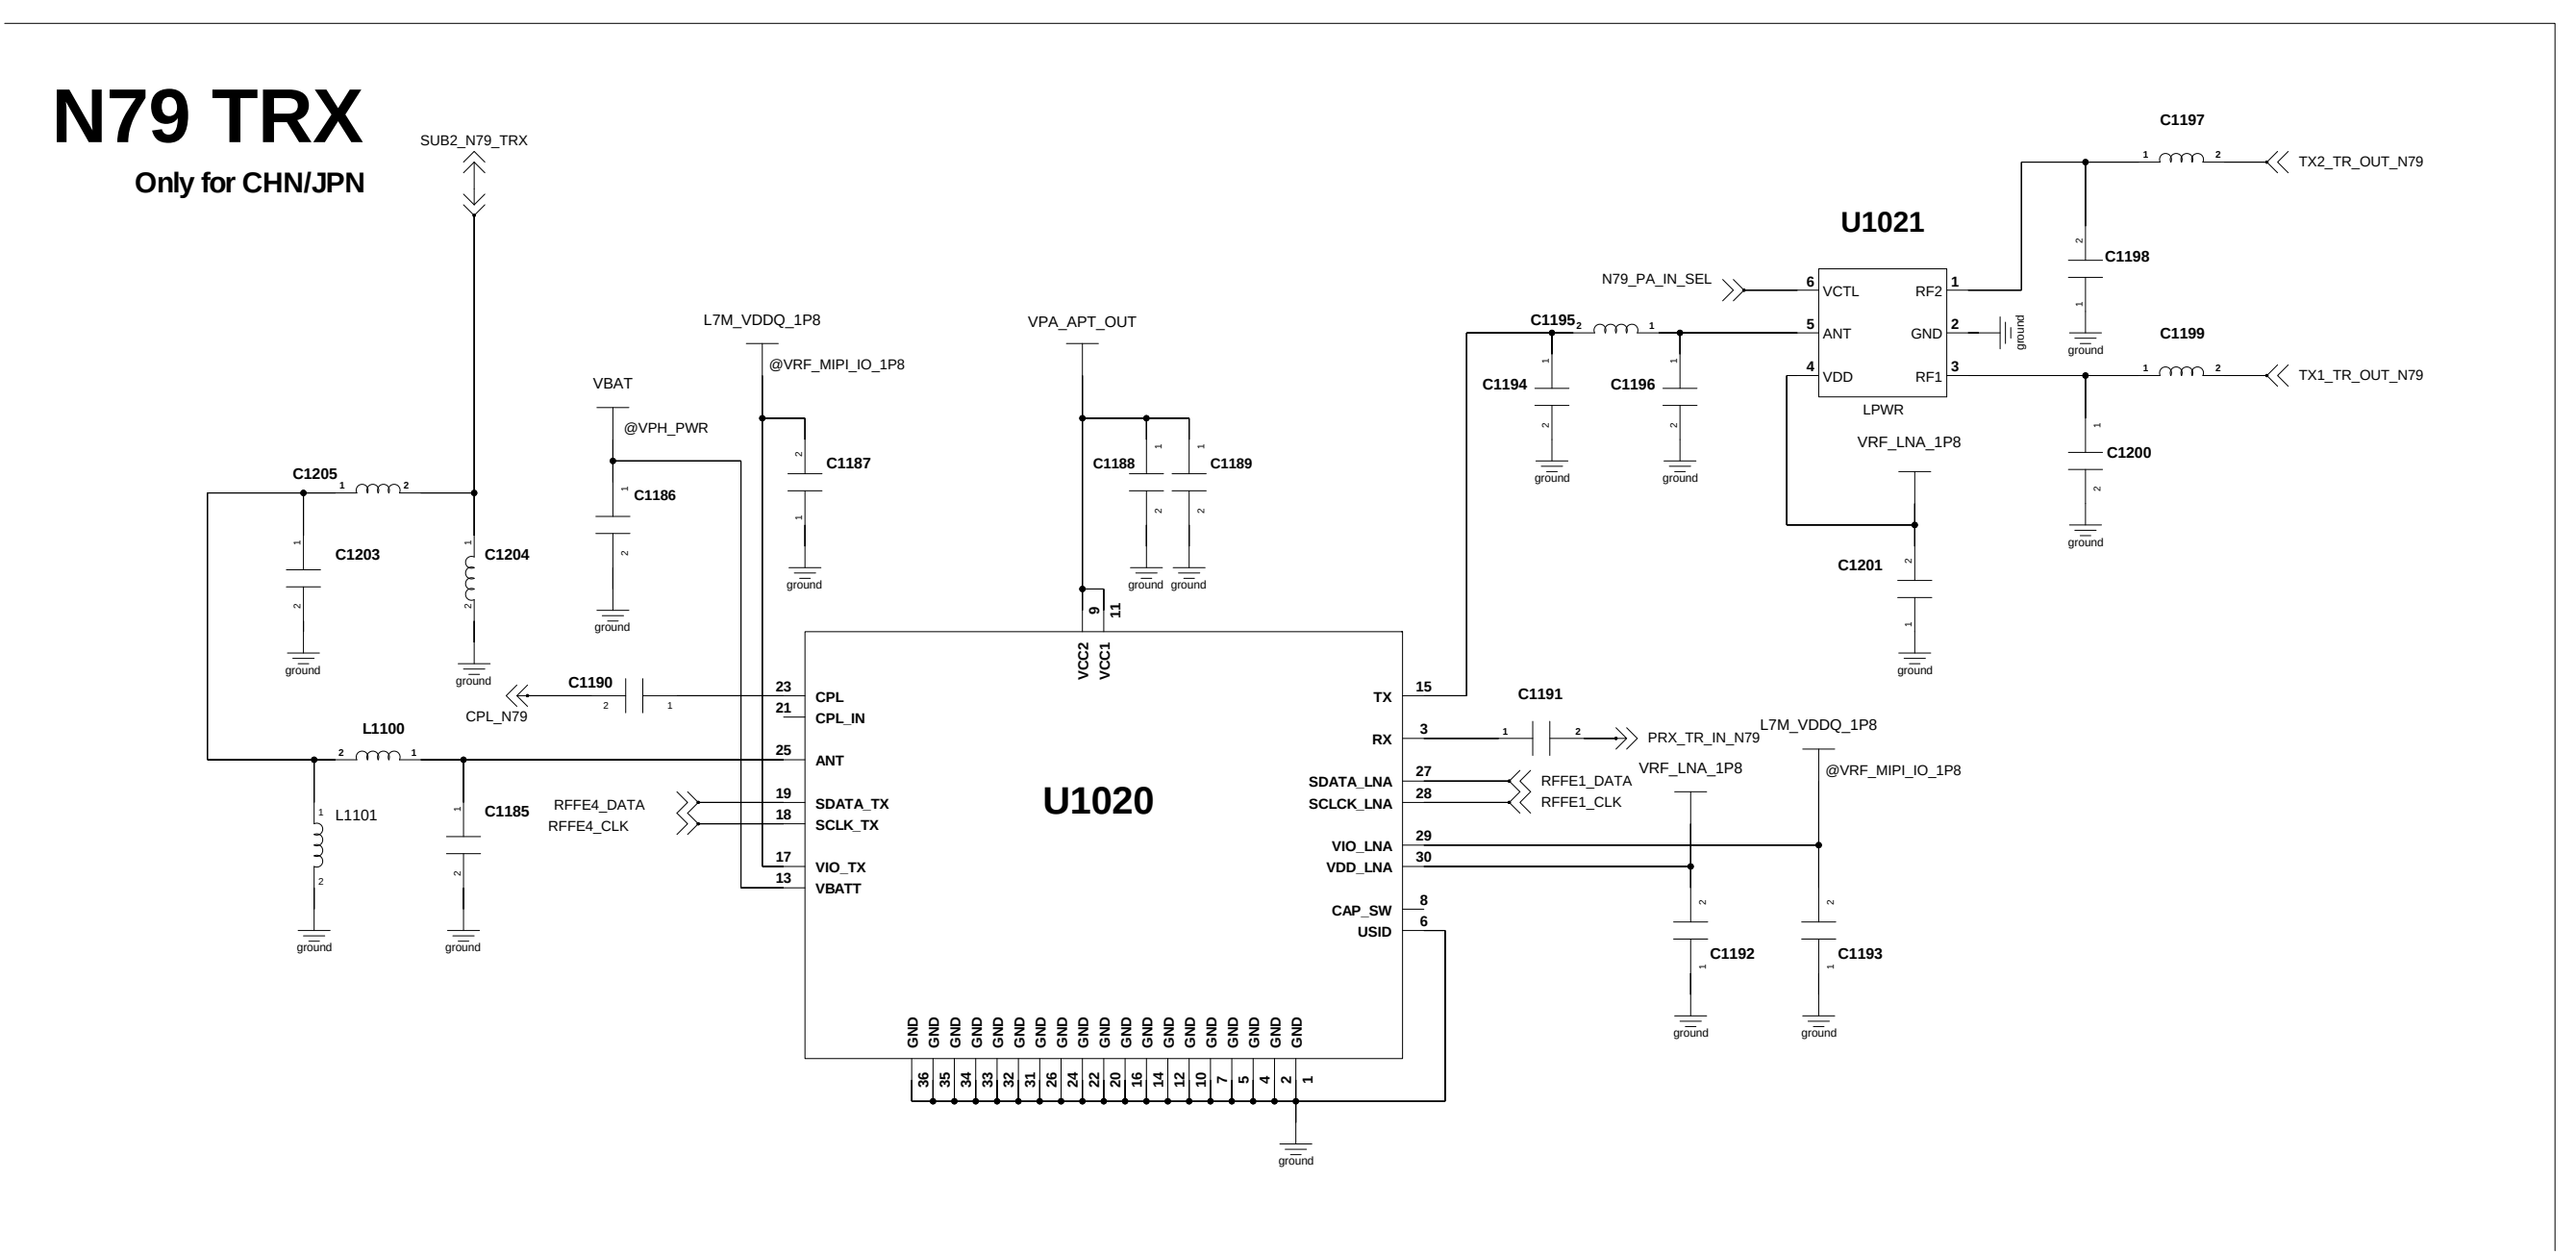
SUB2_N79_TRX
C1205
C1203
C1204
L1100
L1101
C1185
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C1187
VBAT
@VPH_PWR
C1186
VPA_APT_OUT
C1188
C1189
C1190
CPL_N79
RFFE4_DATA
RFFE4_CLK
U1020
CPL
CPL_IN
ANT
SDATA_TX
SCLK_TX
VIO_TX
VBATT
VCC2
VCC1
TX
RX
SDATA_LNA
SCLCK_LNA
VIO_LNA
VDD_LNA
CAP_SW
USID
C1191
PRX_TR_IN_N79
RFFE1_DATA
RFFE1_CLK
VRF_LNA_1P8
C1192
C1193
N79_PA_IN_SEL
U1021
VCTL
RF2
RF1
LPWR
C1195
C1194
C1196
C1201
C1197
C1198
C1199
C1200
TX2_TR_OUT_N79
TX1_TR_OUT_N79
ground

US/CAN QPA5580
The others SKY58253

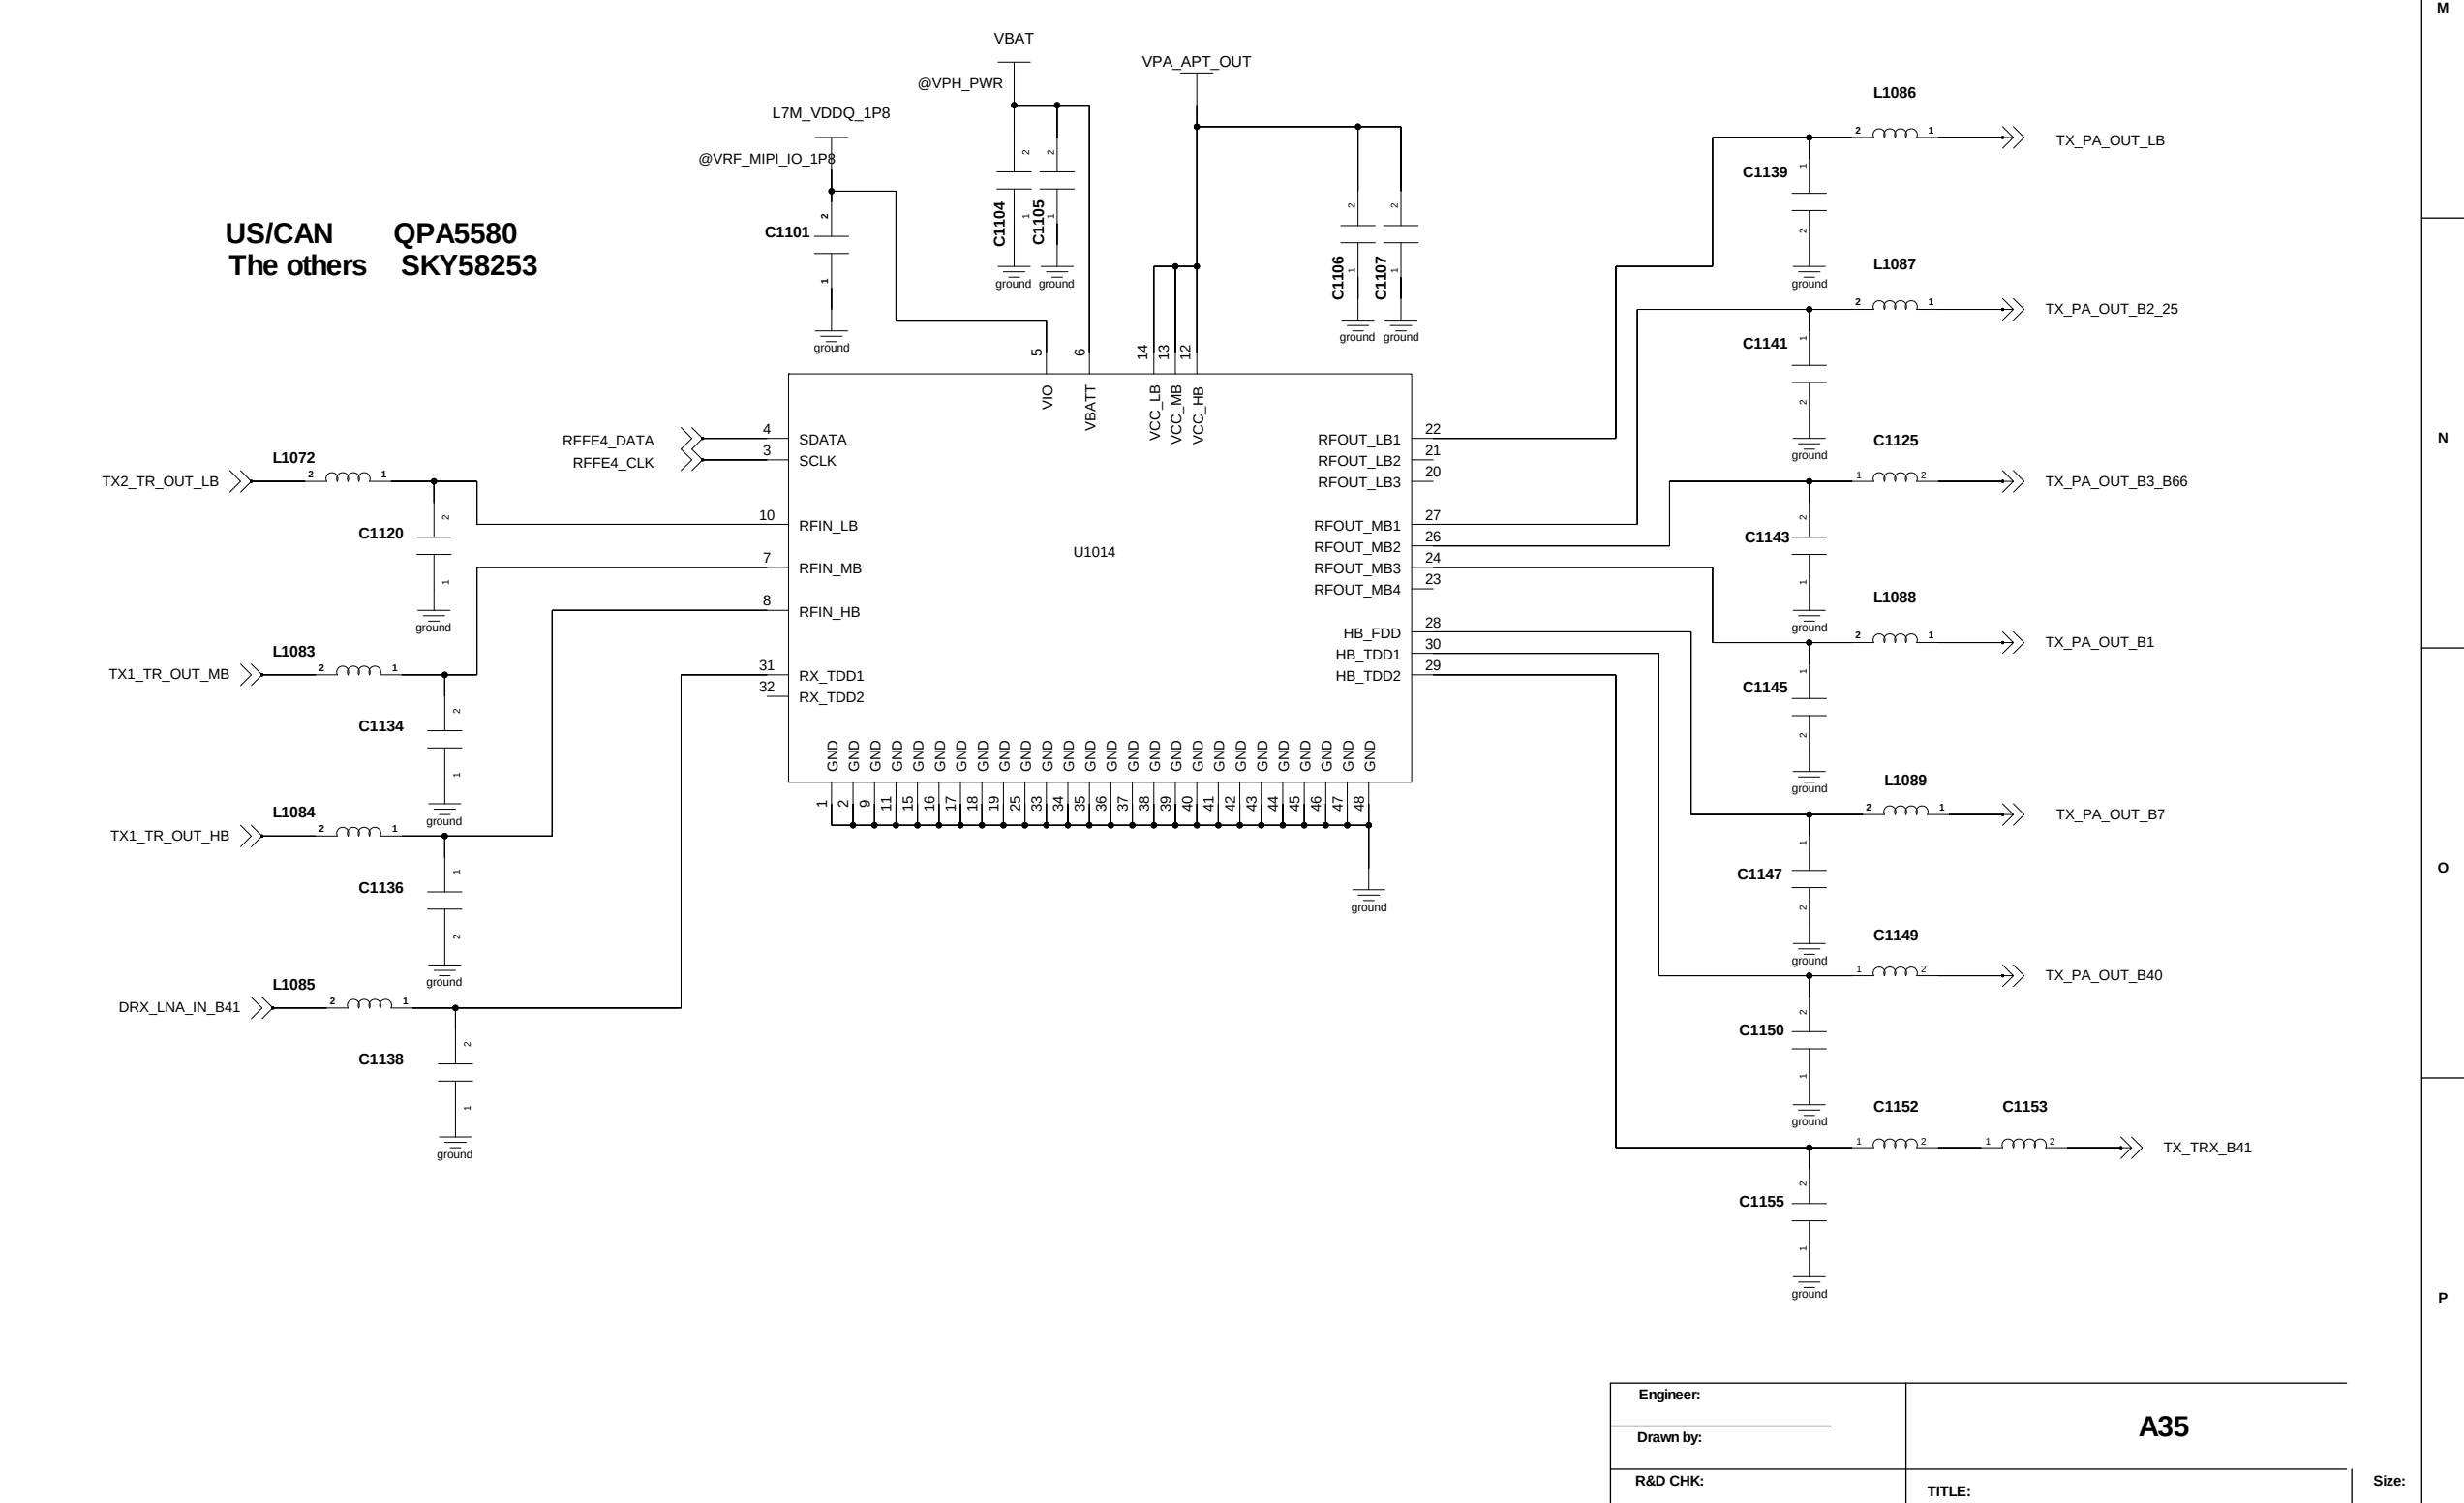
VBAT
@VPH_PWR
VPA_APT_OUT
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C1101
C1104
C1105
C1106
C1107
U1014
RFFE4_DATA
RFFE4_CLK
SDATA
SCLK
RFIN_LB
RFIN_MB
RFIN_HB
RX_TDD1
RX_TDD2
VIO
VBATT
VCC_LB
VCC_MB
VCC_HB
RFOUT_LB1
RFOUT_LB2
RFOUT_LB3
RFOUT_MB1
RFOUT_MB2
RFOUT_MB3
RFOUT_MB4
HB_FDD
HB_TDD1
HB_TDD2
TX2_TR_OUT_LB
L1072
C1120
TX1_TR_OUT_MB
L1083
C1134
TX1_TR_OUT_HB
L1084
C1136
DRX_LNA_IN_B41
L1085
C1138
L1086
C1139
TX_PA_OUT_LB
L1087
C1141
TX_PA_OUT_B2_25
C1125
C1143
TX_PA_OUT_B3_B66
L1088
C1145
TX_PA_OUT_B1
L1089
C1147
TX_PA_OUT_B7
C1149
C1150
TX_PA_OUT_B40
C1152
C1153
C1155
TX_TRX_B41
ground

Engineer:		A35
Drawn by:		
R&D CHK:	TITLE:	Size:
DOC CTRL CHK:	RF PAM/FEM	
MFG ENGR CHK:		
QA CHK:	REV:	Drawing Number:

Changed by: Date Changed: Time Changed:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

TRANSCEIVER (S5525)

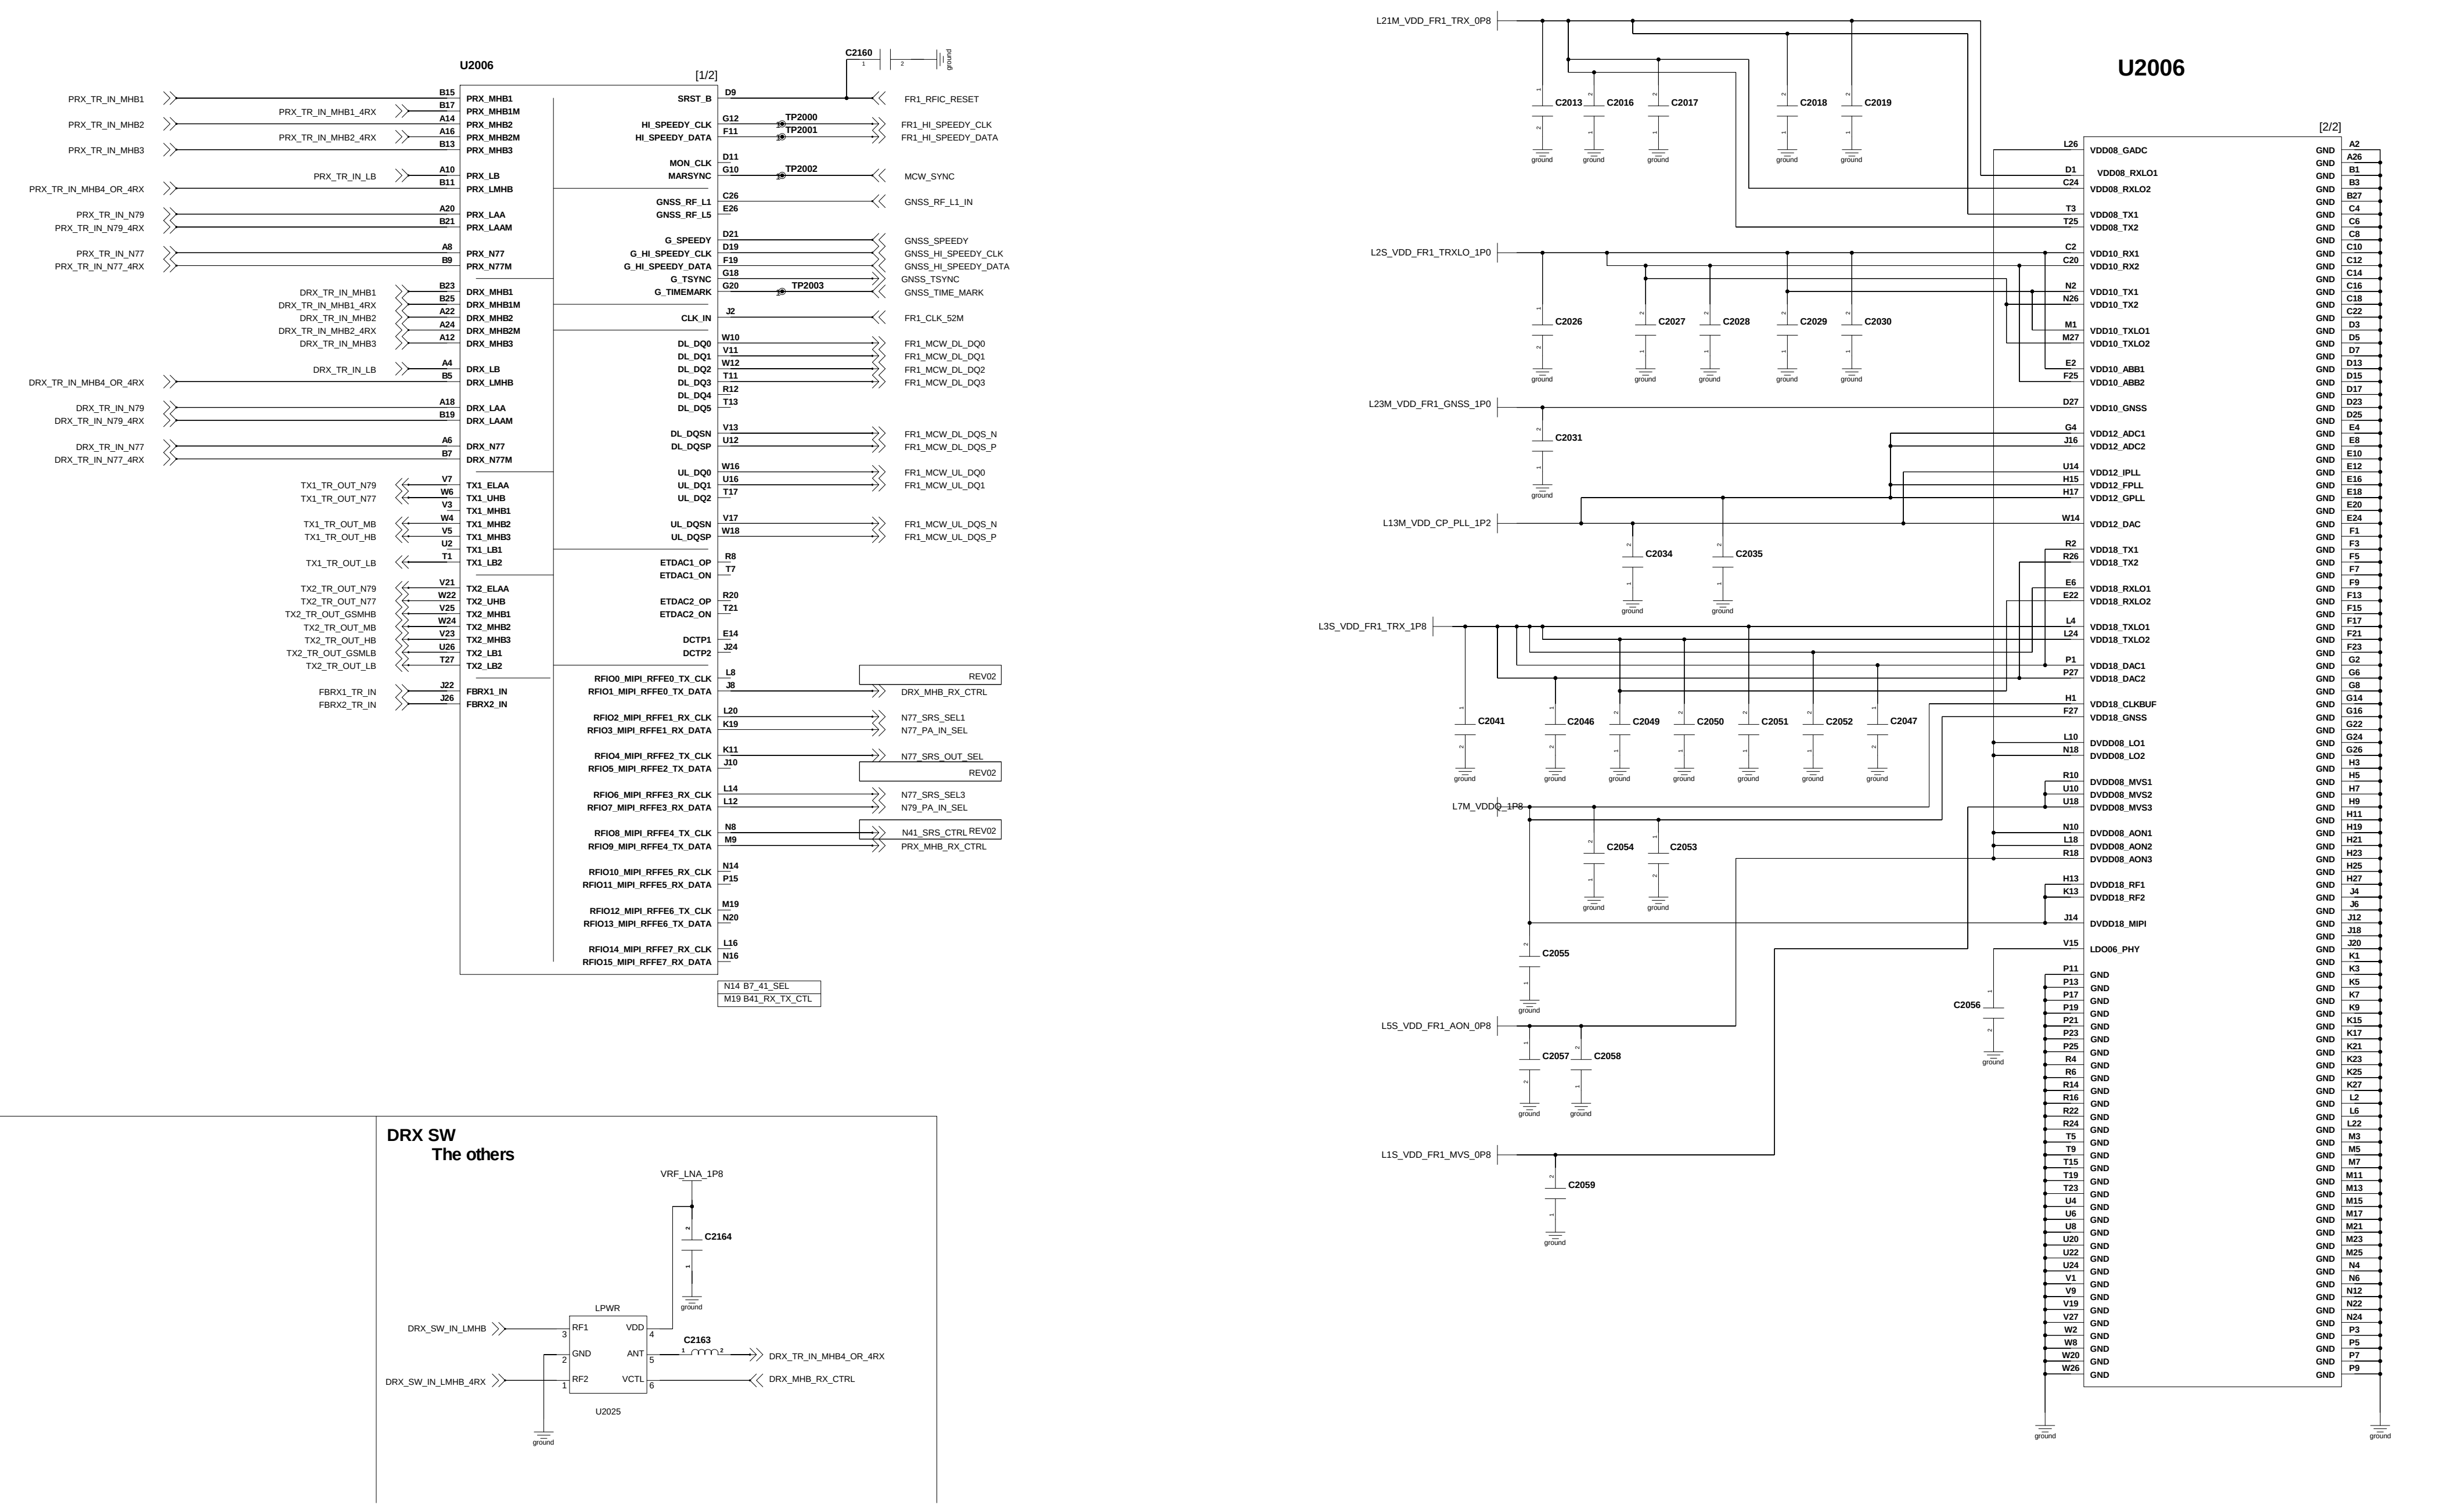
U2006
[1/2]
[2/2]
PRX_TR_IN_MHB1
PRX_TR_IN_MHB1_4RX
PRX_TR_IN_MHB2
PRX_TR_IN_MHB2_4RX
PRX_TR_IN_MHB3
PRX_TR_IN_LB
PRX_TR_IN_MHB4_OR_4RX
PRX_TR_IN_N79
PRX_TR_IN_N79_4RX
PRX_TR_IN_N77
PRX_TR_IN_N77_4RX
DRX_TR_IN_MHB1
DRX_TR_IN_MHB1_4RX
DRX_TR_IN_MHB2
DRX_TR_IN_MHB2_4RX
DRX_TR_IN_MHB3
DRX_TR_IN_LB
DRX_TR_IN_MHB4_OR_4RX
DRX_TR_IN_N79
DRX_TR_IN_N79_4RX
DRX_TR_IN_N77
DRX_TR_IN_N77_4RX
TX1_TR_OUT_N79
TX1_TR_OUT_N77
TX1_TR_OUT_MB
TX1_TR_OUT_HB
TX1_TR_OUT_LB
TX2_TR_OUT_N79
TX2_TR_OUT_N77
TX2_TR_OUT_GSMHB
TX2_TR_OUT_MB
TX2_TR_OUT_HB
TX2_TR_OUT_GSMLB
TX2_TR_OUT_LB
FBRX1_TR_IN
FBRX2_TR_IN
C2160
SRST_B
HI_SPEEDY_CLK
HI_SPEEDY_DATA
MON_CLK
MARSYNC
GNSS_RF_L1
GNSS_RF_L5
G_SPEEDY
G_HI_SPEEDY_CLK
G_HI_SPEEDY_DATA
G_TSYNC
G_TIMEMARK
CLK_IN
DL_DQ0 … DL_DQ5
DL_DQSN
DL_DQSP
UL_DQ0 … UL_DQ2
UL_DQSN
UL_DQSP
ETDAC1_OP
ETDAC1_ON
ETDAC2_OP
ETDAC2_ON
DCTP1
DCTP2
RFIO0_MIPI_RFFE0_TX_CLK … RFIO15_MIPI_RFFE7_RX_DATA
TP2000
TP2001
TP2002
TP2003
FR1_RFIC_RESET
FR1_HI_SPEEDY_CLK
FR1_HI_SPEEDY_DATA
MCW_SYNC
GNSS_RF_L1_IN
GNSS_SPEEDY
GNSS_HI_SPEEDY_CLK
GNSS_HI_SPEEDY_DATA
GNSS_TSYNC
GNSS_TIME_MARK
FR1_CLK_52M
FR1_MCW_DL_DQ0
FR1_MCW_DL_DQ1
FR1_MCW_DL_DQ2
FR1_MCW_DL_DQ3
FR1_MCW_DL_DQS_N
FR1_MCW_DL_DQS_P
FR1_MCW_UL_DQ0
FR1_MCW_UL_DQ1
FR1_MCW_UL_DQS_N
FR1_MCW_UL_DQS_P
REV02
DRX_MHB_RX_CTRL
N77_SRS_SEL1
N77_PA_IN_SEL
N77_SRS_OUT_SEL
N77_SRS_SEL3
N79_PA_IN_SEL
N41_SRS_CTRL
PRX_MHB_RX_CTRL
N14 B7_41_SEL
M19 B41_RX_TX_CTL
L21M_VDD_FR1_TRX_0P8
L2S_VDD_FR1_TRXLO_1P0
L23M_VDD_FR1_GNSS_1P0
L13M_VDD_CP_PLL_1P2
L3S_VDD_FR1_TRX_1P8
L7M_VDDQ_1P8
L5S_VDD_FR1_AON_0P8
L1S_VDD_FR1_MVS_0P8
C2013 C2016 C2017 C2018 C2019
C2026 C2027 C2028 C2029 C2030
C2031 C2034 C2035
C2041 C2046 C2049 C2050 C2051 C2052 C2047
C2054 C2053 C2055 C2056 C2057 C2058 C2059
VDD08_GADC
VDD08_RXLO1
VDD08_RXLO2
VDD08_TX1
VDD08_TX2
VDD10_RX1
VDD10_RX2
VDD10_TX1
VDD10_TX2
VDD10_TXLO1
VDD10_TXLO2
VDD10_ABB1
VDD10_ABB2
VDD10_GNSS
VDD12_ADC1
VDD12_ADC2
VDD12_IPLL
VDD12_FPLL
VDD12_GPLL
VDD12_DAC
VDD18_TX1
VDD18_TX2
VDD18_RXLO1
VDD18_RXLO2
VDD18_TXLO1
VDD18_TXLO2
VDD18_DAC1
VDD18_DAC2
VDD18_CLKBUF
VDD18_GNSS
DVDD08_LO1
DVDD08_LO2
DVDD08_MVS1
DVDD08_MVS2
DVDD08_MVS3
DVDD08_AON1
DVDD08_AON2
DVDD08_AON3
DVDD18_RF1
DVDD18_RF2
DVDD18_MIPI
LDO06_PHY
GND
ground

MIMO MUX
US/CAN

DRX SW
The others

VRF_LNA_1P8
C2164
LPWR
DRX_SW_IN_LMHB
DRX_SW_IN_LMHB_4RX
RF1
GND
RF2
VDD
ANT
VCTL
C2163
DRX_TR_IN_MHB4_OR_4RX
DRX_MHB_RX_CTRL
U2025
ground

APT1

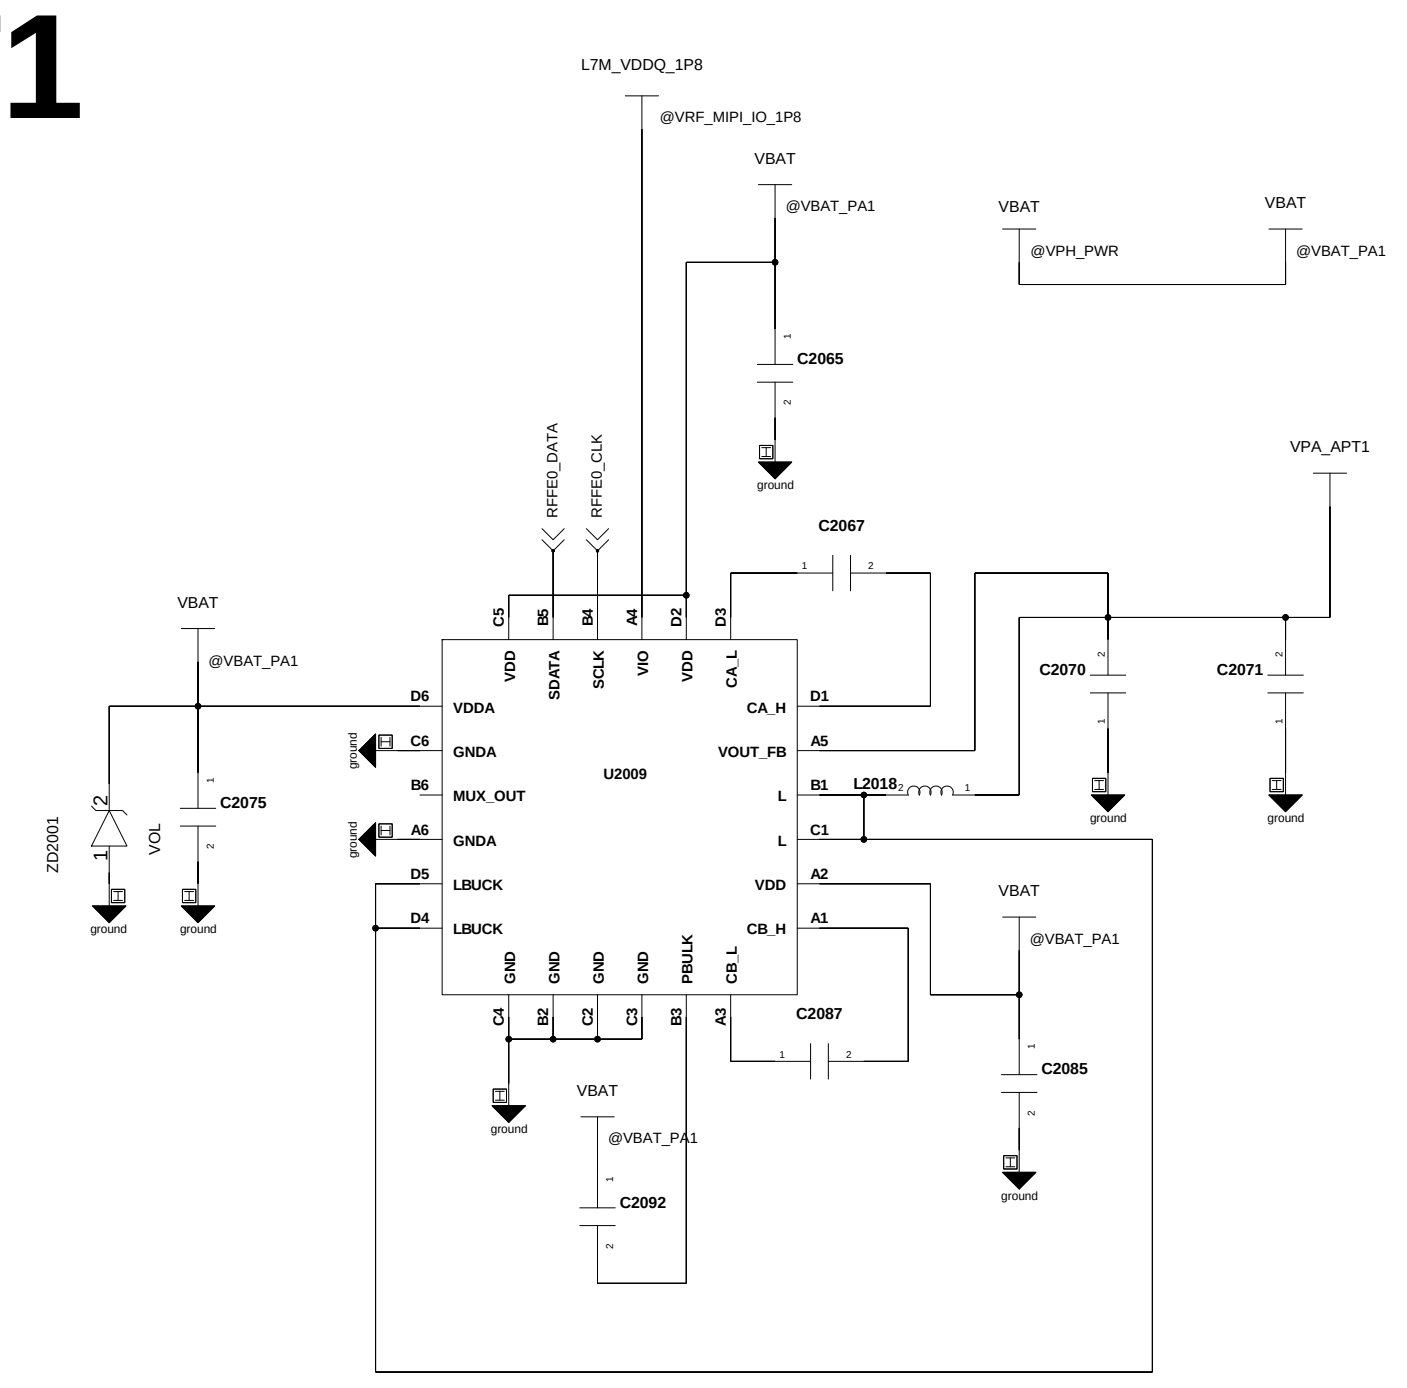
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
VBAT
@VBAT_PA1
@VPH_PWR
C2065
RFFE0_DATA
RFFE0_CLK
VPA_APT1
C2067
C2070
C2071
U2009
VDDA
GNDA
MUX_OUT
LBUCK
CA_H
VOUT_FB
L
VDD
CB_H
CA_L
CB_L
PBULK
L2018
C2075
ZD2001
VOL
C2087
C2085
C2092
ground

APT2

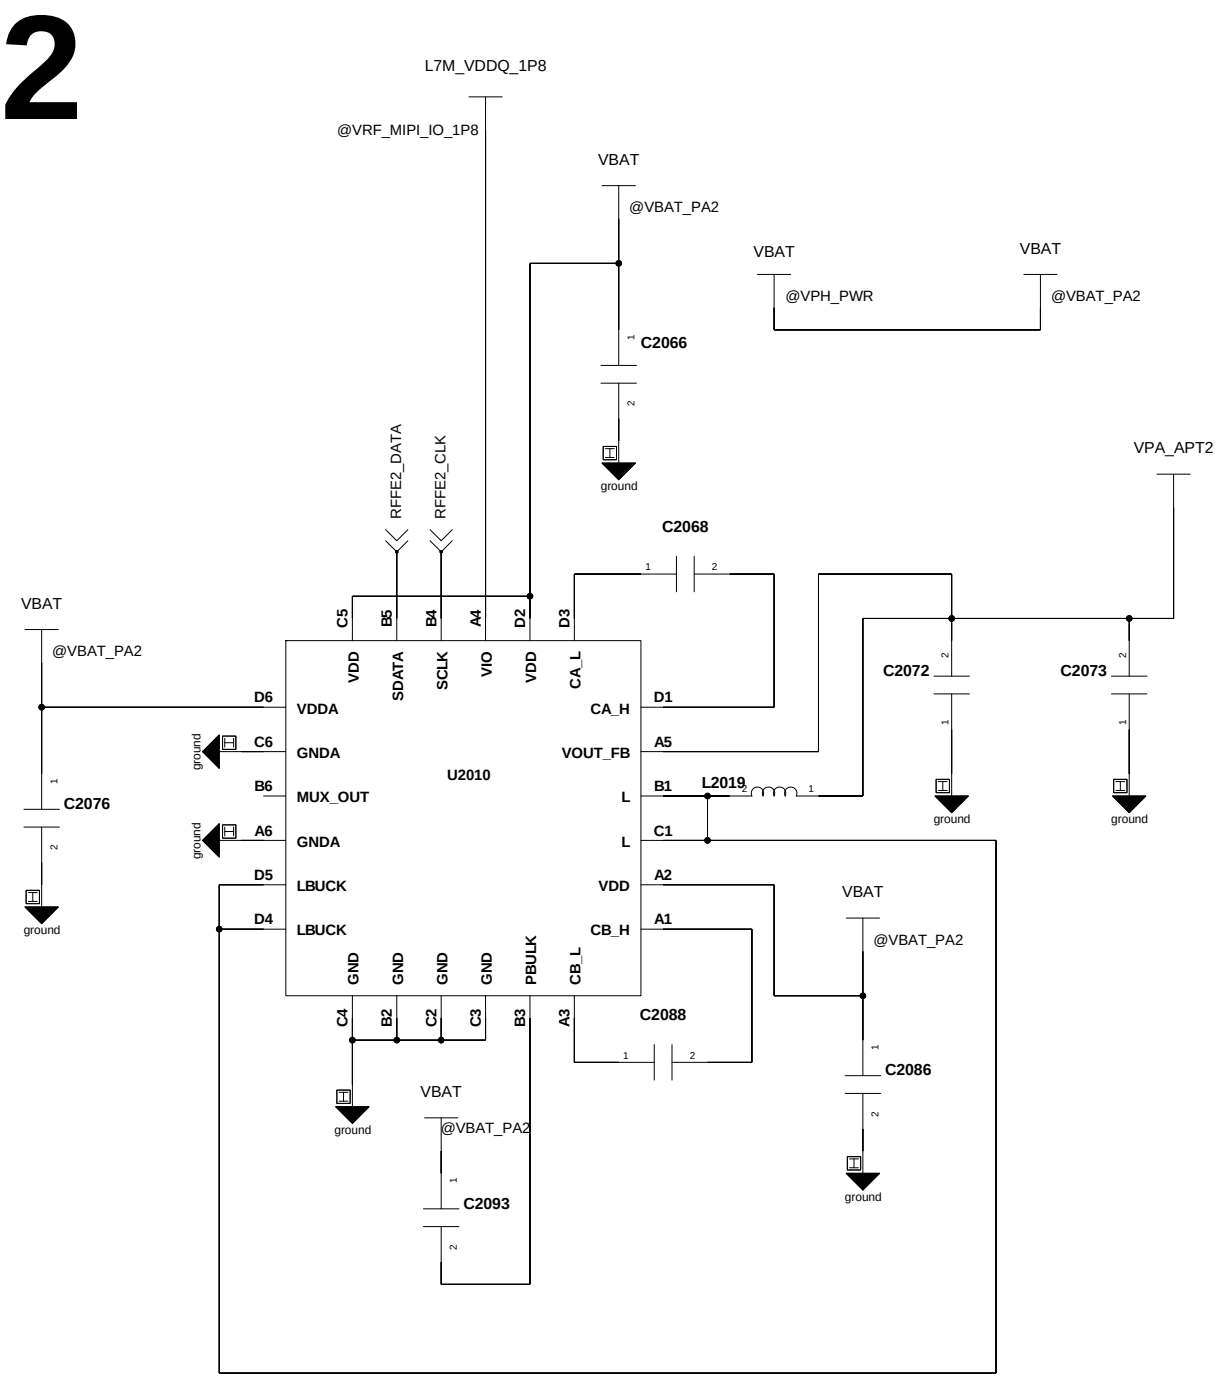
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
VBAT
@VBAT_PA2
@VPH_PWR
C2066
RFFE2_DATA
RFFE2_CLK
VPA_APT2
C2068
C2072
C2073
U2010
L2019
C2076
C2088
C2086
C2093
ground

SUB ANT3

N77 TRX, WIFI_5G

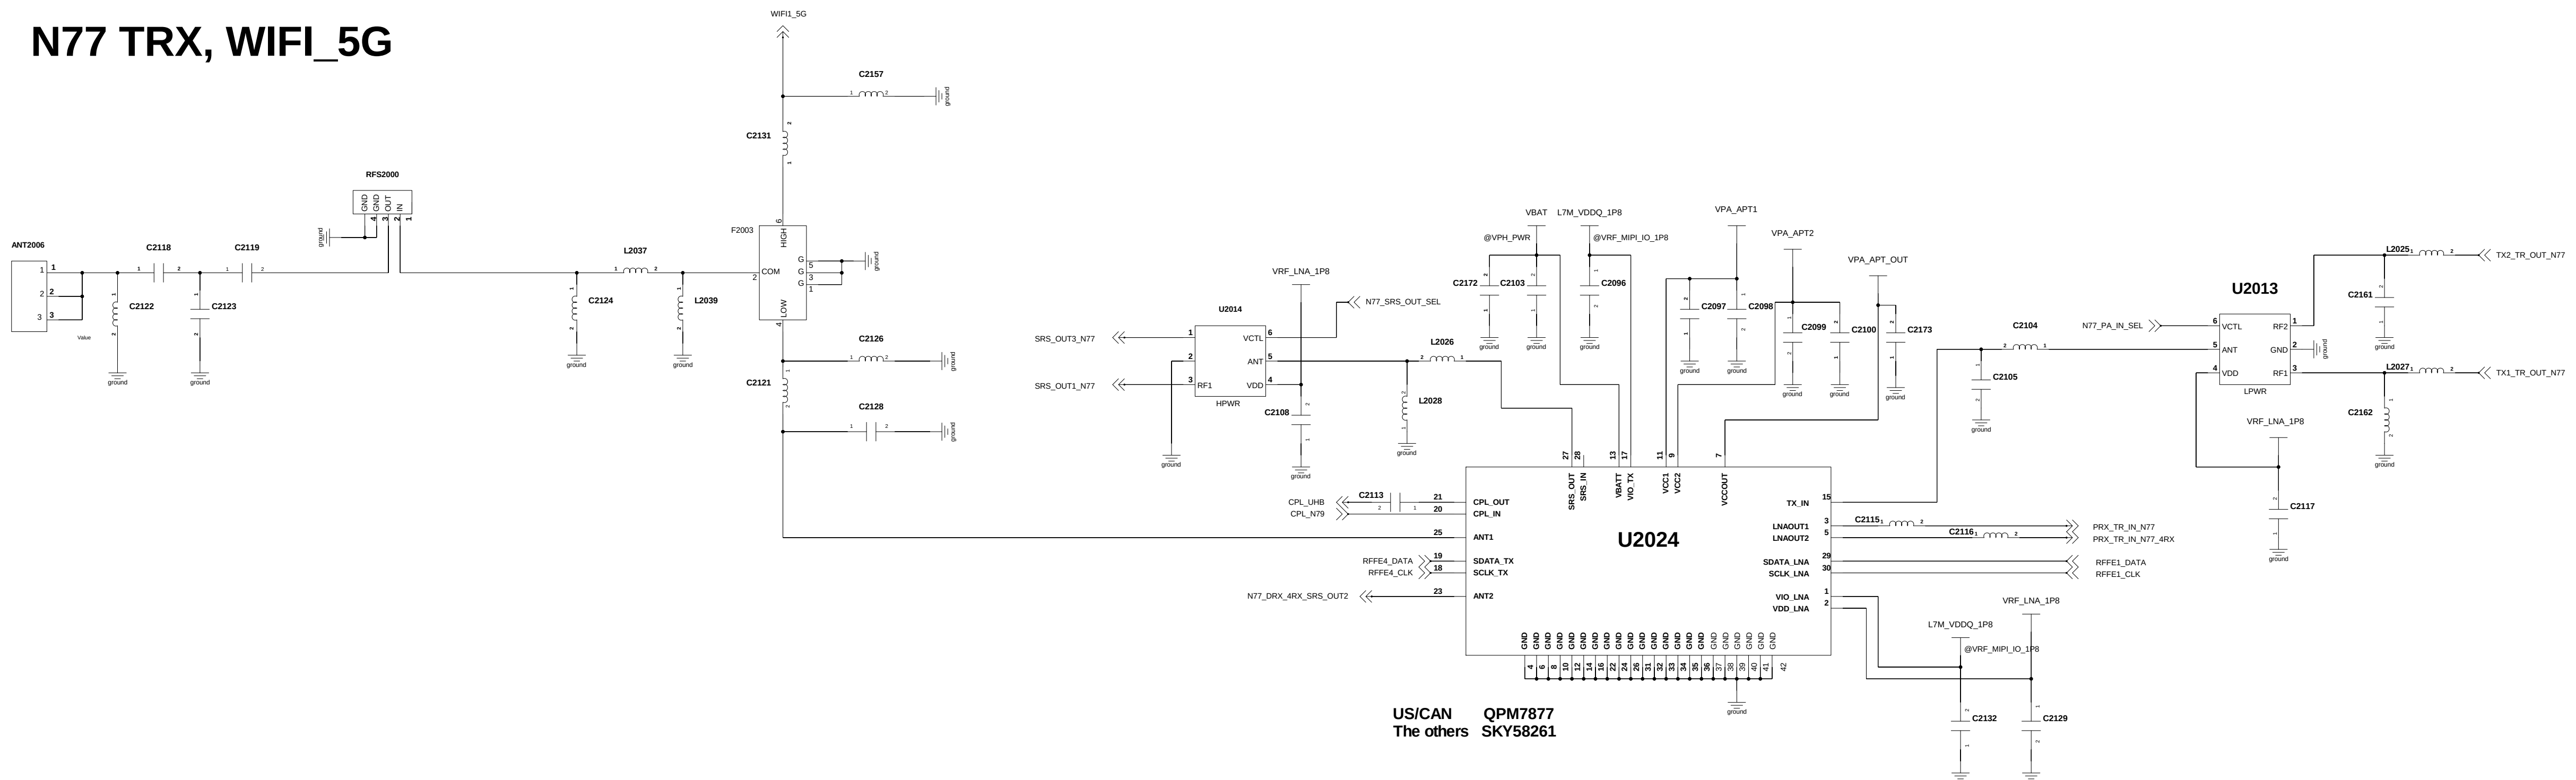
ANT2006
C2118
C2119
C2122
C2123
RFS2000
L2037
C2124
L2039
F2003
HIGH
COM
LOW
WIFI1_5G
C2157
C2131
C2126
C2121
C2128
U2014
HPWR
VRF_LNA_1P8
N77_SRS_OUT_SEL
SRS_OUT3_N77
SRS_OUT1_N77
C2108
L2026
L2028
VBAT
L7M_VDDQ_1P8
@VPH_PWR
@VRF_MIPI_IO_1P8
C2172
C2103
C2096
VPA_APT1
VPA_APT2
VPA_APT_OUT
C2097
C2098
C2099
C2100
C2173
U2024
CPL_OUT
CPL_IN
ANT1
SDATA_TX
SCLK_TX
ANT2
SRS_OUT
SRS_IN
VBATT
VIO_TX
VCC1
VCC2
VCCOUT
TX_IN
LNAOUT1
LNAOUT2
SDATA_LNA
SCLK_LNA
VIO_LNA
VDD_LNA
C2113
CPL_UHB
CPL_N79
RFFE4_DATA
RFFE4_CLK
N77_DRX_4RX_SRS_OUT2
C2115
C2116
PRX_TR_IN_N77
PRX_TR_IN_N77_4RX
RFFE1_DATA
RFFE1_CLK
C2132
C2129
C2104
C2105
N77_PA_IN_SEL
U2013
LPWR
L2025
L2027
C2161
C2162
C2117
TX2_TR_OUT_N77
TX1_TR_OUT_N77
ground

US/CAN QPM7877
The others SKY58261

SUB ANT5

MHB PRX MIMO, WIFI1_2.4G

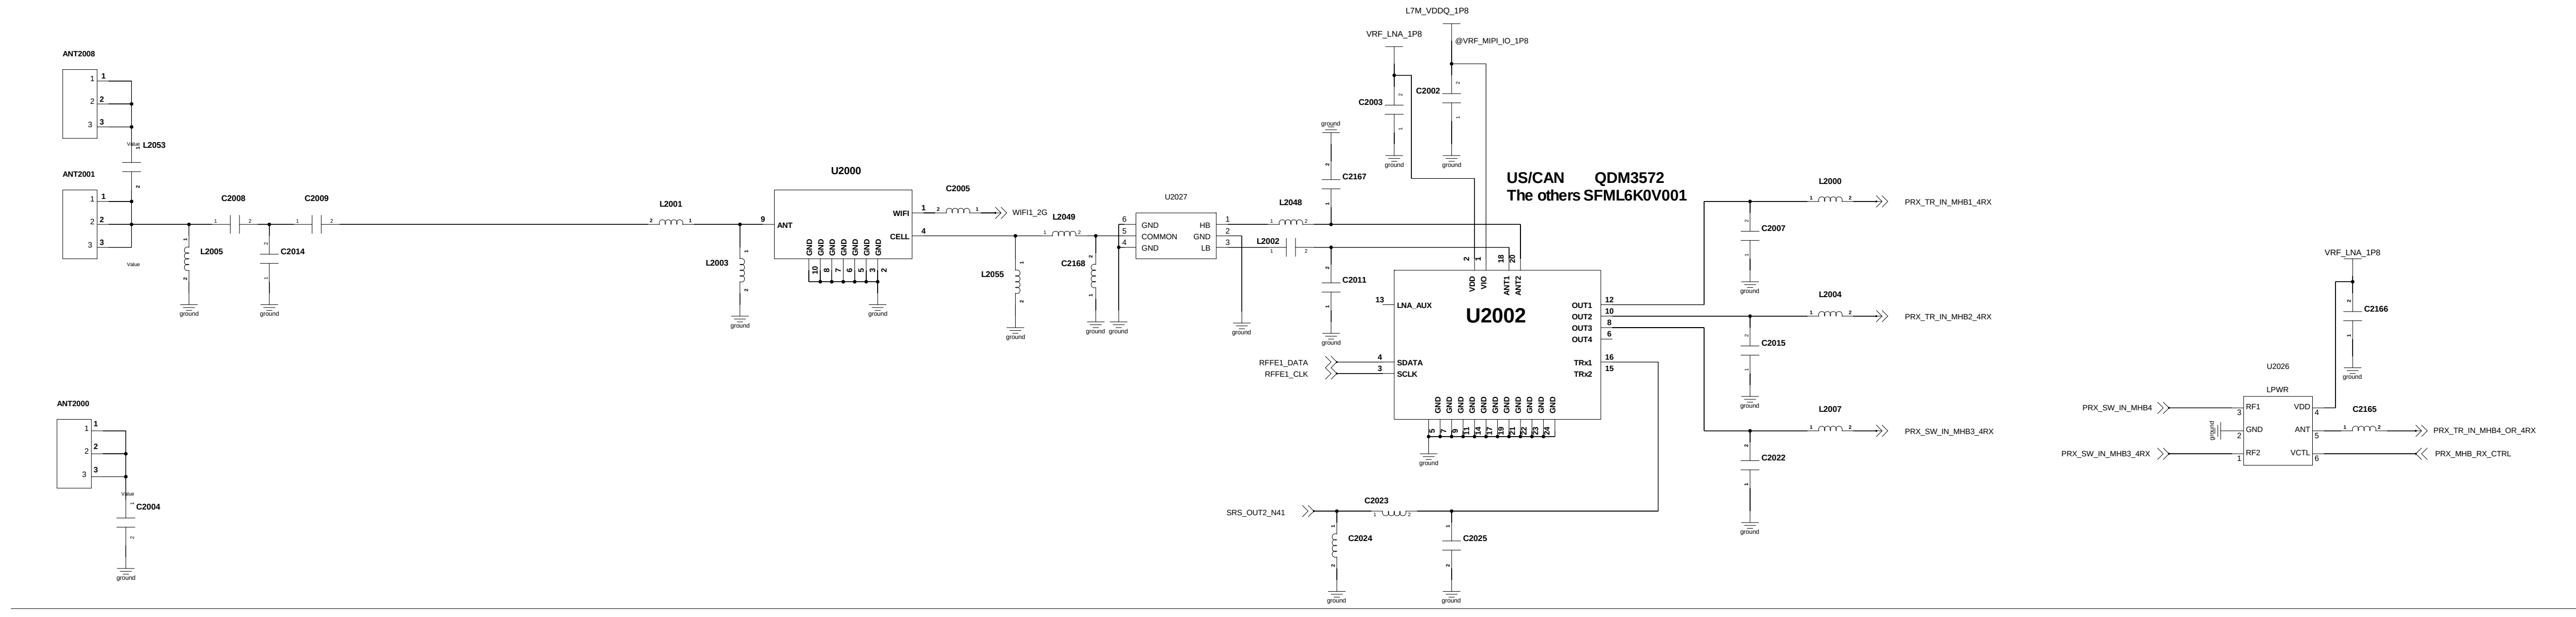
ANT2008
ANT2001
ANT2000
L2053
C2008
C2009
L2005
C2014
C2004
L2001
L2003
U2000
ANT
WIFI
CELL
C2005
WIFI1_2G
L2055
L2049
C2168
U2027
HB
COMMON
LB
L2048
L2002
C2167
C2011
VRF_LNA_1P8
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C2003
C2002
U2002
LNA_AUX
SDATA
SCLK
OUT1
OUT2
OUT3
OUT4
TRx1
TRx2
RFFE1_DATA
RFFE1_CLK
SRS_OUT2_N41
C2023
C2024
C2025
L2000
L2004
L2007
C2007
C2015
C2022
PRX_TR_IN_MHB1_4RX
PRX_TR_IN_MHB2_4RX
PRX_SW_IN_MHB3_4RX
U2026
LPWR
PRX_SW_IN_MHB4
PRX_SW_IN_MHB3_4RX
C2166
C2165
PRX_TR_IN_MHB4_OR_4RX
PRX_MHB_RX_CTRL
ground

US/CAN QDM3572
The others SFML6K0V001

SUB ANT6

MB DRX MIMO

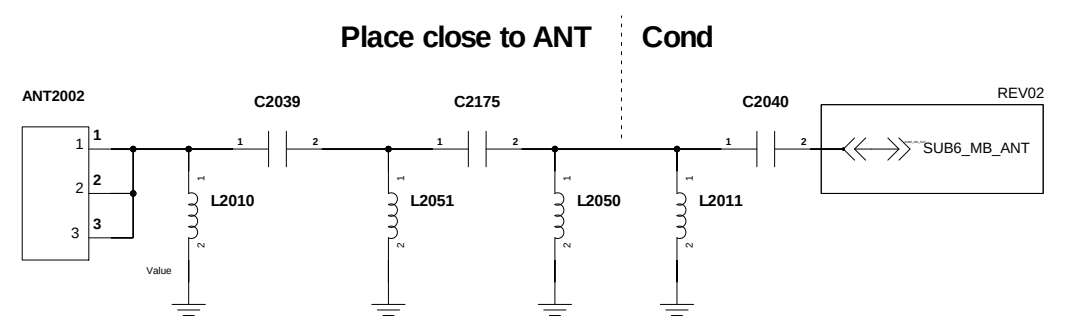
ANT2002
C2039
C2175
C2040
L2010
L2051
L2050
L2011
REV02
SUB6_MB_ANT
ground

Place close to ANT | Cond

The others | US/CAN

SUB ANT7

N77 PRX MIMO

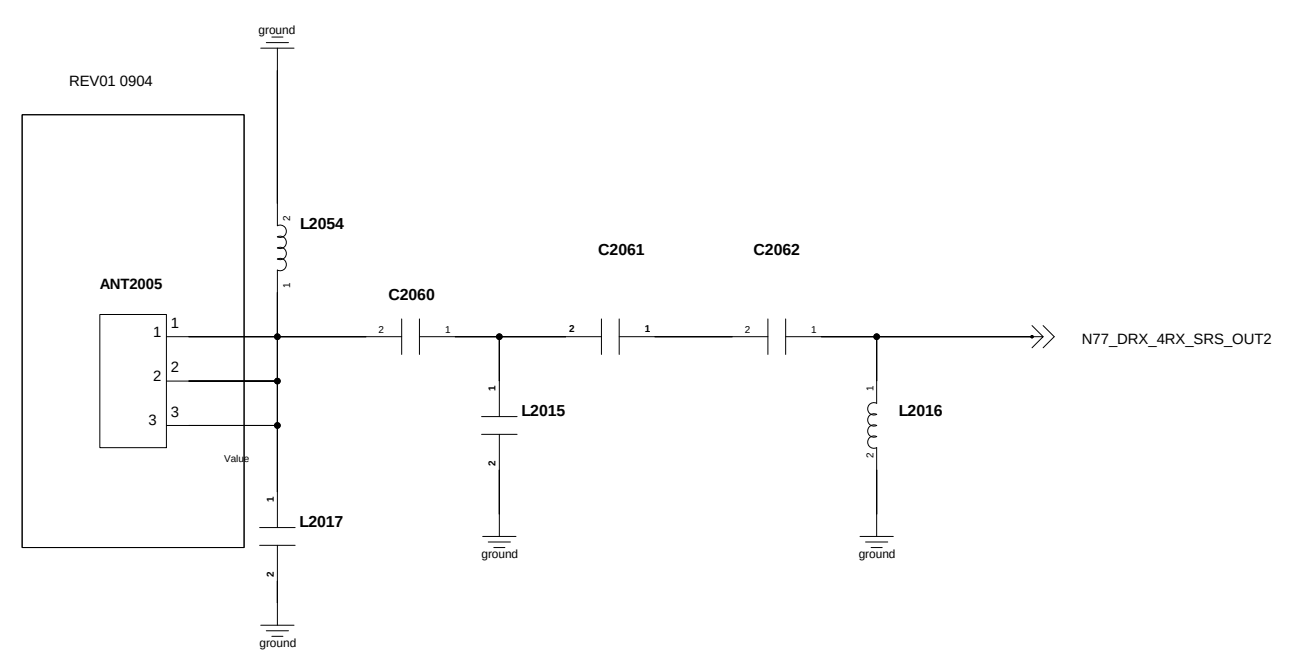
REV01 0904
ANT2005
L2054
C2060
C2061
C2062
L2015
L2016
L2017
N77_DRX_4RX_SRS_OUT2
ground

SUB ANT8

N77_DRX_MIMO

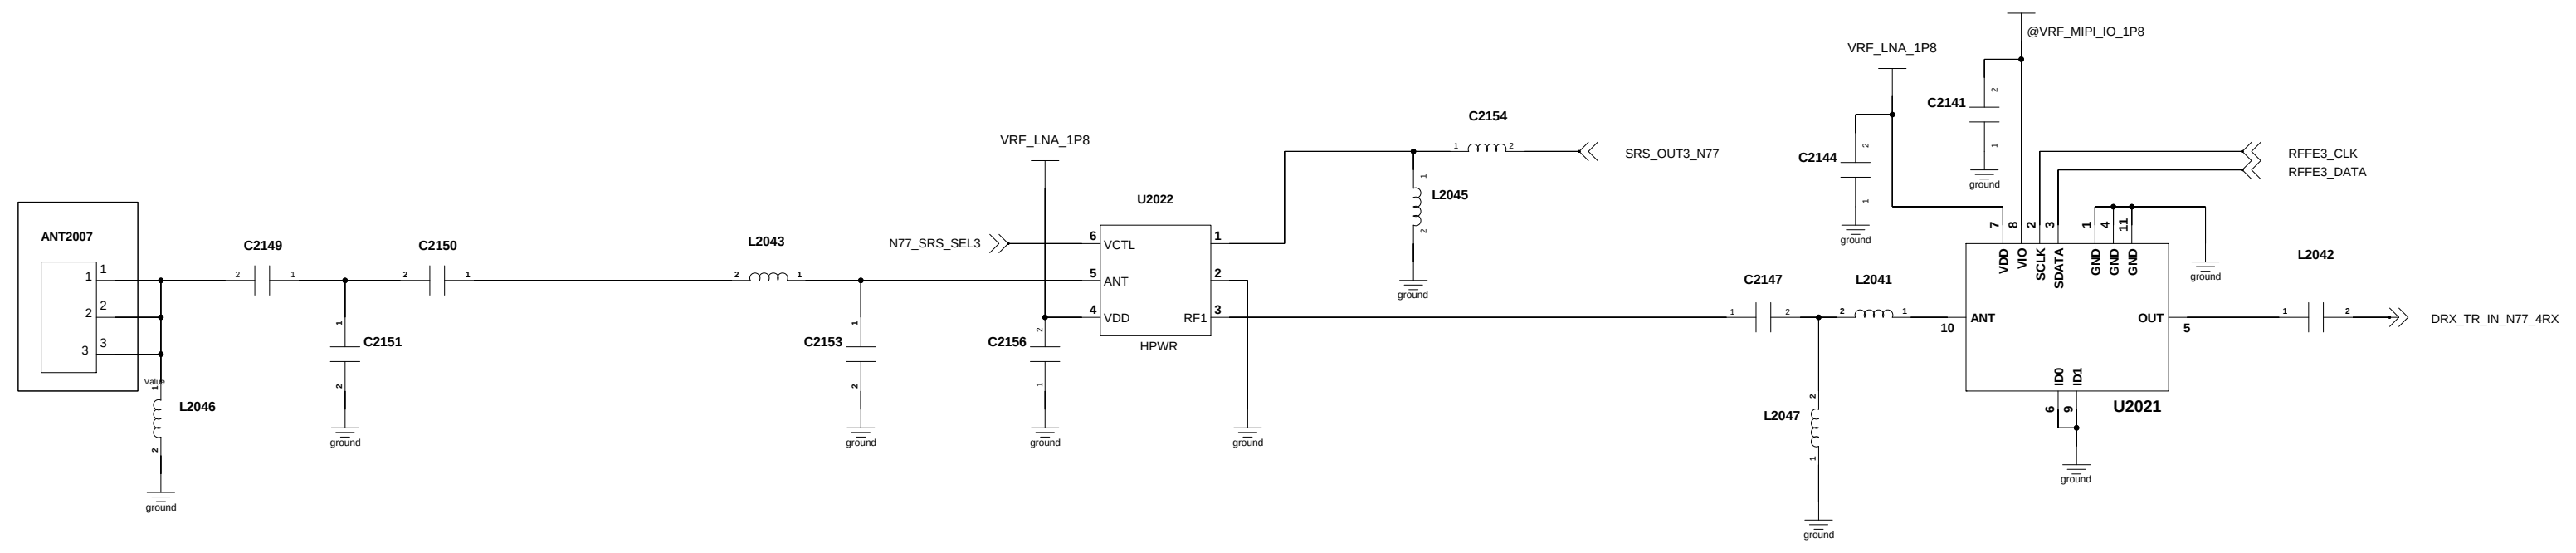
ANT2007
C2149
C2150
C2151
L2046
L2043
C2153
VRF_LNA_1P8
N77_SRS_SEL3
U2022
VCTL
ANT
VDD
RF1
HPWR
C2156
C2154
L2045
SRS_OUT3_N77
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C2141
C2144
RFFE3_CLK
RFFE3_DATA
C2147
L2041
L2047
U2021
ANT
OUT
L2042
DRX_TR_IN_N77_4RX
ground

SUB ANT10

N79_DRX_MIMO(CHN/JPN ONLY)

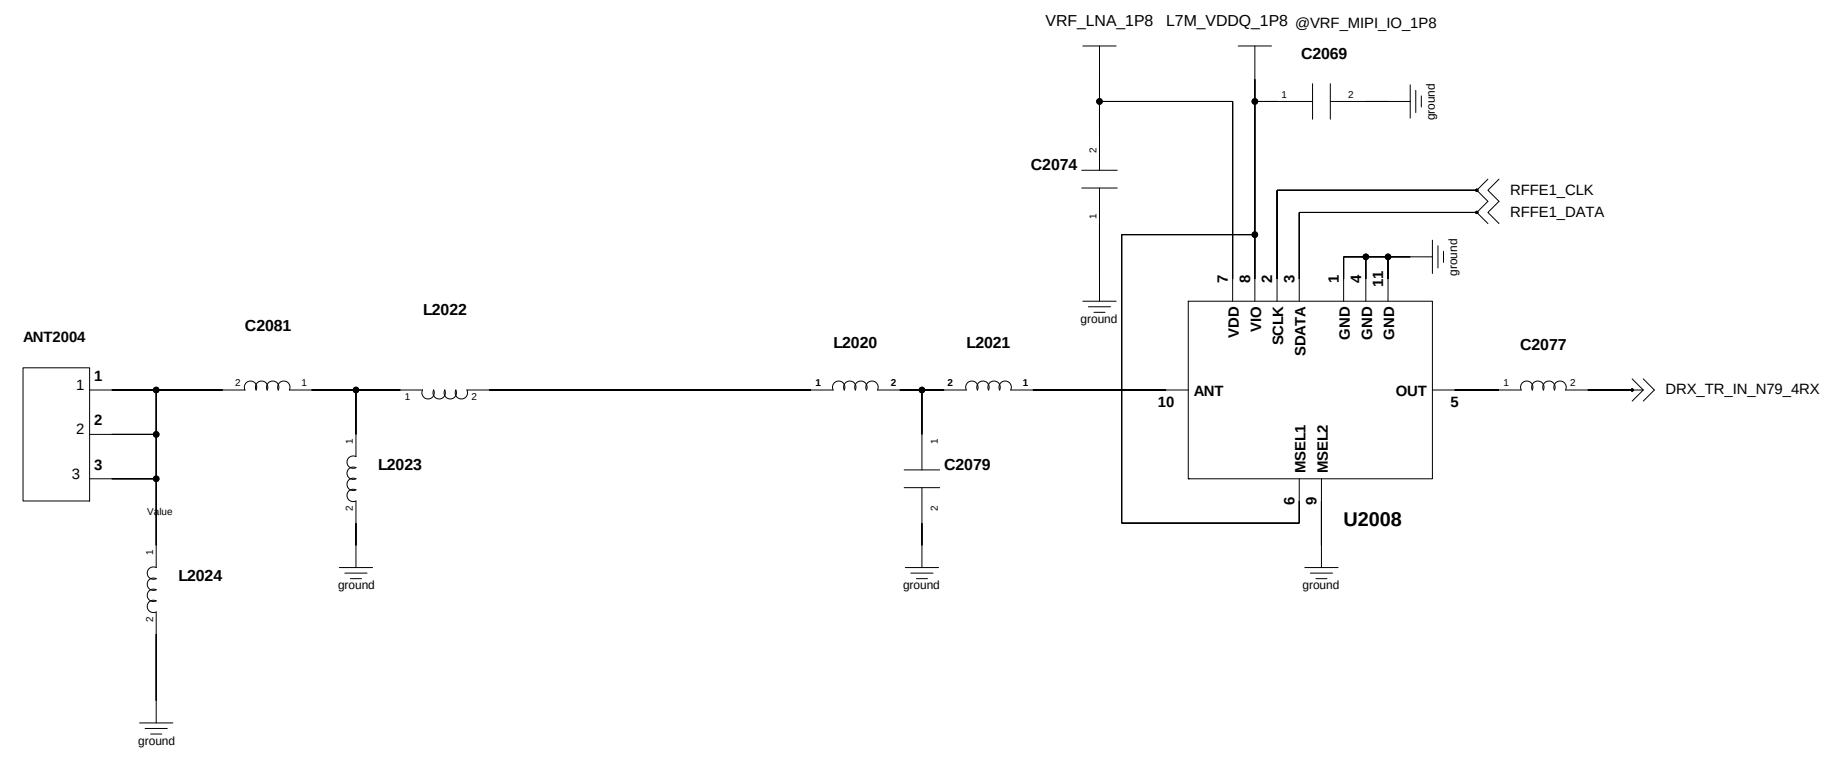
VRF_LNA_1P8
L7M_VDDQ_1P8
@VRF_MIPI_IO_1P8
C2069
C2074
RFFE1_CLK
RFFE1_DATA
ANT2004
C2081
L2022
L2023
L2024
L2020
L2021
C2079
U2008
ANT
OUT
MSEL1
MSEL2
C2077
DRX_TR_IN_N79_4RX
ground

Engineer:	A35	
Drawn by:		
R&D CHK:	TITLE:	Size:
DOC CTRL CHK:	RF TRCV/PAM/APT	
MFG ENGR CHK:		
QA CHK:	REV:	Drawing Number:

Changed by: | Date Changed: | Time Changed:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

SUB ANT9

WIFI2 2.4G/5G

WIFI/BT/FM

WIFI 2.4G - sub5/sub9
WIFI 5G - sub3/sub9

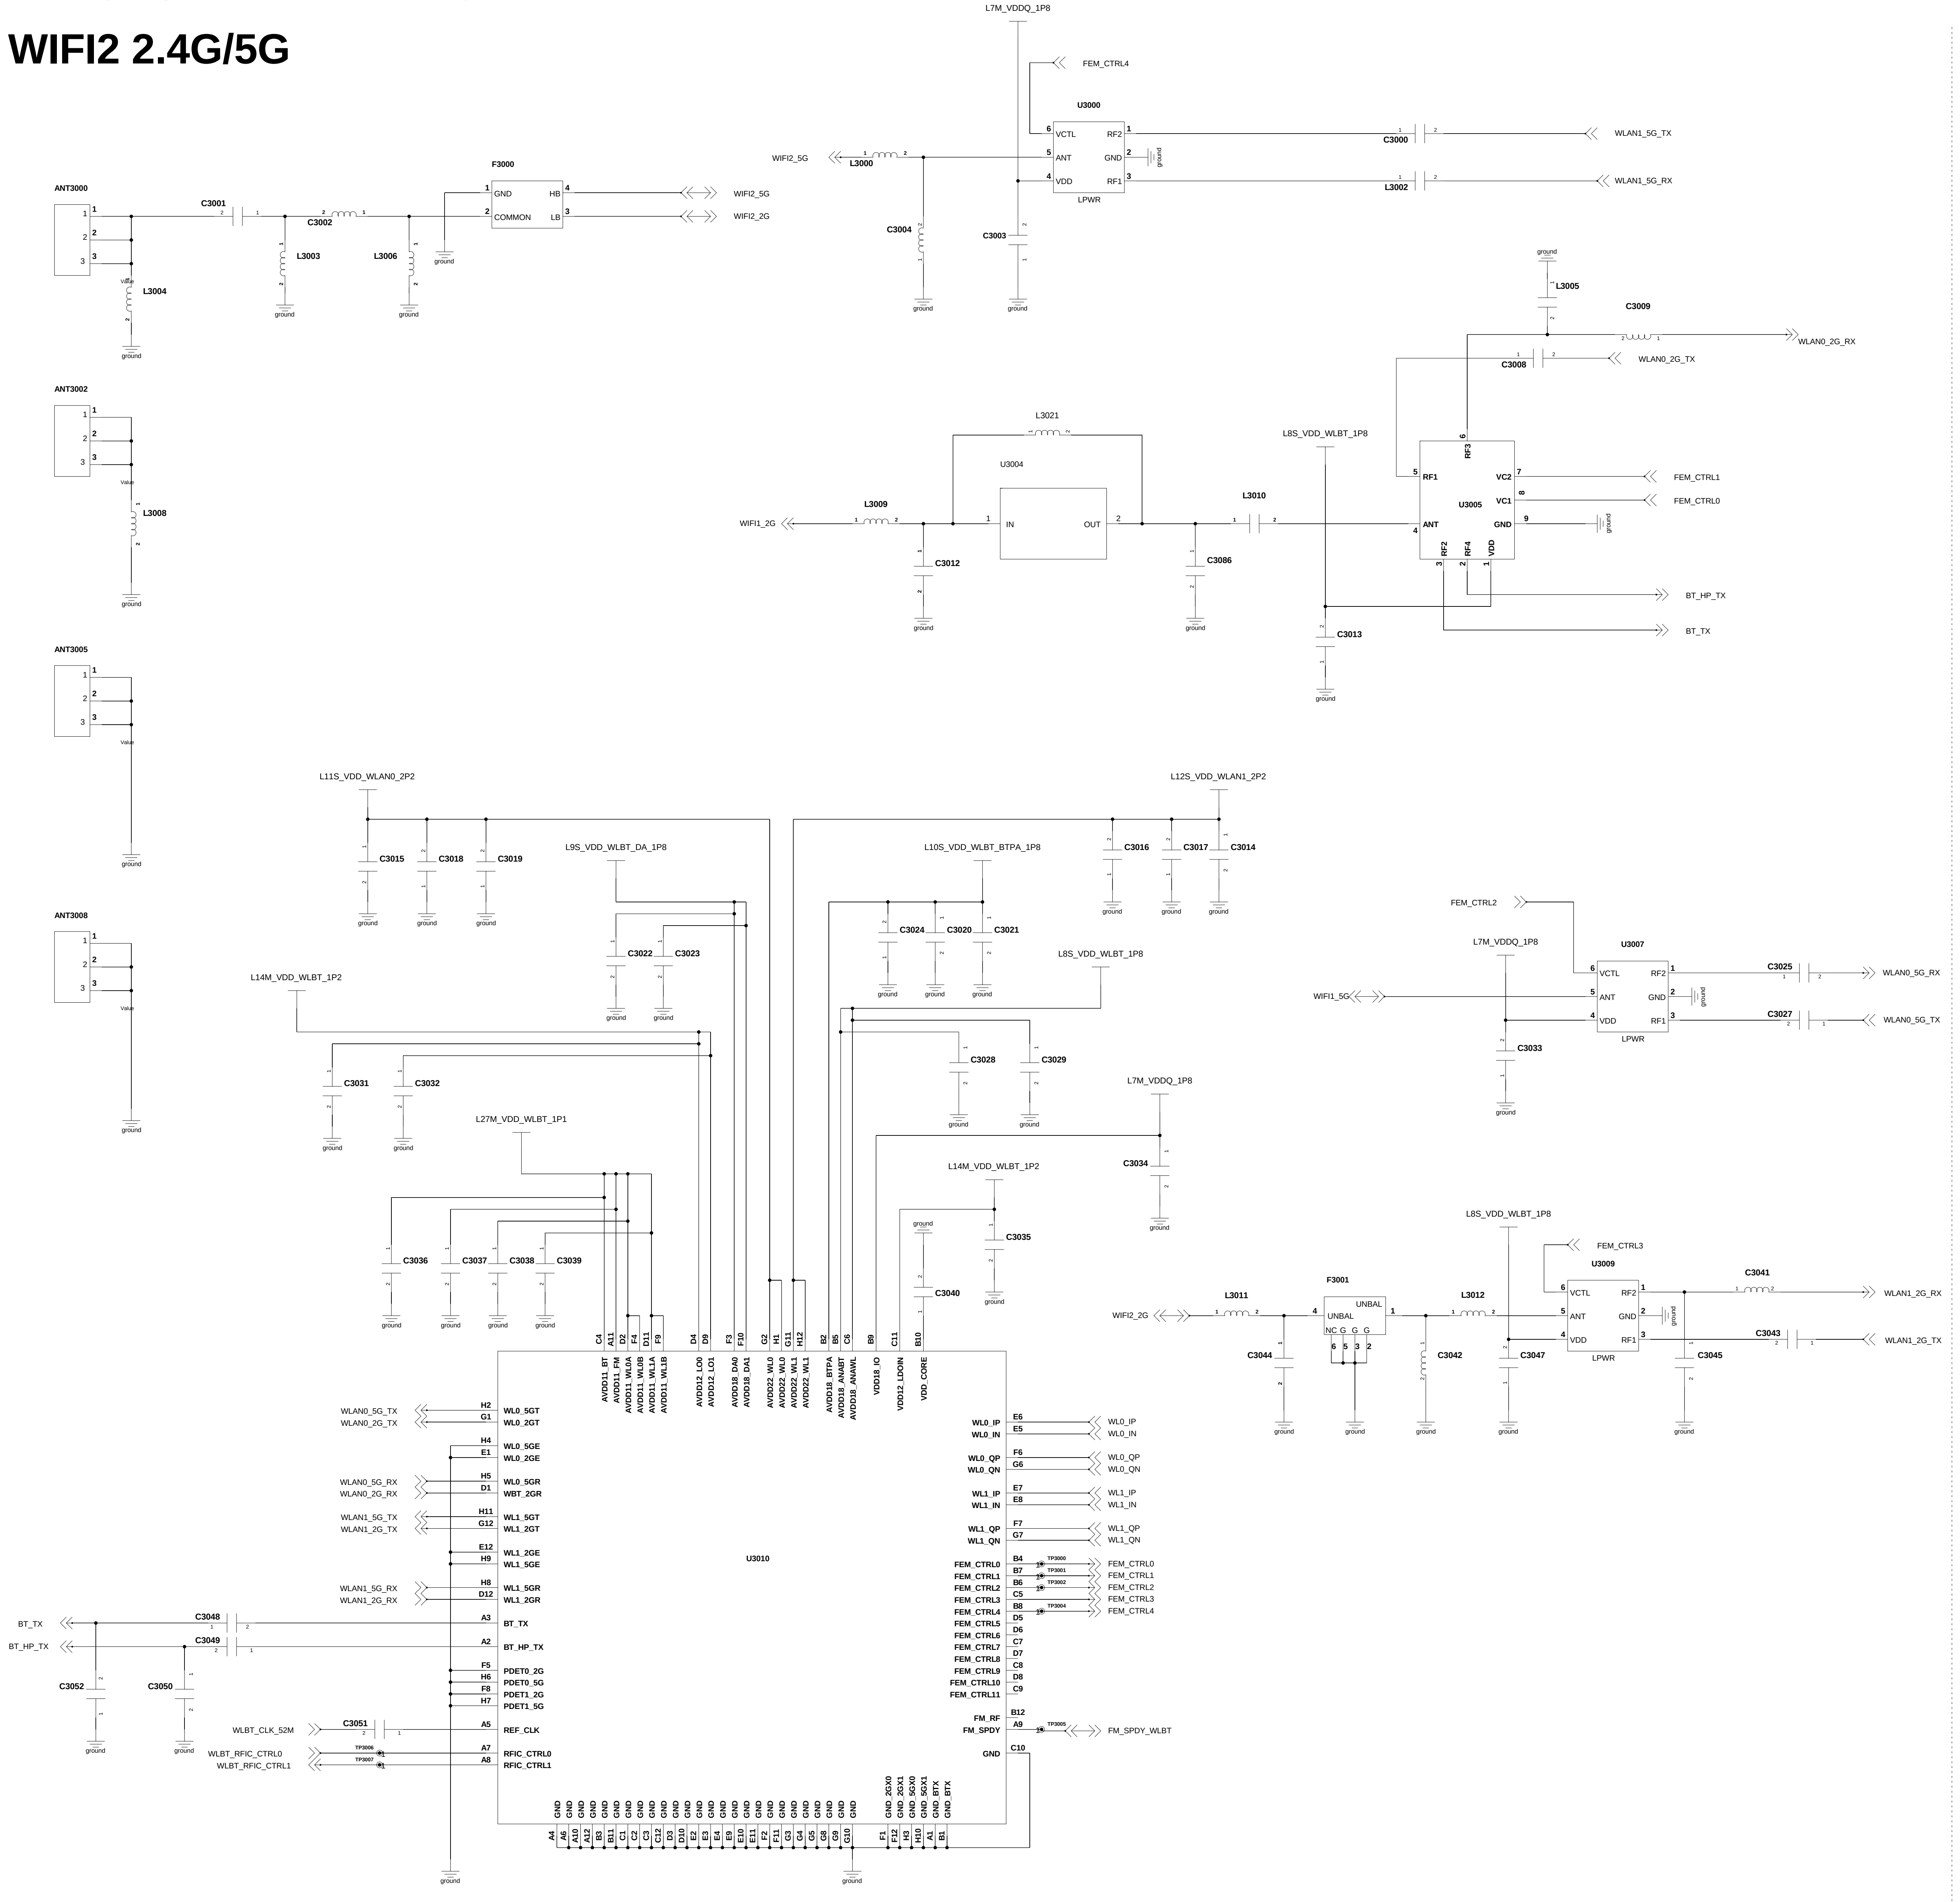
ANT3000
C3001
C3002
L3003
L3006
L3004
F3000
GND
COMMON
HB
LB
WIFI2_5G
WIFI2_2G
ANT3002
L3008
ANT3005
ANT3008
Value
ground
L7M_VDDQ_1P8
FEM_CTRL4
U3000
VCTL
ANT
VDD
RF2
GND
RF1
LPWR
WIFI2_5G
L3000
C3004
C3003
C3000
L3002
WLAN1_5G_TX
WLAN1_5G_RX
L3005
C3009
C3008
WLAN0_2G_RX
WLAN0_2G_TX
L3021
U3004
IN
OUT
WIFI1_2G
L3009
C3012
C3086
L3010
L8S_VDD_WLBT_1P8
U3005
RF1
RF3
VC2
VC1
GND
RF2
RF4
VDD
FEM_CTRL1
FEM_CTRL0
BT_HP_TX
BT_TX
C3013
L11S_VDD_WLAN0_2P2
C3015
C3018
C3019
L9S_VDD_WLBT_DA_1P8
C3022
C3023
L10S_VDD_WLBT_BTPA_1P8
C3024
C3020
C3021
L12S_VDD_WLAN1_2P2
C3016
C3017
C3014
L8S_VDD_WLBT_1P8
C3028
C3029
L14M_VDD_WLBT_1P2
C3031
C3032
L27M_VDD_WLBT_1P1
C3036
C3037
C3038
C3039
L7M_VDDQ_1P8
C3034
L14M_VDD_WLBT_1P2
C3035
C3040
FEM_CTRL2
L7M_VDDQ_1P8
U3007
WIFI1_5G
C3033
C3025
C3027
WLAN0_5G_RX
WLAN0_5G_TX
FEM_CTRL3
U3009
L3011
F3001
UNBAL
NC G G G
L3012
WIFI2_2G
C3044
C3042
C3047
C3041
C3043
C3045
WLAN1_2G_RX
WLAN1_2G_TX
U3010
AVDD11_BT
AVDD11_FM
AVDD11_WL0A
AVDD11_WL0B
AVDD11_WL1A
AVDD11_WL1B
AVDD12_LO0
AVDD12_LO1
AVDD18_DA0
AVDD18_DA1
AVDD22_WL0
AVDD22_WL0
AVDD22_WL1
AVDD22_WL1
AVDD18_BTPA
AVDD18_ANABT
AVDD18_ANAWL
VDD18_IO
VDD12_LDOIN
VDD_CORE
WLAN0_5G_TX
WLAN0_2G_TX
WL0_5GT
WL0_2GT
WL0_5GE
WL0_2GE
WLAN0_5G_RX
WLAN0_2G_RX
WL0_5GR
WBT_2GR
WLAN1_5G_TX
WLAN1_2G_TX
WL1_5GT
WL1_2GT
WL1_2GE
WL1_5GE
WLAN1_5G_RX
WLAN1_2G_RX
WL1_5GR
WL1_2GR
BT_TX
C3048
BT_HP_TX
C3049
C3052
C3050
PDET0_2G
PDET0_5G
PDET1_2G
PDET1_5G
WLBT_CLK_52M
C3051
REF_CLK
WLBT_RFIC_CTRL0
WLBT_RFIC_CTRL1
TP3006
TP3007
RFIC_CTRL0
RFIC_CTRL1
WL0_IP
WL0_IN
WL0_QP
WL0_QN
WL1_IP
WL1_IN
WL1_QP
WL1_QN
FEM_CTRL0
FEM_CTRL1
FEM_CTRL2
FEM_CTRL3
FEM_CTRL4
FEM_CTRL5
FEM_CTRL6
FEM_CTRL7
FEM_CTRL8
FEM_CTRL9
FEM_CTRL10
FEM_CTRL11
TP3000
TP3001
TP3002
TP3004
FM_RF
FM_SPDY
TP3005
FM_SPDY_WLBT
GND
GND_2GX0
GND_2GX1
GND_5GX0
GND_5GX1
GND_BTX
GND_BTX

MST

(KOR only)

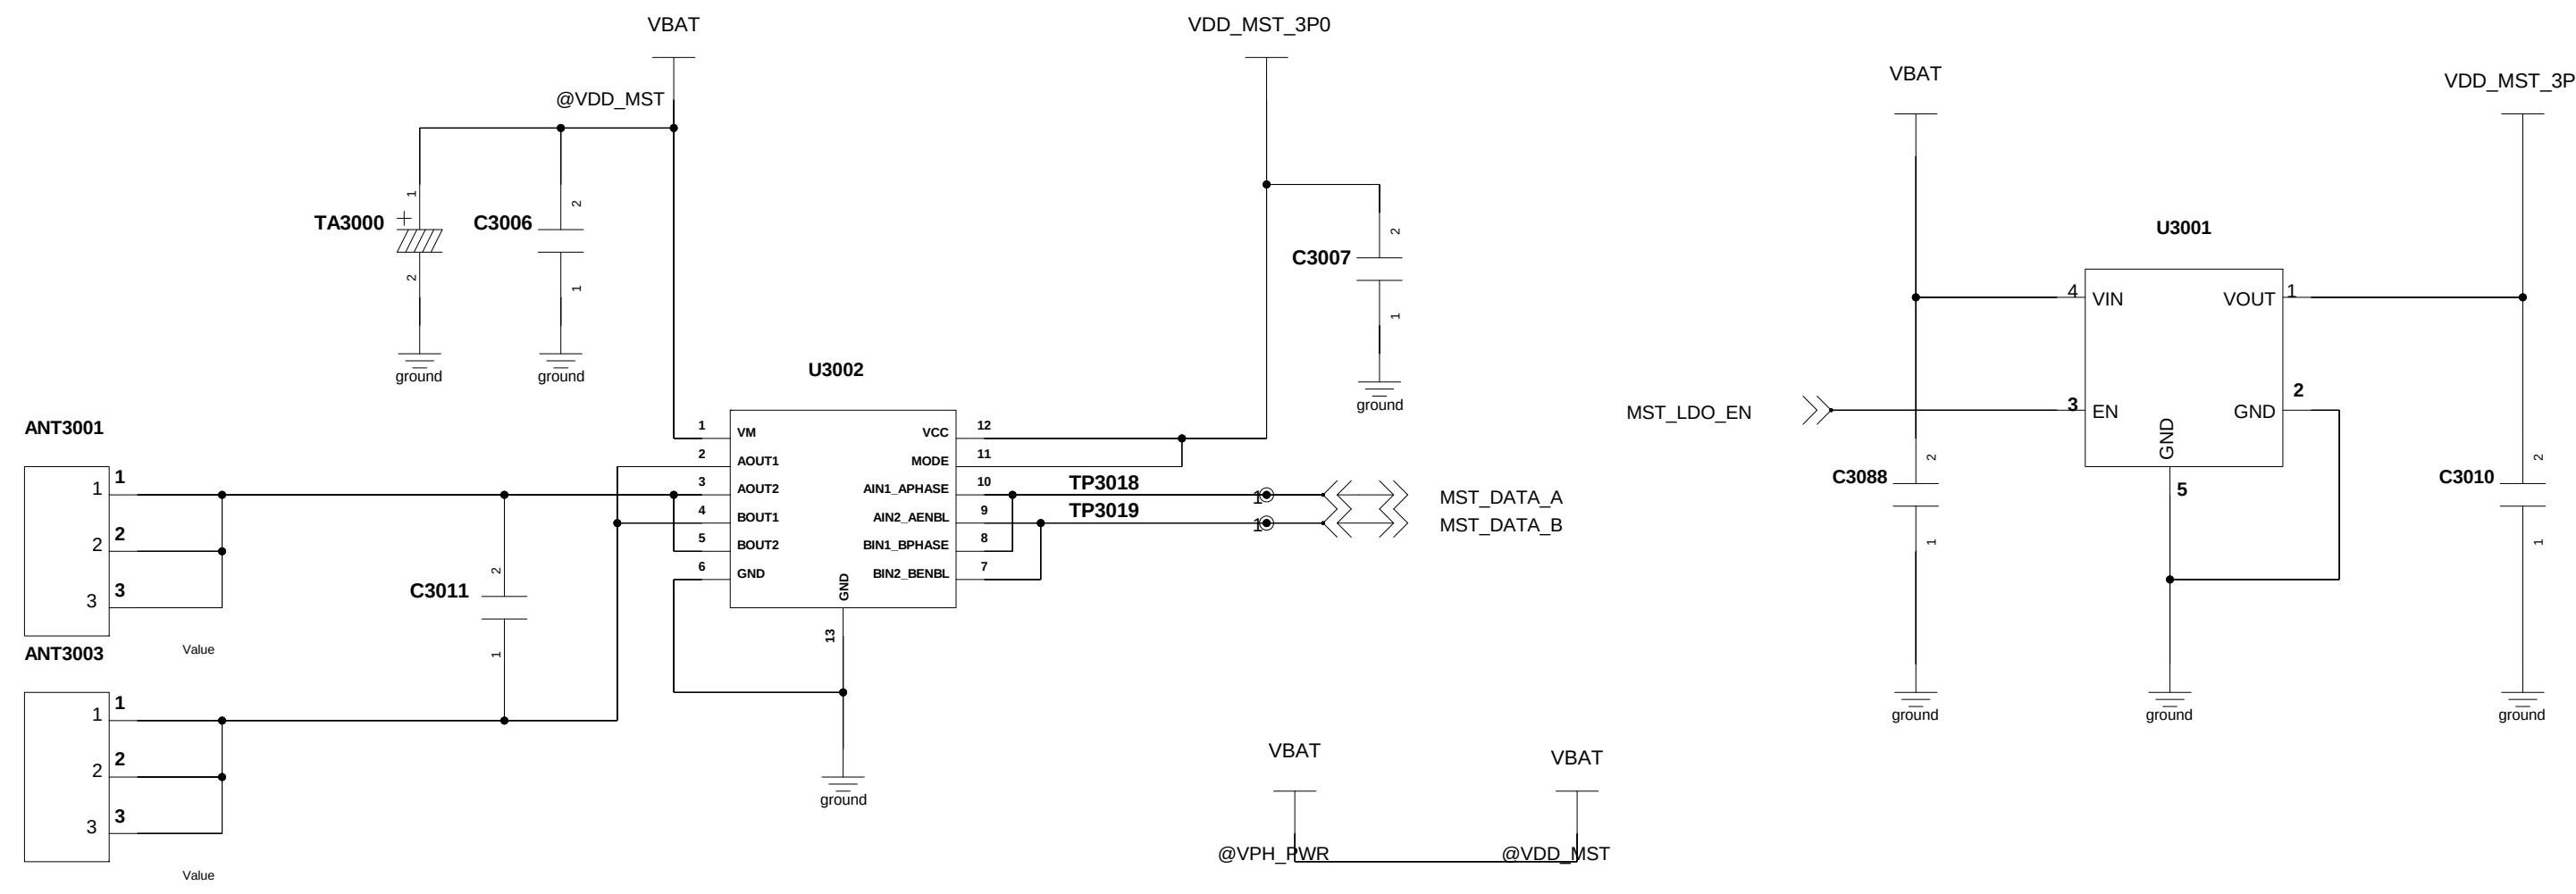
VBAT
@VDD_MST
TA3000
C3006
VDD_MST_3P0
C3007
ANT3001
ANT3003
C3011
U3002
VM
AOUT1
AOUT2
BOUT1
BOUT2
GND
VCC
MODE
AIN1_APHASE
AIN2_AENBL
BIN1_BPHASE
BIN2_BENBL
TP3018
TP3019
MST_DATA_A
MST_DATA_B
VBAT
VBAT
@VPH_PWR
@VDD_MST
VBAT
VDD_MST_3P0
U3001
VIN
VOUT
EN
GND
MST_LDO_EN
C3088
C3010
ground

NFC

	Option	#1	#2	#3	SIM2 BLOCK	SW IC	ESIM_SIM2_SEL
EUR	2-Nano + eSIM	NC	NC	SHORT	SMD	SMD	HSD2(H)_SIM2 HSD1(L)_eSIM
GLOBAL	2-Nano (DS)	Short	NC	NC	SMD	NC	
	Nano (SS)	NC	NC	NC	NC	NC	
HK/TW	2-Nano	SHORT	NC	NC	SMD	NC	

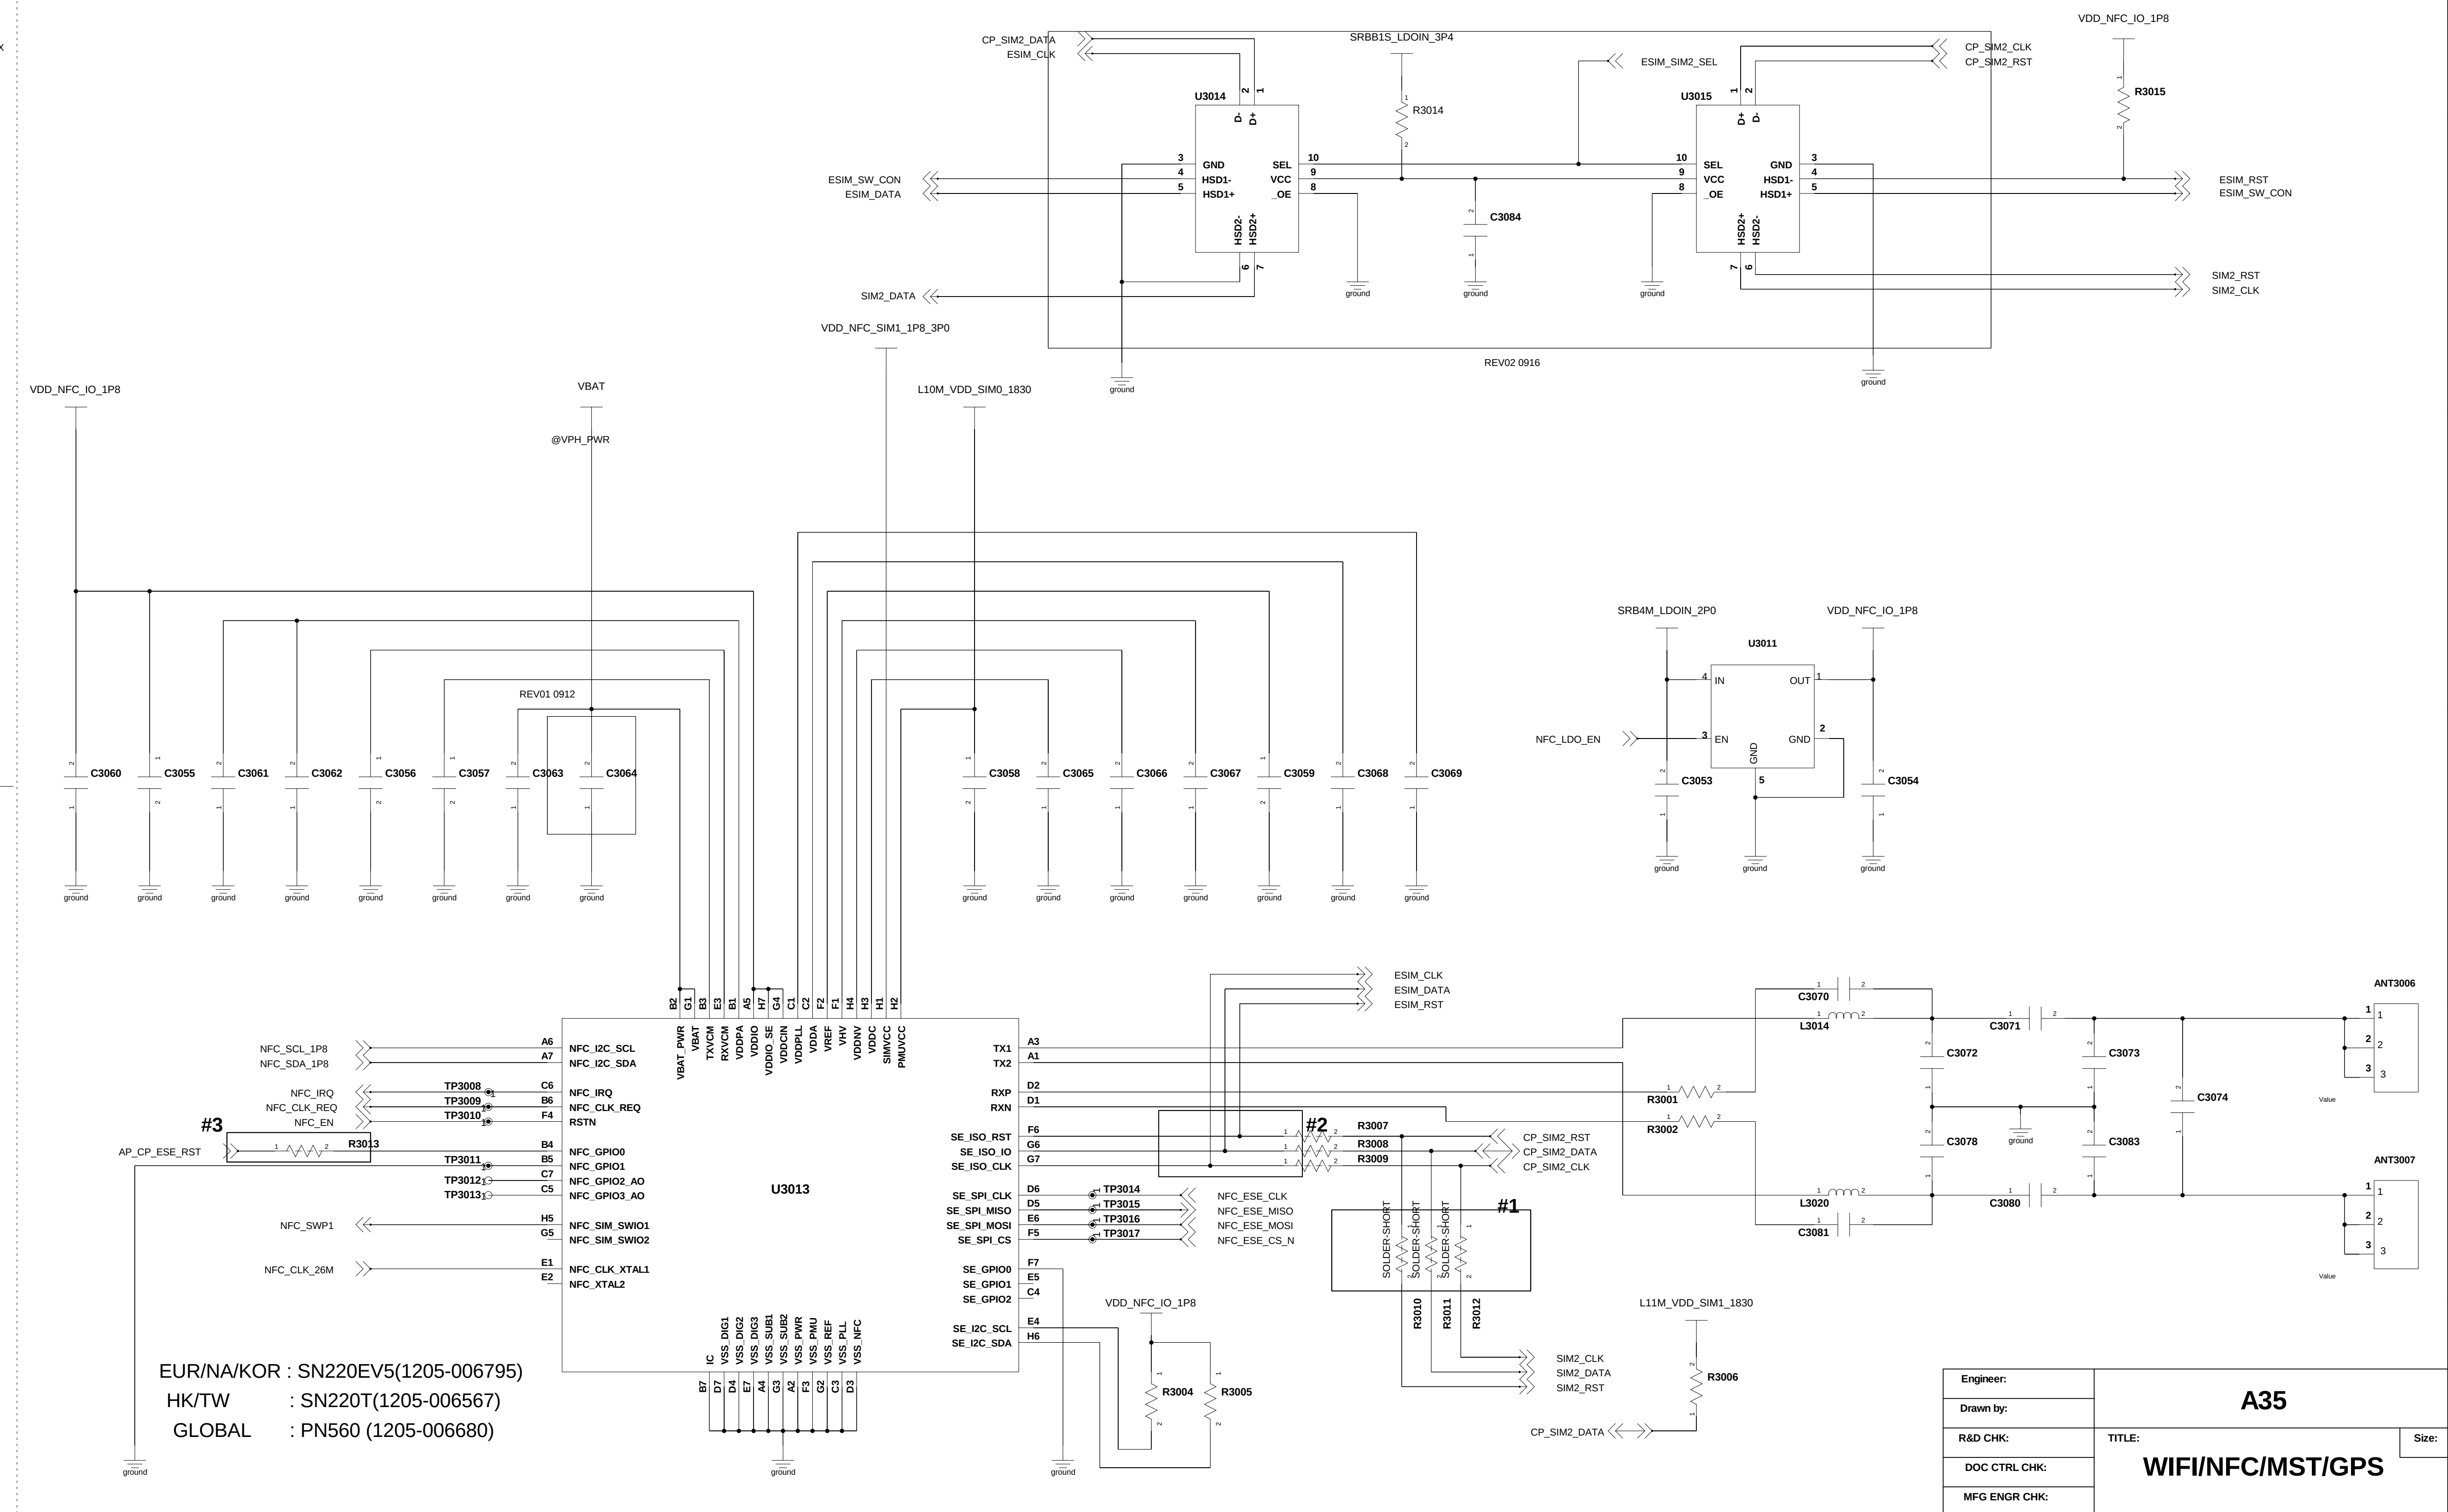
CP_SIM2_DATA
ESIM_CLK
SRBB1S_LDOIN_3P4
ESIM_SIM2_SEL
CP_SIM2_CLK
CP_SIM2_RST
VDD_NFC_IO_1P8
U3014
R3014
U3015
R3015
GND
HSD1-
HSD1+
SEL
VCC
_OE
HSD2-
HSD2+
D-
D+
ESIM_SW_CON
ESIM_DATA
ESIM_RST
ESIM_SW_CON
C3084
SIM2_DATA
SIM2_RST
SIM2_CLK
REV02 0916
VDD_NFC_SIM1_1P8_3P0
L10M_VDD_SIM0_1830
VDD_NFC_IO_1P8
VBAT
@VPH_PWR
REV01 0912
C3060
C3055
C3061
C3062
C3056
C3057
C3063
C3064
C3058
C3065
C3066
C3067
C3059
C3068
C3069
SRB4M_LDOIN_2P0
VDD_NFC_IO_1P8
U3011
IN
OUT
EN
GND
NFC_LDO_EN
C3053
C3054
U3013
NFC_SCL_1P8
NFC_SDA_1P8
NFC_I2C_SCL
NFC_I2C_SDA
NFC_IRQ
NFC_CLK_REQ
NFC_EN
TP3008
TP3009
TP3010
NFC_IRQ
NFC_CLK_REQ
RSTN
#3
AP_CP_ESE_RST
R3013
TP3011
TP3012
TP3013
NFC_GPIO0
NFC_GPIO1
NFC_GPIO2_AO
NFC_GPIO3_AO
NFC_SWP1
NFC_SIM_SWIO1
NFC_SIM_SWIO2
NFC_CLK_26M
NFC_CLK_XTAL1
NFC_XTAL2
VBAT_PWR
VBAT
TXVCM
RXVCM
VDDPA
VDDIO
VDDIO_SE
VDDCIN
VDDPLL
VDDA
VREF
VHV
VDDNV
VDDC
SIMVCC
PMUVCC
IC
VSS_DIG1
VSS_DIG2
VSS_DIG3
VSS_SUB1
VSS_SUB2
VSS_PWR
VSS_PMU
VSS_REF
VSS_PLL
VSS_NFC
TX1
TX2
RXP
RXN
SE_ISO_RST
SE_ISO_IO
SE_ISO_CLK
SE_SPI_CLK
SE_SPI_MISO
SE_SPI_MOSI
SE_SPI_CS
SE_GPIO0
SE_GPIO1
SE_GPIO2
SE_I2C_SCL
SE_I2C_SDA
ESIM_CLK
ESIM_DATA
ESIM_RST
#2
R3007
R3008
R3009
CP_SIM2_RST
CP_SIM2_DATA
CP_SIM2_CLK
TP3014
TP3015
TP3016
TP3017
NFC_ESE_CLK
NFC_ESE_MISO
NFC_ESE_MOSI
NFC_ESE_CS_N
#1
SOLDER-SHORT
R3010
R3011
R3012
SIM2_CLK
SIM2_DATA
SIM2_RST
VDD_NFC_IO_1P8
R3004
R3005
L11M_VDD_SIM1_1830
R3006
CP_SIM2_DATA
C3070
L3014
C3071
C3072
C3073
C3074
R3001
R3002
C3078
C3083
L3020
C3080
C3081
ANT3006
ANT3007
Value
ground

EUR/NA/KOR : SN220EV5(1205-006795)
HK/TW : SN220T(1205-006567)
GLOBAL : PN560 (1205-006680)

GPS L1 / GNSS/BEIDOU

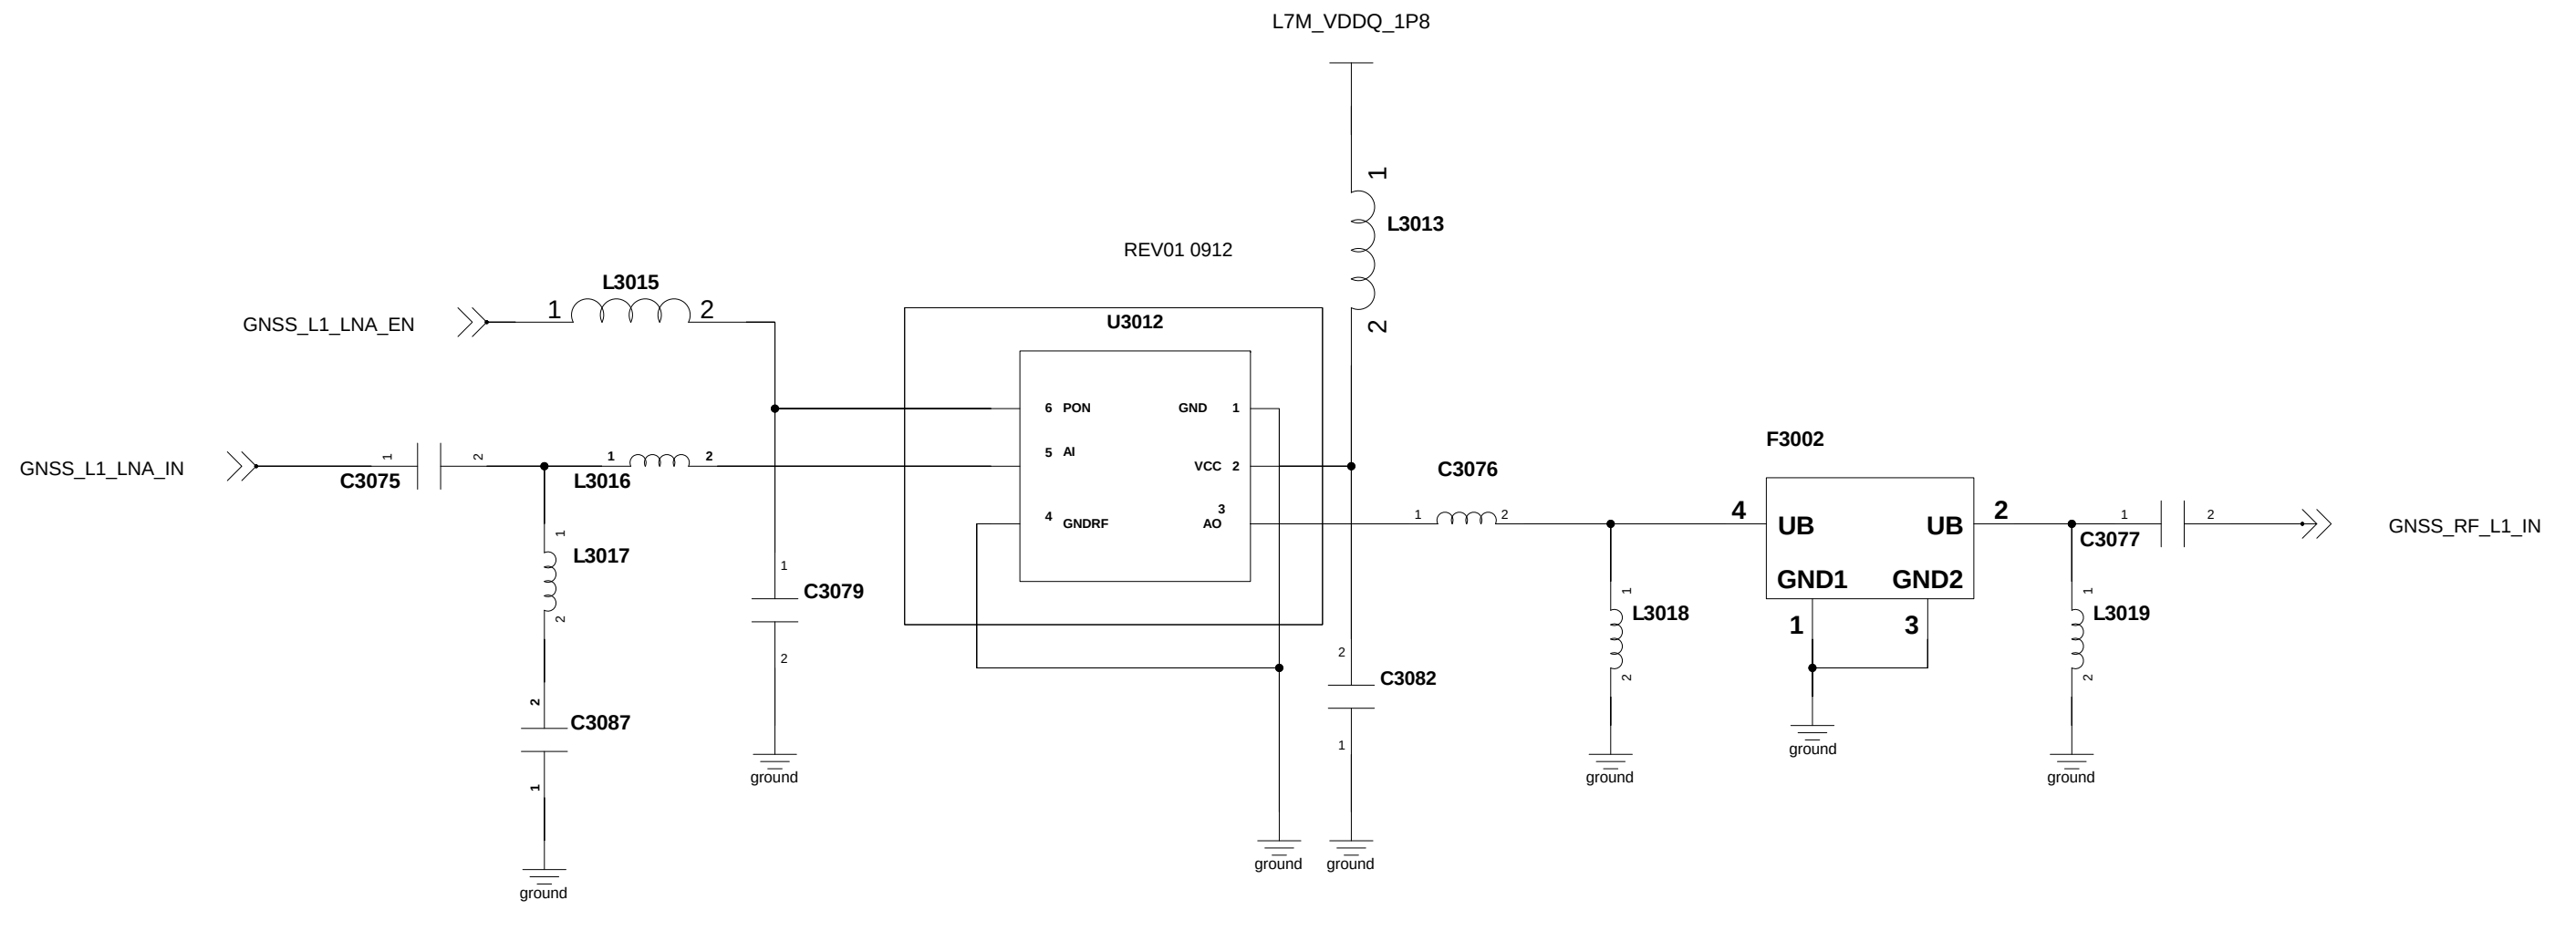
L7M_VDDQ_1P8
L3013
REV01 0912
U3012
PON
AI
GNDRF
GND
VCC
AO
GNSS_L1_LNA_EN
L3015
GNSS_L1_LNA_IN
C3075
L3016
L3017
C3087
C3079
C3082
C3076
L3018
F3002
UB
UB
GND1
GND2
C3077
L3019
GNSS_RF_L1_IN
ground

Engineer:	A35	
Drawn by:		
R&D CHK:	TITLE: WIFI/NFC/MST/GPS	Size:
DOC CTRL CHK:		
MFG ENGR CHK:		
QA CHK:	REV: Drawing Number:	Page:

Changed by: Date Changed: Time Changed:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

Quartz

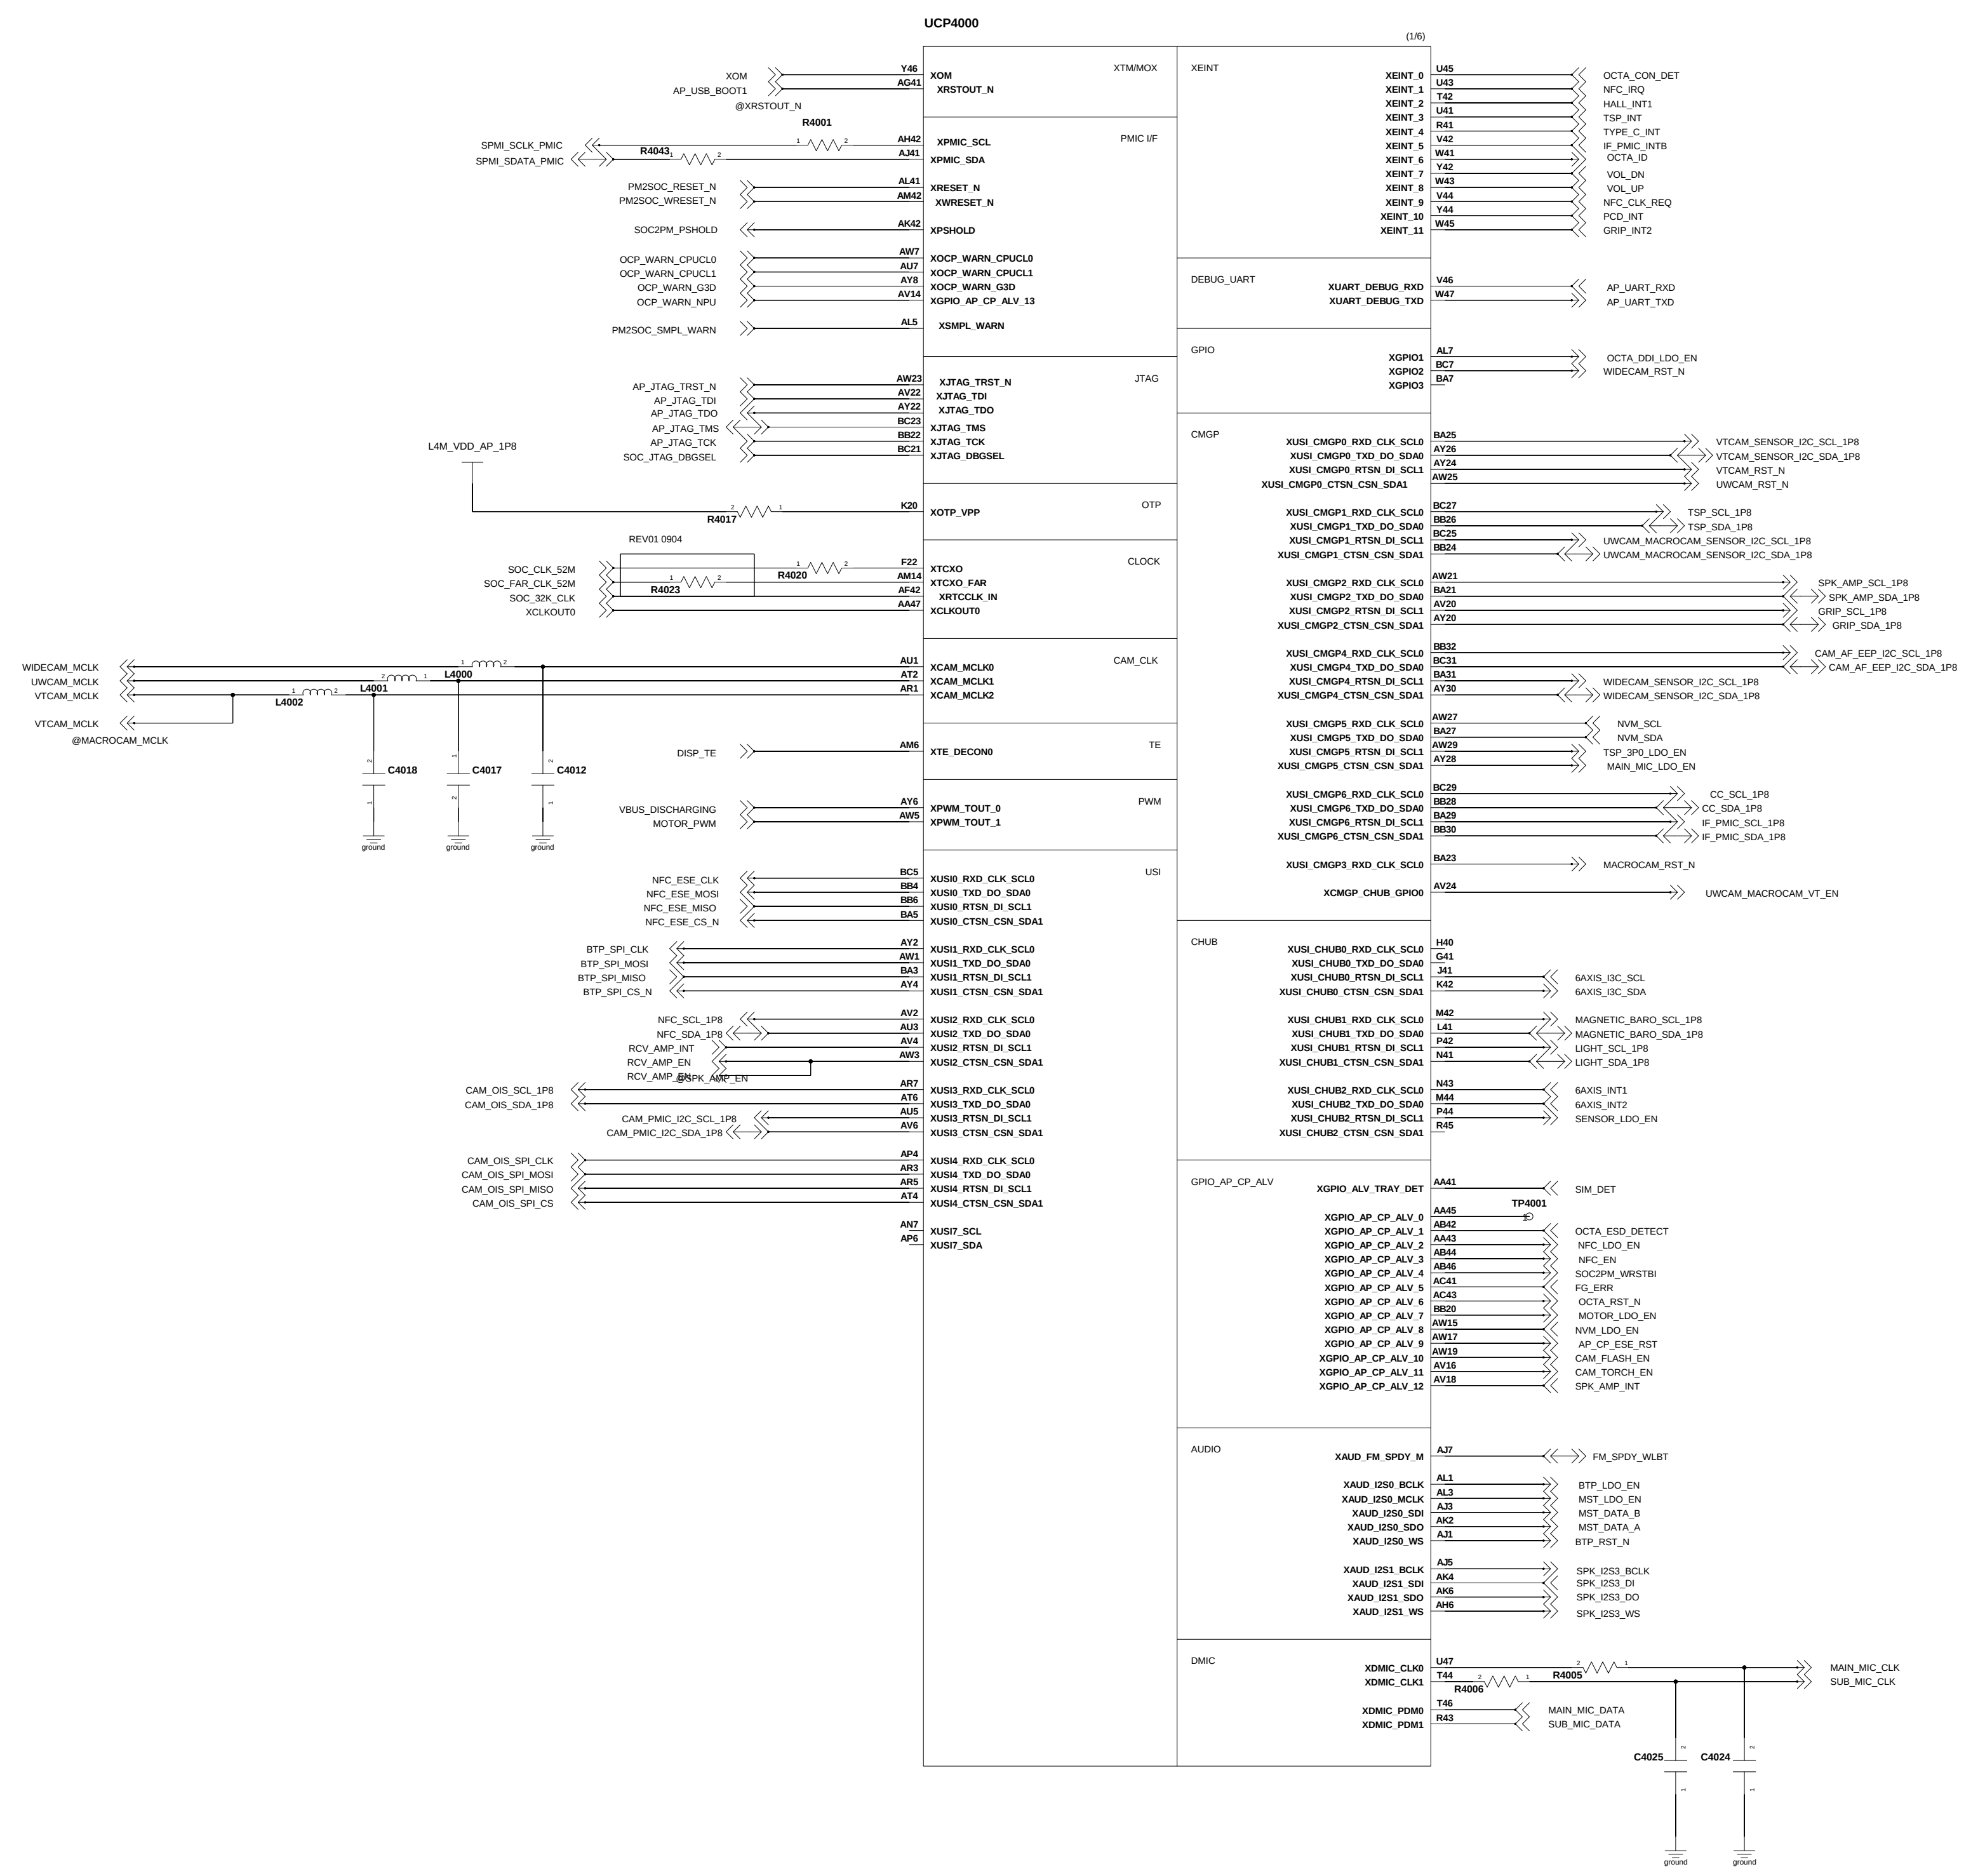
UCP4000
(1/6)
XTM/MOX
PMIC I/F
JTAG
OTP
CLOCK
CAM_CLK
TE
PWM
USI
XEINT
DEBUG_UART
GPIO
CMGP
CHUB
GPIO_AP_CP_ALV
AUDIO
DMIC
R4001
R4043
R4017
R4020
R4023
REV01 0904
L4000
L4001
L4002
C4018
C4017
C4012
TP4001
R4005
R4006
C4025
C4024
L4M_VDD_AP_1P8
WIDECAM_MCLK
UWCAM_MCLK
VTCAM_MCLK
@MACROCAM_MCLK
MAIN_MIC_CLK
SUB_MIC_CLK
MAIN_MIC_DATA
SUB_MIC_DATA
ground

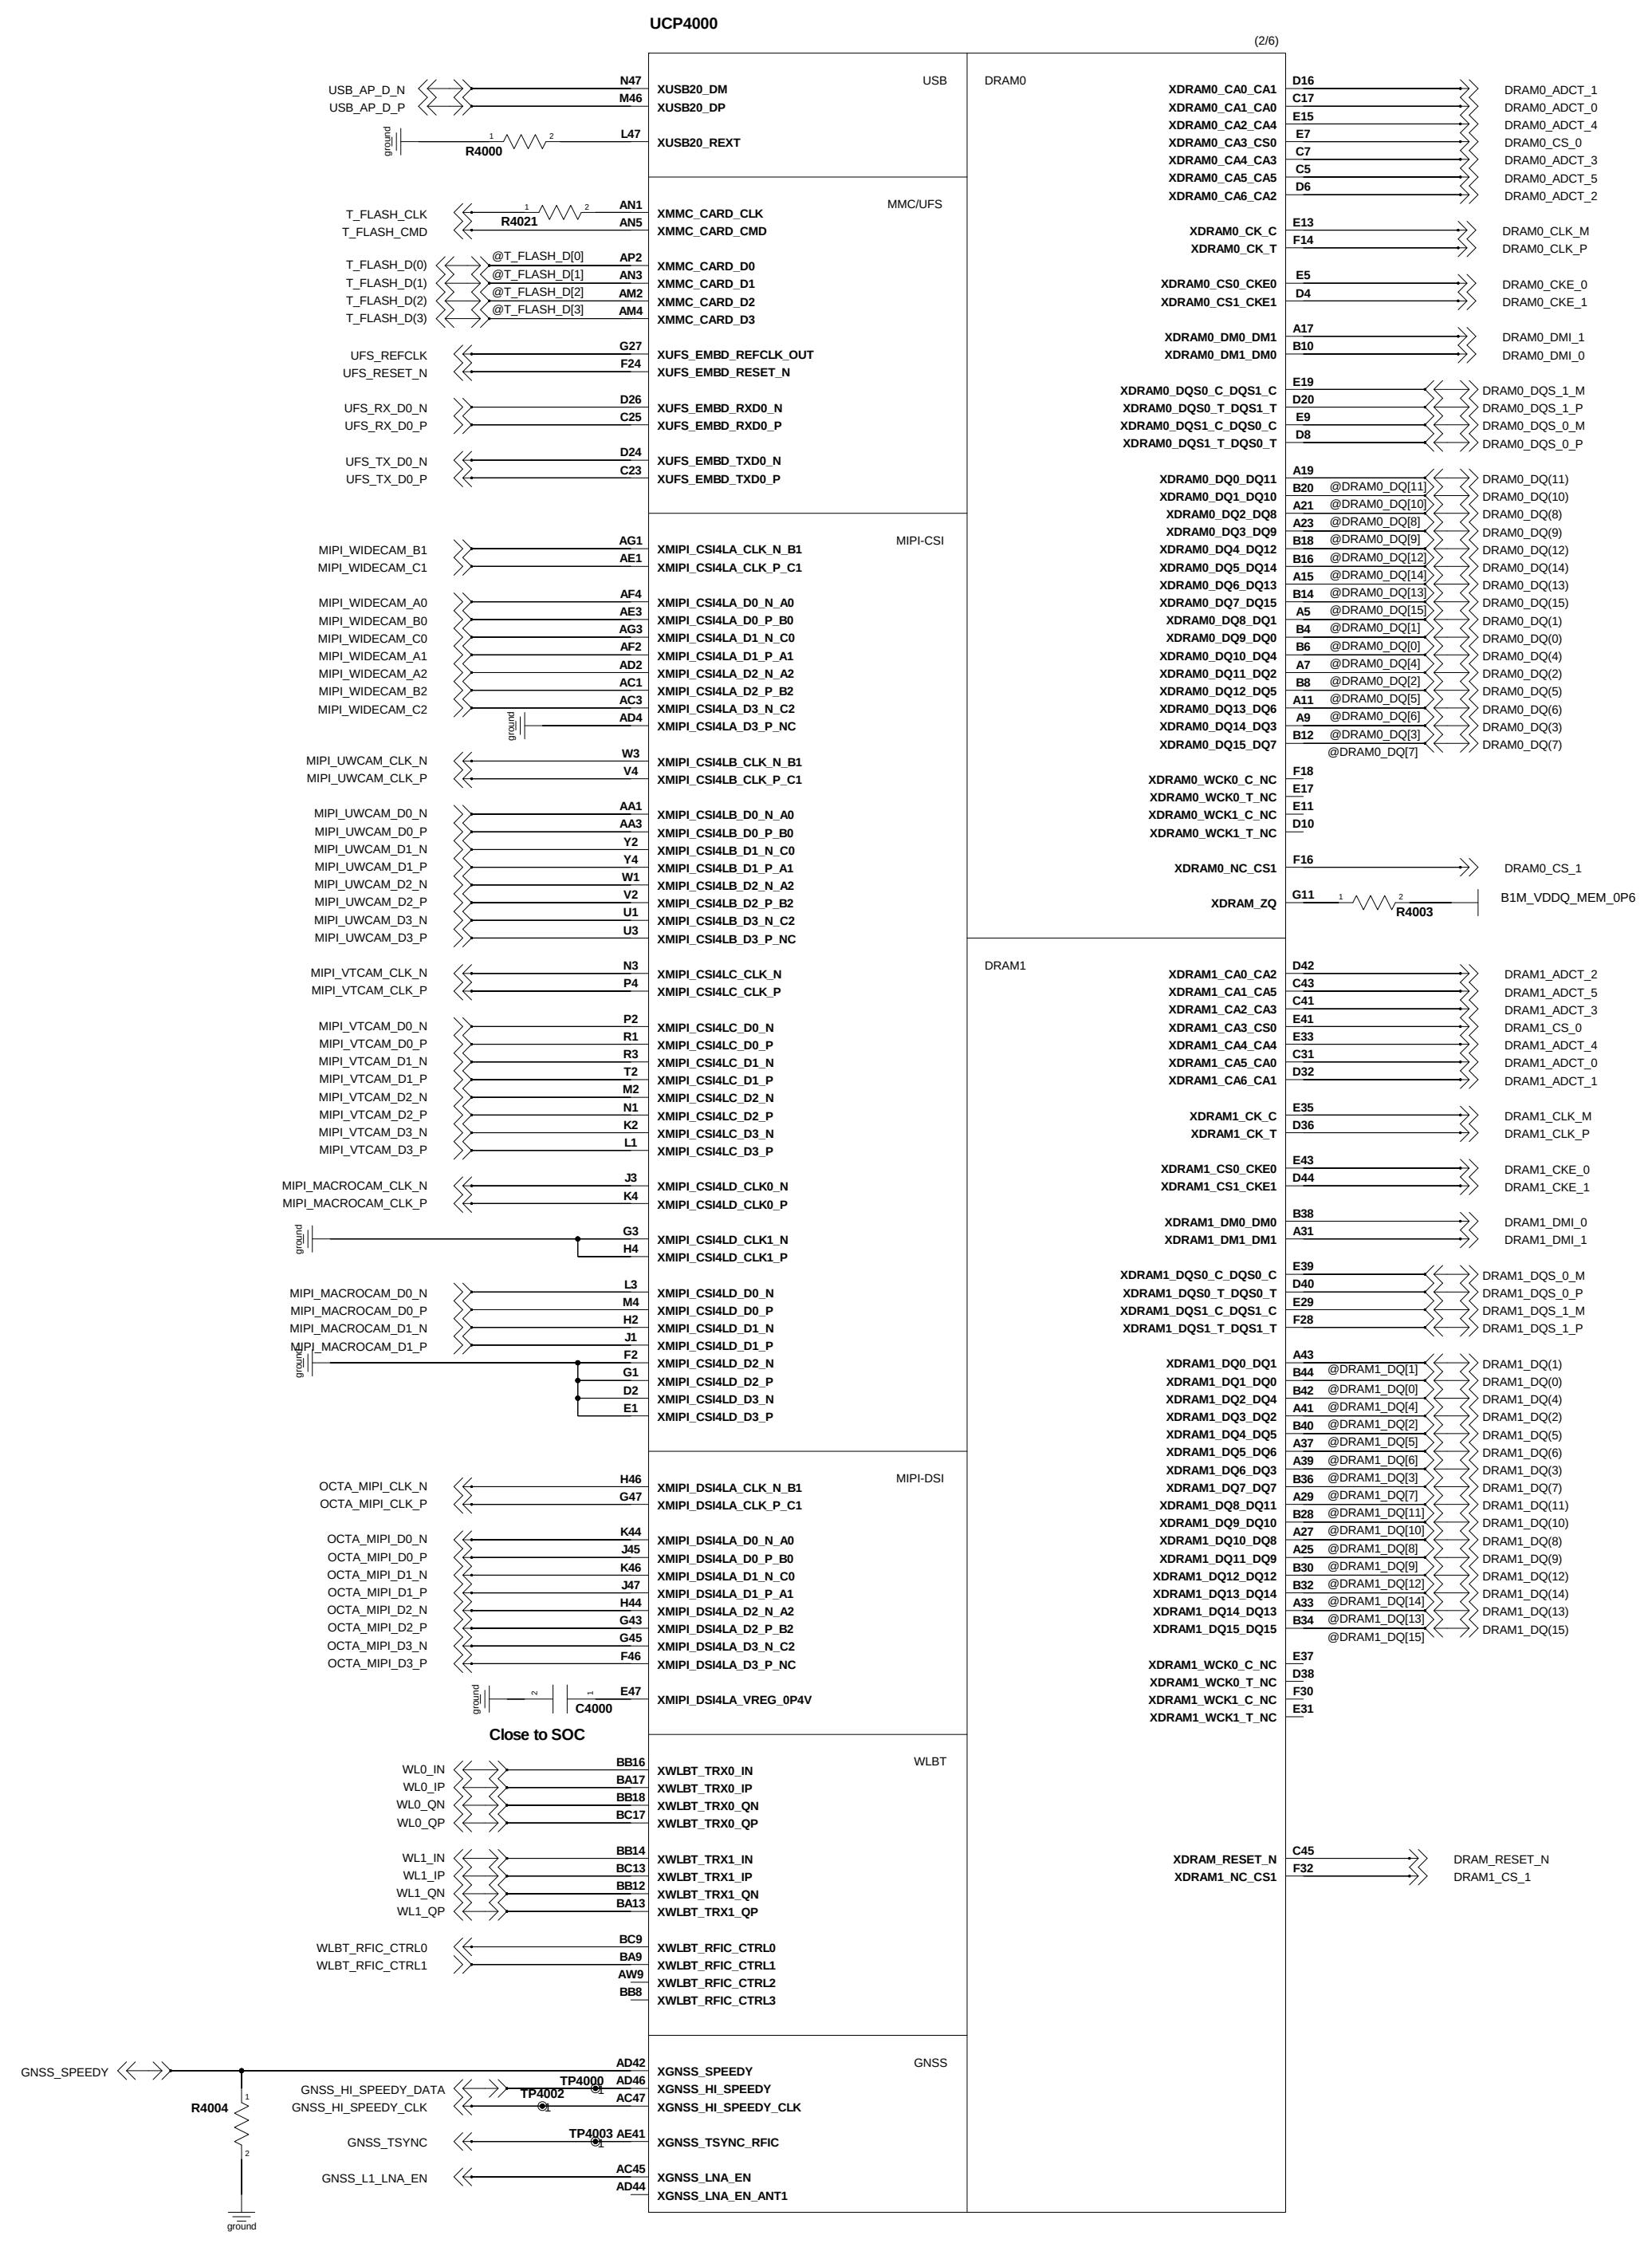
UCP4000
(2/6)
USB
MMC/UFS
MIPI-CSI
MIPI-DSI
WLBT
GNSS
DRAM0
DRAM1
R4000
R4021
R4003
R4004
TP4000
TP4002
TP4003
C4000
Close to SOC
B1M_VDDQ_MEM_0P6
DRAM_RESET_N
DRAM1_CS_1
GNSS_SPEEDY
ground

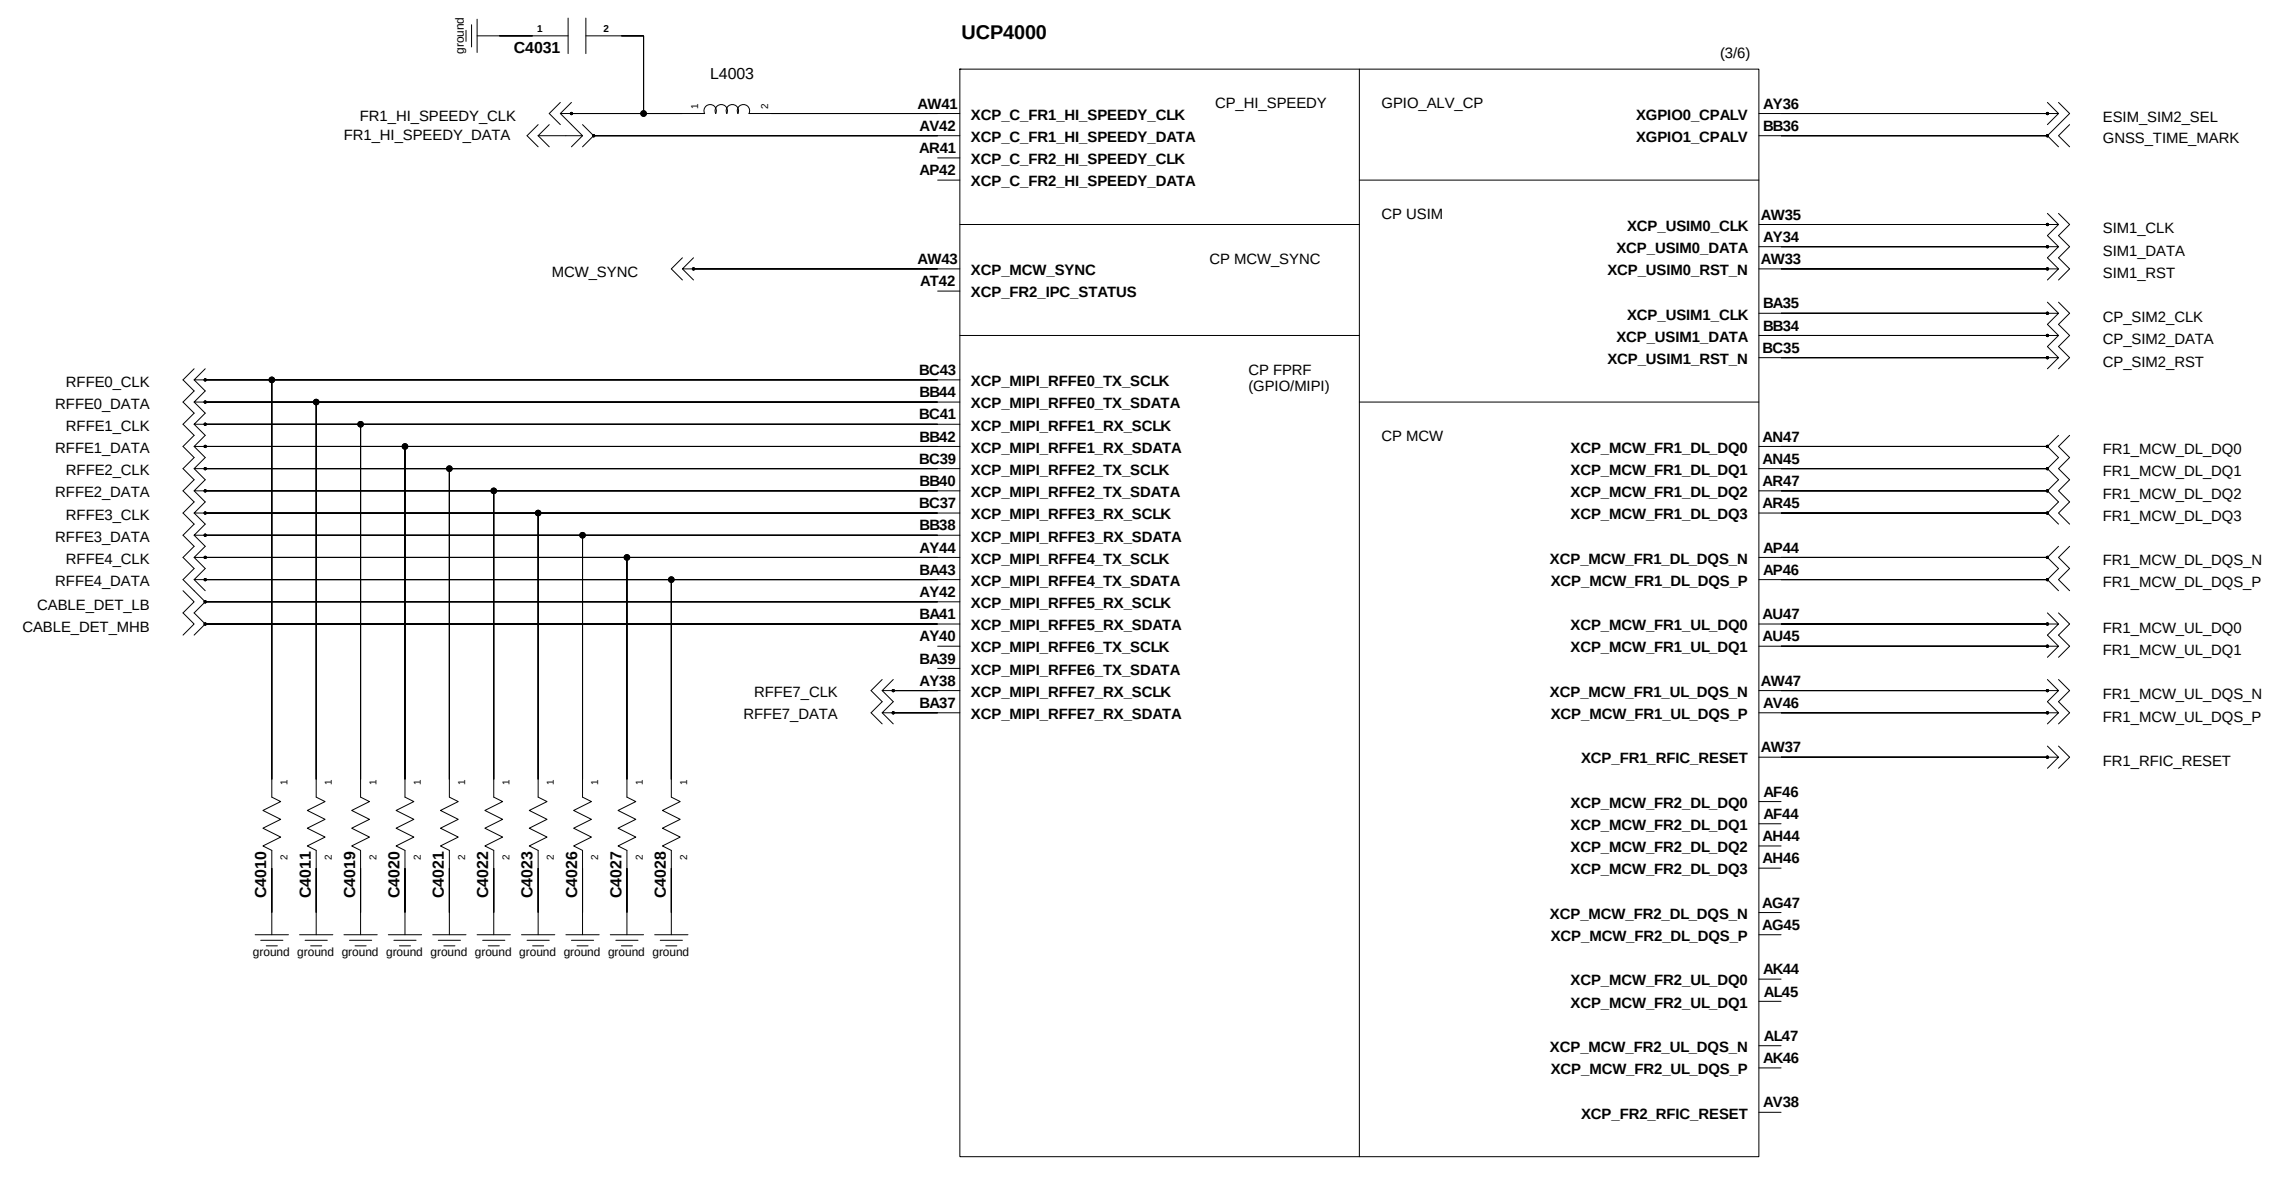
UCP4000
(3/6)
CP_HI_SPEEDY
CP MCW_SYNC
CP FPRF (GPIO/MIPI)
GPIO_ALV_CP
CP USIM
CP MCW
C4031
L4003
FR1_HI_SPEEDY_CLK
FR1_HI_SPEEDY_DATA
MCW_SYNC
C4010
C4011
C4019
C4020
C4021
C4022
C4023
C4026
C4027
C4028
ESIM_SIM2_SEL
GNSS_TIME_MARK
SIM1_CLK
SIM1_DATA
SIM1_RST
CP_SIM2_CLK
CP_SIM2_DATA
CP_SIM2_RST
FR1_RFIC_RESET
ground

I2C PU RESISTOR

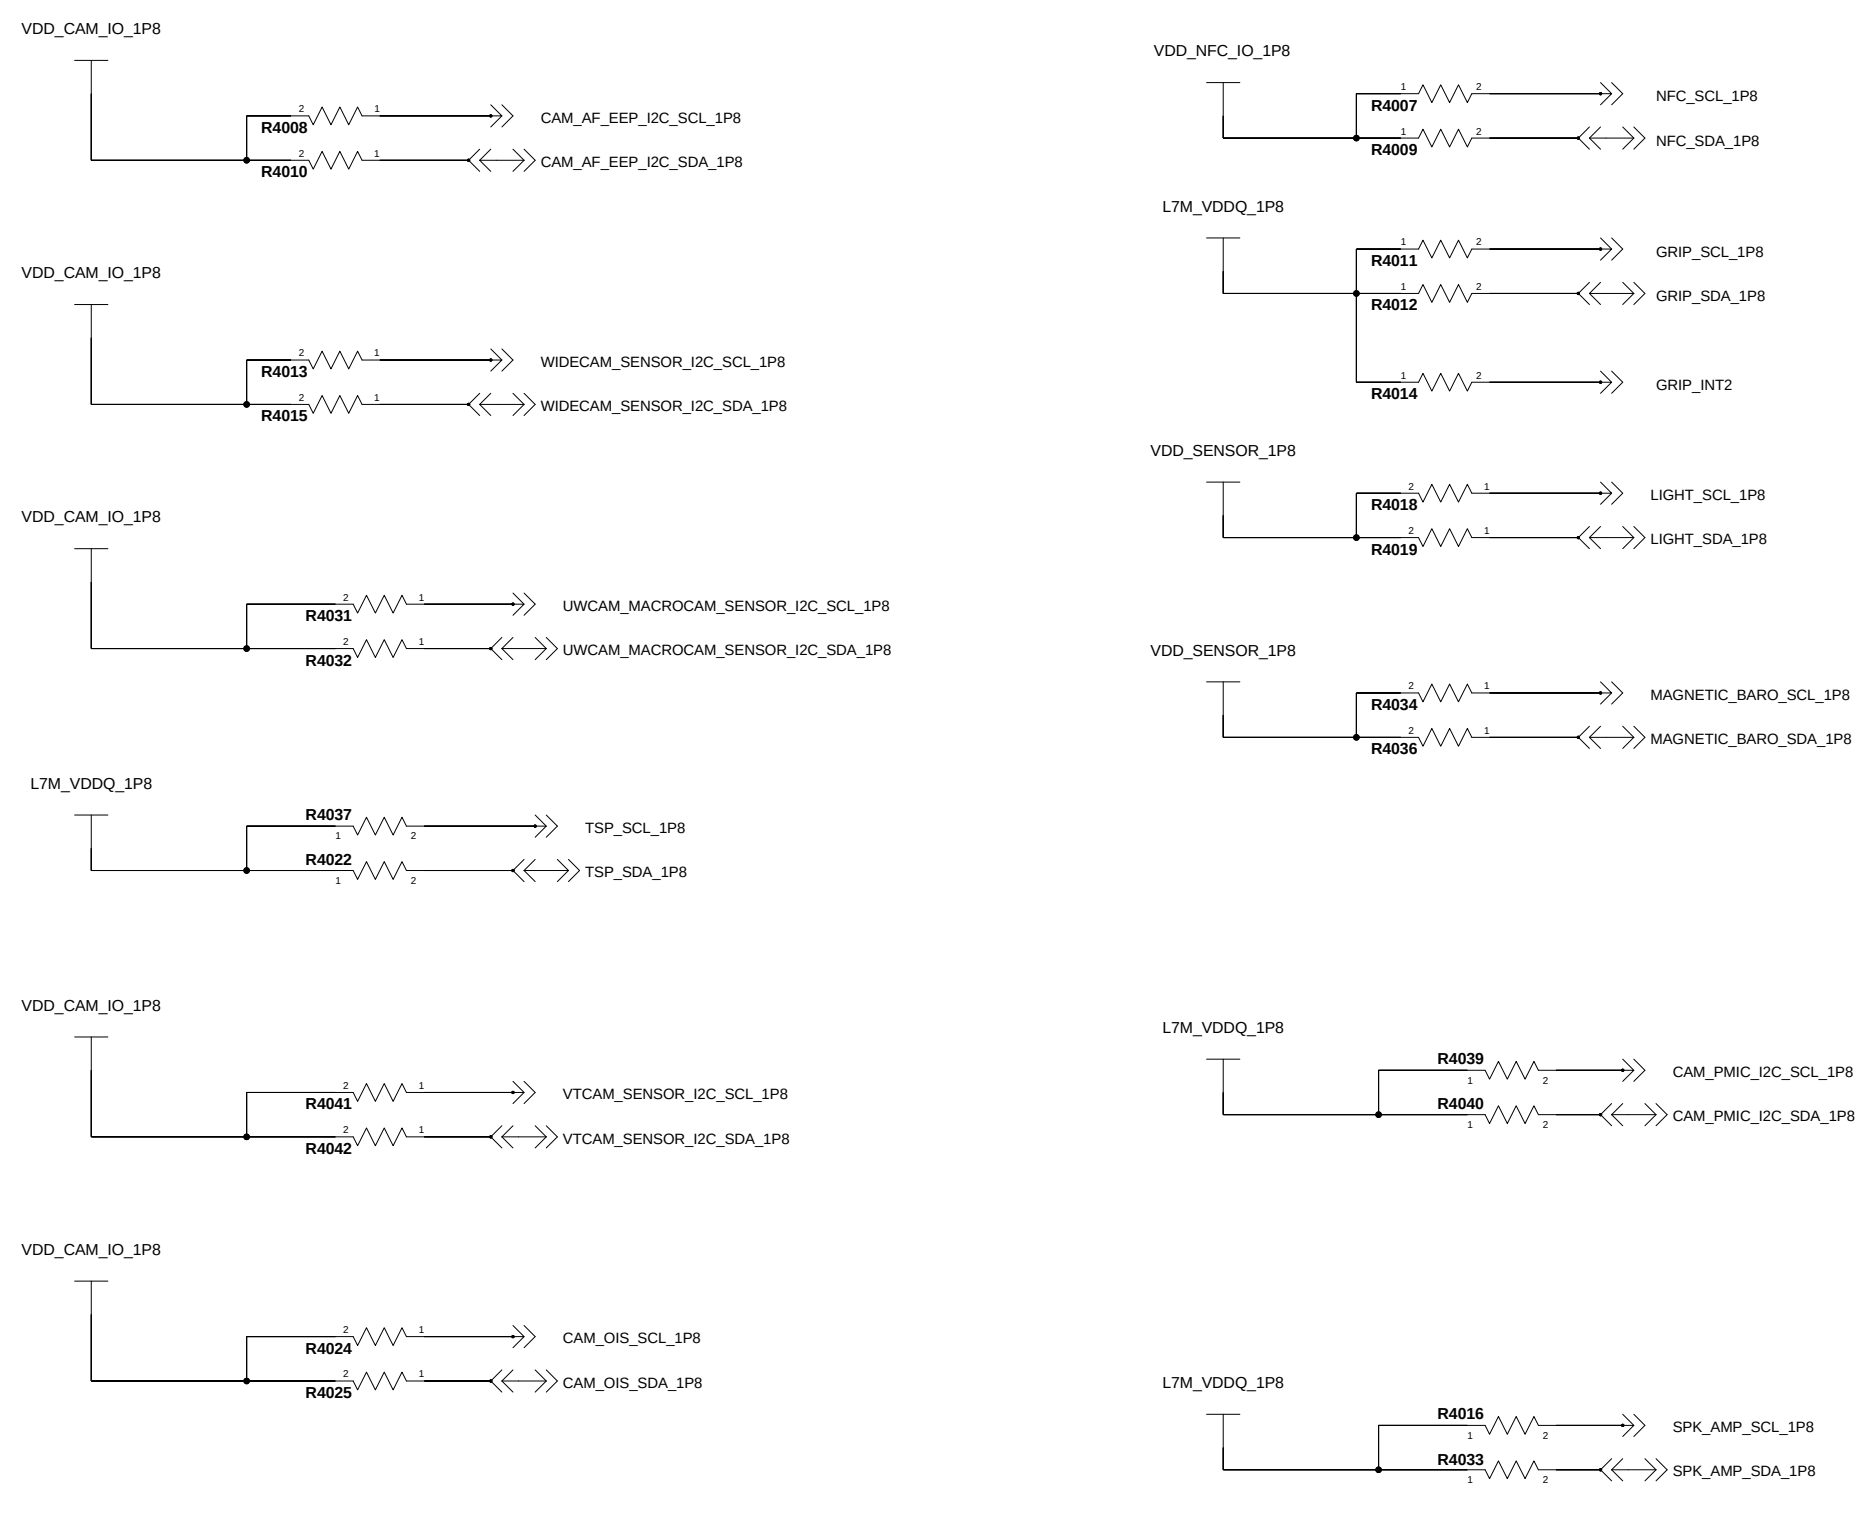
VDD_CAM_IO_1P8
R4008
R4010
CAM_AF_EEP_I2C_SCL_1P8
CAM_AF_EEP_I2C_SDA_1P8
VDD_CAM_IO_1P8
R4013
R4015
WIDECAM_SENSOR_I2C_SCL_1P8
WIDECAM_SENSOR_I2C_SDA_1P8
VDD_CAM_IO_1P8
R4031
R4032
UWCAM_MACROCAM_SENSOR_I2C_SCL_1P8
UWCAM_MACROCAM_SENSOR_I2C_SDA_1P8
L7M_VDDQ_1P8
R4037
R4022
TSP_SCL_1P8
TSP_SDA_1P8
VDD_CAM_IO_1P8
R4041
R4042
VTCAM_SENSOR_I2C_SCL_1P8
VTCAM_SENSOR_I2C_SDA_1P8
VDD_CAM_IO_1P8
R4024
R4025
CAM_OIS_SCL_1P8
CAM_OIS_SDA_1P8
VDD_NFC_IO_1P8
R4007
R4009
NFC_SCL_1P8
NFC_SDA_1P8
L7M_VDDQ_1P8
R4011
R4012
R4014
GRIP_SCL_1P8
GRIP_SDA_1P8
GRIP_INT2
VDD_SENSOR_1P8
R4018
R4019
LIGHT_SCL_1P8
LIGHT_SDA_1P8
VDD_SENSOR_1P8
R4034
R4036
MAGNETIC_BARO_SCL_1P8
MAGNETIC_BARO_SDA_1P8
L7M_VDDQ_1P8
R4039
R4040
CAM_PMIC_I2C_SCL_1P8
CAM_PMIC_I2C_SDA_1P8
L7M_VDDQ_1P8
R4016
R4033
SPK_AMP_SCL_1P8
SPK_AMP_SDA_1P8

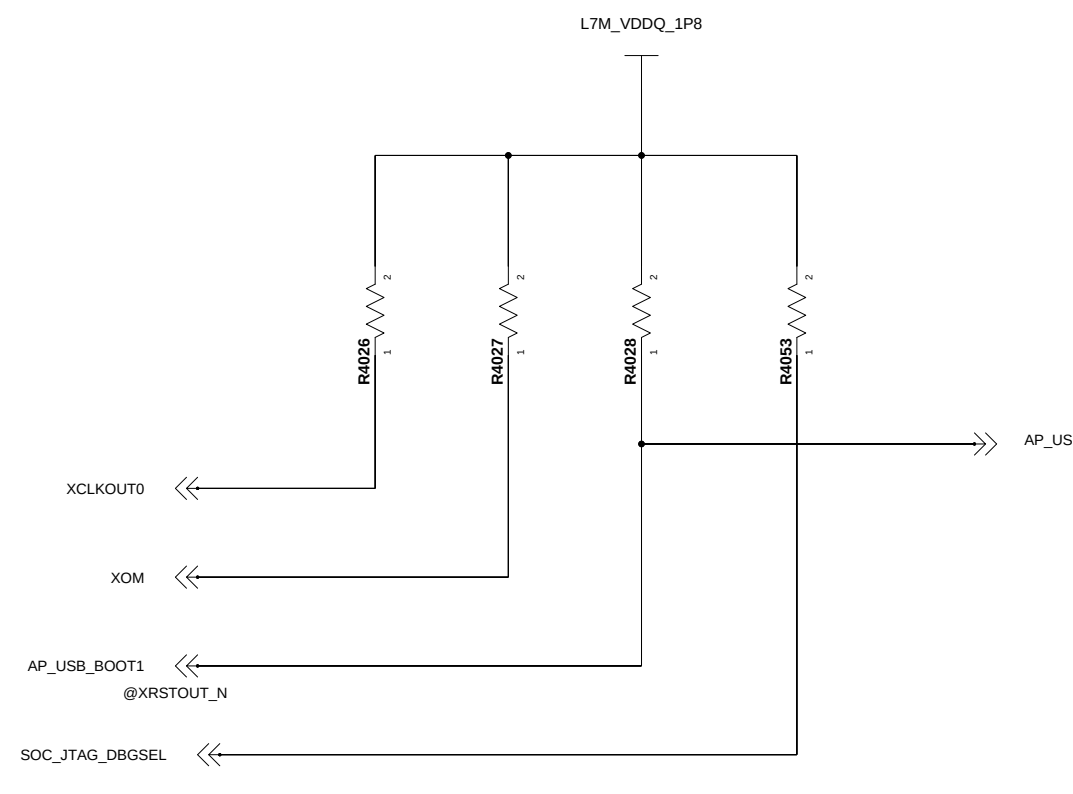
L7M_VDDQ_1P8
R4026
R4027
R4028
R4053
AP_USB_BOOT1
XCLKOUT0
XOM
AP_USB_BOOT1
@XRSTOUT_N
SOC_JTAG_DBGSEL

PIN			Function	
XCLKOUT0	XRSTOUT_N	XOM	1st Boot	2nd Boot
0	0	0	UFS	USB
0	1	X	USB	----
1	0	0	SD	USB

BOOT CONFIGURATIONS

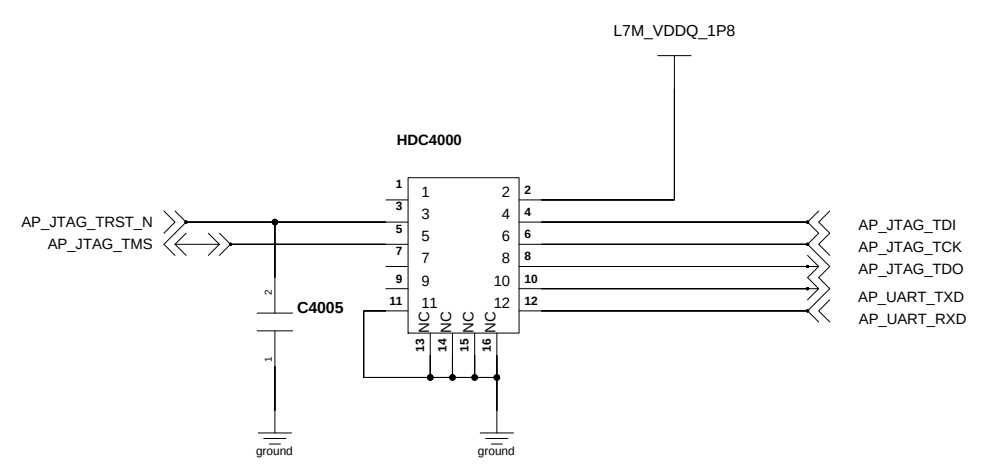
L7M_VDDQ_1P8
HDC4000
AP_JTAG_TRST_N
AP_JTAG_TMS
C4005
AP_JTAG_TDI
AP_JTAG_TCK
AP_JTAG_TDO
AP_UART_TXD
AP_UART_RXD
NC
ground

AP JTAG

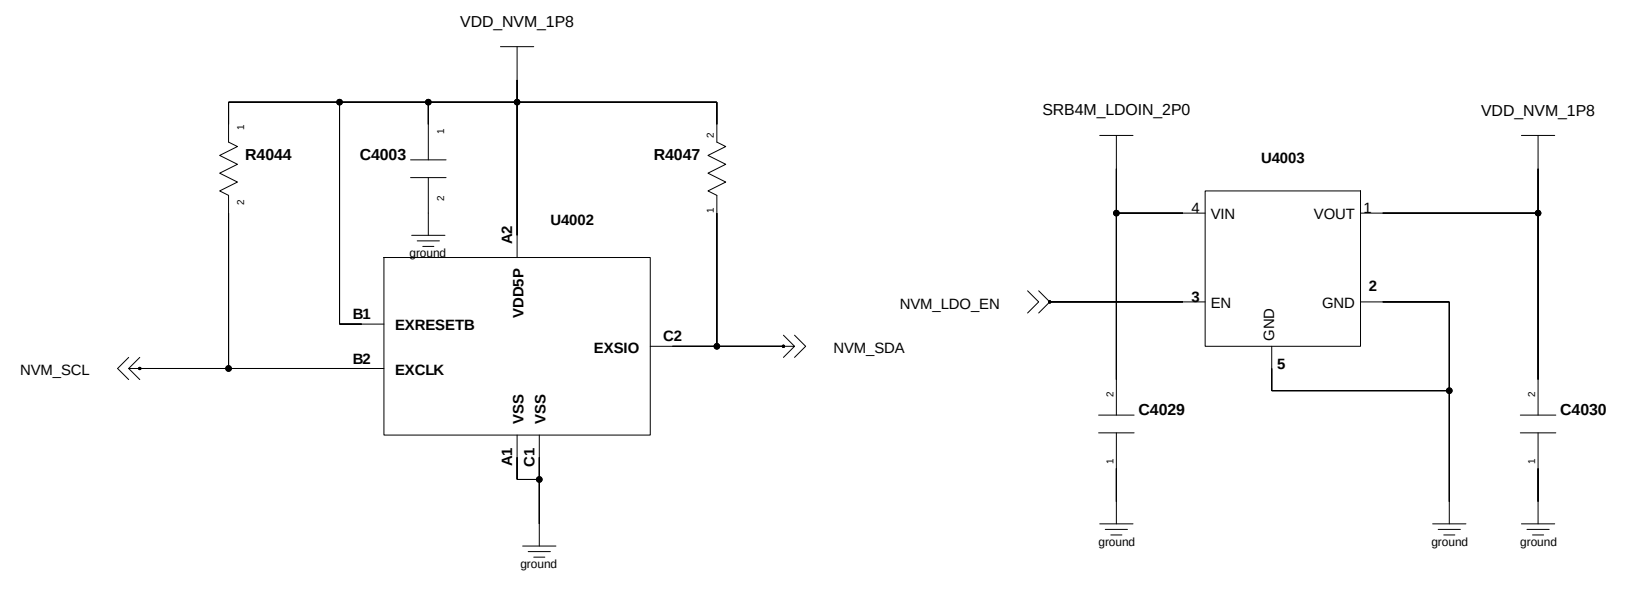
VDD_NVM_1P8
R4044
C4003
R4047
U4002
EXRESETB
EXCLK
VDD5P
VSS
EXSIO
NVM_SCL
NVM_SDA
SRB4M_LDOIN_2P0
U4003
VIN
VOUT
EN
GND
VDD_NVM_1P8
NVM_LDO_EN
C4029
C4030
ground

NVM

SYSTEM CLOCK

SOC THERMISTOR

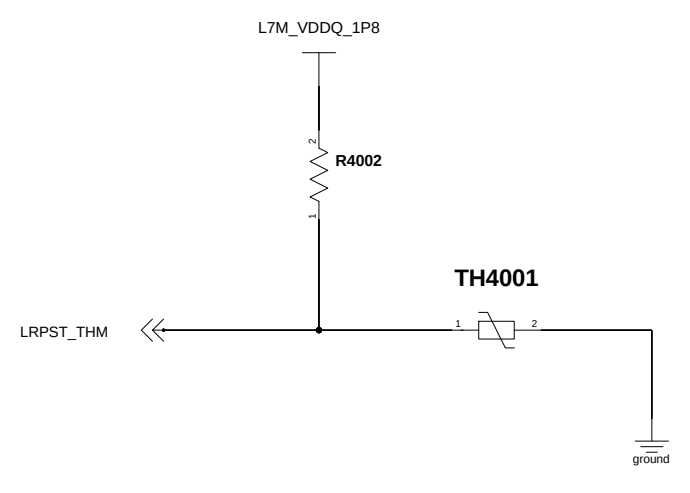
L7M_VDDQ_1P8
R4002
TH4001
LRPST_THM
ground

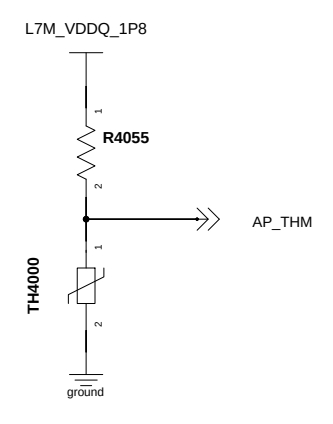
L7M_VDDQ_1P8
R4055
AP_THM
TH4000
ground

AP_THM

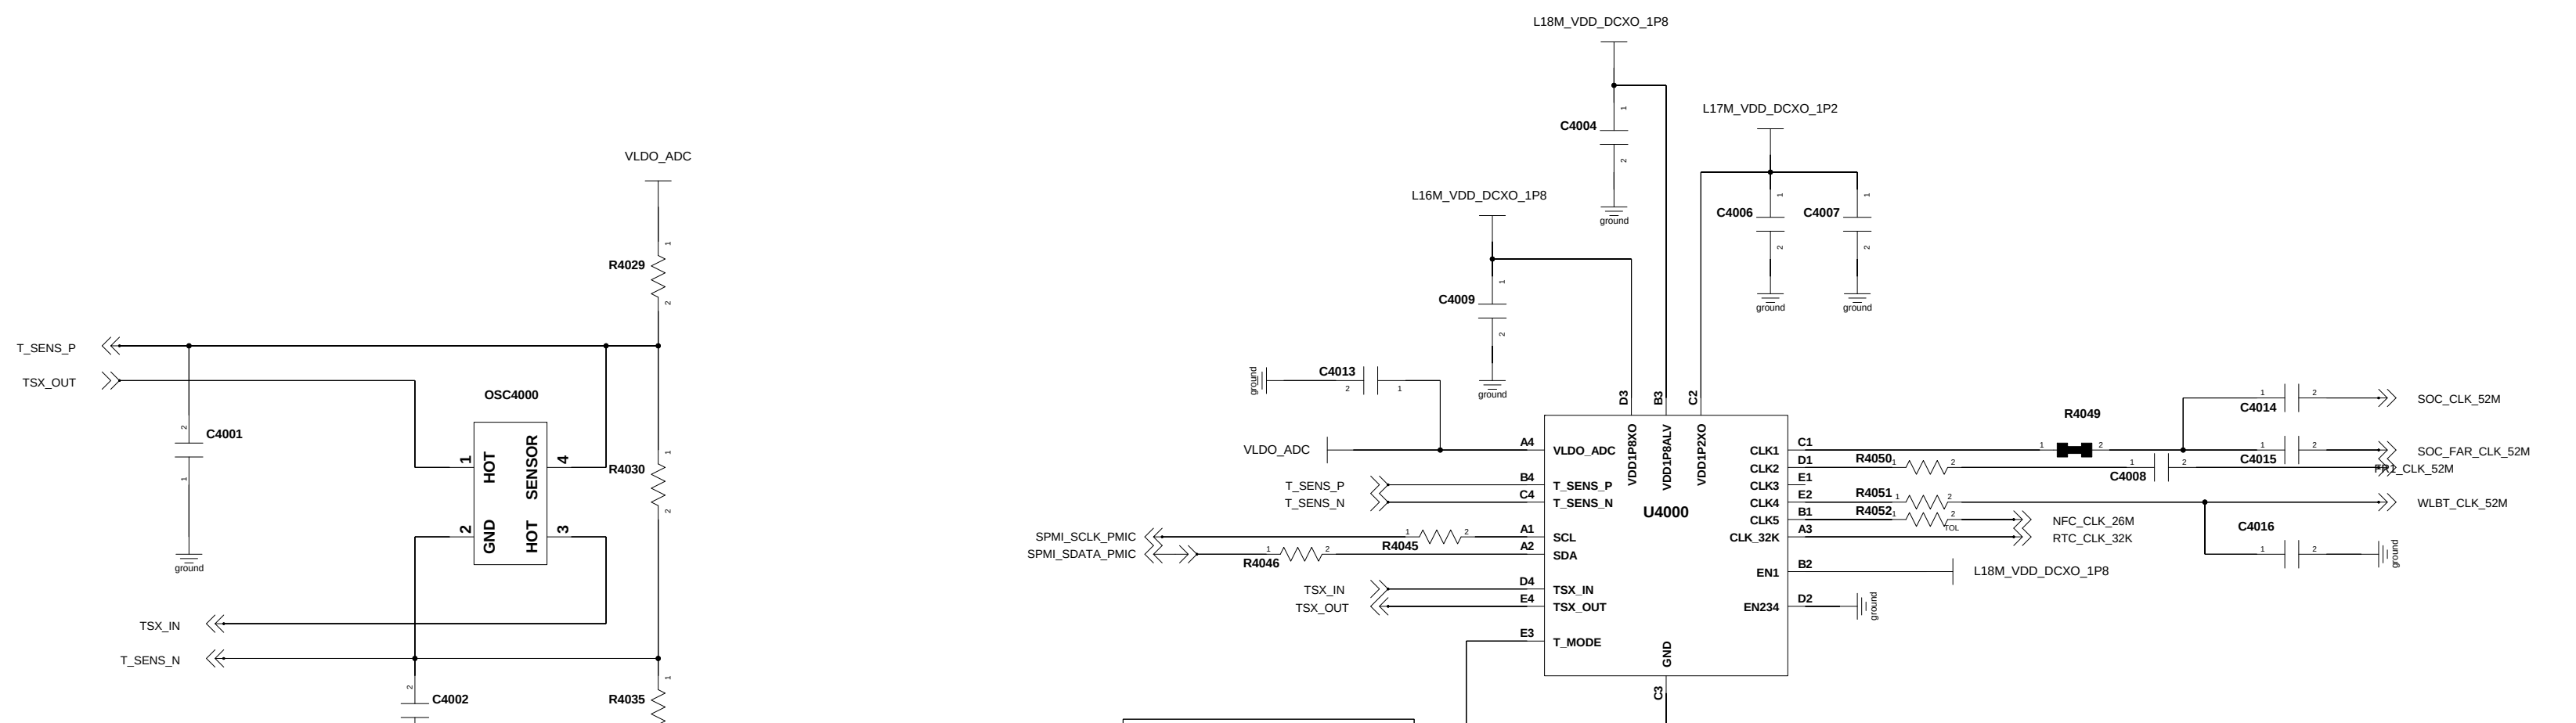
VLDO_ADC
R4029
T_SENS_P
TSX_OUT
C4001
OSC4000
HOT
SENSOR
GND
R4030
TSX_IN
T_SENS_N
C4002
R4035
L18M_VDD_DCXO_1P8
C4004
L17M_VDD_DCXO_1P2
C4006
C4007
L16M_VDD_DCXO_1P8
C4009
C4013
U4000
VLDO_ADC
T_SENS_P
T_SENS_N
SCL
SDA
TSX_IN
TSX_OUT
T_MODE
VDD1P8XO
VDD1P8ALV
VDD1P2XO
CLK1
CLK2
CLK3
CLK4
CLK5
CLK_32K
EN1
EN234
SPMI_SCLK_PMIC
SPMI_SDATA_PMIC
R4045
R4046
R4049
R4050
R4051
R4052
C4008
C4014
C4015
C4016
SOC_CLK_52M
SOC_FAR_CLK_52M
FR1_CLK_52M
WLBT_CLK_52M
NFC_CLK_26M
RTC_CLK_32K
L18M_VDD_DCXO_1P8
ground

T MODE	
GND	DCXO(Default)
PWR	TCXO

PCB JTAG

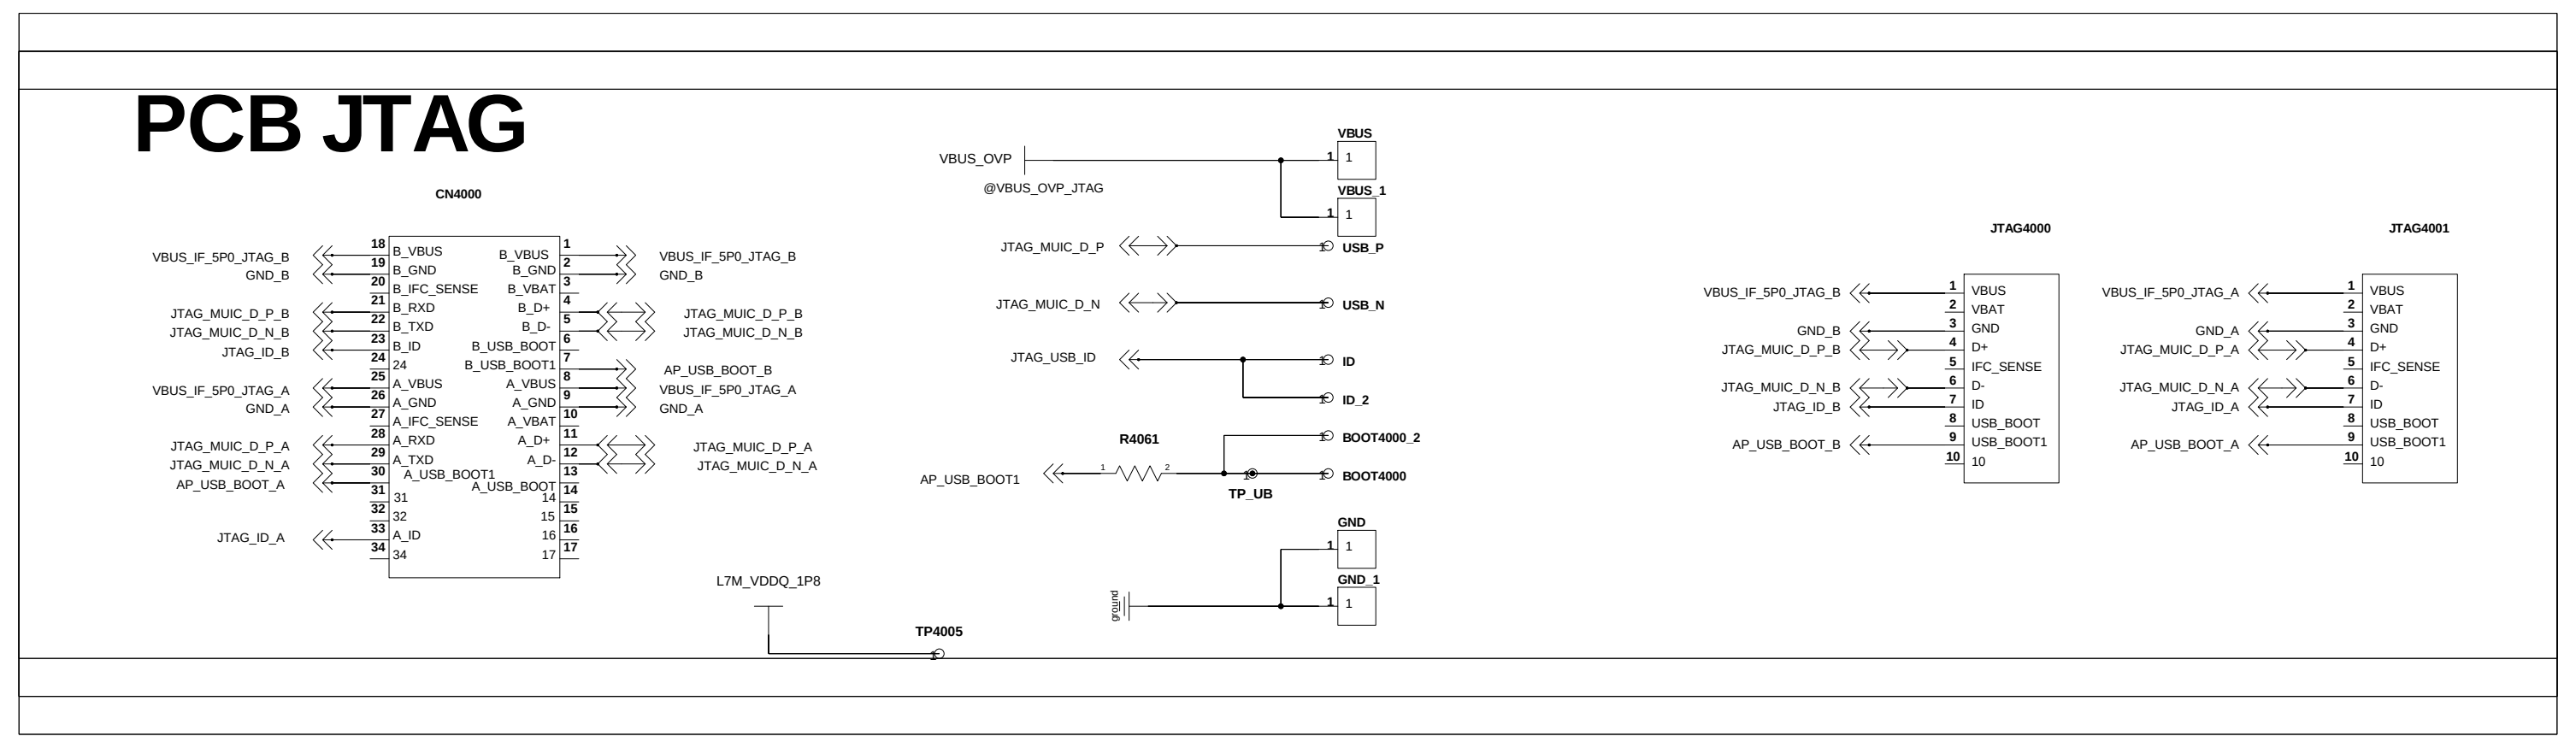
CN4000
VBUS_IF_5P0_JTAG_B
GND_B
JTAG_MUIC_D_P_B
JTAG_MUIC_D_N_B
JTAG_ID_B
VBUS_IF_5P0_JTAG_A
GND_A
JTAG_MUIC_D_P_A
JTAG_MUIC_D_N_A
AP_USB_BOOT_A
JTAG_ID_A
AP_USB_BOOT_B
VBUS_OVP
@VBUS_OVP_JTAG
JTAG_MUIC_D_P
JTAG_MUIC_D_N
JTAG_USB_ID
R4061
AP_USB_BOOT1
TP_UB
VBUS
VBUS_1
USB_P
USB_N
ID
ID_2
BOOT4000_2
BOOT4000
GND
GND_1
L7M_VDDQ_1P8
TP4005
JTAG4000
JTAG4001
VBUS
VBAT
GND
D+
IFC_SENSE
D-
ID
USB_BOOT
USB_BOOT1

Engineer:	A35
Drawn by:	
R&D CHK:	TITLE: Size:
DOC CTRL CHK:	
MFG ENGR CHK:	
QA CHK:	REV: Drawing Number: Page:

Changed by: Date Changed: Time Changed:

SAMSUNG CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

UCP4000
(4/6)
(5/6)
(6/6)
UME5000
230526
B1M_VDDQ_MEM_0P6
@RSP1M
@RSN1M
C5007
C5019
C5000
C5125
C5126
VDDQ06_DRAM0
VDDQ06_DRAM1
B2_3M_VDD_CAM_1P3
@RSP2_3M
@RSN2_3M
C5132
C5016
C5012
C5001
VDD_CAM
B4_5_6M_VDD_CPUCL1_BIG_1P3
@RSP4_5_6M
@RSN4_5_6M
C5104
C5105
C5106
C5110
C5111
C5112
C5113
C5021
C5109
C5114
C5115
C5116
C5117
C5118
VDD_CPUCL1_BIG
B7M_VDD_CPUCL0_LIT_1P3
@RSP7M
@RSN7M
C5043
C5035
VDD_CPUCL0_LIT
B8M_VDD2_MEM_1P1
C5005
C5053
VDDQ11_DRAM0_CKE
VDDQ11_DRAM1_CKE
L1M_VDD_ALIVE_0P75
C5002
C5003
VDD_ALIVE
VDD_ALIVE_JSC
VDD_CHUBVTS
AVDD075_USB20
VDD075_DLL_GNSS
VDD_GNSS_ALV
VDD_ALV_CP
C5145
C5144
C5143
C5142
L2M_VDD_AP_1833
VDDQ1833_MMC_CARD
C5146
ground
AVDD085_UFS_EMBD
AVDD085_MIPI_DSI
AVDD085_MIPI_CSI
VDD_ICPU_CSILINK
C5006
C5147
C5148
C5149
C5150
L3M_VDD_AP_0P85
AVDD18_UFS_EMBD
AVDD18_MIPI_DSI
AVDD18_MIPI_CSI
AVDD18_OTP
AVDD18_TS
C5151
C5152
C5153
C5154
L4M_VDD_AP_1P8
AVDD12_PLL_AUD
AVDD12_PLL_CPU
AVDD12_PLL_SHARED
AVDD12_PLL_MIF
AVDD12_MIPI_DSI
VDDQ12_UFS_EMBD
C5155
C5156
C5157
L5M_VDD_AP_PLL_1P2
AVDD33_USB20
C5004
L6M_VDD_USB20_3P0
AVDD18_TCXO_FAR
AVDD18_TCXO
AVDD18_USB20
VDDQ18_GPIO_ALV_CP
VDDQ18_MCW_CP
VDDQ1218_GNSS
VDDQ18_WLBT
VDDQ18_GNSS
VDDQ18_GPIO_B
VDDQ18_GPIO_T
VDDQ18_CMGP
C5158
C5159
C5160
C5161
L7M_VDDQ_1P8
VDD_MCW_CP
C5046
C5162
L8M_VDD_MCW_0P75
VDD06_MCW_FR12_CP
C5164
C5165
L9M_VDD_MCW_0P6
VDDQ1830_USIM0_CP
C5163
L10M_VDD_SIM0_1830
VDDQ1830_USIM1_CP
C5166
L11M_VDD_SIM1_1830
VDD_GNSS
C5167
C5168
L12M_VDD_GNSS_0P75
AVDD12_CDPLL_CP
AVDD12_IMPLL_CP
C5169
C5170
L13M_VDD_CP_PLL_1P2
AVDD12_WLBT
C5171
L14M_VDD_WLBT_1P2
VDD_WLBT_M
C5172
L20M_VDD_WLBT_M_0P75
VDD_SRAM_PPC_LIT
C5173
C5174
L34M_VDD_SRAM_PPC_LIT_0P75
VDD_SRAM_PPC_BIG
C5175
C5176
C5177
L35M_VDD_SRAM_PPC_BIG_0P75
VSS
B1S_VDD_MIF_0P75
@RSP1S
@RSN1S
C5013
C5130
C5068
VDD_MIF
B2S_VDD_WLBT_0P75
@RSP2S
@RSN2S
C5010
C5011
VDD_WLBT
B3S_VDD_NPU_0P75
@RSP3S
@RSN3S
C5087
C5018
VDD_NPU
B4_5S_VDD_G3D_0P75
@RSP4_5S
@RSN4_5S
C5178
C5088
C5089
VDD_G3D
B6S_VDD_CPU_CP_0P75
@RSP6S
@RSN6S
C5184
C5180
VDD_CPU_CP
VDD_CP
B7_8S_VDD_CP_0P75
@RSP7_8S
@RSN7_8S
C5185
C5186
C5191
C5190
VDD_INT
B9S_VDD_INT_0P75
@RSP9S
@RSN9S
C5192
C5193
C5198
C5200
VDD_SRAM
B10S_VDD_SRAM_0P75
@RSP10S
@RSN10S
C5201
C5202
C5203
AVDD18_WLBT
C5204
L8S_VDD_WLBT_1P8
VDD_SRAM_PPC_NPU
C5205
L15S_VDD_SRAM_PPC_NPU_0P75
@RSP8M
@RSN8M
C5014
C5047
C5050
C5051
C5015
C5017
L29M_VDD_UFS_2P95
C5076
C5077
L30M_VDD_UFS_1P8
C5060
C5061
C5062
C5063
C5064
C5065
C5066
C5078
C5008
C5009
C5069
C5070
C5071
C5072
C5073
C5074
C5075
R5000
R5001
VCC
VCCQ
VCCQ2
VDD1
VDD2
VDDI
VDDIQ
VDDIQ2
VDDQ
ZQ0_A
ZQ1_A
DRAM0_ADCT_0
DRAM0_ADCT_1
DRAM0_ADCT_2
DRAM0_ADCT_3
DRAM0_ADCT_4
DRAM0_ADCT_5
CA0_A
CA1_A
CA2_A
CA3_A
CA4_A
CA5_A
DRAM0_CLK_M
DRAM0_CLK_P
CK_C_A
CK_T_A
DRAM0_CKE_0
DRAM0_CKE_1
CKE0_A
CKE1_A
DRAM0_CS_0
DRAM0_CS_1
CS0_A
CS1_A
DRAM0_DMI_0
DRAM0_DMI_1
DMI0_A
DMI1_A
DRAM0_DQ(0)
DQ0_A
DQ15_A
DRAM0_DQS_0_M
DRAM0_DQS_0_P
DRAM0_DQS_1_M
DRAM0_DQS_1_P
DQS0_C_A
DQS0_T_A
DQS1_C_A
DQS1_T_A
ODT_A
UFS_TX_D0_N
UFS_TX_D0_P
TP5003
TP5004
DIN0_C
DIN0_T
DIN1_C
DIN1_T
UFS_RX_D0_N
UFS_RX_D0_P
TP5005
TP5006
DOUT0_C
DOUT0_T
DOUT1_C
DOUT1_T
UFS_REFCLK
TP5007
REF_CLK
RFU
NC
VSS_G
CA0_B
CA5_B
DRAM1_ADCT_0
DRAM1_ADCT_5
CK_C_B
CK_T_B
DRAM1_CLK_M
DRAM1_CLK_P
CKE0_B
CKE1_B
DRAM1_CKE_0
DRAM1_CKE_1
CS0_B
CS1_B
DRAM1_CS_0
DRAM1_CS_1
DMI0_B
DMI1_B
DRAM1_DMI_0
DRAM1_DMI_1
DQ0_B
DQ15_B
DRAM1_DQ(0)
DRAM1_DQ(15)
DQS0_C_B
DQS0_T_B
DQS1_C_B
DQS1_T_B
DRAM1_DQS_0_M
DRAM1_DQS_0_P
DRAM1_DQS_1_M
DRAM1_DQS_1_P
ODT_B
RESET_N
RST_N
TP5001
TP5002
DRAM_RESET_N
UFS_RESET_N
DNU
VSF1
VSF2
VSF3
VSF4
VSF5
VSF6
TP5008
TP5009

Engineer:	A35
Drawn by:	
R&D CHK:	TITLE: AP/CP/uMCP
DOC CTRL CHK:	Size:
MFG ENGR CHK:	
QA CHK:	REV: Drawing Number: Page:

Changed by: Date Changed: Time Changed:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

MAIN PMIC

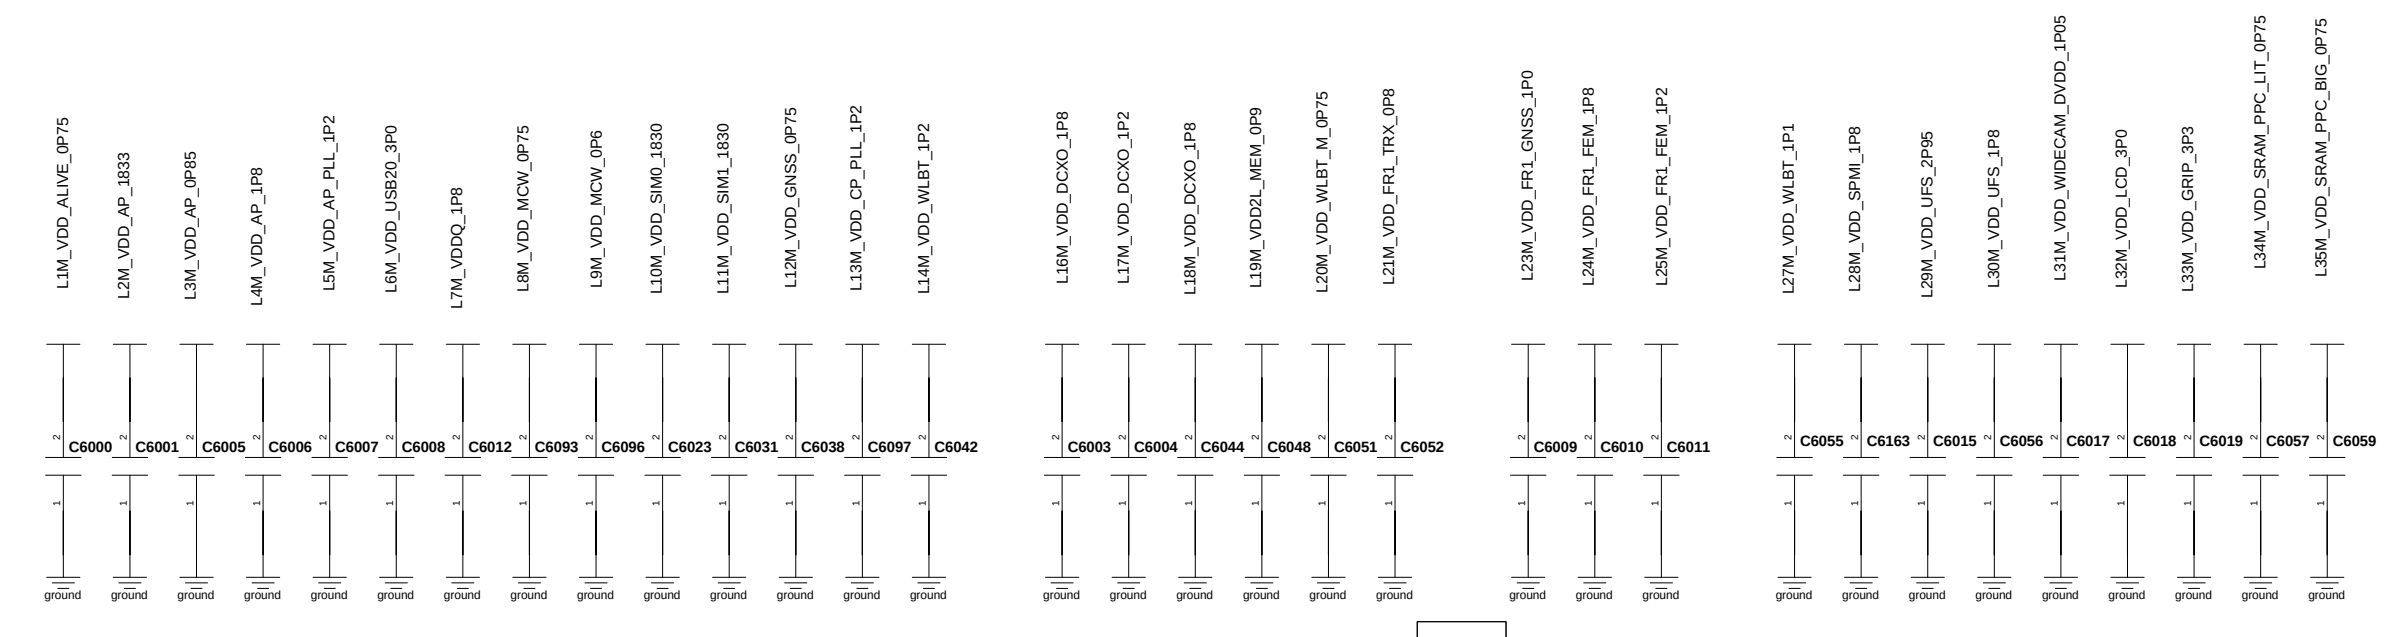
L1M_VDD_ALIVE_0P75
L2M_VDD_AP_1833
L3M_VDD_AP_0P85
L4M_VDD_AP_1P8
L5M_VDD_AP_PLL_1P2
L6M_VDD_USB20_3P0
L7M_VDDQ_1P8
L8M_VDD_MCW_0P75
L9M_VDD_MCW_0P6
L10M_VDD_SIM0_1830
L11M_VDD_SIM1_1830
L12M_VDD_GNSS_0P75
L13M_VDD_CP_PLL_1P2
L14M_VDD_WLBT_1P2
L16M_VDD_DCXO_1P8
L17M_VDD_DCXO_1P2
L18M_VDD_DCXO_1P8
L19M_VDD2L_MEM_0P9
L20M_VDD_WLBT_M_0P75
L21M_VDD_FR1_TRX_0P8
L23M_VDD_FR1_GNSS_1P0
L24M_VDD_FR1_FEM_1P8
L25M_VDD_FR1_FEM_1P2
L27M_VDD_WLBT_1P1
L28M_VDD_SPMI_1P8
L29M_VDD_UFS_2P95
L30M_VDD_UFS_1P8
L31M_VDD_WIDECAM_DVDD_1P05
L32M_VDD_LCD_3P0
L33M_VDD_GRIP_3P3
L34M_VDD_SRAM_PPC_LIT_0P75
L35M_VDD_SRAM_PPC_BIG_0P75
C6000 C6001 C6005 C6006 C6007 C6008 C6012 C6093 C6096 C6023 C6031 C6038 C6097 C6042
C6003 C6004 C6044 C6048 C6051 C6052
C6009 C6010 C6011
C6055 C6163 C6015 C6056 C6017 C6018 C6019 C6057 C6059
ground
REV01 0912

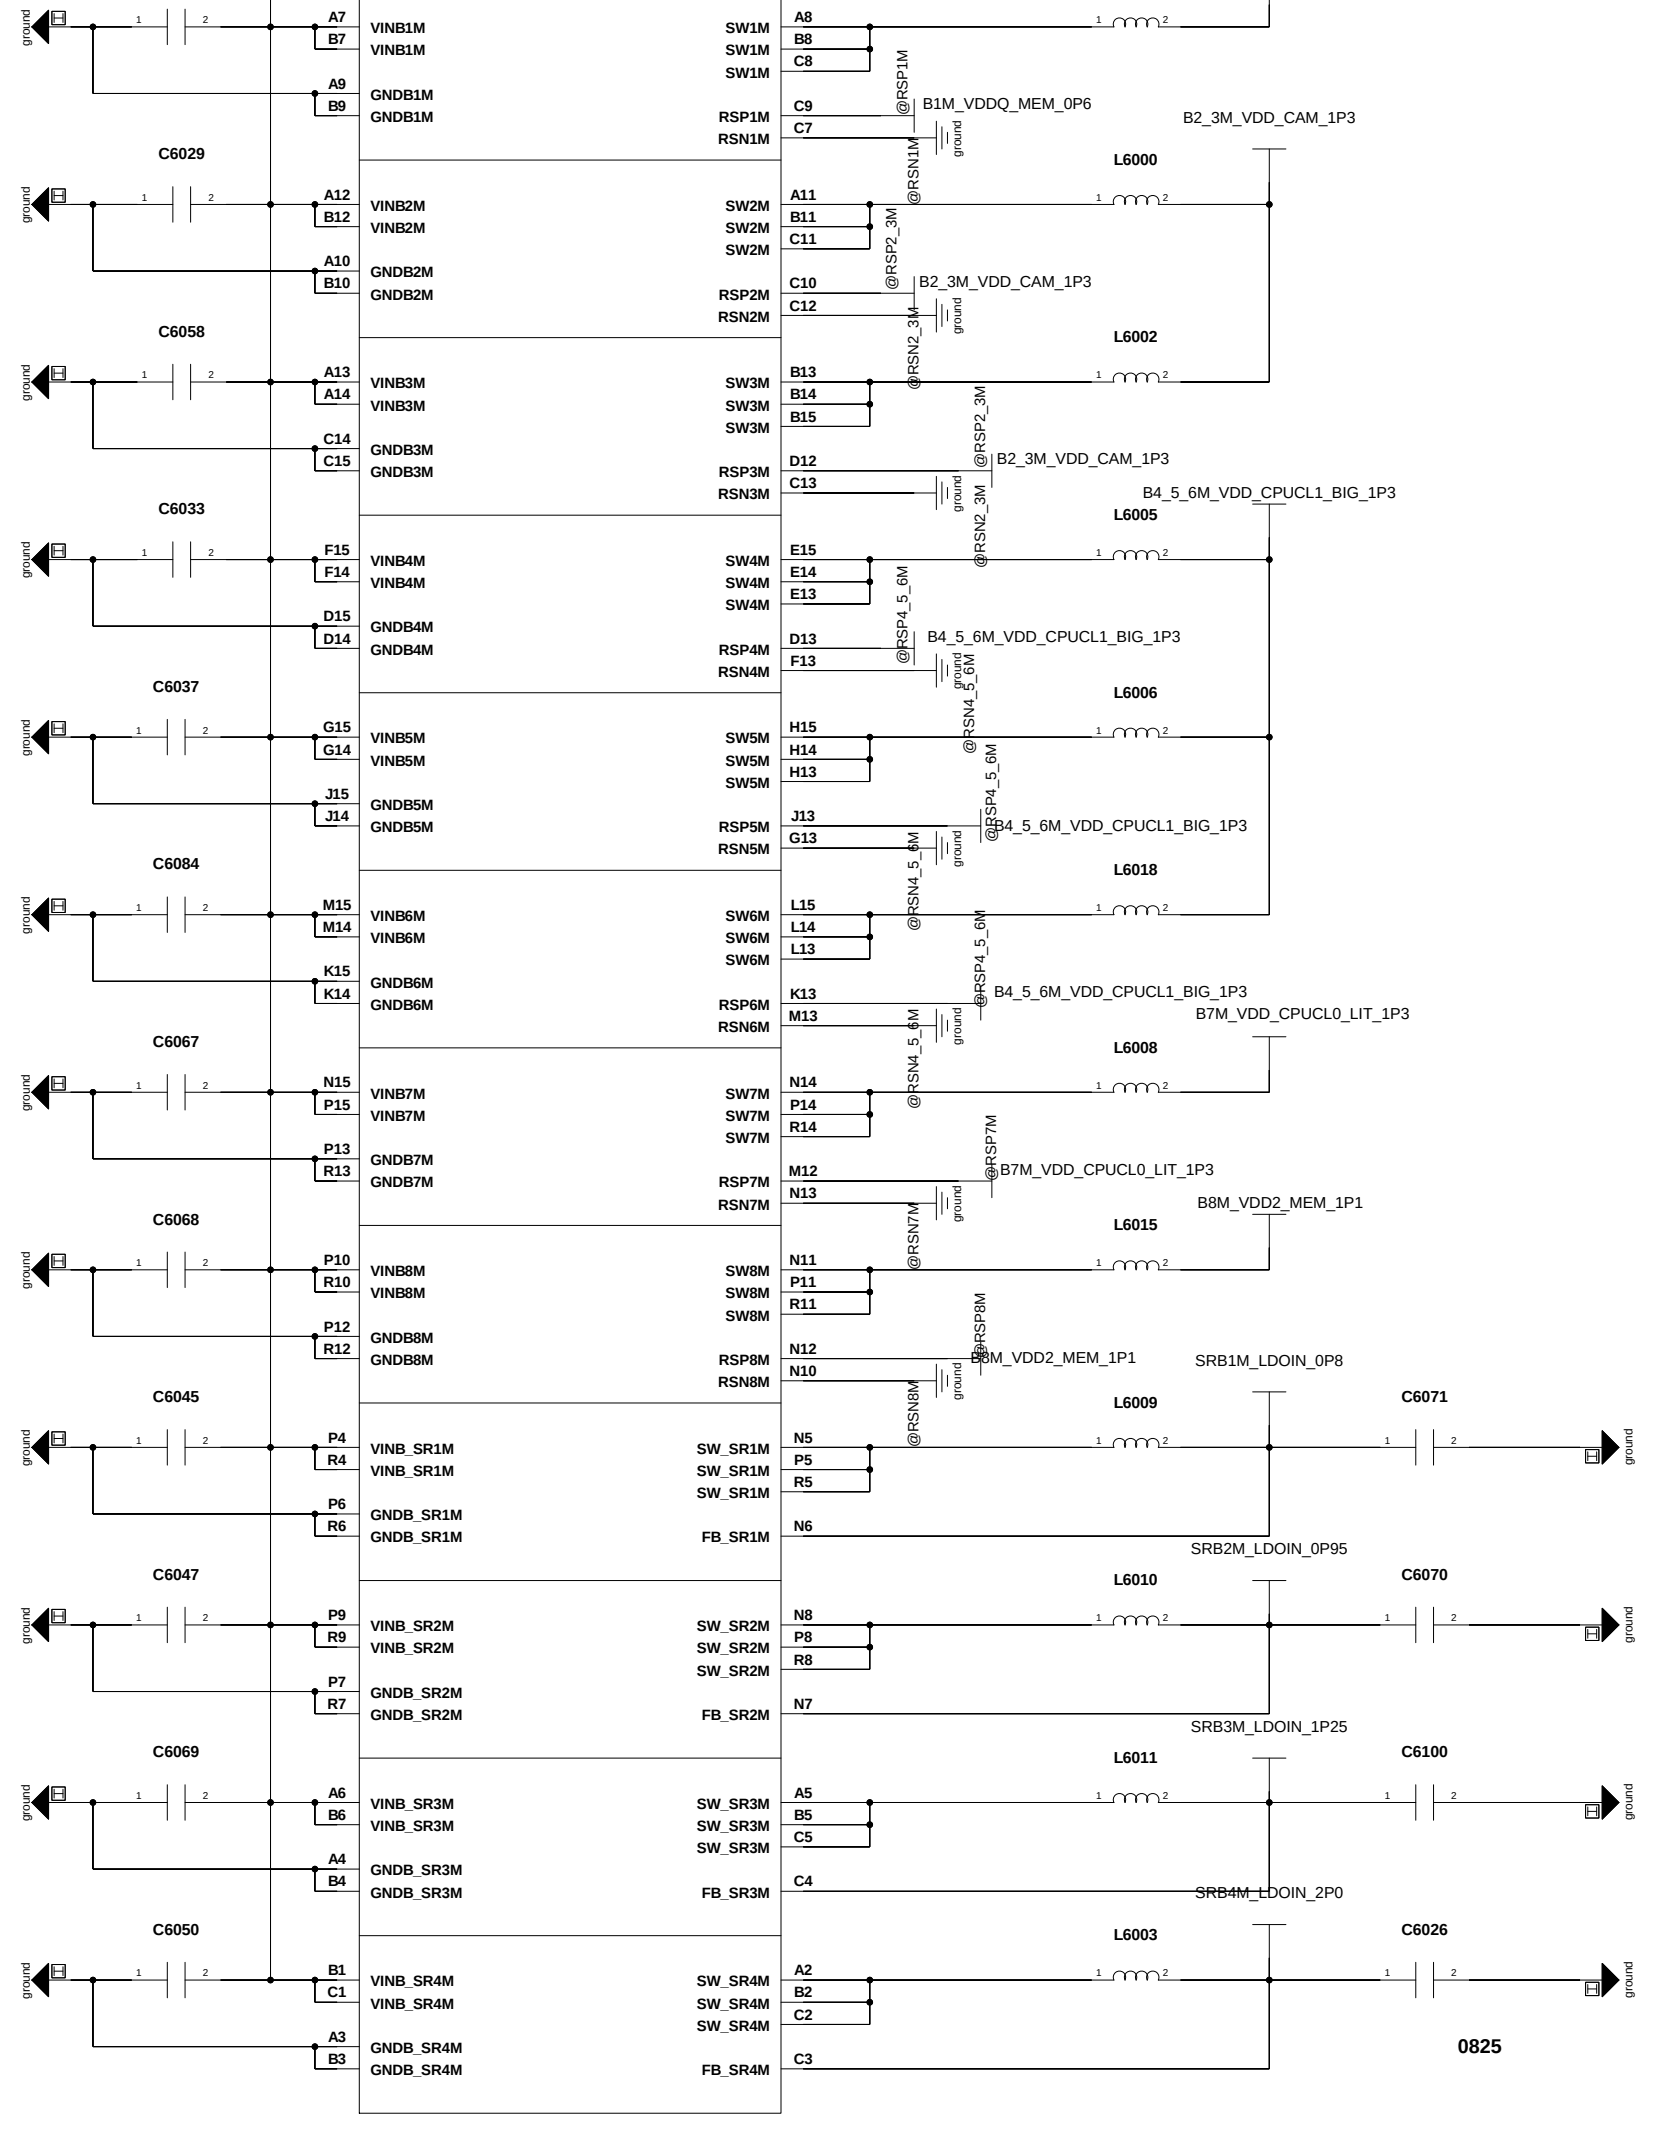
VBAT
U6000
(2/3)
C6024 C6029 C6058 C6033 C6037 C6084 C6067 C6068 C6045 C6047 C6069 C6050
VINB1M VINB2M VINB3M VINB4M VINB5M VINB6M VINB7M VINB8M
GNDB1M GNDB2M GNDB3M GNDB4M GNDB5M GNDB6M GNDB7M GNDB8M
VINB_SR1M VINB_SR2M VINB_SR3M VINB_SR4M
GNDB_SR1M GNDB_SR2M GNDB_SR3M GNDB_SR4M
SW1M SW2M SW3M SW4M SW5M SW6M SW7M SW8M
RSP1M RSN1M RSP2M RSN2M RSP3M RSN3M RSP4M RSN4M RSP5M RSN5M RSP6M RSN6M RSP7M RSN7M RSP8M RSN8M
SW_SR1M SW_SR2M SW_SR3M SW_SR4M
FB_SR1M FB_SR2M FB_SR3M FB_SR4M
L6001 L6000 L6002 L6005 L6006 L6018 L6008 L6015 L6009 L6010 L6011 L6003
B1M_VDDQ_MEM_0P6
B2_3M_VDD_CAM_1P3
B4_5_6M_VDD_CPUCL1_BIG_1P3
B7M_VDD_CPUCL0_LIT_1P3
B8M_VDD2_MEM_1P1
SRB1M_LDOIN_0P8
SRB2M_LDOIN_0P95
SRB3M_LDOIN_1P25
SRB4M_LDOIN_2P0
C6071 C6070 C6100 C6026
0825
ground

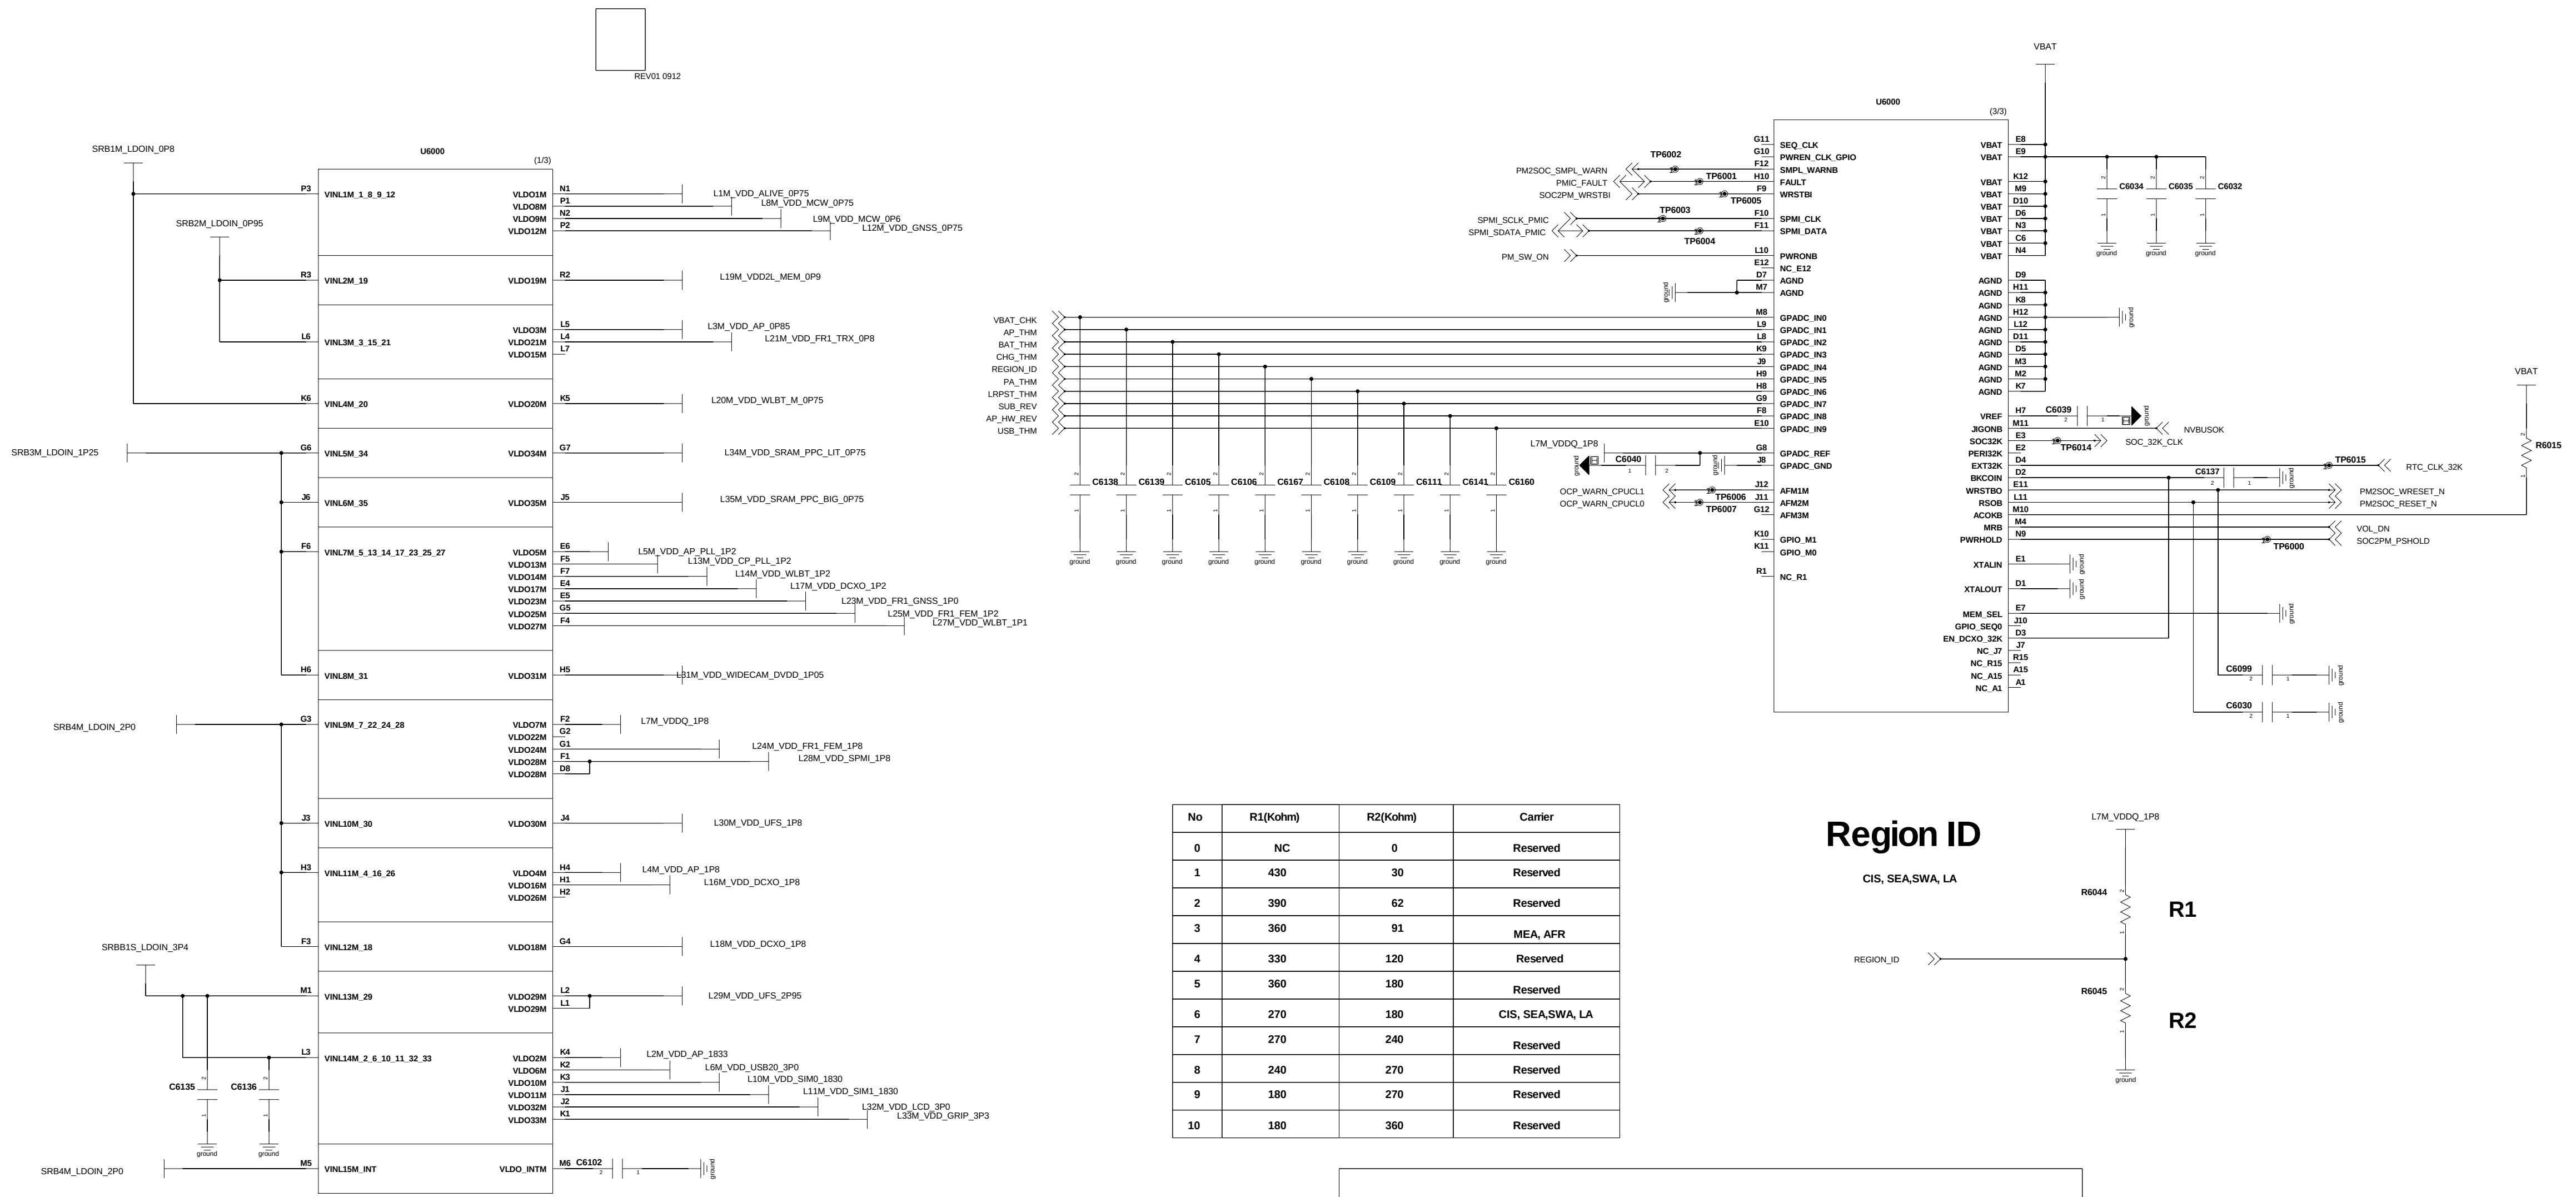
U6000
(1/3)
SRB1M_LDOIN_0P8
SRB2M_LDOIN_0P95
SRB3M_LDOIN_1P25
SRB4M_LDOIN_2P0
SRBB1S_LDOIN_3P4
VINL1M_1_8_9_12
VINL2M_19
VINL3M_3_15_21
VINL4M_20
VINL5M_34
VINL6M_35
VINL7M_5_13_14_17_23_25_27
VINL8M_31
VINL9M_7_22_24_28
VINL10M_30
VINL11M_4_16_26
VINL12M_18
VINL13M_29
VINL14M_2_6_10_11_32_33
VINL15M_INT
VLDO_INTM
C6135 C6136 C6102
L1M_VDD_ALIVE_0P75
L8M_VDD_MCW_0P75
L9M_VDD_MCW_0P6
L12M_VDD_GNSS_0P75
L19M_VDD2L_MEM_0P9
L3M_VDD_AP_0P85
L21M_VDD_FR1_TRX_0P8
L20M_VDD_WLBT_M_0P75
L34M_VDD_SRAM_PPC_LIT_0P75
L35M_VDD_SRAM_PPC_BIG_0P75
L5M_VDD_AP_PLL_1P2
L13M_VDD_CP_PLL_1P2
L14M_VDD_WLBT_1P2
L17M_VDD_DCXO_1P2
L23M_VDD_FR1_GNSS_1P0
L25M_VDD_FR1_FEM_1P2
L27M_VDD_WLBT_1P1
L31M_VDD_WIDECAM_DVDD_1P05
L7M_VDDQ_1P8
L24M_VDD_FR1_FEM_1P8
L28M_VDD_SPMI_1P8
L30M_VDD_UFS_1P8
L4M_VDD_AP_1P8
L16M_VDD_DCXO_1P8
L18M_VDD_DCXO_1P8
L29M_VDD_UFS_2P95
L2M_VDD_AP_1833
L6M_VDD_USB20_3P0
L10M_VDD_SIM0_1830
L11M_VDD_SIM1_1830
L32M_VDD_LCD_3P0
L33M_VDD_GRIP_3P3
U6000
(3/3)
VBAT
SEQ_CLK
PWREN_CLK_GPIO
SMPL_WARNB
FAULT
WRSTBI
SPMI_CLK
SPMI_DATA
PWRONB
NC_E12
AGND
GPADC_IN0 … GPADC_IN9
GPADC_REF
GPADC_GND
AFM1M AFM2M AFM3M
GPIO_M1 GPIO_M0
NC_R1
VREF JIGONB SOC32K PERI32K EXT32K BKCOIN WRSTBO RSOB ACOKB MRB PWRHOLD
XTALIN XTALOUT
MEM_SEL GPIO_SEQ0 EN_DCXO_32K NC_J7 NC_R15 NC_A15 NC_A1
TP6002 TP6001 TP6005 TP6003 TP6004 TP6014 TP6015 TP6006 TP6007 TP6000
PM2SOC_SMPL_WARN
PMIC_FAULT
SOC2PM_WRSTBI
SPMI_SCLK_PMIC
SPMI_SDATA_PMIC
PM_SW_ON
VBAT_CHK
AP_THM
BAT_THM
CHG_THM
REGION_ID
PA_THM
LRPST_THM
SUB_REV
AP_HW_REV
USB_THM
C6138 C6139 C6105 C6106 C6167 C6108 C6109 C6111 C6141 C6160
L7M_VDDQ_1P8
C6040
OCP_WARN_CPUCL1
OCP_WARN_CPUCL0
C6034 C6035 C6032
C6039
NVBUSOK
SOC_32K_CLK
C6137
RTC_CLK_32K
R6015
PM2SOC_WRESET_N
PM2SOC_RESET_N
VOL_DN
SOC2PM_PSHOLD
C6099 C6030
ground

No	R1(Kohm)	R2(Kohm)	Carrier
0	NC	0	Reserved
1	430	30	Reserved
2	390	62	Reserved
3	360	91	MEA, AFR
4	330	120	Reserved
5	360	180	Reserved
6	270	180	CIS, SEA,SWA, LA
7	270	240	Reserved
8	240	270	Reserved
9	180	270	Reserved
10	180	360	Reserved

Region ID

CIS, SEA,SWA, LA

L7M_VDDQ_1P8
R6044
R1
REGION_ID
R6045
R2
ground

ID	REV	R1(Kohm)	R2(Kohm)	AP
00		NC	0	
01	0	470	30	R00
02	1	390	62	R01
03	2	360	91	R02
04	3	330	120	R03
05	4	360	180	R04
06	5	270	180	R05
07	6	270	240	
08	7	240	270	
09	8	180	270	
	9	180	360	

AP HW REV

R05

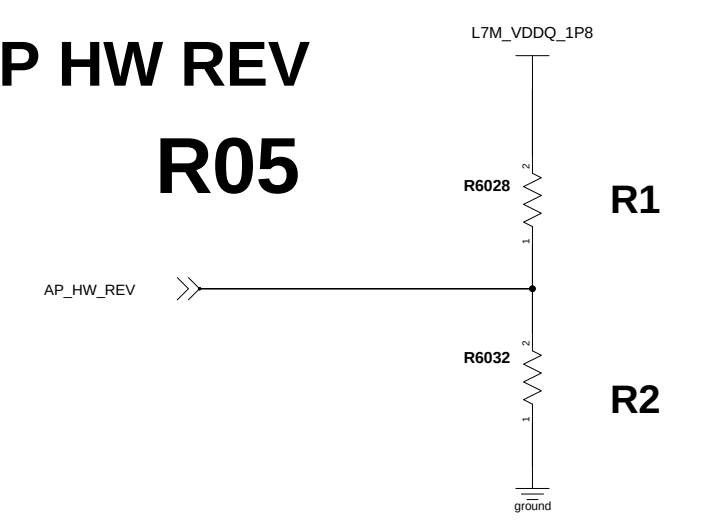
L7M_VDDQ_1P8
R6028
R1
AP_HW_REV
R6032
R2
ground

MOT DRV

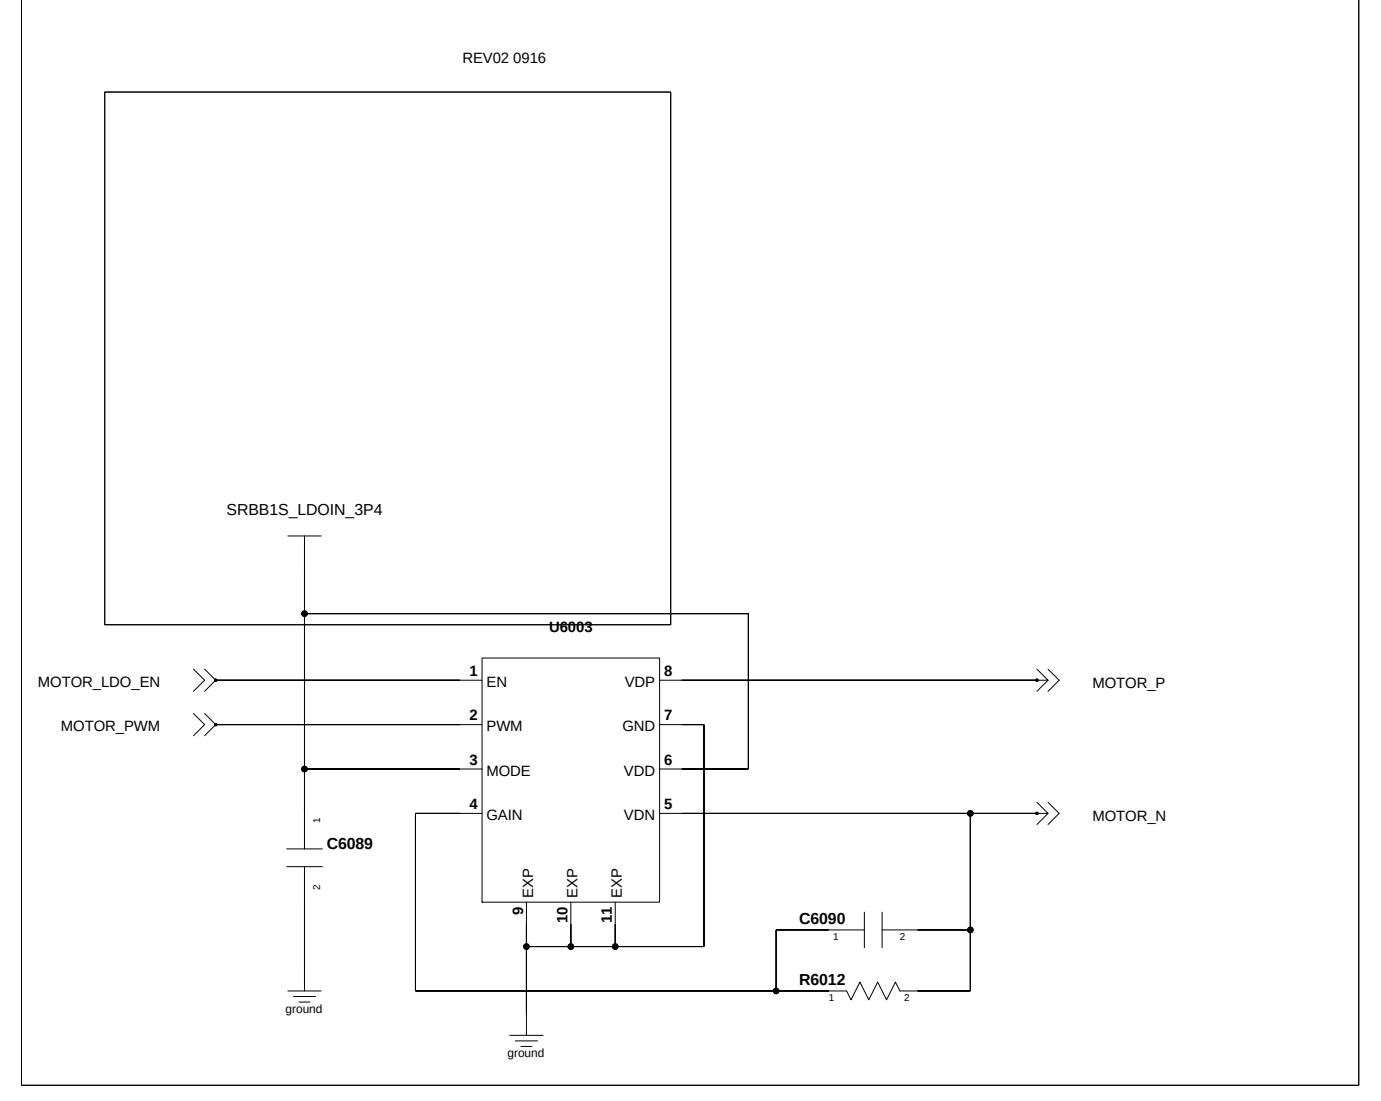
REV02 0916
SRBB1S_LDOIN_3P4
U6003
MOTOR_LDO_EN
MOTOR_PWM
EN PWM MODE GAIN
VDP GND VDD VDN
EXP EXP EXP
C6089
C6090
R6012
MOTOR_P
MOTOR_N
ground

SUB PMIC

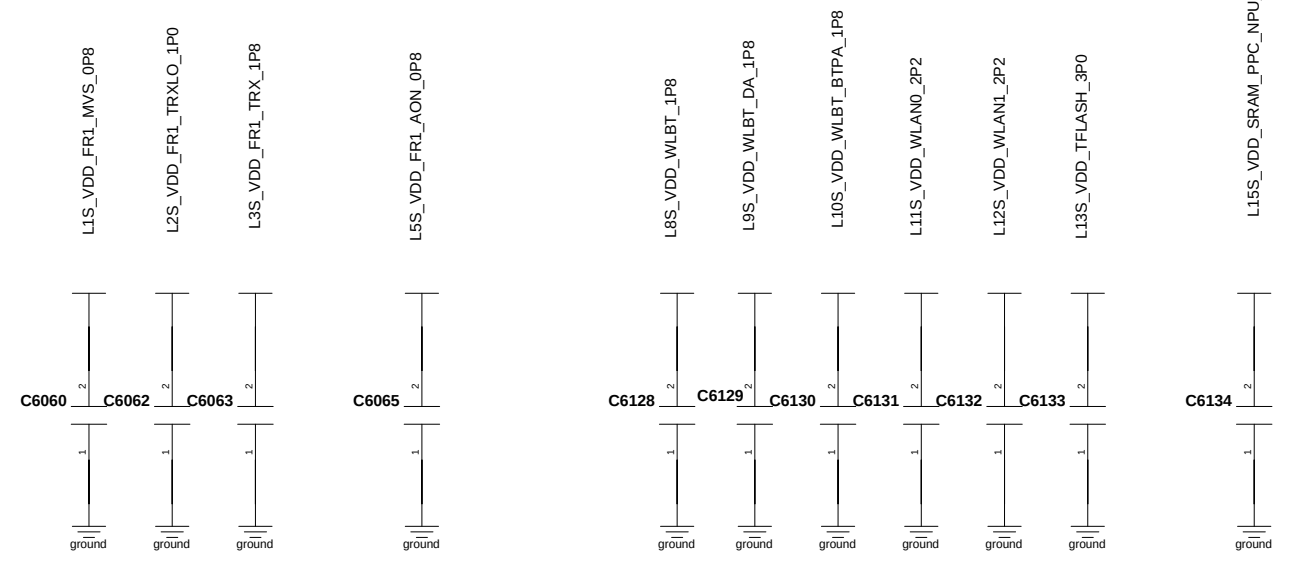
L1S_VDD_FR1_MVS_0P8
L2S_VDD_FR1_TRXLO_1P0
L3S_VDD_FR1_TRX_1P8
L5S_VDD_FR1_AON_0P8
L8S_VDD_WLBT_1P8
L9S_VDD_WLBT_DA_1P8
L10S_VDD_WLBT_BTPA_1P8
L11S_VDD_WLAN0_2P2
L12S_VDD_WLAN1_2P2
L13S_VDD_TFLASH_3P0
L15S_VDD_SRAM_PPC_NPU_0P75
C6060 C6062 C6063 C6065 C6128 C6129 C6130 C6131 C6132 C6133 C6134
ground

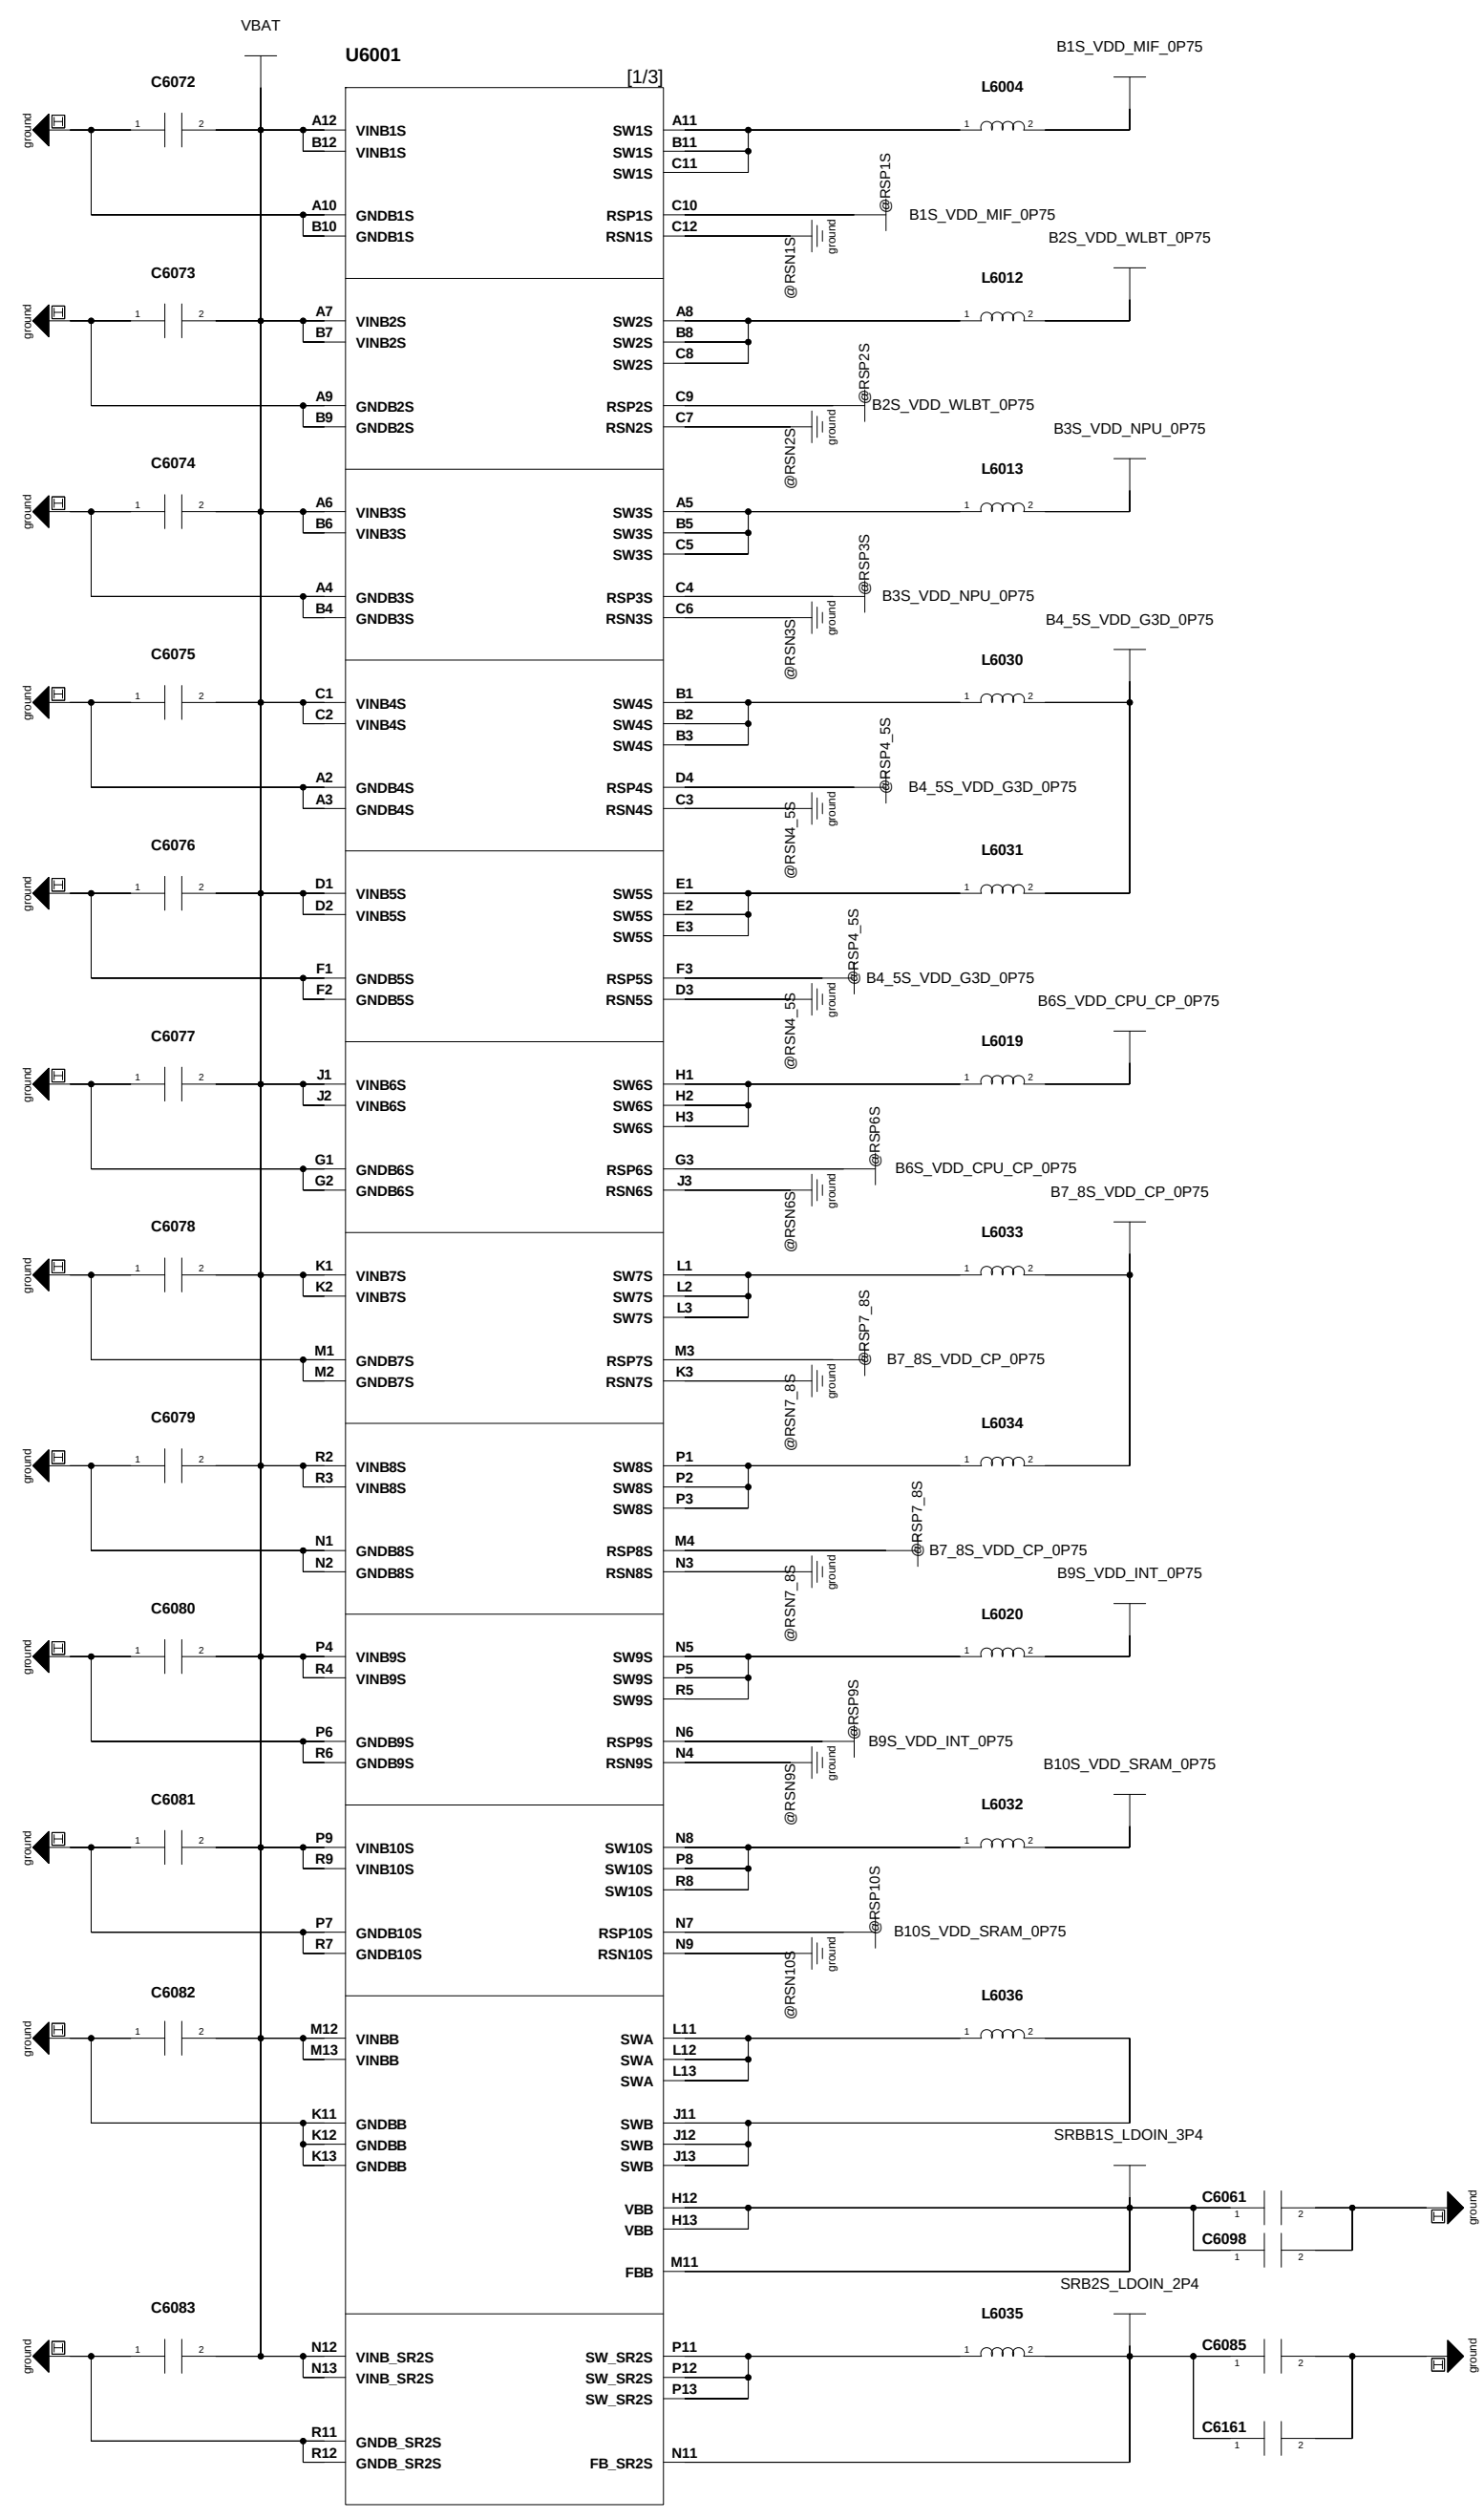
VBAT
U6001
[1/3]
C6072 C6073 C6074 C6075 C6076 C6077 C6078 C6079 C6080 C6081 C6082 C6083
VINB1S … VINB10S
GNDB1S … GNDB10S
VINBB GNDBB
VINB_SR2S GNDB_SR2S
SW1S … SW10S
RSP1S … RSP10S
RSN1S … RSN10S
SWA SWB VBB FBB
SW_SR2S FB_SR2S
L6004 L6012 L6013 L6030 L6031 L6019 L6033 L6034 L6020 L6032 L6036 L6035
B1S_VDD_MIF_0P75
B2S_VDD_WLBT_0P75
B3S_VDD_NPU_0P75
B4_5S_VDD_G3D_0P75
B6S_VDD_CPU_CP_0P75
B7_8S_VDD_CP_0P75
B9S_VDD_INT_0P75
B10S_VDD_SRAM_0P75
SRBB1S_LDOIN_3P4
SRB2S_LDOIN_2P4
C6061 C6098 C6085 C6161
ground

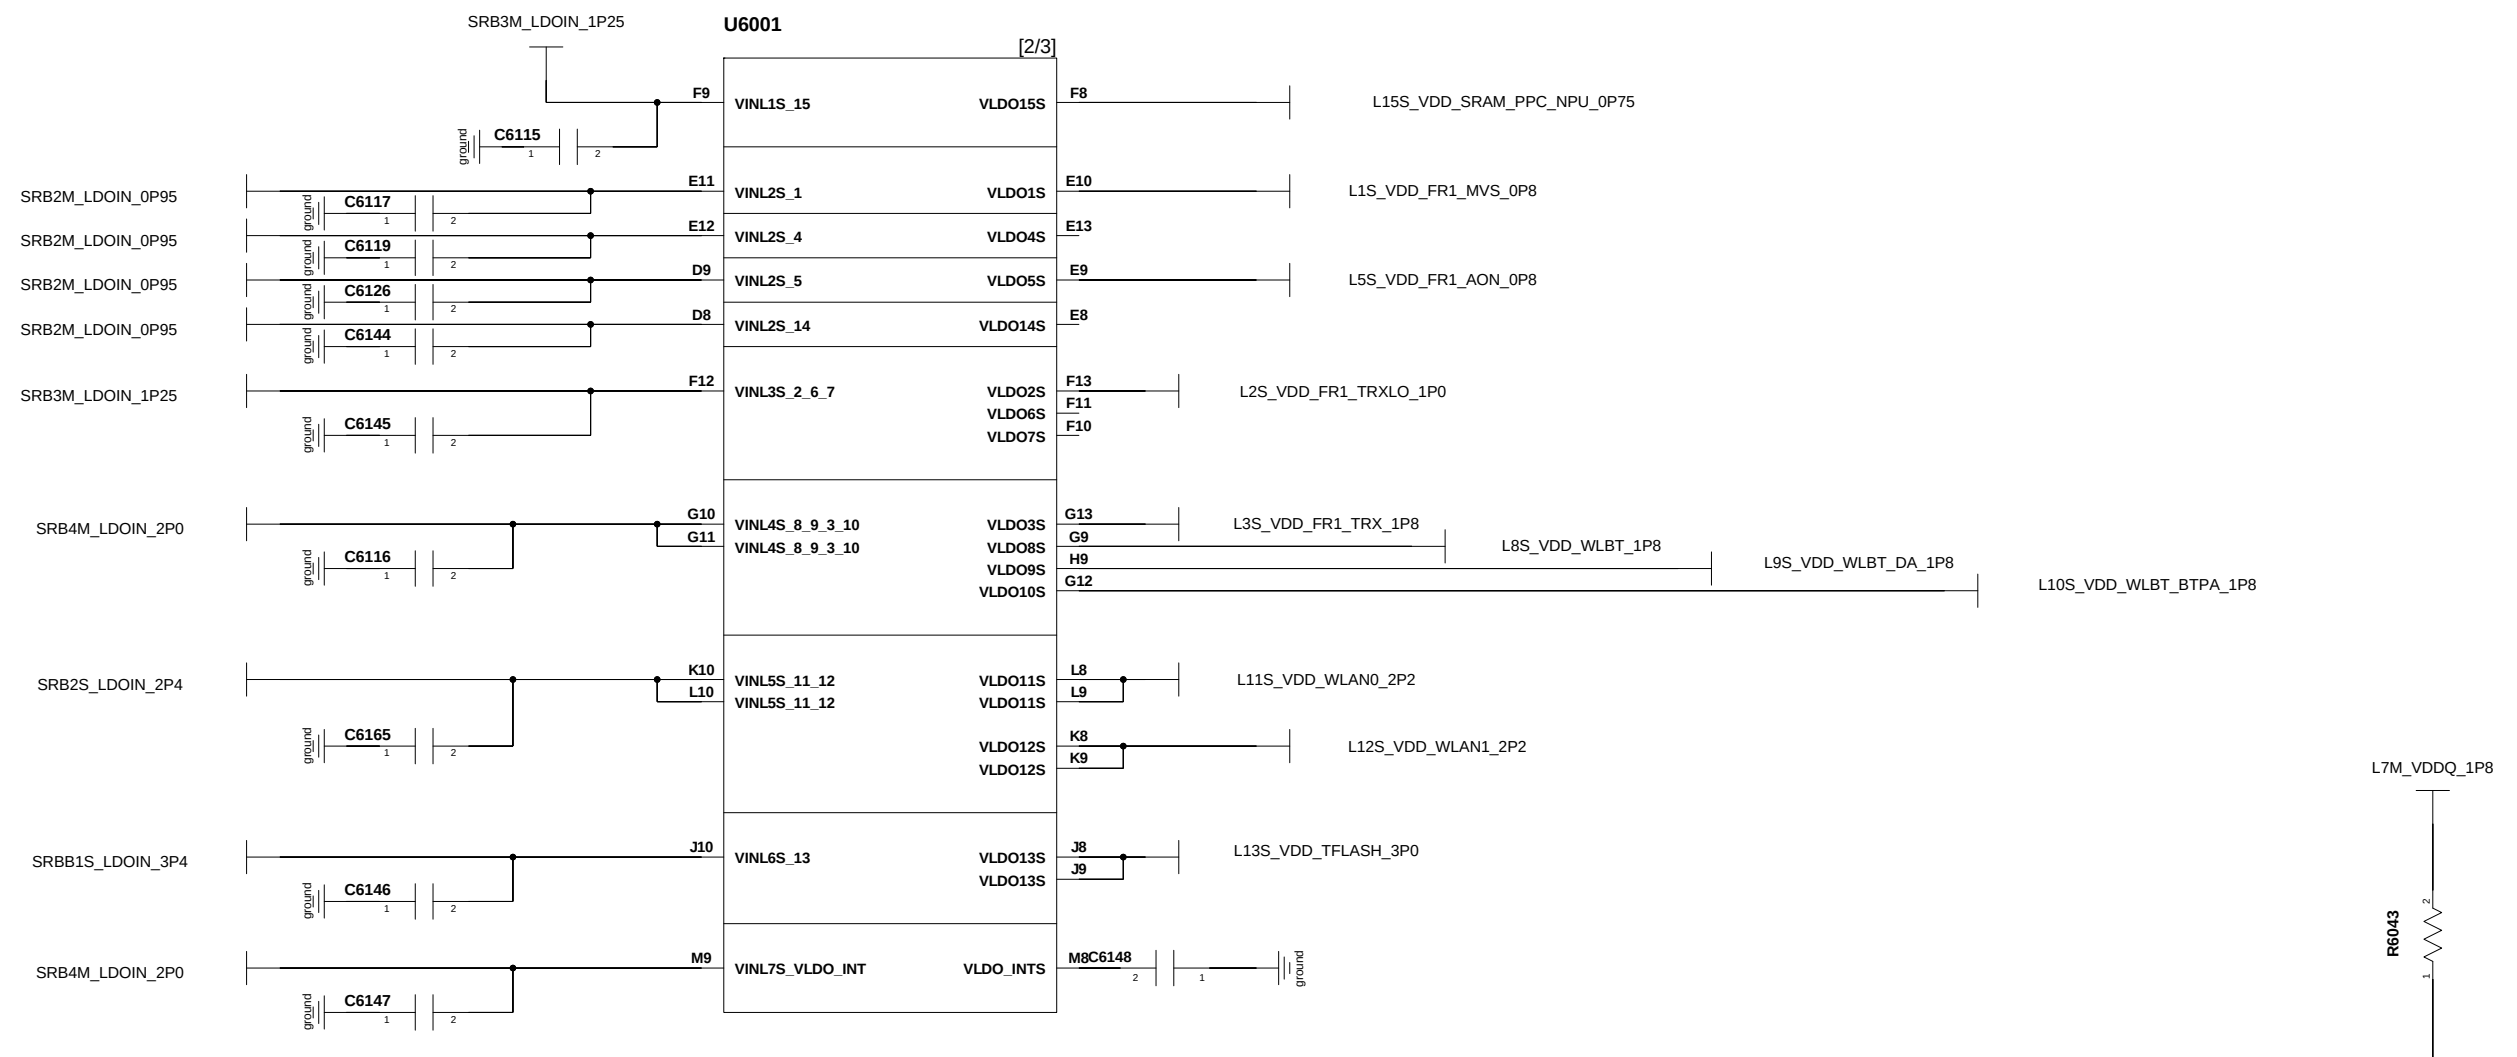
SRB3M_LDOIN_1P25
U6001
[2/3]
C6115
SRB2M_LDOIN_0P95
SRB3M_LDOIN_1P25
SRB4M_LDOIN_2P0
SRB2S_LDOIN_2P4
SRBB1S_LDOIN_3P4
C6117 C6119 C6126 C6144 C6145 C6116 C6165 C6146 C6147 C6148
VINL1S_15 VINL2S_1 VINL2S_4 VINL2S_5 VINL2S_14 VINL3S_2_6_7 VINL4S_8_9_3_10 VINL5S_11_12 VINL6S_13 VINL7S_VLDO_INT
VLDO15S VLDO1S VLDO4S VLDO5S VLDO14S VLDO2S VLDO6S VLDO7S VLDO3S VLDO8S VLDO9S VLDO10S VLDO11S VLDO12S VLDO13S VLDO_INTS
L15S_VDD_SRAM_PPC_NPU_0P75
L1S_VDD_FR1_MVS_0P8
L5S_VDD_FR1_AON_0P8
L2S_VDD_FR1_TRXLO_1P0
L3S_VDD_FR1_TRX_1P8
L8S_VDD_WLBT_1P8
L9S_VDD_WLBT_DA_1P8
L10S_VDD_WLBT_BTPA_1P8
L11S_VDD_WLAN0_2P2
L12S_VDD_WLAN1_2P2
L13S_VDD_TFLASH_3P0
L7M_VDDQ_1P8
R6043

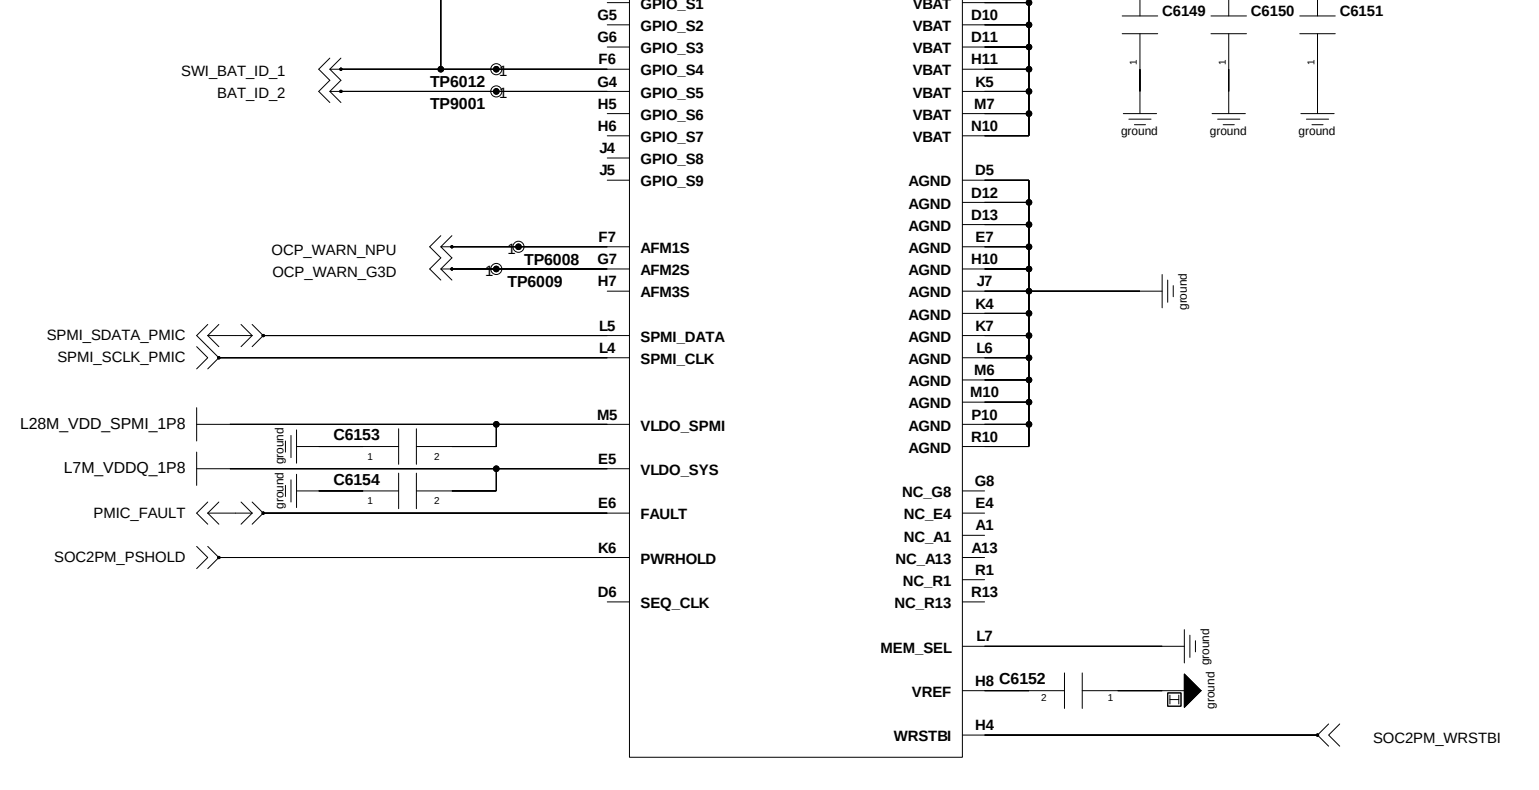
U6001
[3/3]
VBAT
GPIO_HV GPIO_S0 … GPIO_S9
SWI_BAT_ID_1
BAT_ID_2
TP6012 TP9001
OCP_WARN_NPU
OCP_WARN_G3D
TP6008 TP6009
AFM1S AFM2S AFM3S
SPMI_SDATA_PMIC
SPMI_SCLK_PMIC
SPMI_DATA SPMI_CLK
L28M_VDD_SPMI_1P8
L7M_VDDQ_1P8
C6153 C6154
VLDO_SPMI VLDO_SYS
PMIC_FAULT
SOC2PM_PSHOLD
FAULT PWRHOLD SEQ_CLK
AGND
NC_G8 NC_E4 NC_A1 NC_A13 NC_R1 NC_R13
MEM_SEL VREF WRSTBI
C6149 C6150 C6151 C6152
SOC2PM_WRSTBI
ground

IF PMIC(SM5714)

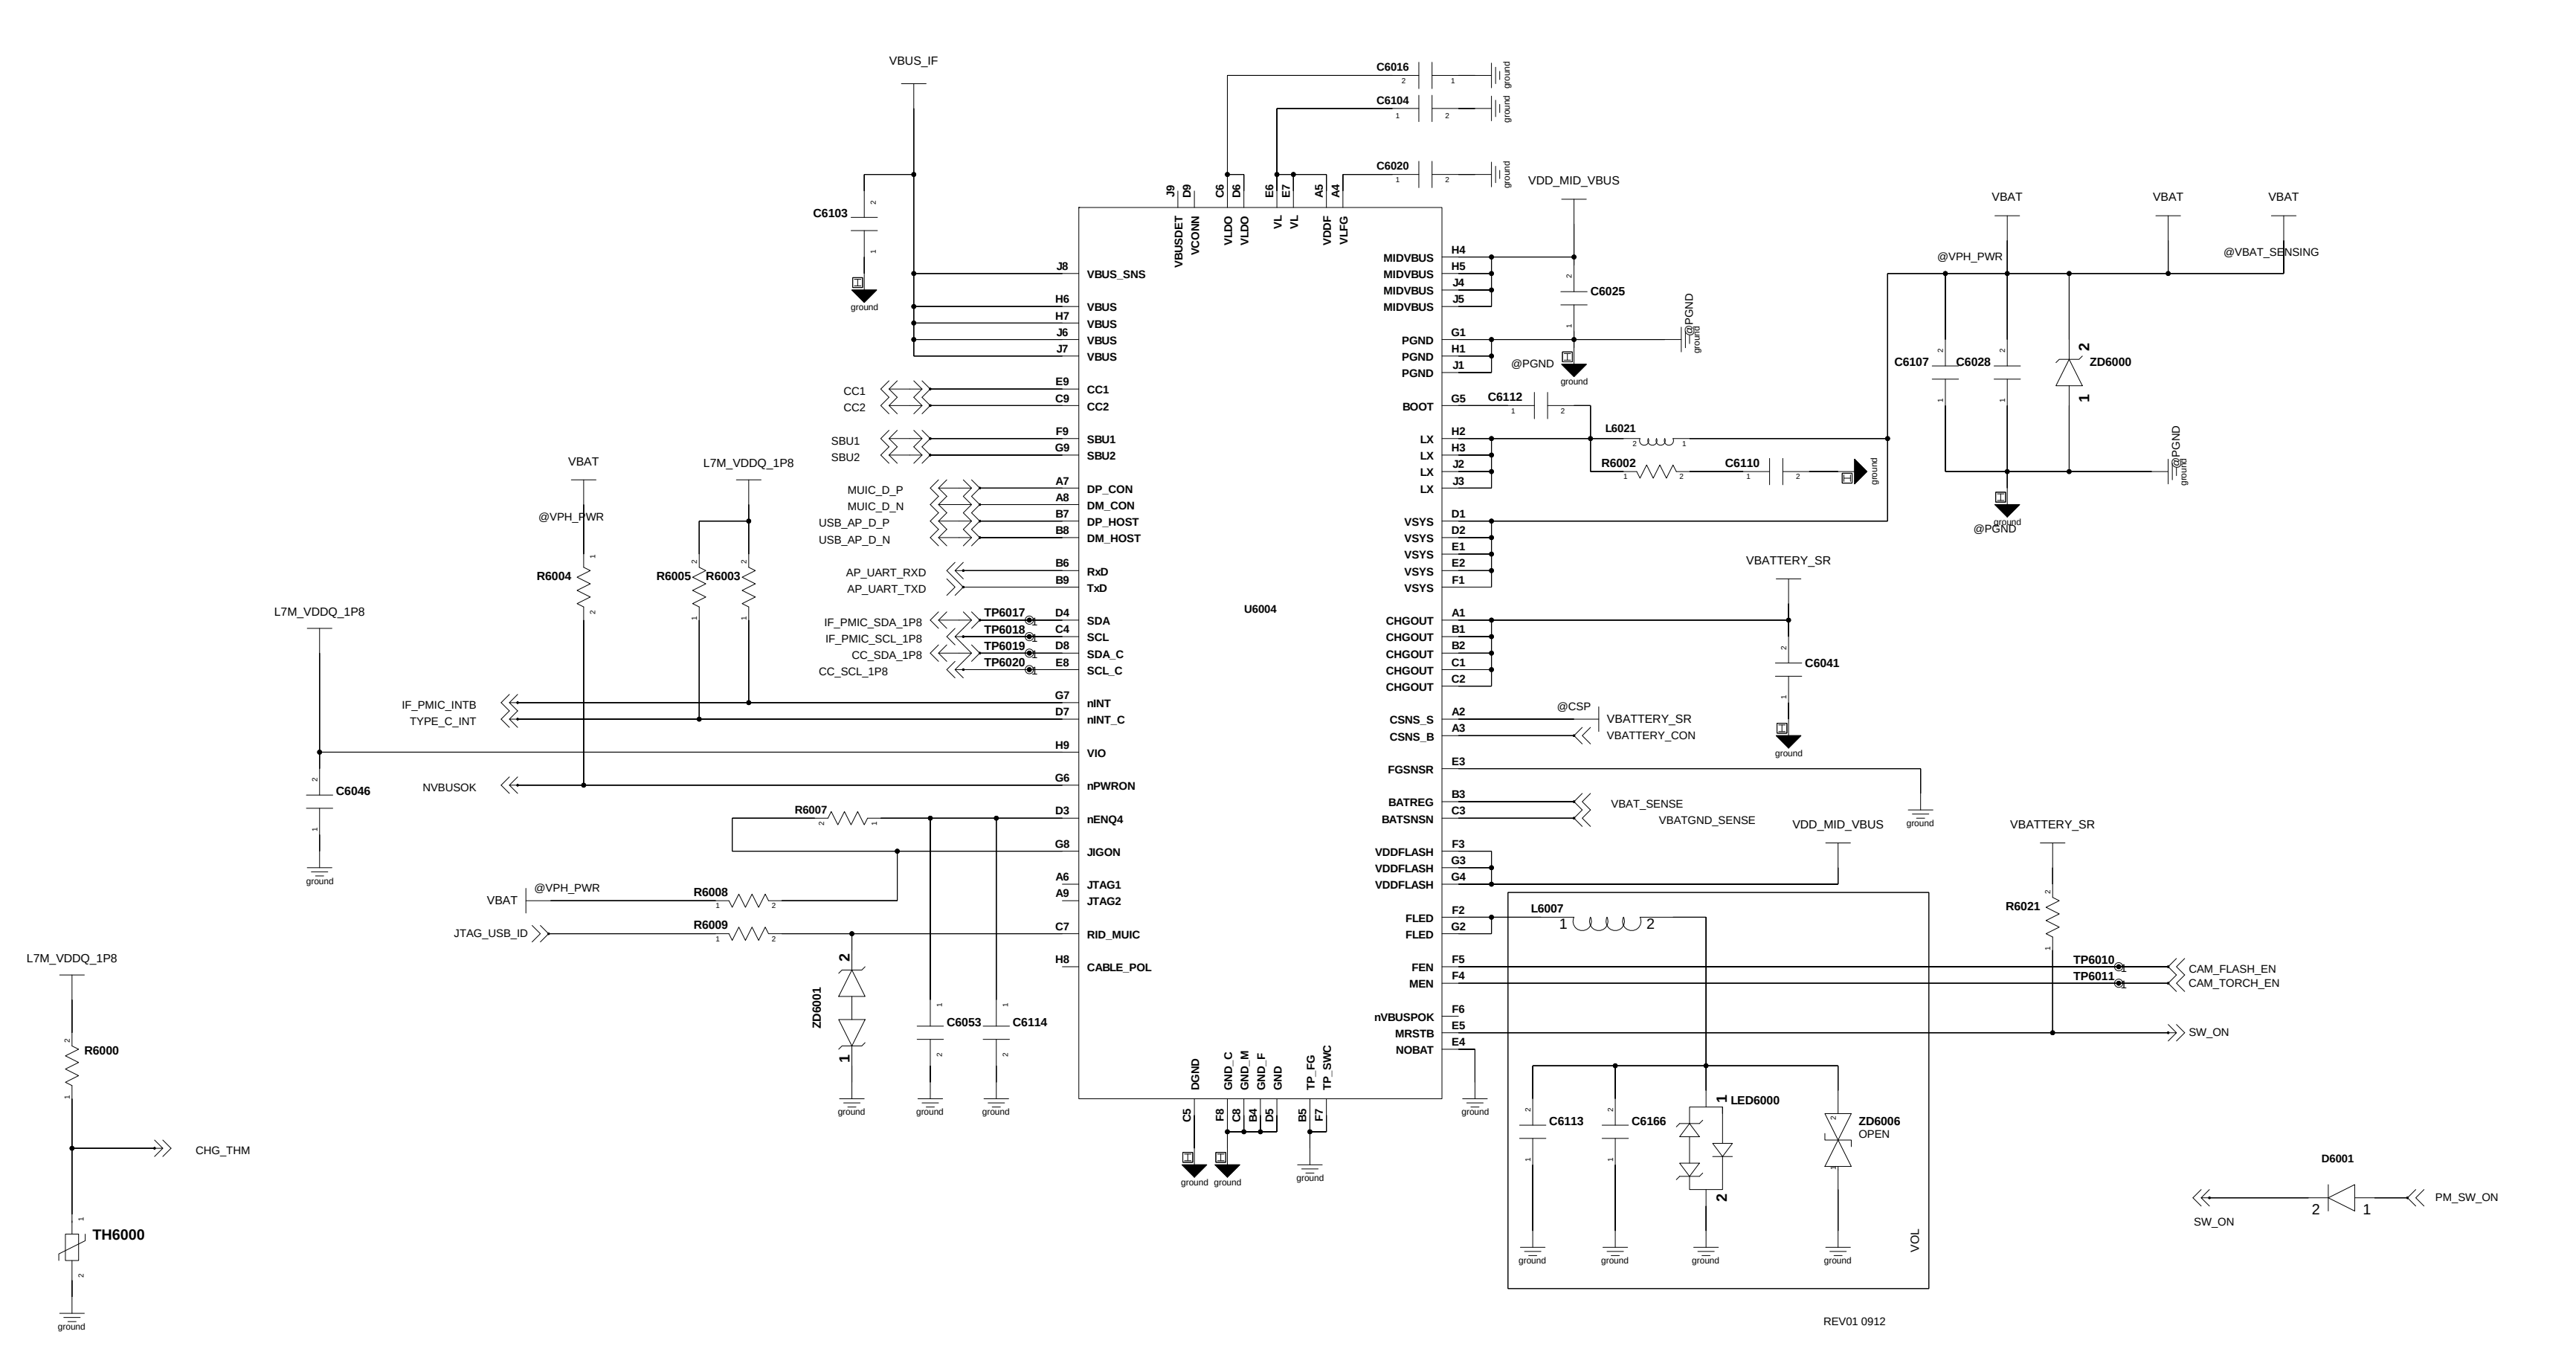
VBUS_IF
C6103
C6016 C6104 C6020
VDD_MID_VBUS
U6004
VBUS_SNS VBUS
VBUSDET VCONN VLDO VL VDDF VLFG
CC1 CC2 SBU1 SBU2
MUIC_D_P MUIC_D_N USB_AP_D_P USB_AP_D_N
DP_CON DM_CON DP_HOST DM_HOST
AP_UART_RXD AP_UART_TXD
RxD TxD
TP6017 TP6018 TP6019 TP6020
IF_PMIC_SDA_1P8 IF_PMIC_SCL_1P8 CC_SDA_1P8 CC_SCL_1P8
SDA SCL SDA_C SCL_C
VBAT
@VPH_PWR
L7M_VDDQ_1P8
R6004 R6005 R6003
IF_PMIC_INTB
TYPE_C_INT
nINT nINT_C VIO
C6046
NVBUSOK
nPWRON nENQ4 JIGON JTAG1 JTAG2 RID_MUIC CABLE_POL
R6007 R6008 R6009
JTAG_USB_ID
ZD6001
C6053 C6114
DGND GND_C GND_M GND_F GND TP_FG TP_SWC
MIDVBUS PGND BOOT LX VSYS CHGOUT CSNS_S CSNS_B FGSNSR BATREG BATSNSN VDDFLASH FLED FEN MEN nVBUSPOK MRSTB NOBAT
C6025 @PGND C6112 L6021 R6002 C6110
C6107 C6028 ZD6000
@VBAT_SENSING
VBATTERY_SR
C6041
@CSP
VBATTERY_CON
VBAT_SENSE
VBATGND_SENSE
L6007
R6021
TP6010 TP6011
CAM_FLASH_EN
CAM_TORCH_EN
SW_ON
C6113 C6166 LED6000 ZD6006 OPEN
VOL
REV01 0912
D6001
PM_SW_ON
L7M_VDDQ_1P8
R6000
CHG_THM
TH6000
ground

DIRECT CHARGER

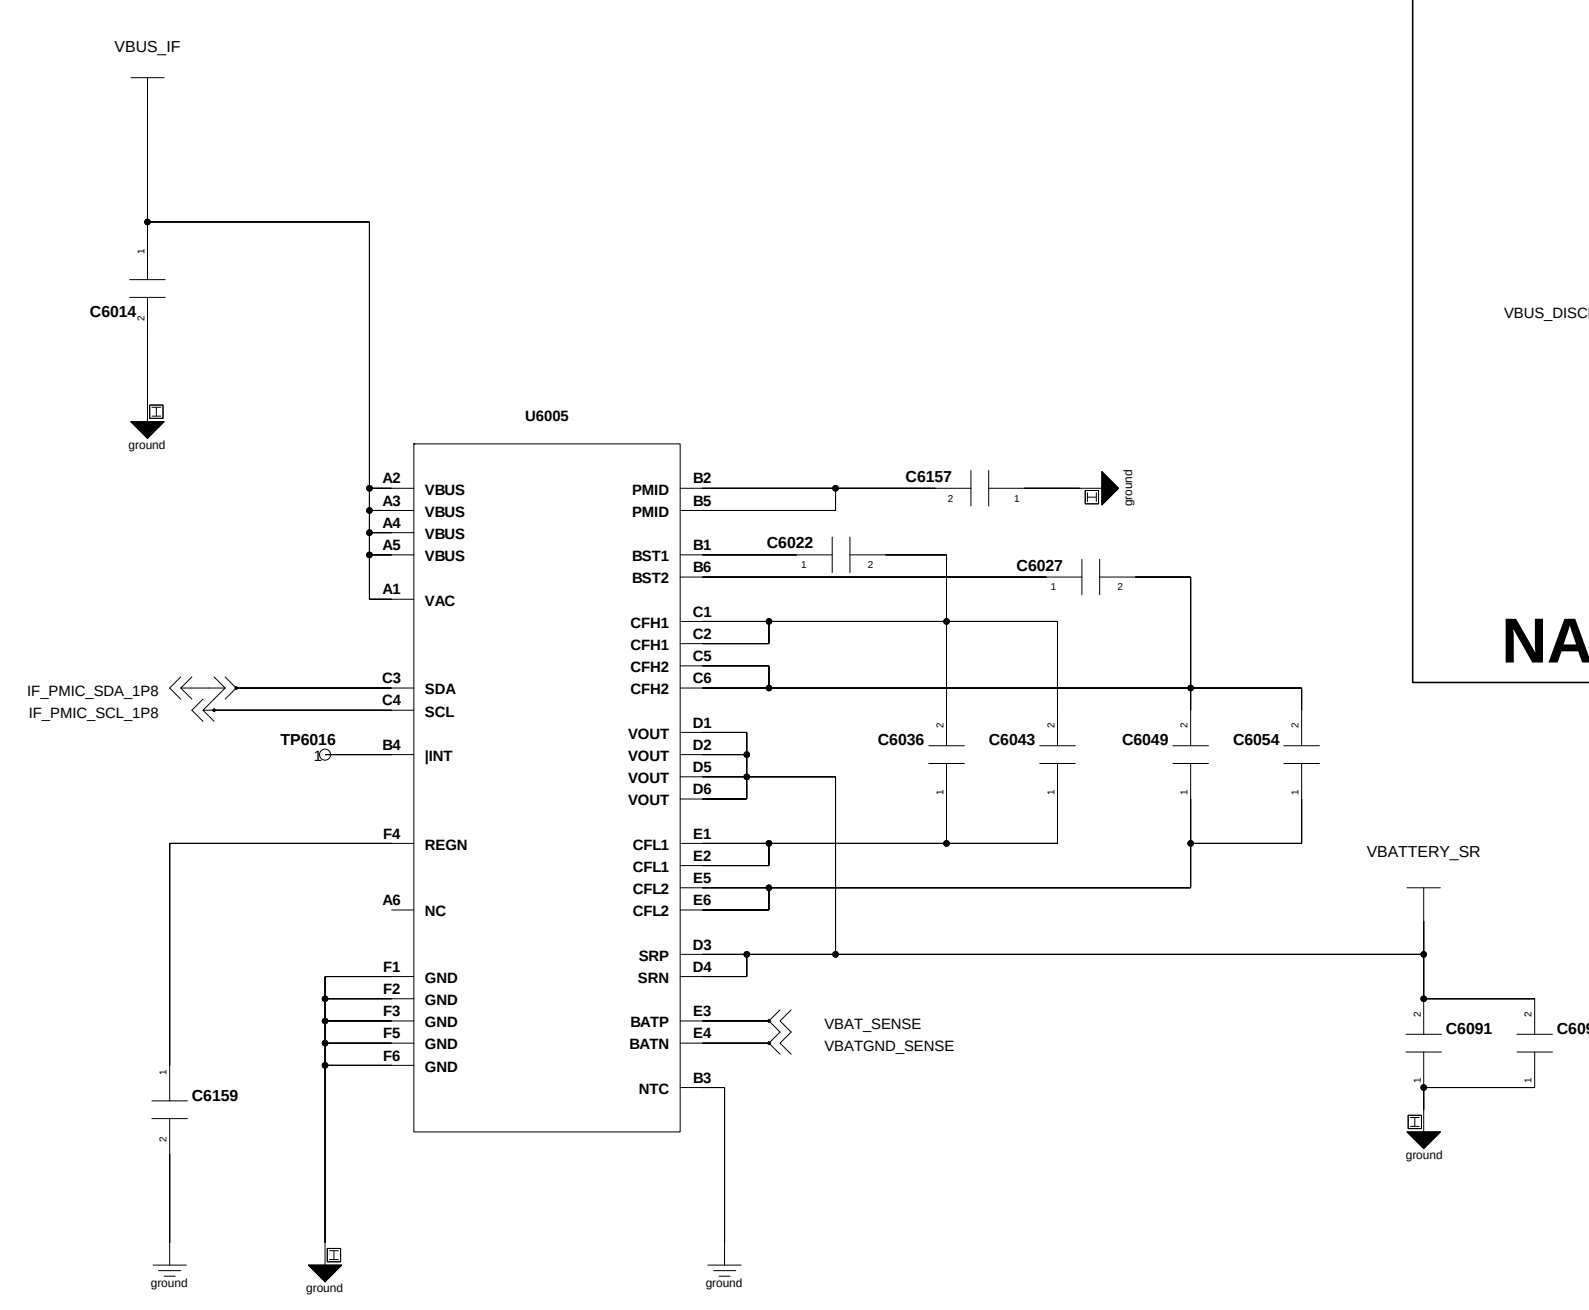
VBUS_IF
C6014
U6005
VBUS VAC
IF_PMIC_SDA_1P8
IF_PMIC_SCL_1P8
SDA SCL
TP6016
|INT REGN NC GND
PMID BST1 BST2 CFH1 CFH2 VOUT CFL1 CFL2 SRP SRN BATP BATN NTC
C6157 C6022 C6027 C6036 C6043 C6049 C6054
VBATTERY_SR
C6091 C6092
VBAT_SENSE
VBATGND_SENSE
C6159
ground

OVP

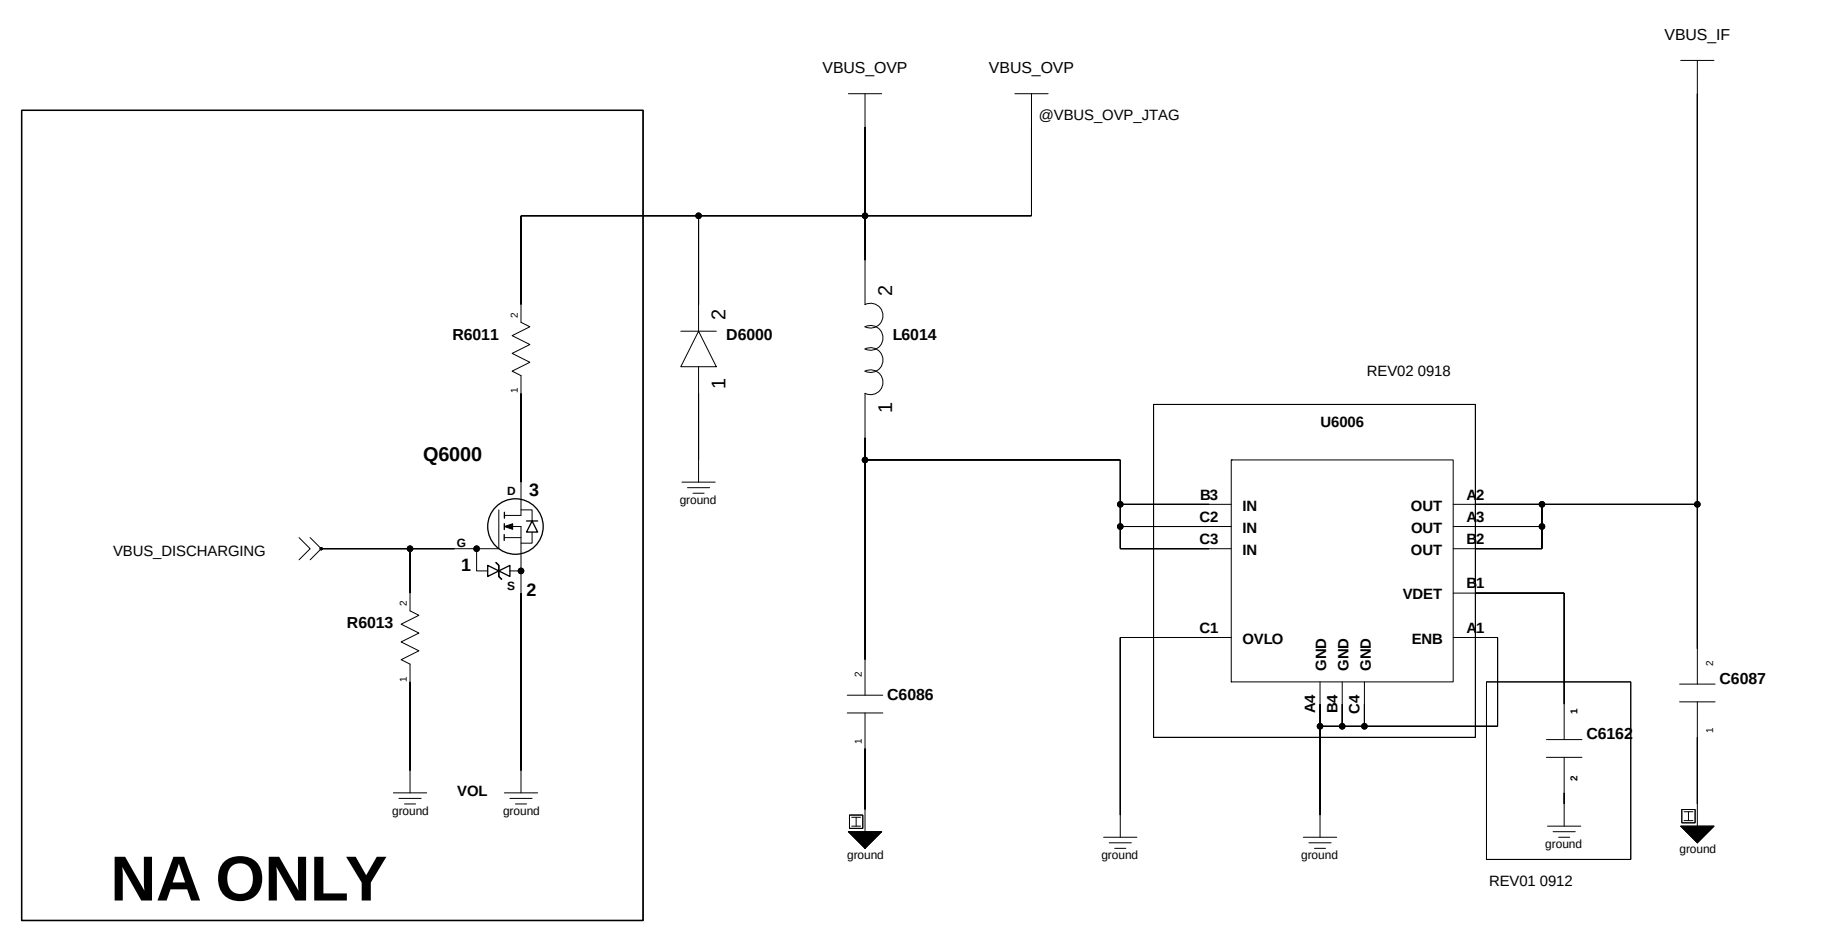
VBUS_OVP
@VBUS_OVP_JTAG
R6011
D6000
L6014
Q6000
VBUS_DISCHARGING
R6013
VOL
NA ONLY
REV02 0918
U6006
IN OUT VDET OVLO ENB GND
C6086 C6162 C6087
VBUS_IF
REV01 0912
ground

BATTERY CON

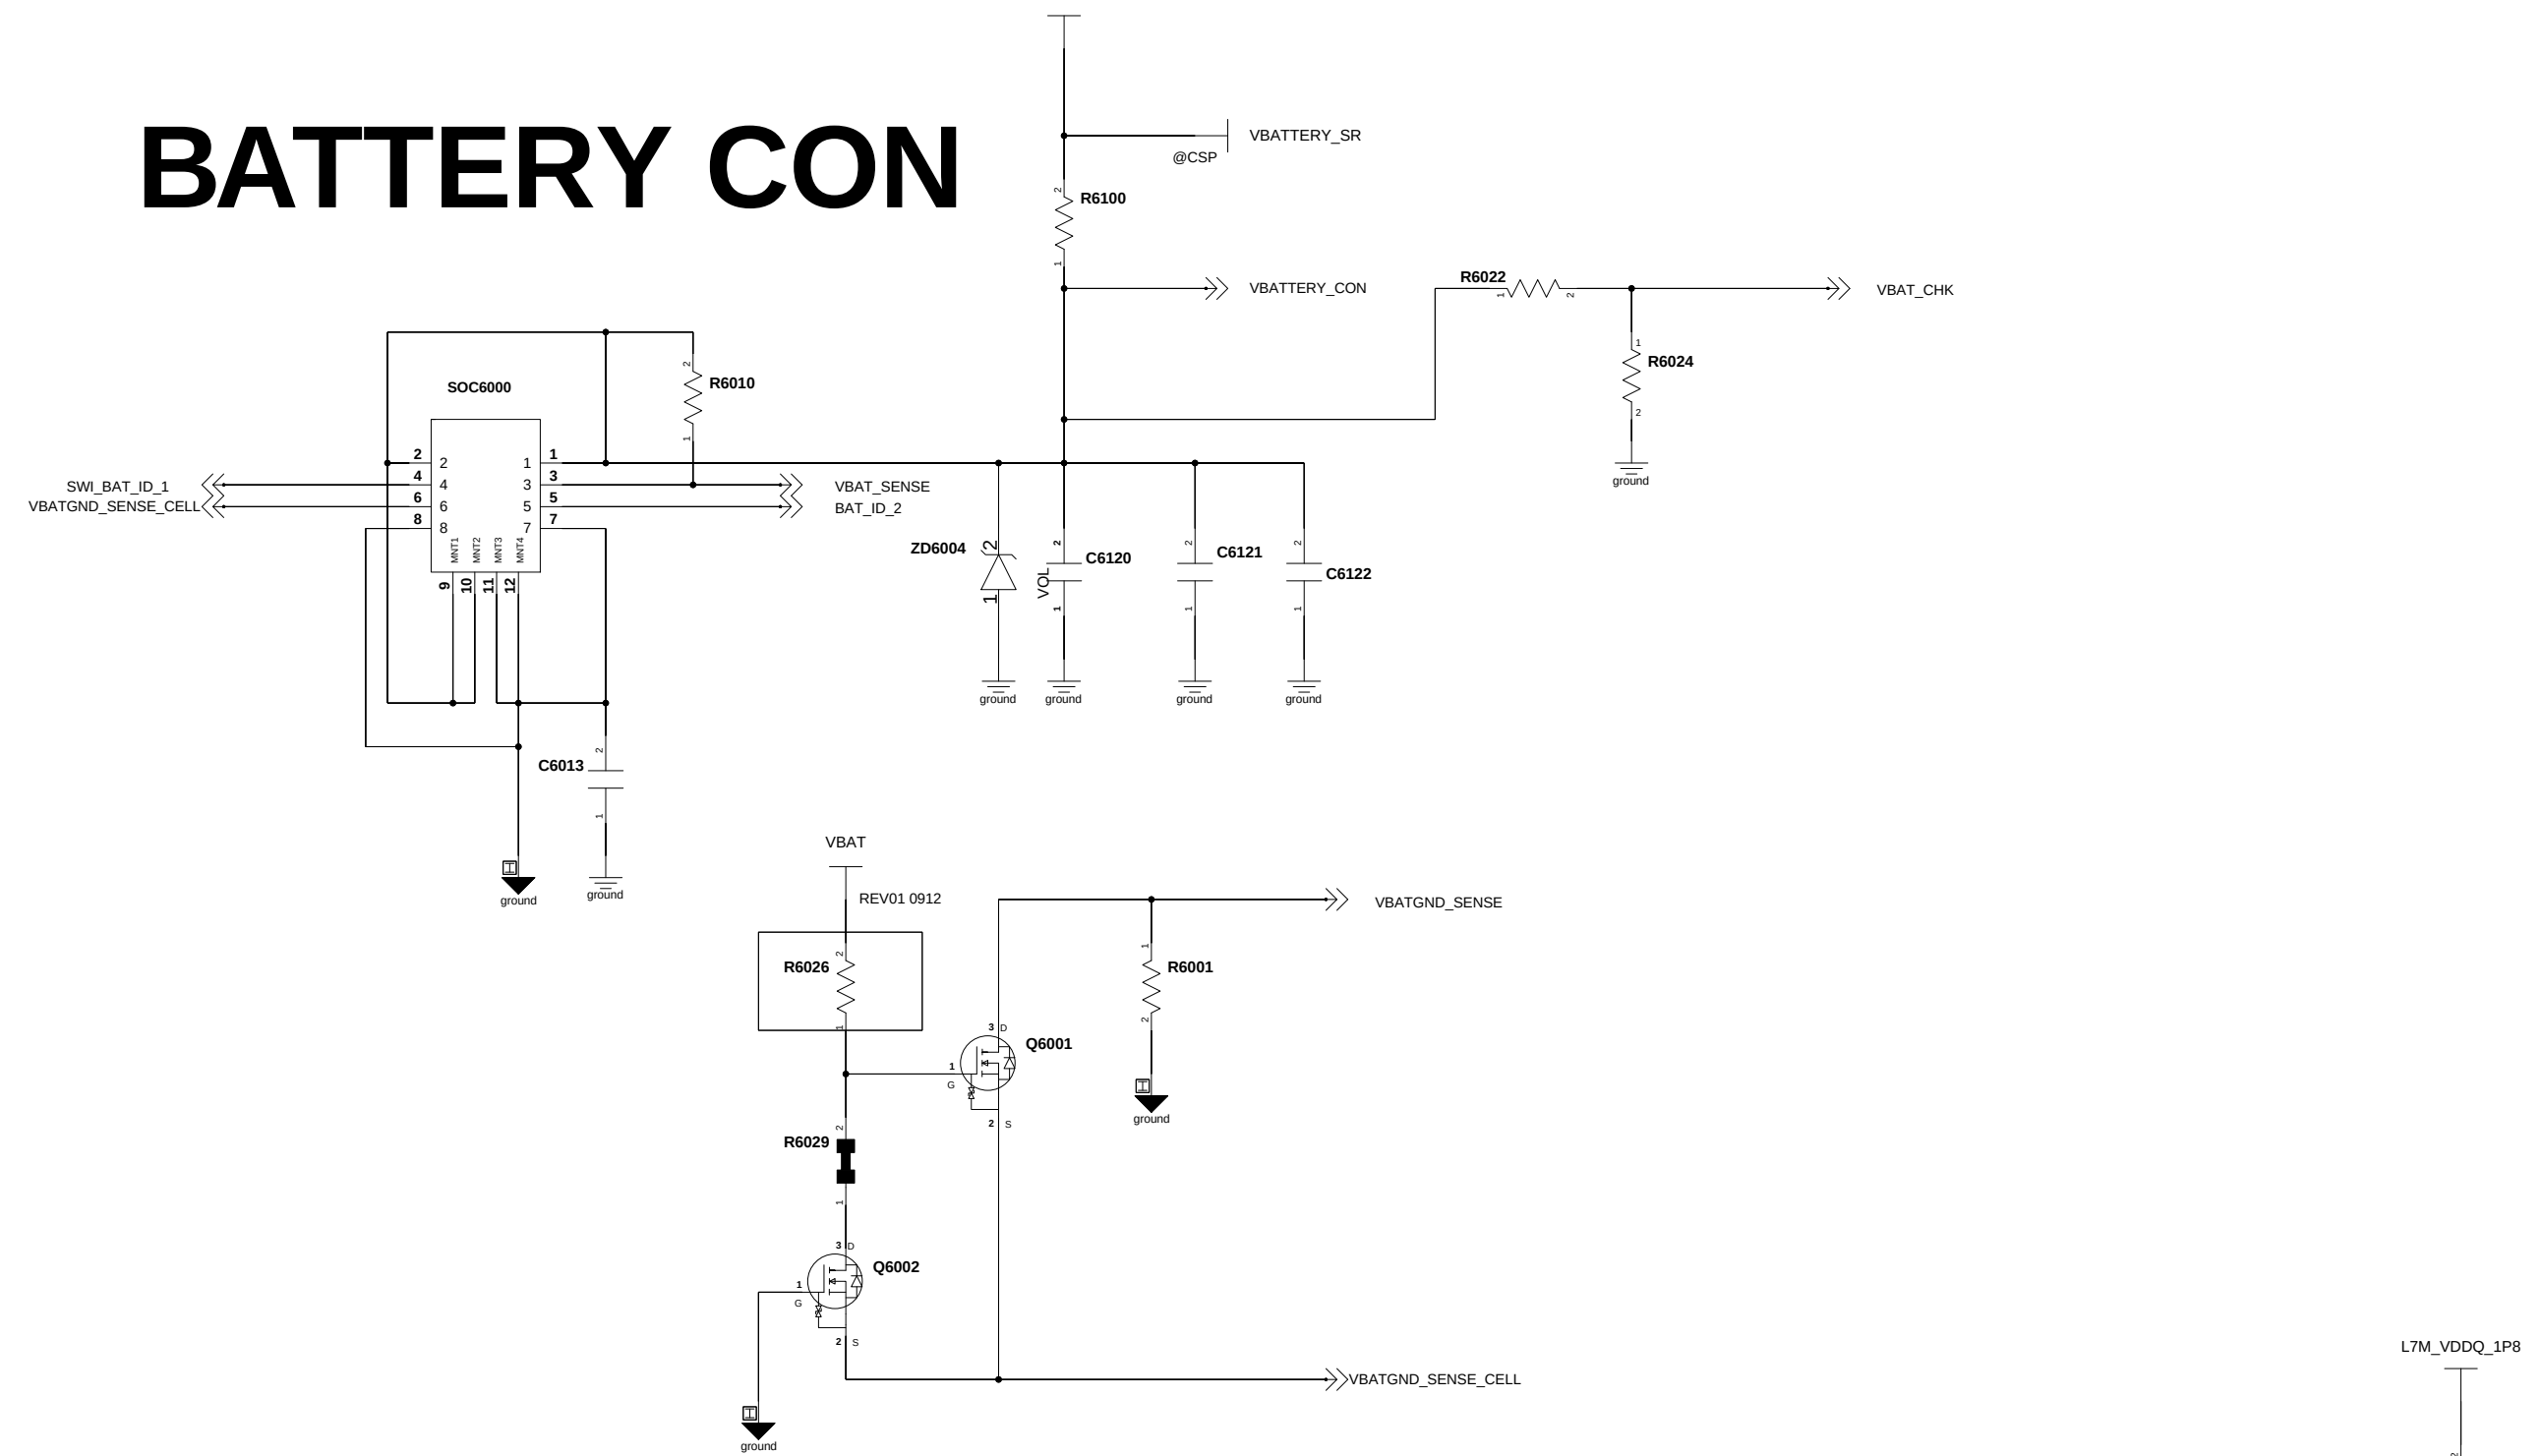
VBATTERY_SR
@CSP
R6100
VBATTERY_CON
R6022
VBAT_CHK
R6024
SOC6000
R6010
SWI_BAT_ID_1
VBATGND_SENSE_CELL
VBAT_SENSE
BAT_ID_2
ZD6004
C6120 C6121 C6122
C6013
VBAT
REV01 0912
R6026
Q6001
R6001
VBATGND_SENSE
R6029
Q6002
VBATGND_SENSE_CELL
ground

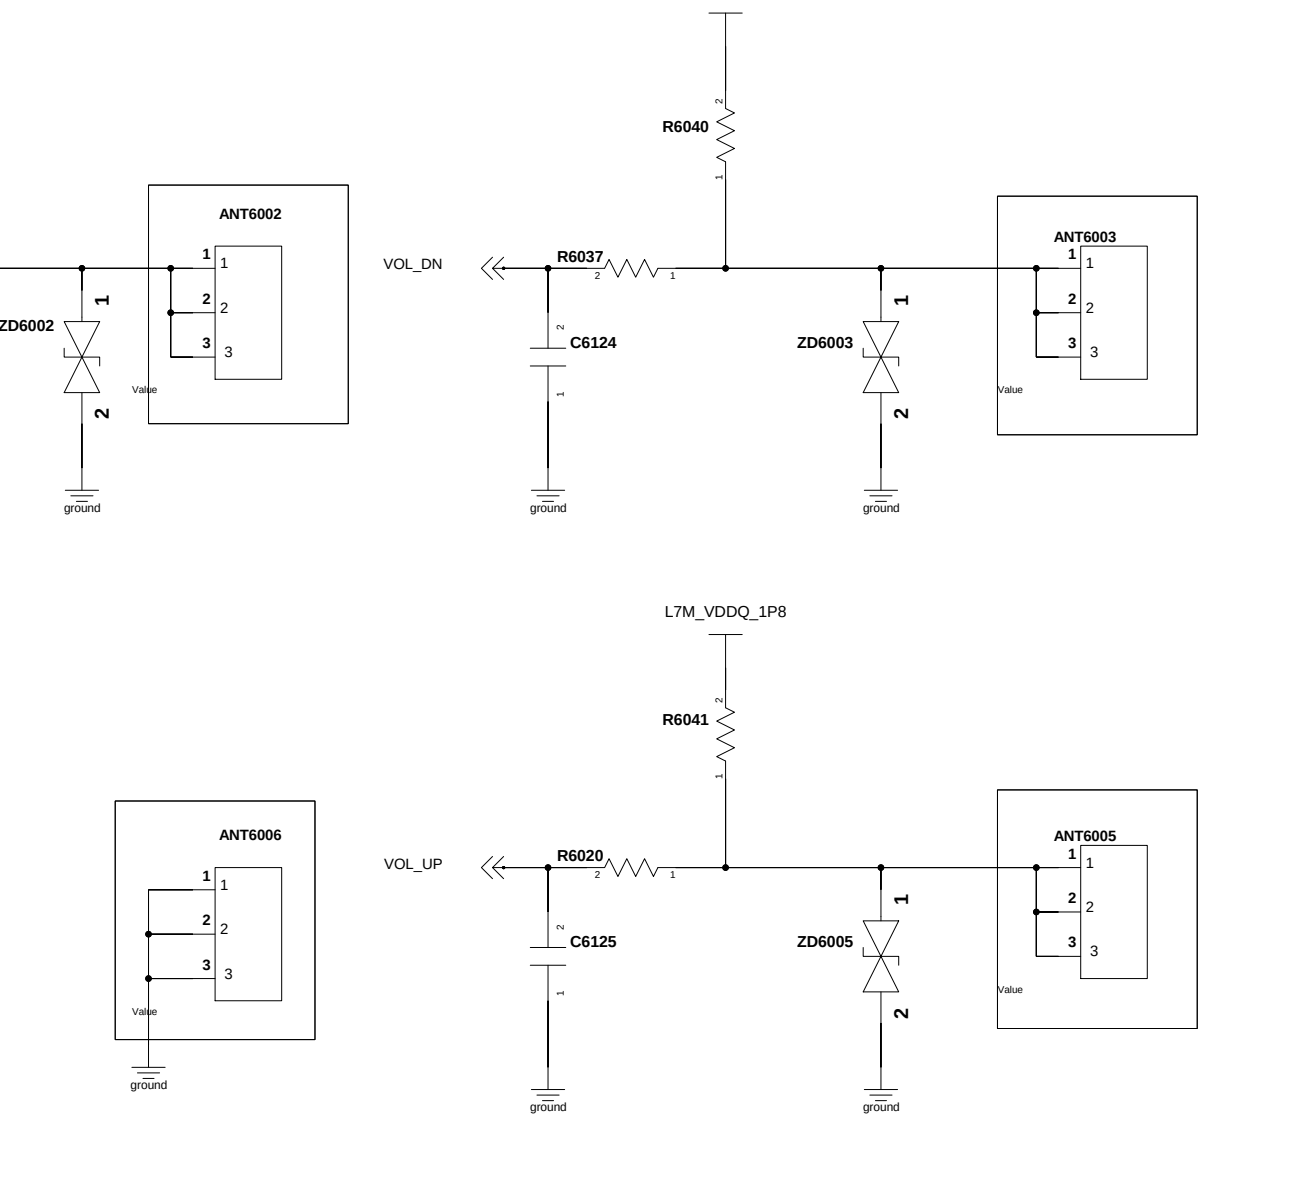
L7M_VDDQ_1P8
SW_ON
R6036
C6123
ZD6002
ANT6002
VOL_DN
R6037
R6040
C6124
ZD6003
ANT6003
VOL_UP
R6020
R6041
C6125
ZD6005
ANT6005
ANT6006
Value
ground

POWER & VOL KEY

Engineer:	A35
Drawn by:	
R&D CHK:	TITLE: POWER/MOT/KEY
DOC CTRL CHK:	Size:
MFG ENGR CHK:	
QA CHK:	REV: Drawing Number:

Changed by: Date Changed: Time Changed:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

AUDIO & SENSOR PART

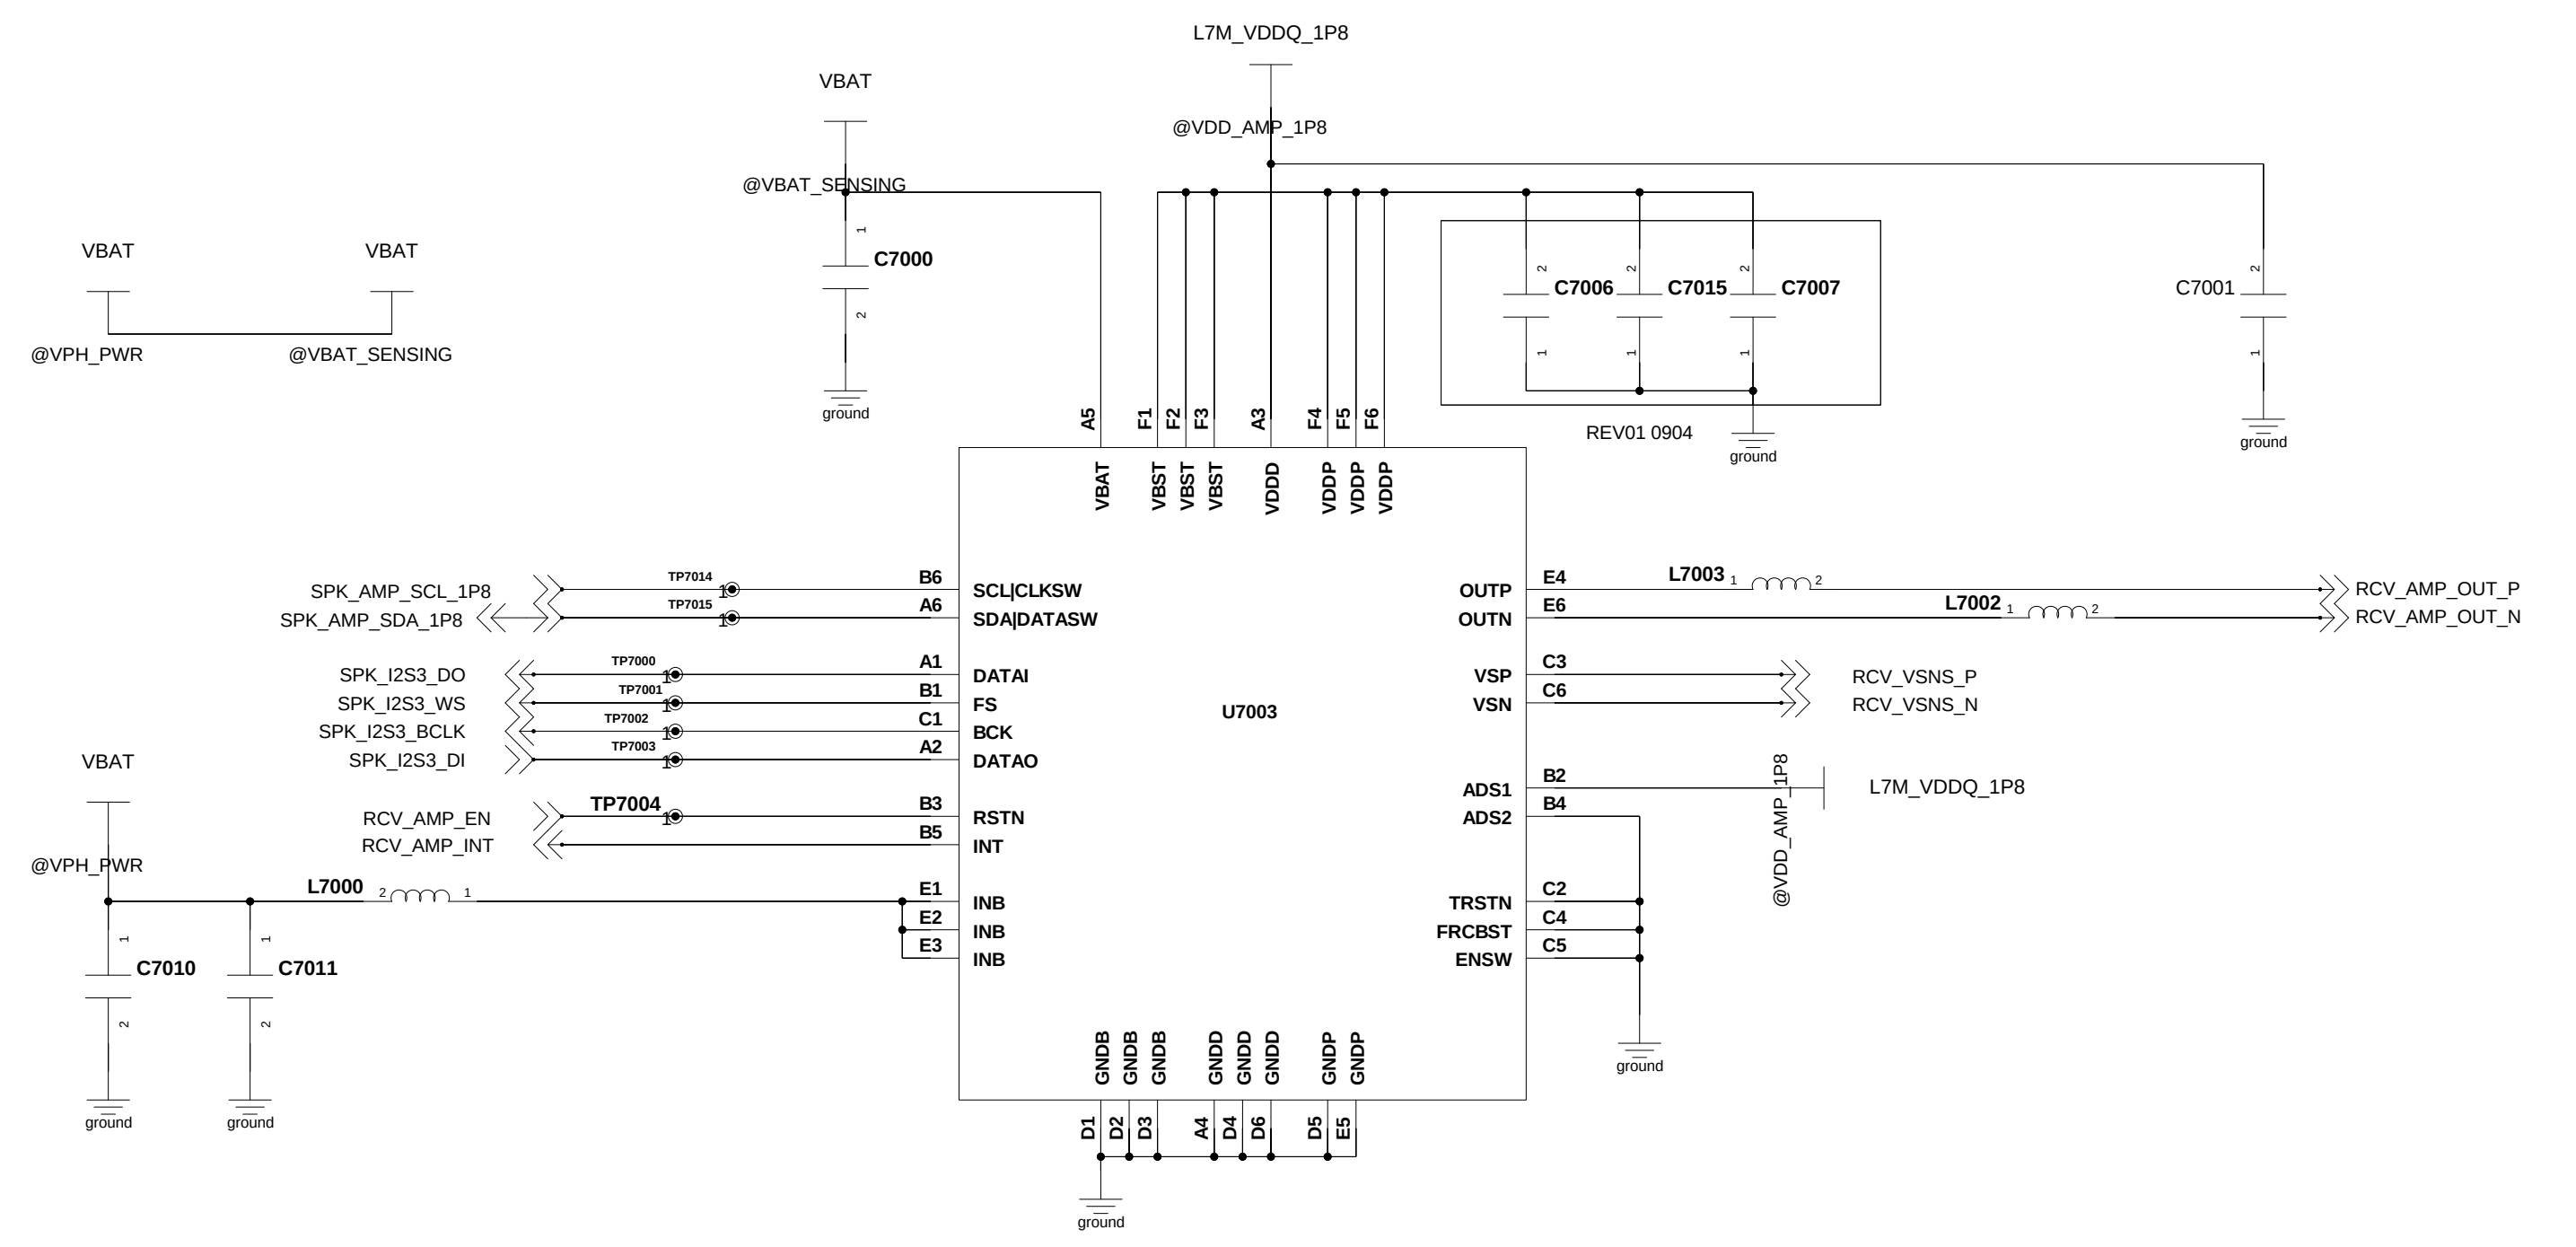
VBAT
@VPH_PWR
@VBAT_SENSING
L7M_VDDQ_1P8
@VDD_AMP_1P8
C7000
C7006
C7015
C7007
REV01 0904
C7001
U7003
SPK_AMP_SCL_1P8
SPK_AMP_SDA_1P8
TP7014
TP7015
B6 SCL|CLKSW
A6 SDA|DATASW
SPK_I2S3_DO
SPK_I2S3_WS
SPK_I2S3_BCLK
SPK_I2S3_DI
TP7000
TP7001
TP7002
TP7003
A1 DATAI
B1 FS
C1 BCK
A2 DATAO
RCV_AMP_EN
RCV_AMP_INT
TP7004
B3 RSTN
B5 INT
L7000
C7010
C7011
E1 INB
E2 INB
E3 INB
A5 VBAT
F1 F2 F3 VBST
A3 VDDD
F4 F5 F6 VDDP
E4 OUTP
E6 OUTN
L7003
L7002
RCV_AMP_OUT_P
RCV_AMP_OUT_N
C3 VSP
C6 VSN
RCV_VSNS_P
RCV_VSNS_N
B2 ADS1
B4 ADS2
@VDD_AMP_1P8
L7M_VDDQ_1P8
C2 TRSTN
C4 FRCBST
C5 ENSW
D1 D2 D3 GNDB
A4 D4 D6 GNDD
D5 E5 GNDP
ground

RCV AMP

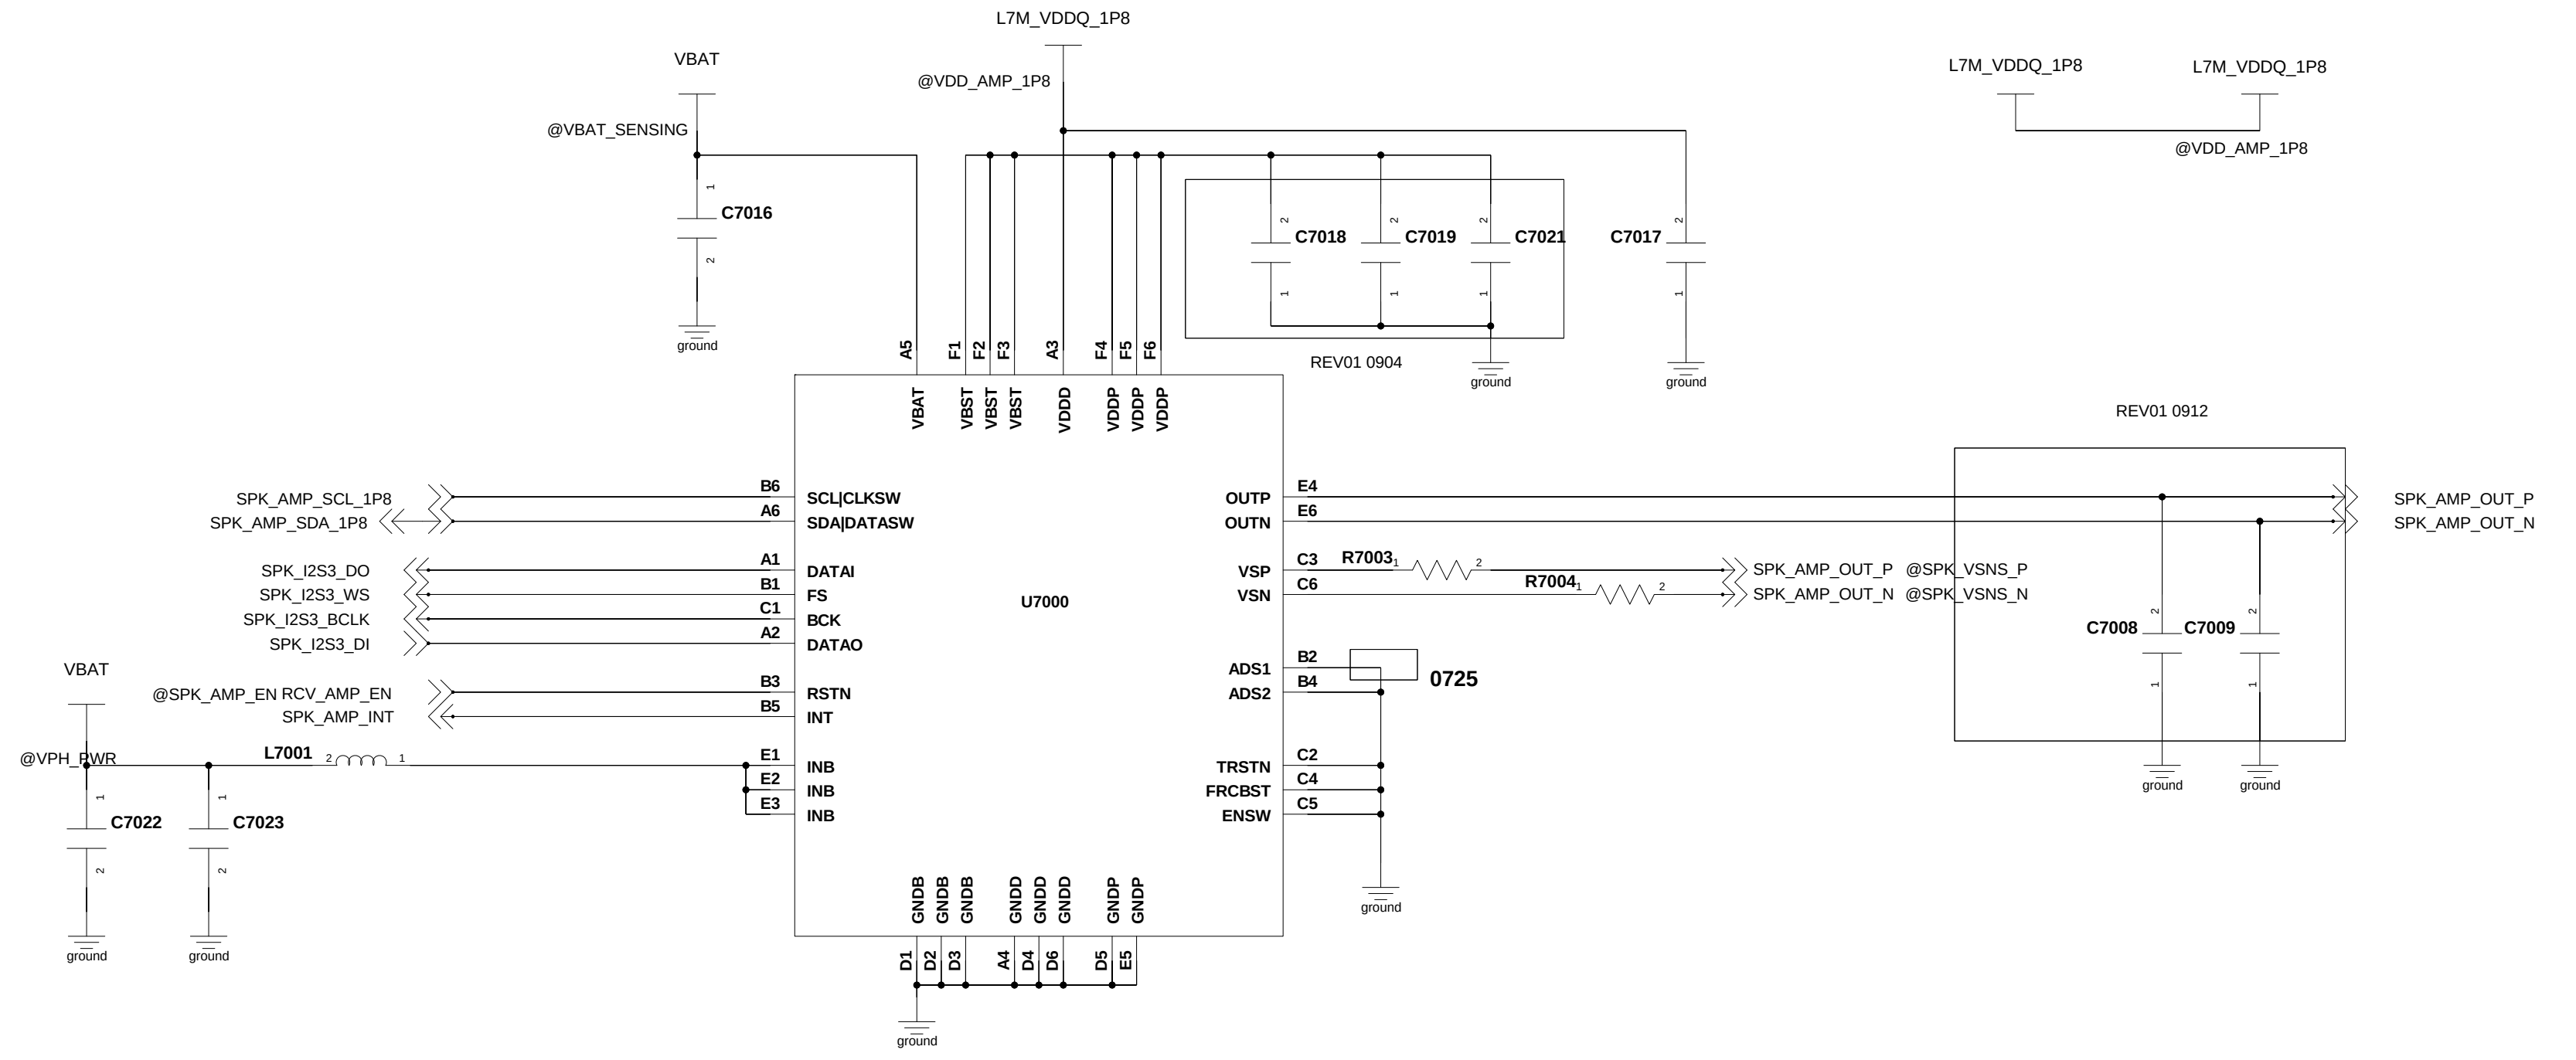
VBAT
@VBAT_SENSING
C7016
L7M_VDDQ_1P8
@VDD_AMP_1P8
C7018
C7019
C7021
C7017
REV01 0904
L7M_VDDQ_1P8
L7M_VDDQ_1P8
@VDD_AMP_1P8
U7000
SPK_AMP_SCL_1P8
SPK_AMP_SDA_1P8
B6 SCL|CLKSW
A6 SDA|DATASW
SPK_I2S3_DO
SPK_I2S3_WS
SPK_I2S3_BCLK
SPK_I2S3_DI
A1 DATAI
B1 FS
C1 BCK
A2 DATAO
@SPK_AMP_EN RCV_AMP_EN
SPK_AMP_INT
B3 RSTN
B5 INT
VBAT
@VPH_PWR
L7001
C7022
C7023
E1 E2 E3 INB
A5 VBAT
F1 F2 F3 VBST
A3 VDDD
F4 F5 F6 VDDP
E4 OUTP
E6 OUTN
C3 VSP
C6 VSN
R7003
R7004
SPK_AMP_OUT_P @SPK_VSNS_P
SPK_AMP_OUT_N @SPK_VSNS_N
B2 ADS1
B4 ADS2
0725
C2 TRSTN
C4 FRCBST
C5 ENSW
D1 D2 D3 GNDB
A4 D4 D6 GNDD
D5 E5 GNDP
REV01 0912
C7008
C7009
SPK_AMP_OUT_P
SPK_AMP_OUT_N
ground

SPK AMP

DUAL SIM / T-FLASH (3in2)

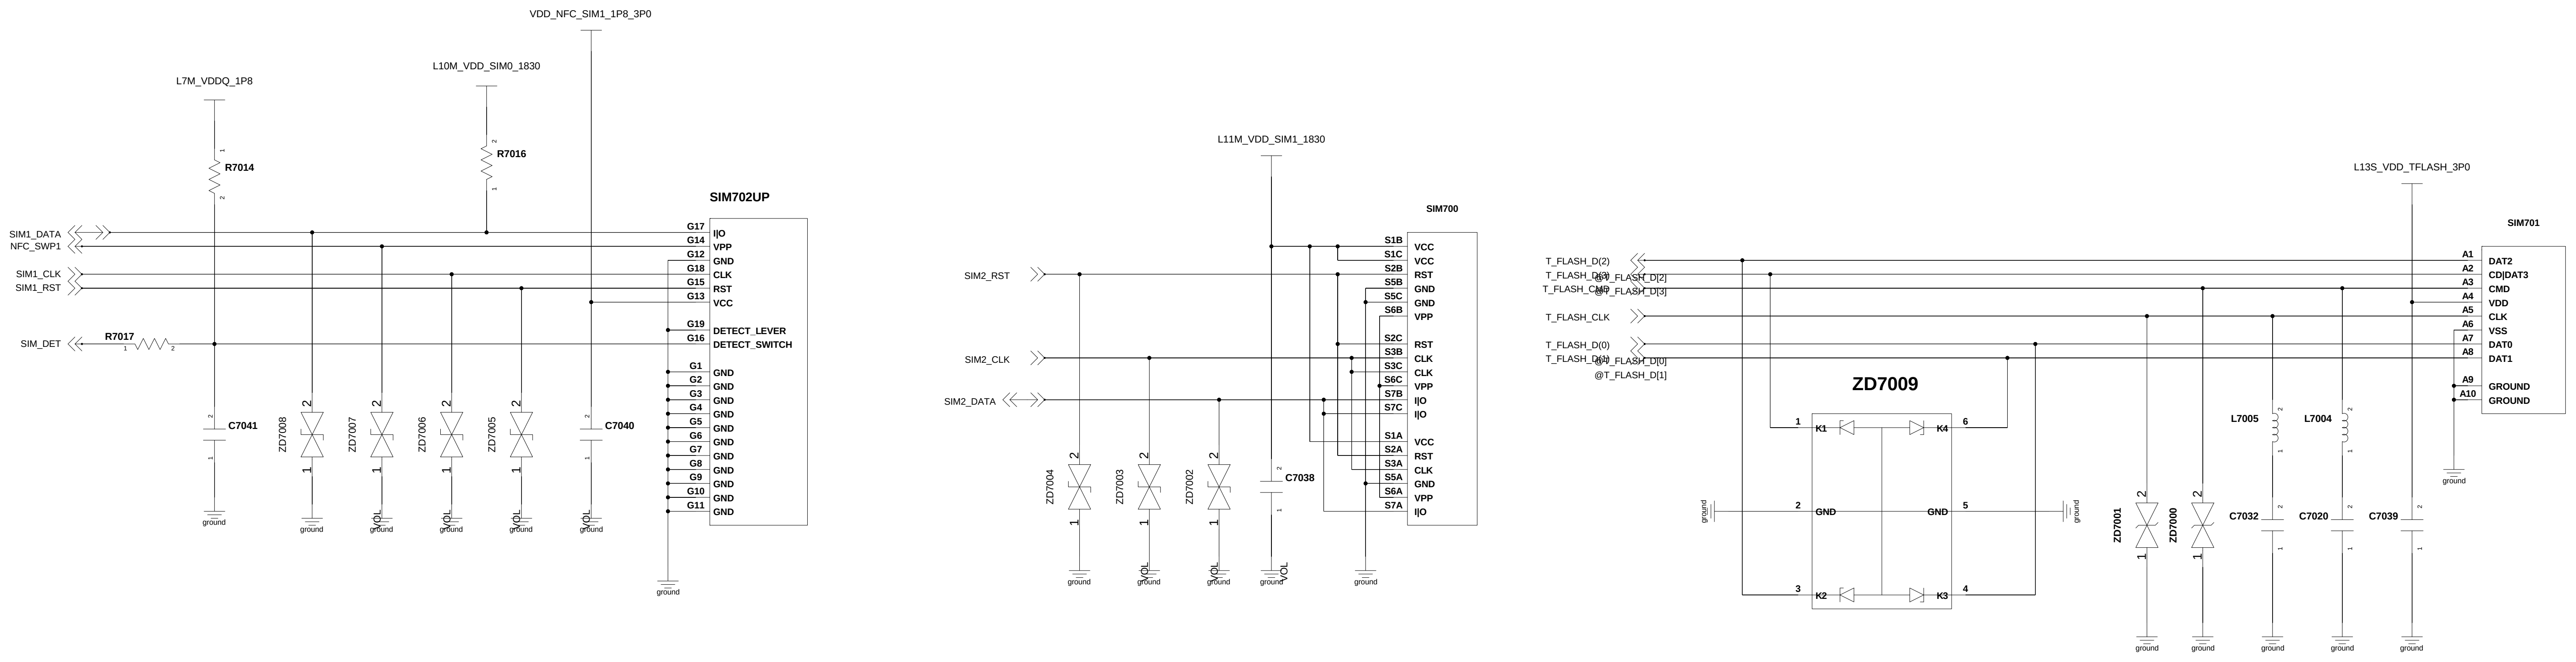
VDD_NFC_SIM1_1P8_3P0
L7M_VDDQ_1P8
L10M_VDD_SIM0_1830
R7014
R7016
SIM702UP
SIM1_DATA
NFC_SWP1
SIM1_CLK
SIM1_RST
SIM_DET
R7017
G17 I|O
G14 VPP
G12 GND
G18 CLK
G15 RST
G13 VCC
G19 DETECT_LEVER
G16 DETECT_SWITCH
G1 G2 G3 G4 G5 G6 G7 G8 G9 G10 G11 GND
C7041
ZD7008
ZD7007
ZD7006
ZD7005
C7040
L11M_VDD_SIM1_1830
SIM700
SIM2_RST
SIM2_CLK
SIM2_DATA
S1B VCC
S1C VCC
S2B RST
S5B GND
S5C GND
S6B VPP
S2C RST
S3B CLK
S3C CLK
S6C VPP
S7B I|O
S7C I|O
S1A VCC
S2A RST
S3A CLK
S5A GND
S6A VPP
S7A I|O
ZD7004
ZD7003
ZD7002
C7038
T_FLASH_D(2)
T_FLASH_D(3)
T_FLASH_CMD
T_FLASH_CLK
T_FLASH_D(0)
T_FLASH_D(1)
@T_FLASH_D[2]
@T_FLASH_D[3]
@T_FLASH_D[0]
@T_FLASH_D[1]
ZD7009
K1 K2 K3 K4 GND
L13S_VDD_TFLASH_3P0
SIM701
A1 DAT2
A2 CD|DAT3
A3 CMD
A4 VDD
A5 CLK
A6 VSS
A7 DAT0
A8 DAT1
A9 A10 GROUND
ZD7001
ZD7000
L7005
L7004
C7032
C7020
C7039
ground

Stacked Dual SIM SOCKET (Reverse)

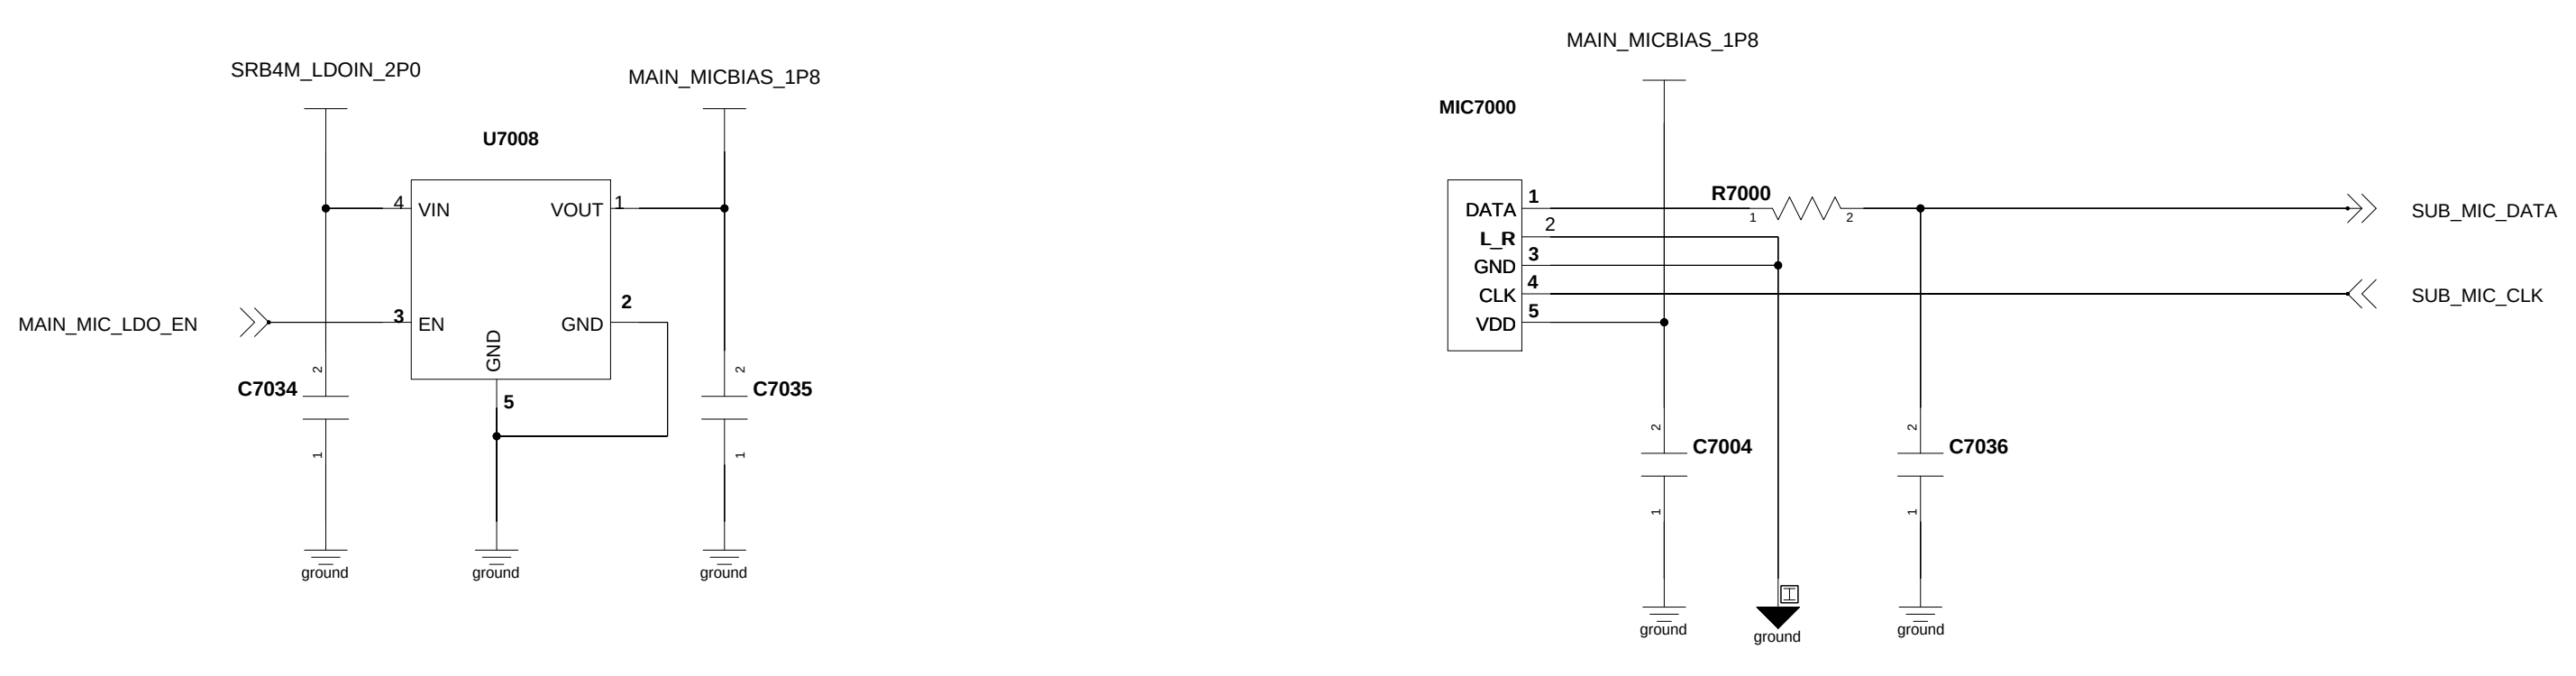
SRB4M_LDOIN_2P0
MAIN_MICBIAS_1P8
U7008
4 VIN
1 VOUT
3 EN
2 GND
5 GND
MAIN_MIC_LDO_EN
C7034
C7035
MAIN_MICBIAS_1P8
MIC7000
1 DATA
2 L_R
3 GND
4 CLK
5 VDD
R7000
SUB_MIC_DATA
SUB_MIC_CLK
C7004
C7036
ground

2nd MIC

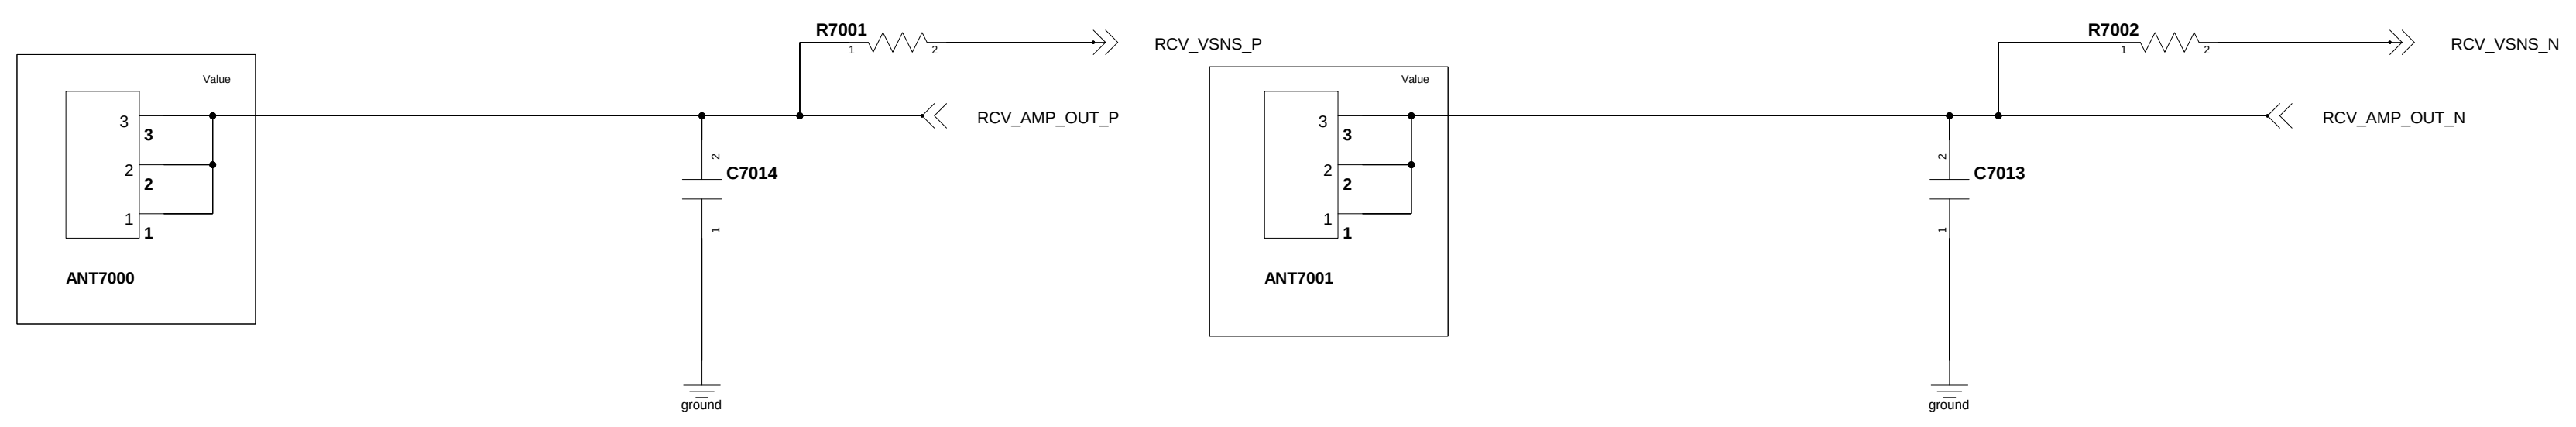
ANT7000
ANT7001
Value
R7001
RCV_VSNS_P
RCV_AMP_OUT_P
C7014
R7002
RCV_VSNS_N
RCV_AMP_OUT_N
C7013
ground

RCV CONTACT

SENSOR

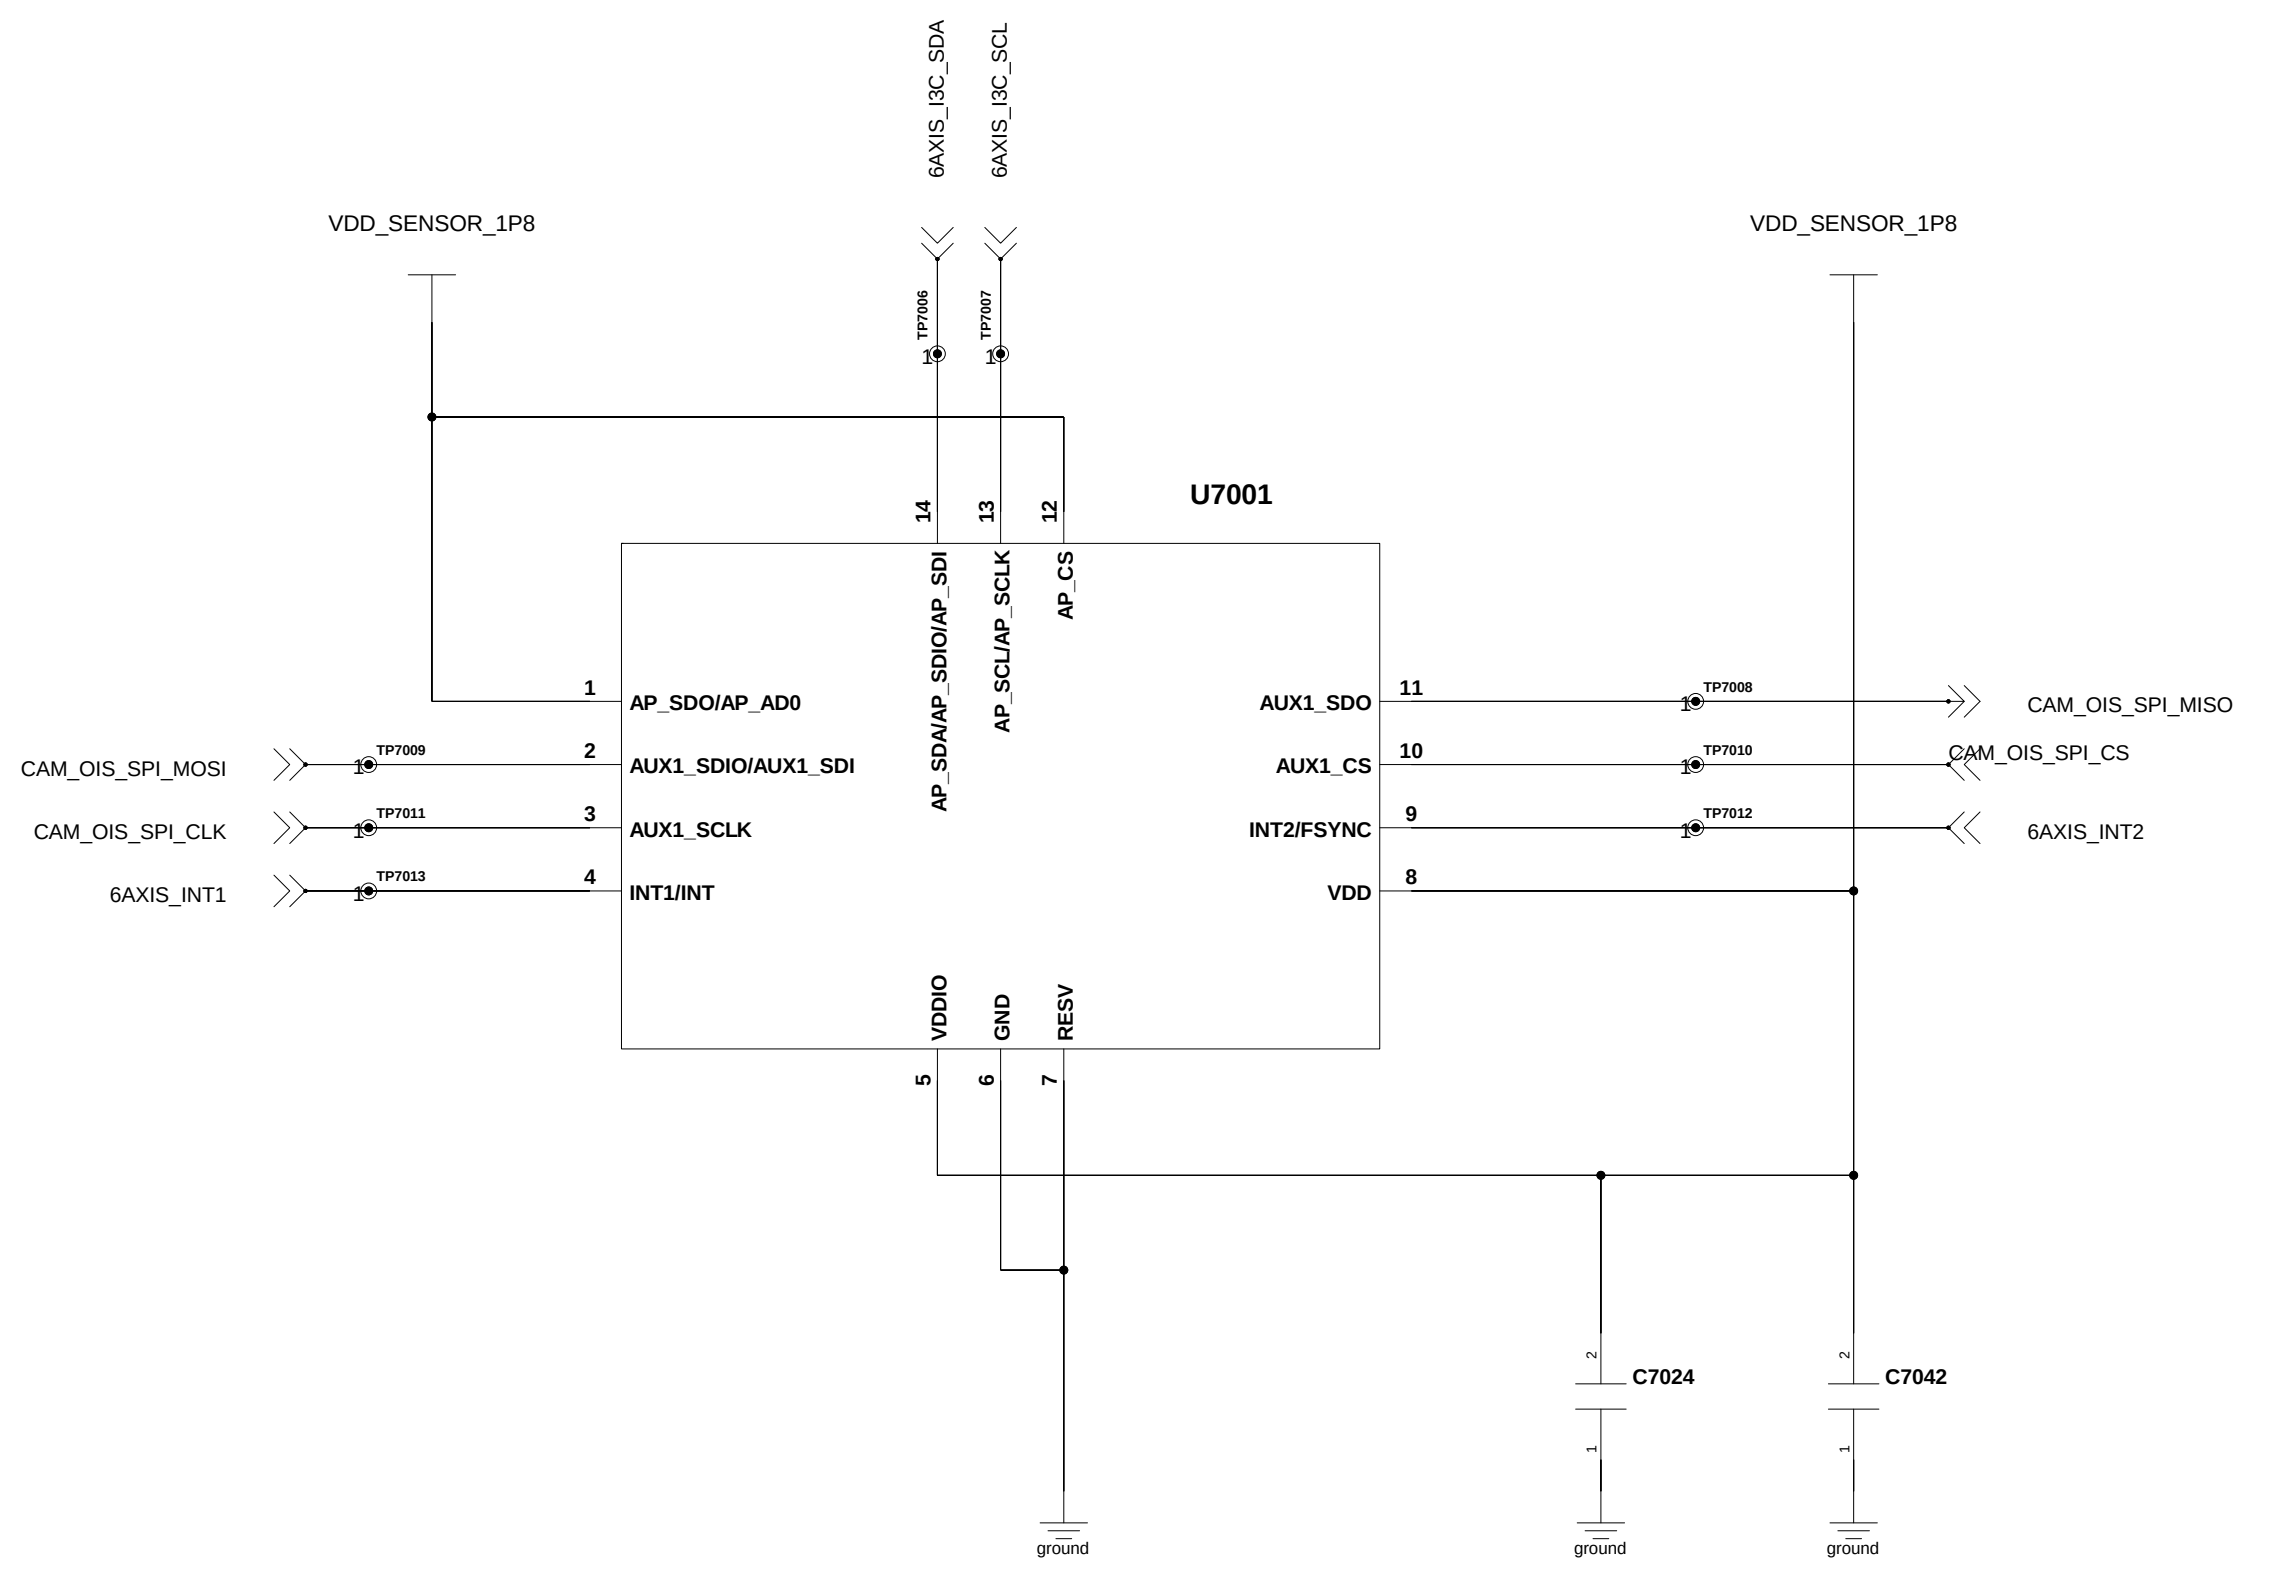
VDD_SENSOR_1P8
6AXIS_I3C_SDA
6AXIS_I3C_SCL
TP7006
TP7007
U7001
14 AP_SDA/AP_SDIO/AP_SDI
13 AP_SCL/AP_SCLK
12 AP_CS
1 AP_SDO/AP_AD0
2 AUX1_SDIO/AUX1_SDI
3 AUX1_SCLK
4 INT1/INT
11 AUX1_SDO
10 AUX1_CS
9 INT2/FSYNC
8 VDD
5 VDDIO
6 GND
7 RESV
CAM_OIS_SPI_MOSI
CAM_OIS_SPI_CLK
6AXIS_INT1
TP7009
TP7011
TP7013
TP7008
TP7010
TP7012
CAM_OIS_SPI_MISO
CAM_OIS_SPI_CS
6AXIS_INT2
C7024
C7042
ground

ACC&GYRO SENSOR

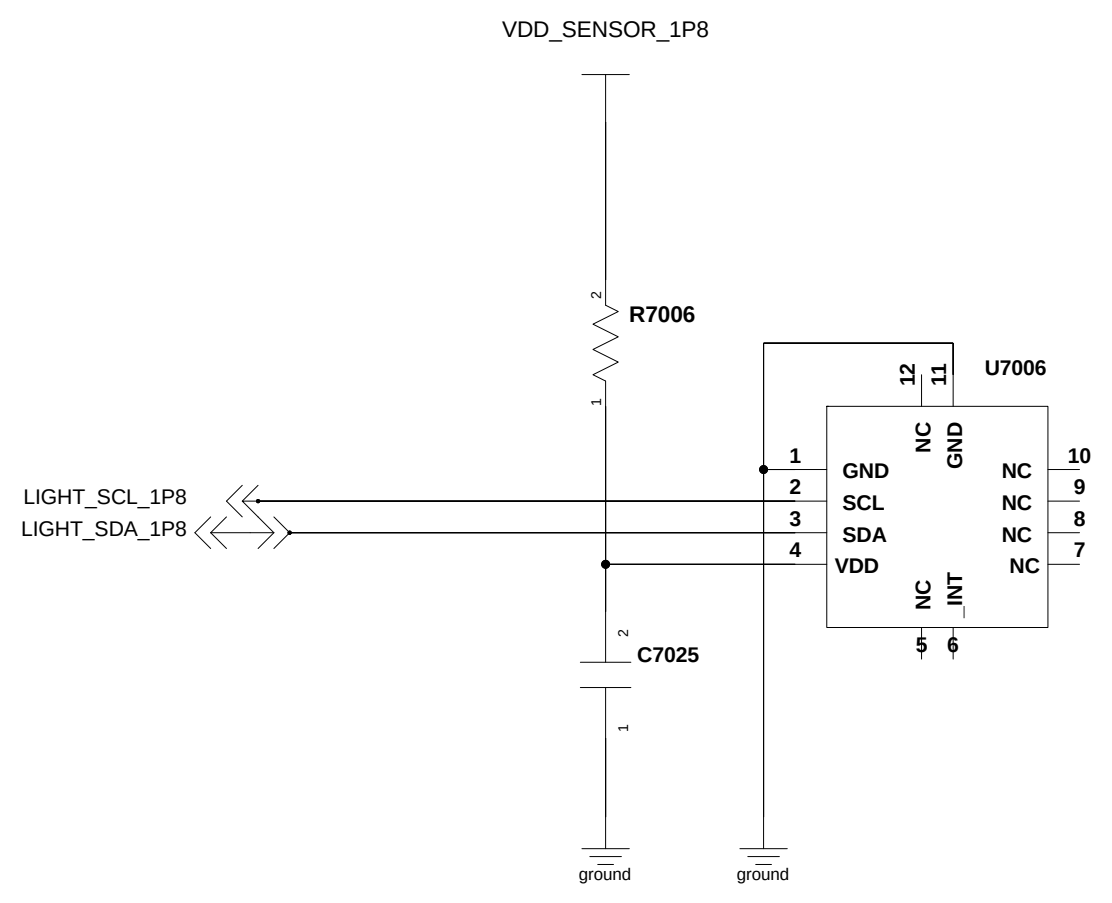
VDD_SENSOR_1P8
R7006
U7006
LIGHT_SCL_1P8
LIGHT_SDA_1P8
1 GND
2 SCL
3 SDA
4 VDD
10 9 8 7 NC
12 NC
11 GND
5 NC
6 INT
C7025
ground

AMBIENT SENSOR

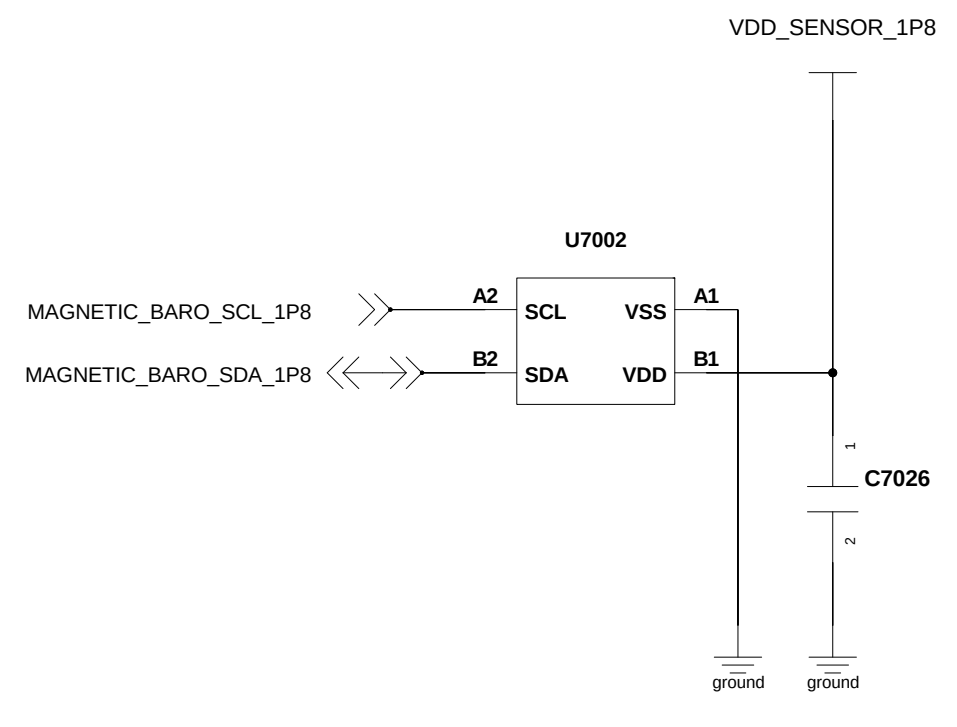
VDD_SENSOR_1P8
U7002
MAGNETIC_BARO_SCL_1P8
MAGNETIC_BARO_SDA_1P8
A2 SCL
B2 SDA
A1 VSS
B1 VDD
C7026
ground

MAGNETIC SENSOR

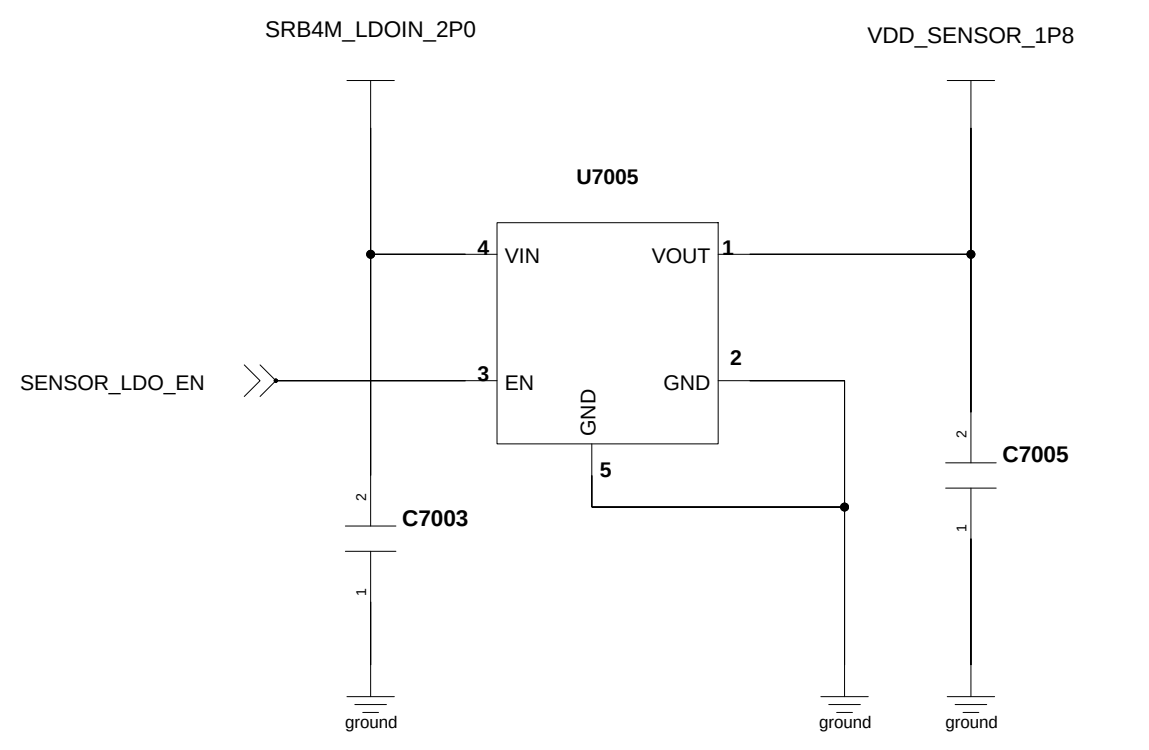
SRB4M_LDOIN_2P0
VDD_SENSOR_1P8
U7005
4 VIN
1 VOUT
3 EN
2 GND
5 GND
SENSOR_LDO_EN
C7003
C7005
ground

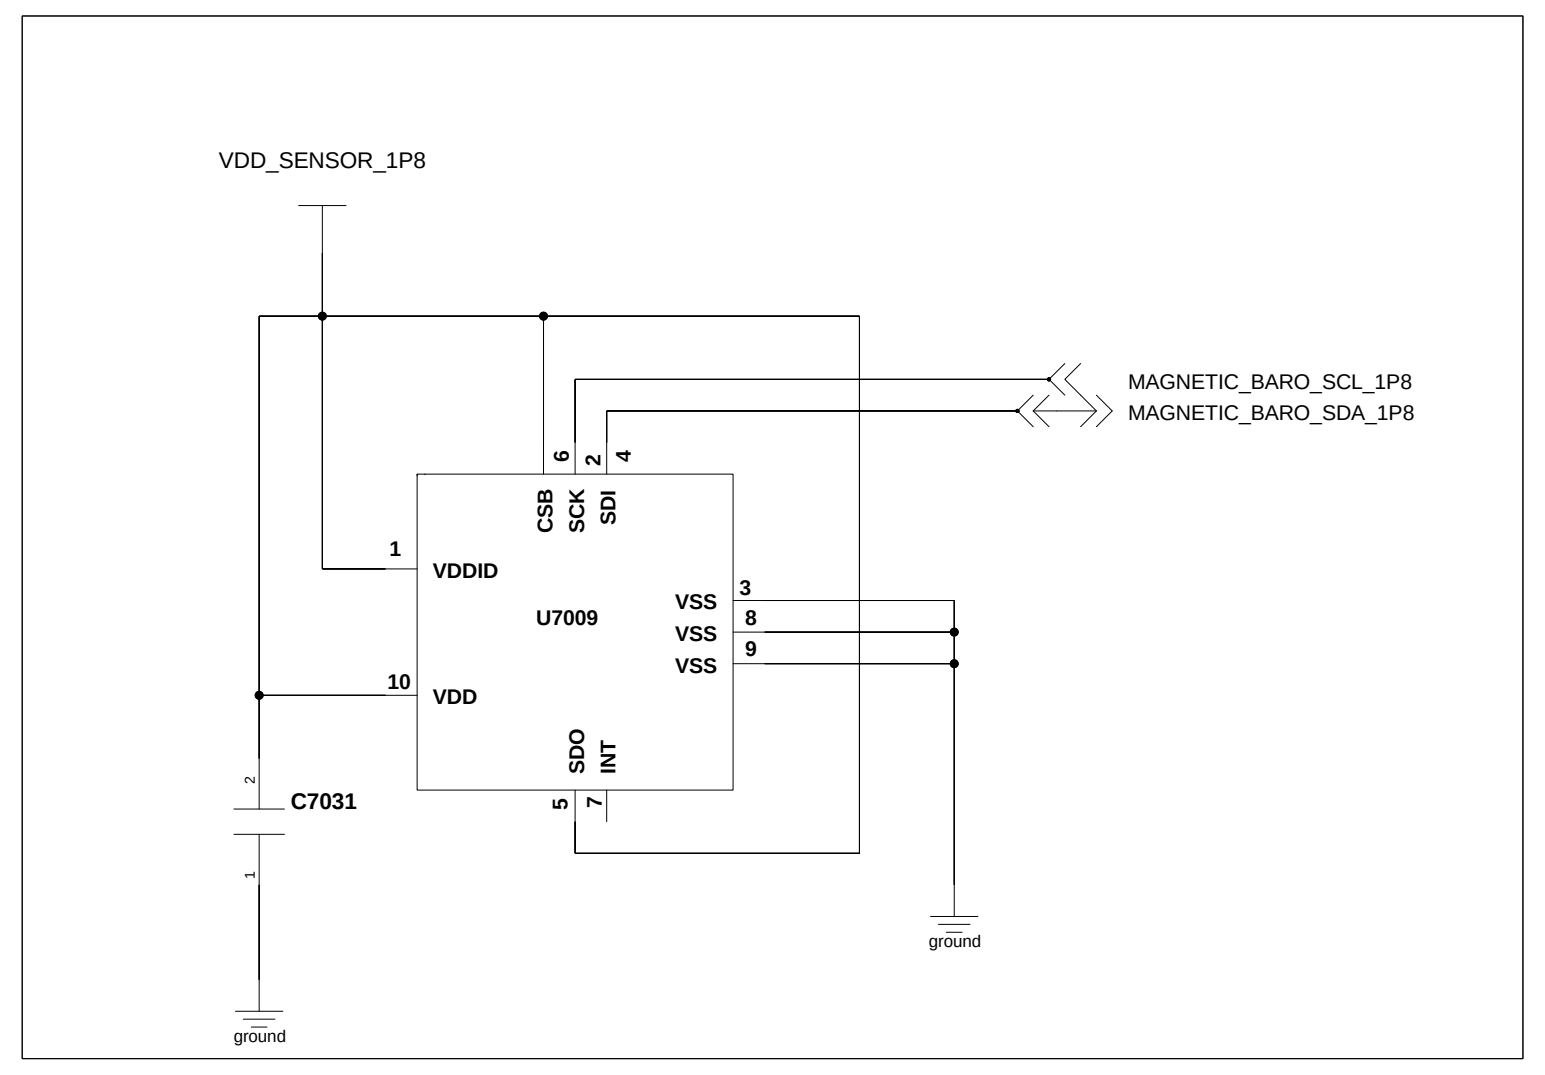
VDD_SENSOR_1P8
MAGNETIC_BARO_SCL_1P8
MAGNETIC_BARO_SDA_1P8
U7009
6 CSB
2 SCK
4 SDI
1 VDDID
10 VDD
3 8 9 VSS
5 SDO
7 INT
C7031
ground

NA ONLY

Engineer:
Drawn by:
R&D CHK:
DOC CTRL CHK:
MFG ENGR CHK:
QA CHK:

A35

TITLE:
Size:

Changed by: Date Changed: Time Changed:
REV: Drawing Number: Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

CAMERA

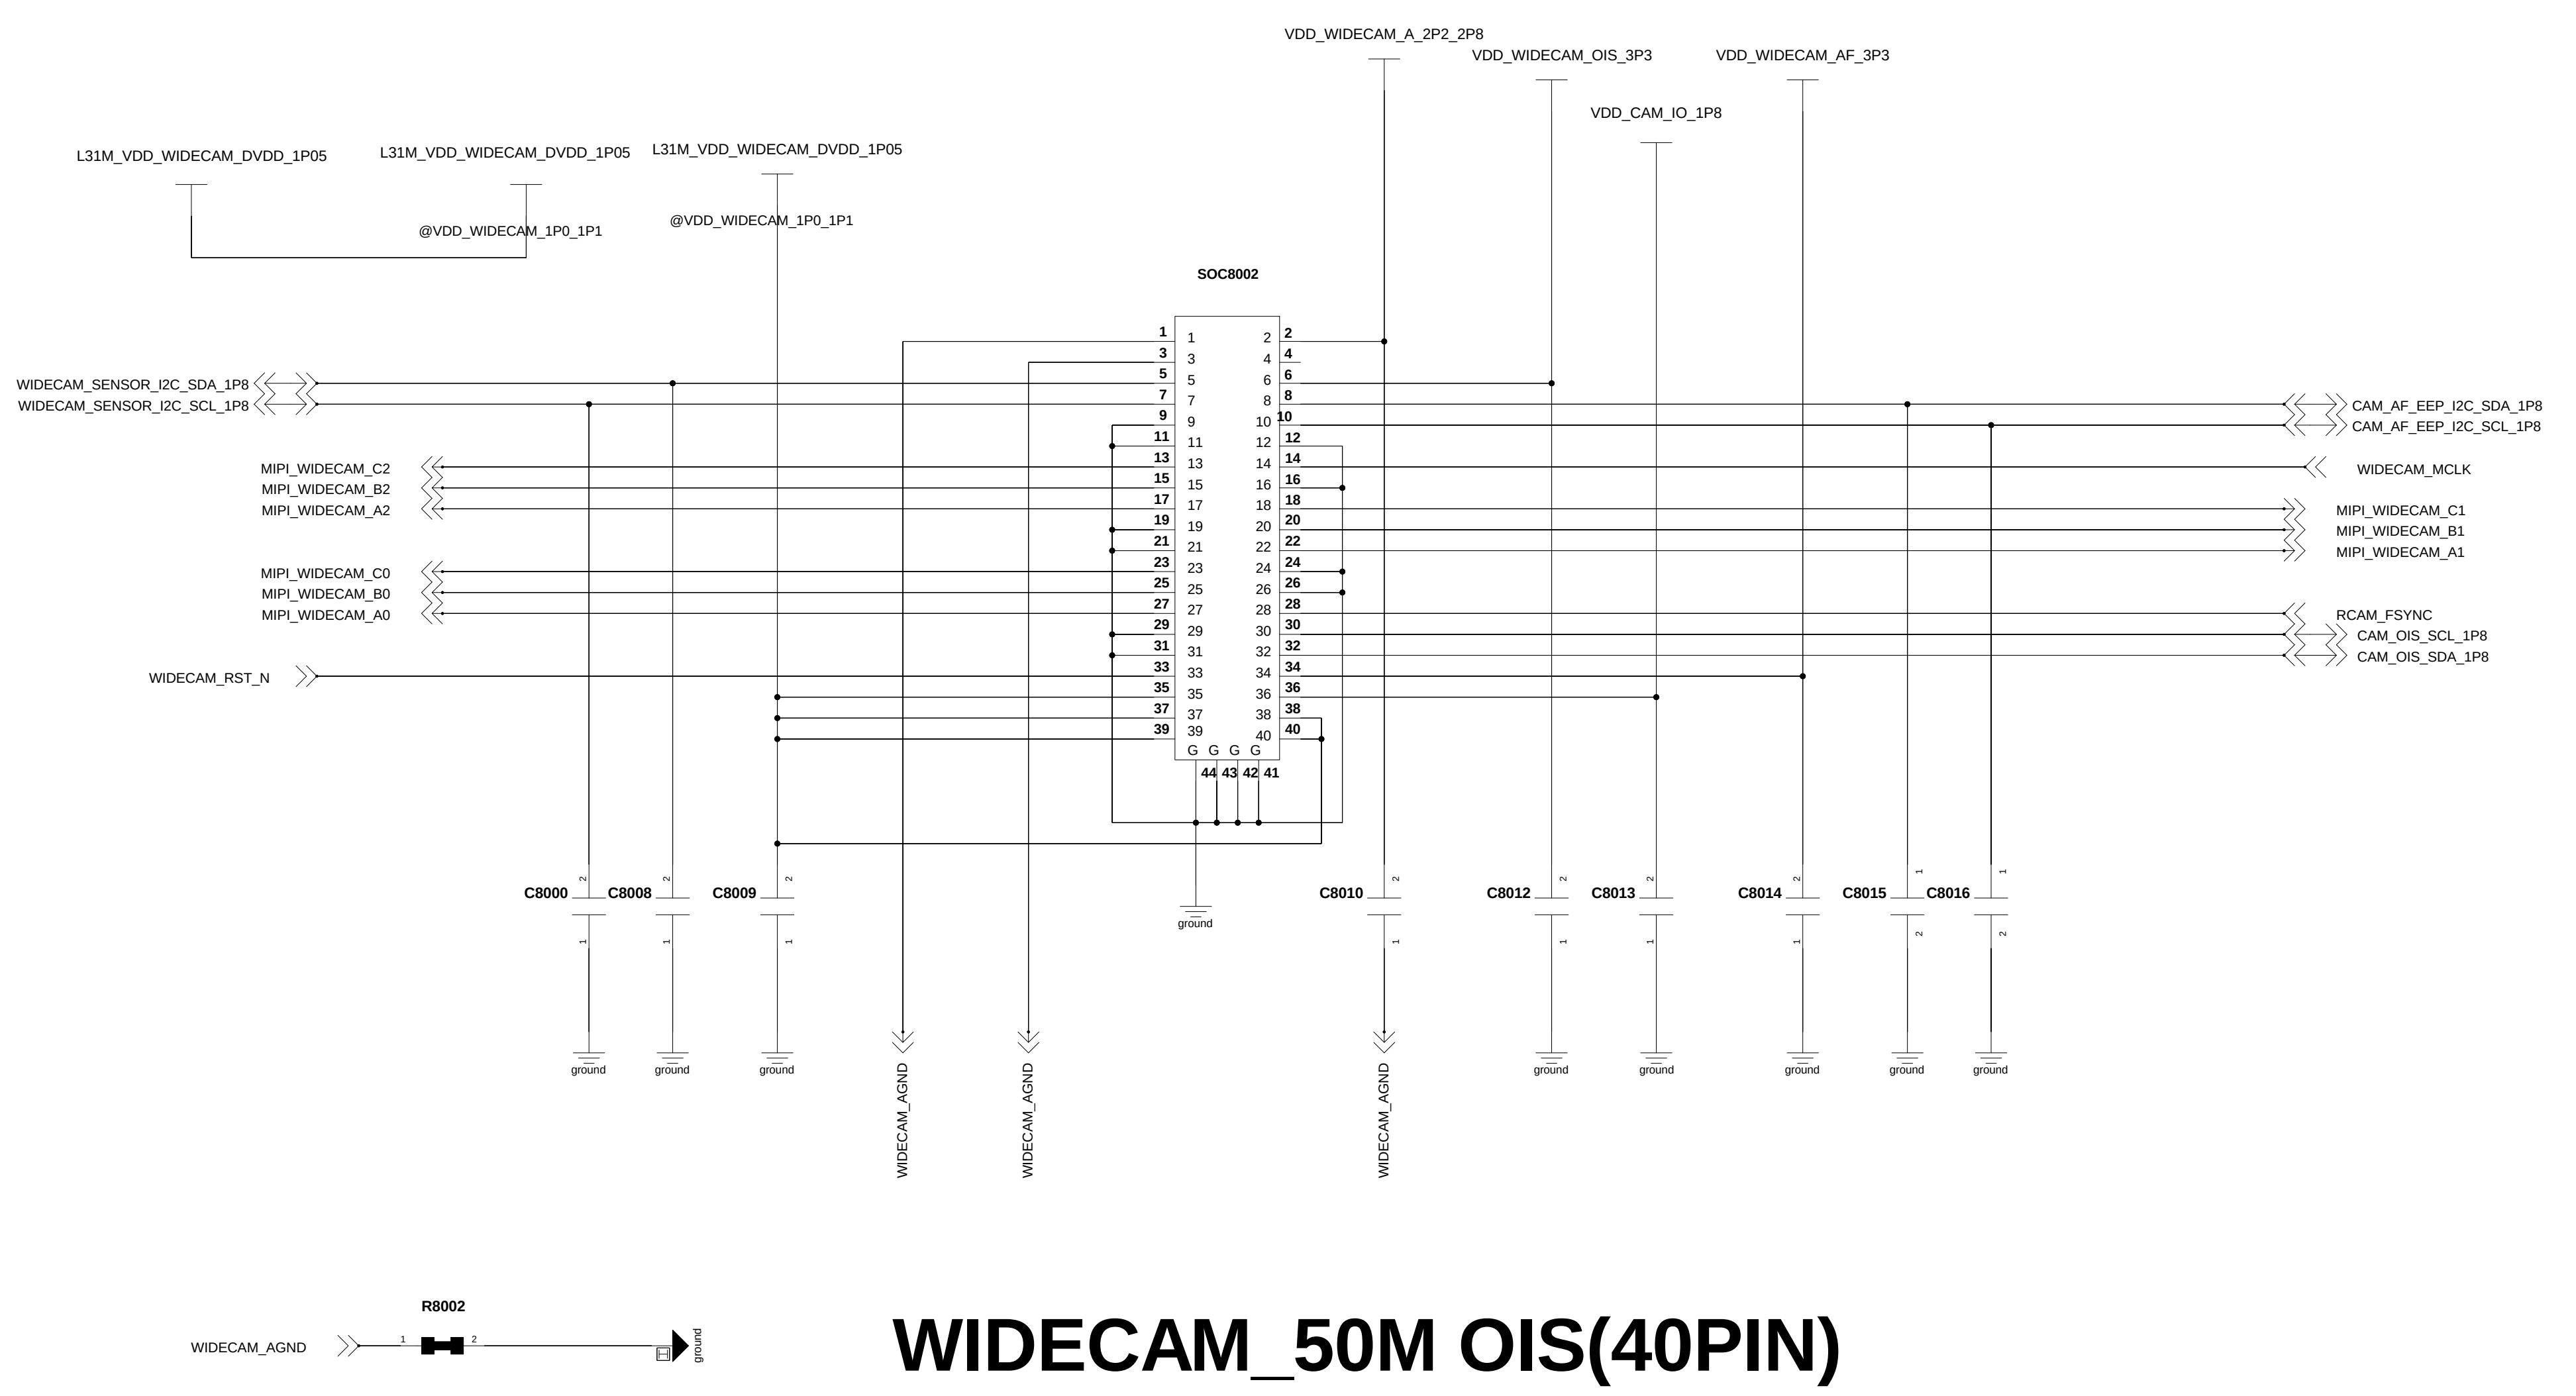
VDD_WIDECAM_A_2P2_2P8
VDD_WIDECAM_OIS_3P3
VDD_WIDECAM_AF_3P3
VDD_CAM_IO_1P8
L31M_VDD_WIDECAM_DVDD_1P05
@VDD_WIDECAM_1P0_1P1
SOC8002
WIDECAM_SENSOR_I2C_SDA_1P8
WIDECAM_SENSOR_I2C_SCL_1P8
MIPI_WIDECAM_C2
MIPI_WIDECAM_B2
MIPI_WIDECAM_A2
MIPI_WIDECAM_C0
MIPI_WIDECAM_B0
MIPI_WIDECAM_A0
WIDECAM_RST_N
CAM_AF_EEP_I2C_SDA_1P8
CAM_AF_EEP_I2C_SCL_1P8
WIDECAM_MCLK
MIPI_WIDECAM_C1
MIPI_WIDECAM_B1
MIPI_WIDECAM_A1
RCAM_FSYNC
CAM_OIS_SCL_1P8
CAM_OIS_SDA_1P8
C8000
C8008
C8009
C8010
C8012
C8013
C8014
C8015
C8016
ground
WIDECAM_AGND
R8002

WIDECAM_50M OIS(40PIN)

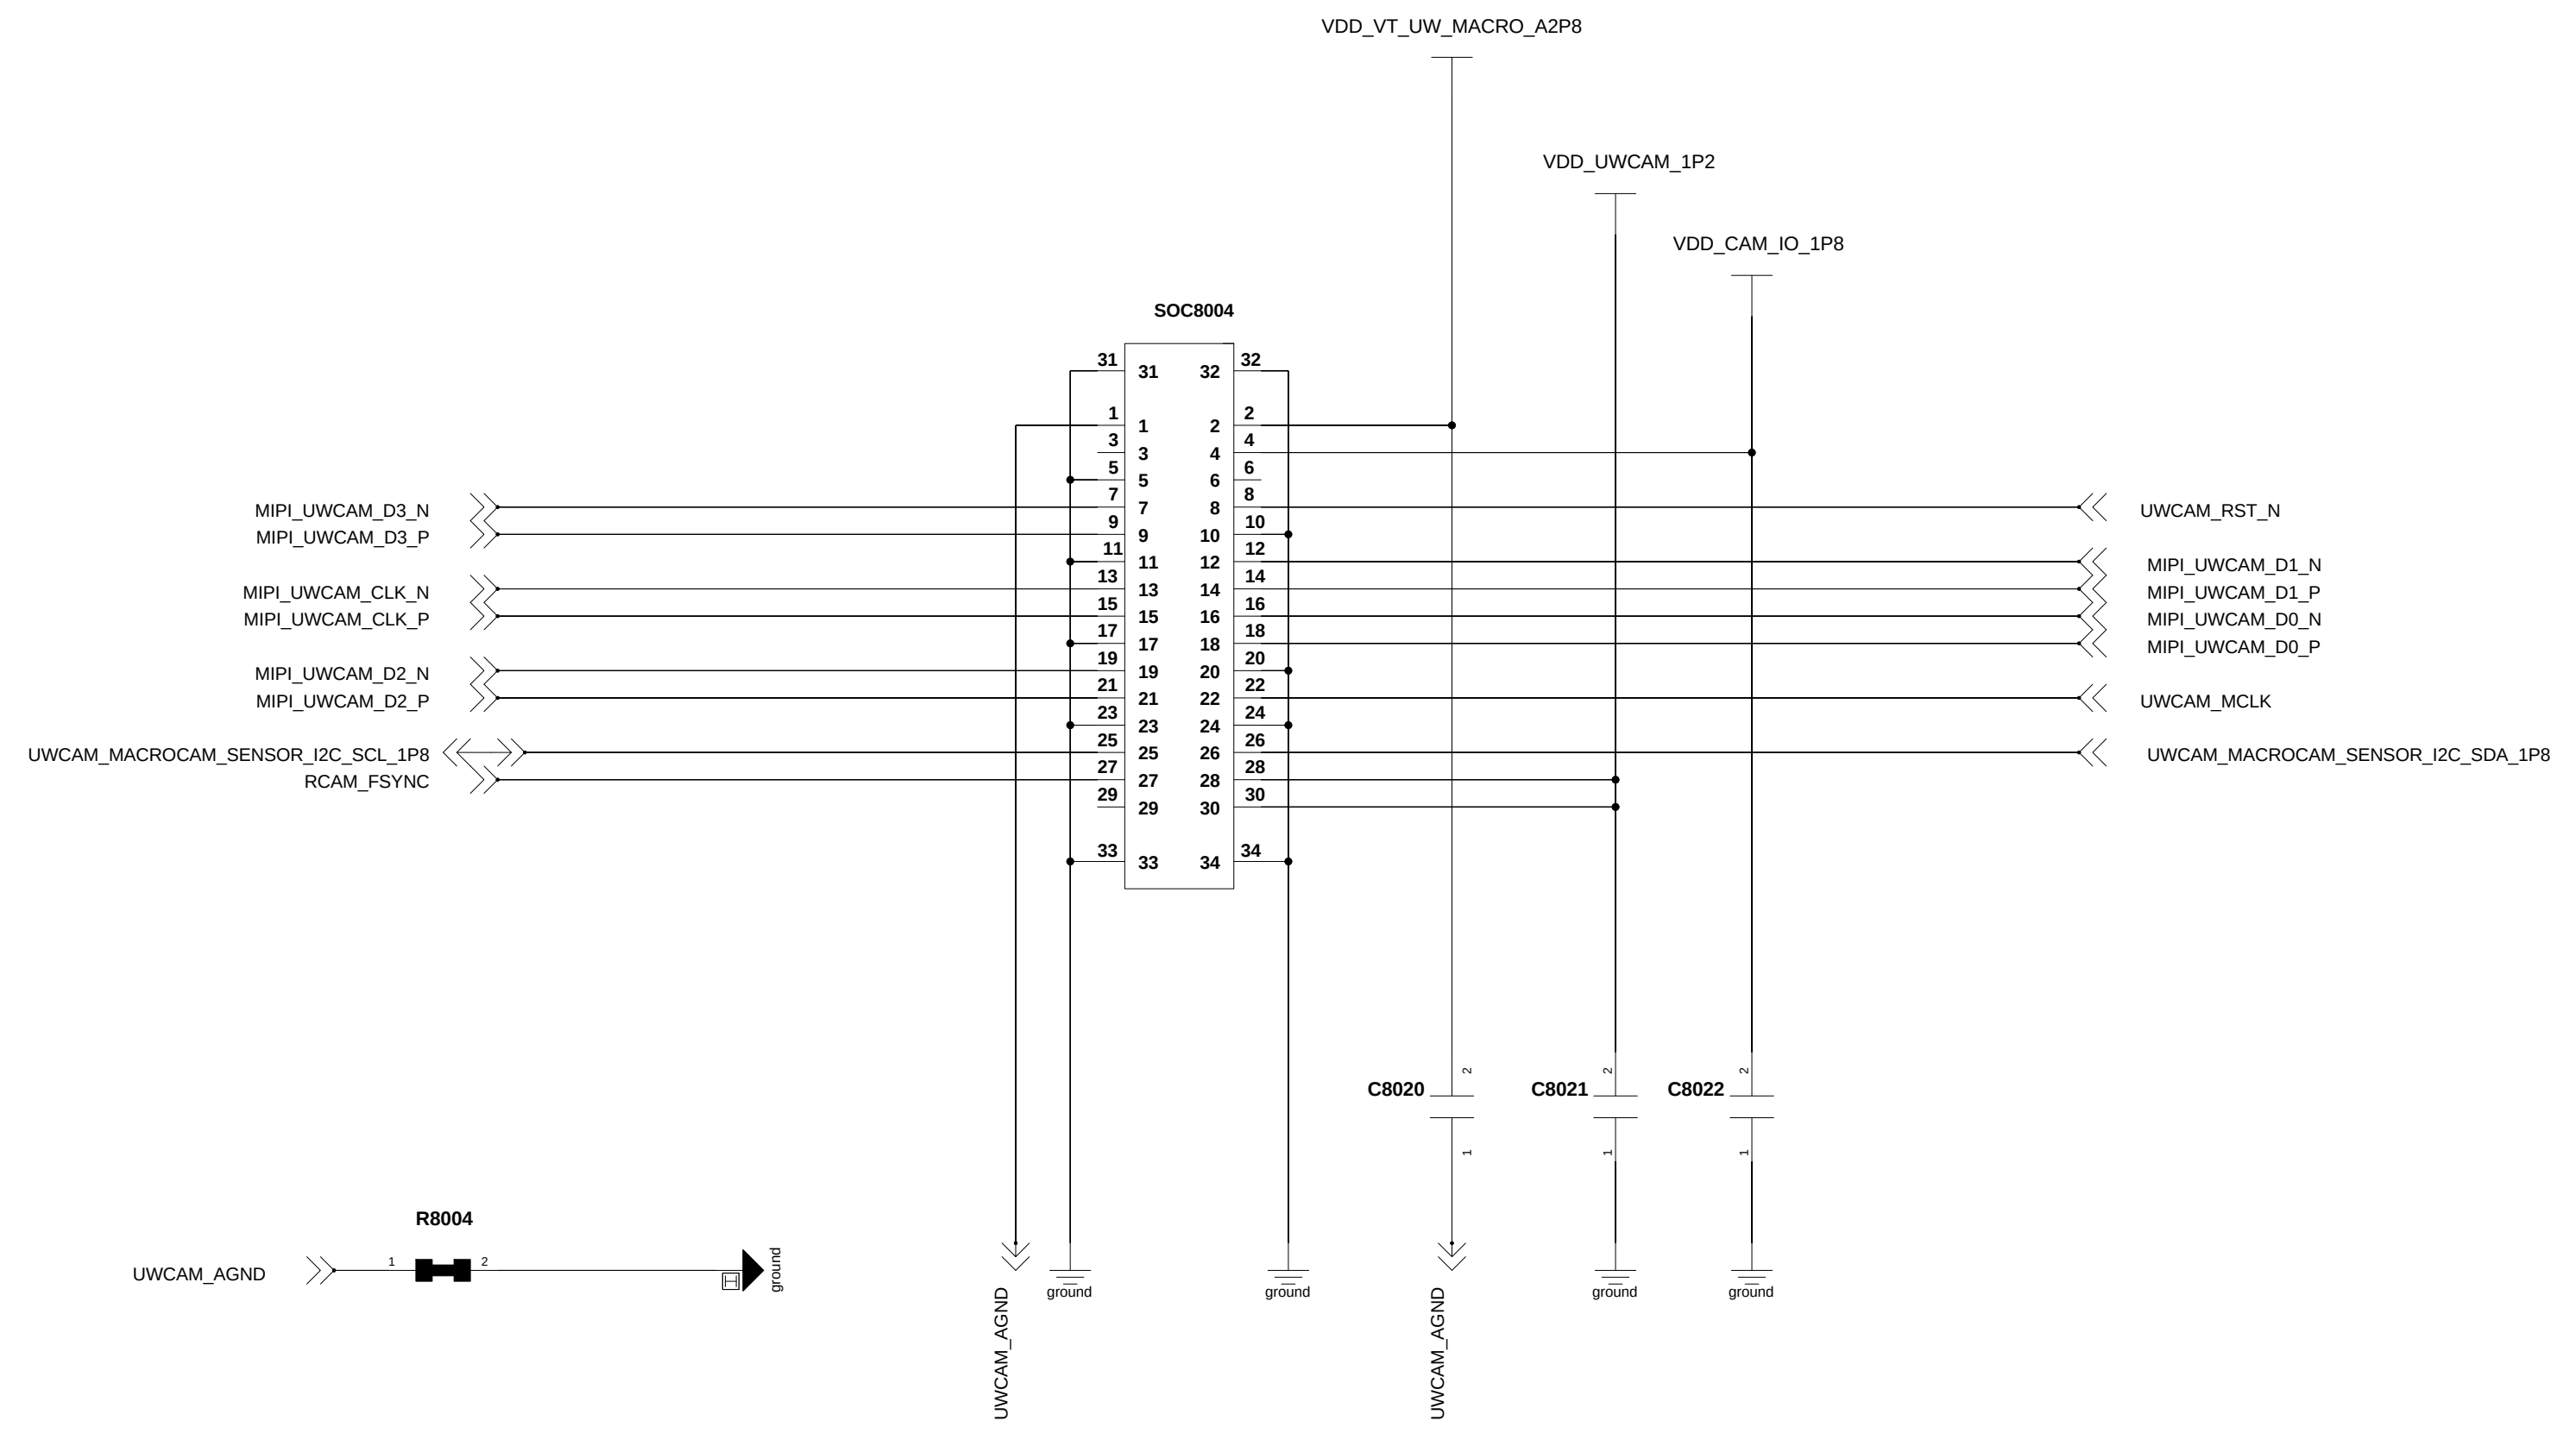
VDD_VT_UW_MACRO_A2P8
VDD_UWCAM_1P2
VDD_CAM_IO_1P8
SOC8004
MIPI_UWCAM_D3_N
MIPI_UWCAM_D3_P
MIPI_UWCAM_CLK_N
MIPI_UWCAM_CLK_P
MIPI_UWCAM_D2_N
MIPI_UWCAM_D2_P
UWCAM_MACROCAM_SENSOR_I2C_SCL_1P8
RCAM_FSYNC
UWCAM_RST_N
MIPI_UWCAM_D1_N
MIPI_UWCAM_D1_P
MIPI_UWCAM_D0_N
MIPI_UWCAM_D0_P
UWCAM_MCLK
UWCAM_MACROCAM_SENSOR_I2C_SDA_1P8
C8020
C8021
C8022
UWCAM_AGND
R8004
ground

ULTRAWIDE_8M CAMERA(30pin)

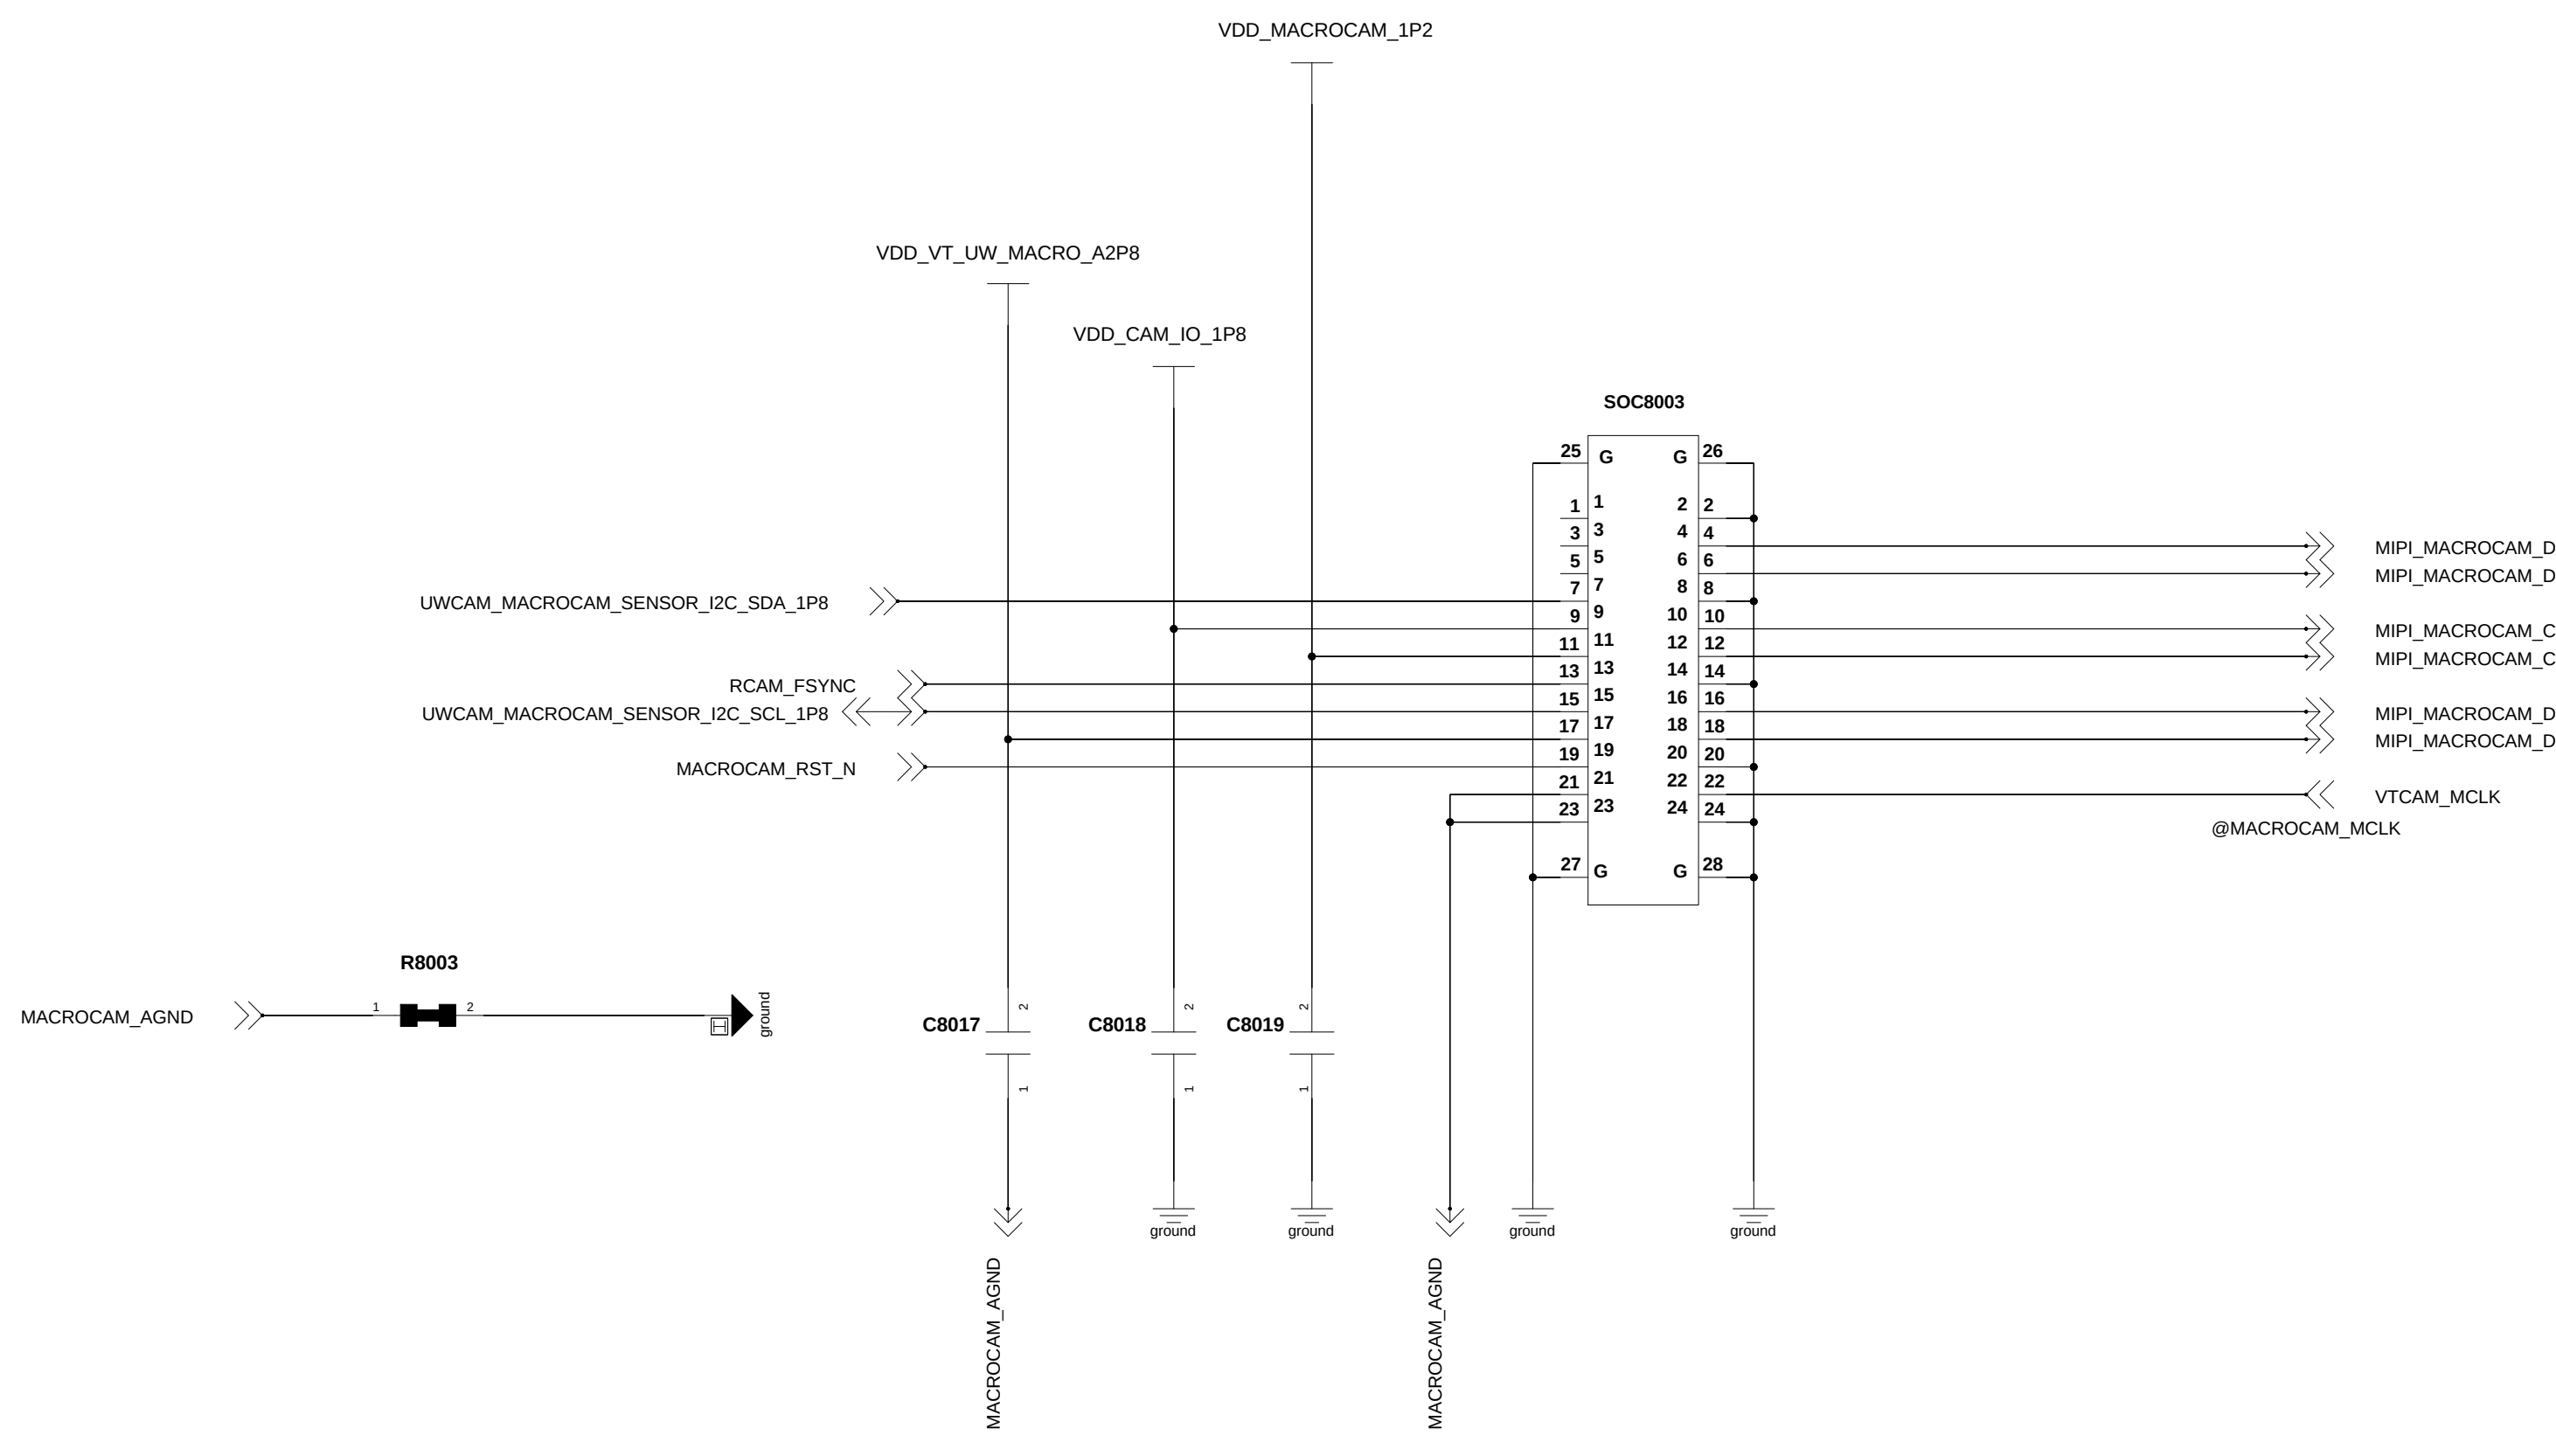
VDD_MACROCAM_1P2
VDD_VT_UW_MACRO_A2P8
VDD_CAM_IO_1P8
SOC8003
UWCAM_MACROCAM_SENSOR_I2C_SDA_1P8
RCAM_FSYNC
UWCAM_MACROCAM_SENSOR_I2C_SCL_1P8
MACROCAM_RST_N
MIPI_MACROCAM_D1_P
MIPI_MACROCAM_D1_N
MIPI_MACROCAM_CLK_P
MIPI_MACROCAM_CLK_N
MIPI_MACROCAM_D0_P
MIPI_MACROCAM_D0_N
VTCAM_MCLK
@MACROCAM_MCLK
MACROCAM_AGND
R8003
C8017
C8018
C8019
ground

MACRO_5M_CAMERA(24PIN)

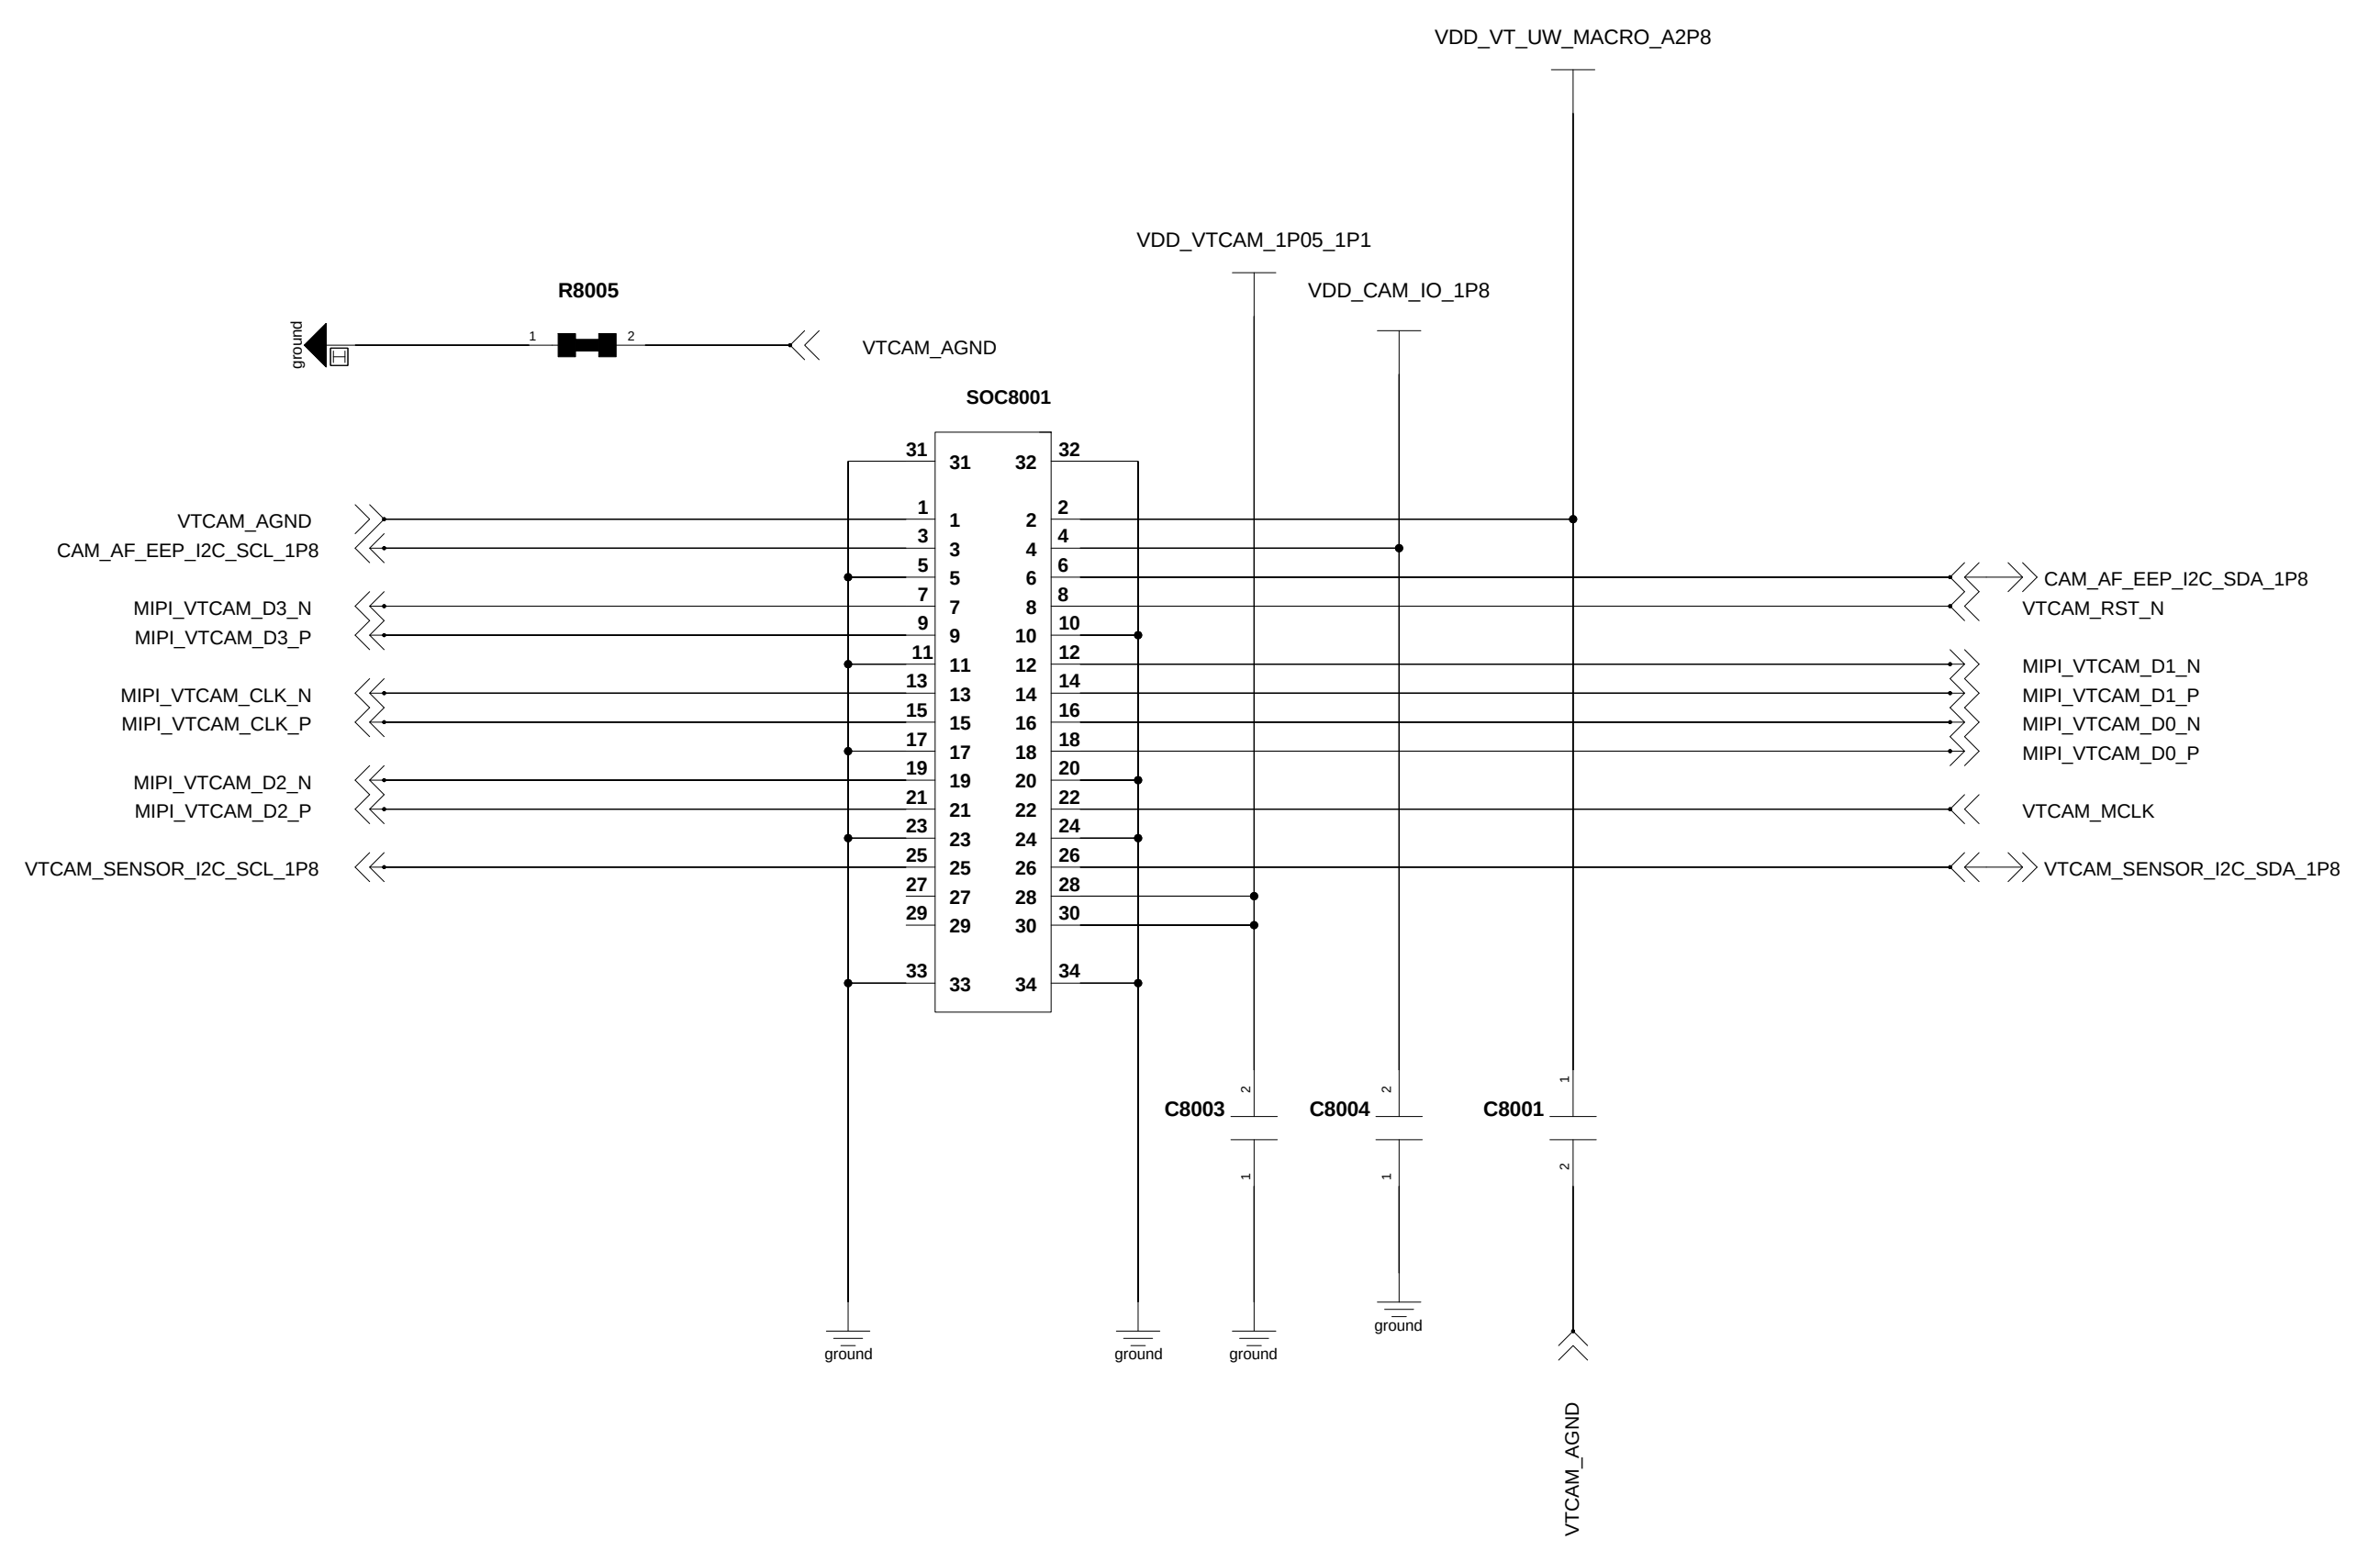
VDD_VT_UW_MACRO_A2P8
VDD_VTCAM_1P05_1P1
VDD_CAM_IO_1P8
R8005
VTCAM_AGND
SOC8001
CAM_AF_EEP_I2C_SCL_1P8
MIPI_VTCAM_D3_N
MIPI_VTCAM_D3_P
MIPI_VTCAM_CLK_N
MIPI_VTCAM_CLK_P
MIPI_VTCAM_D2_N
MIPI_VTCAM_D2_P
VTCAM_SENSOR_I2C_SCL_1P8
CAM_AF_EEP_I2C_SDA_1P8
VTCAM_RST_N
MIPI_VTCAM_D1_N
MIPI_VTCAM_D1_P
MIPI_VTCAM_D0_N
MIPI_VTCAM_D0_P
VTCAM_MCLK
VTCAM_SENSOR_I2C_SDA_1P8
C8003
C8004
C8001
ground

VTCAM_32M CAMERA (30PIN)

CAM PMIC

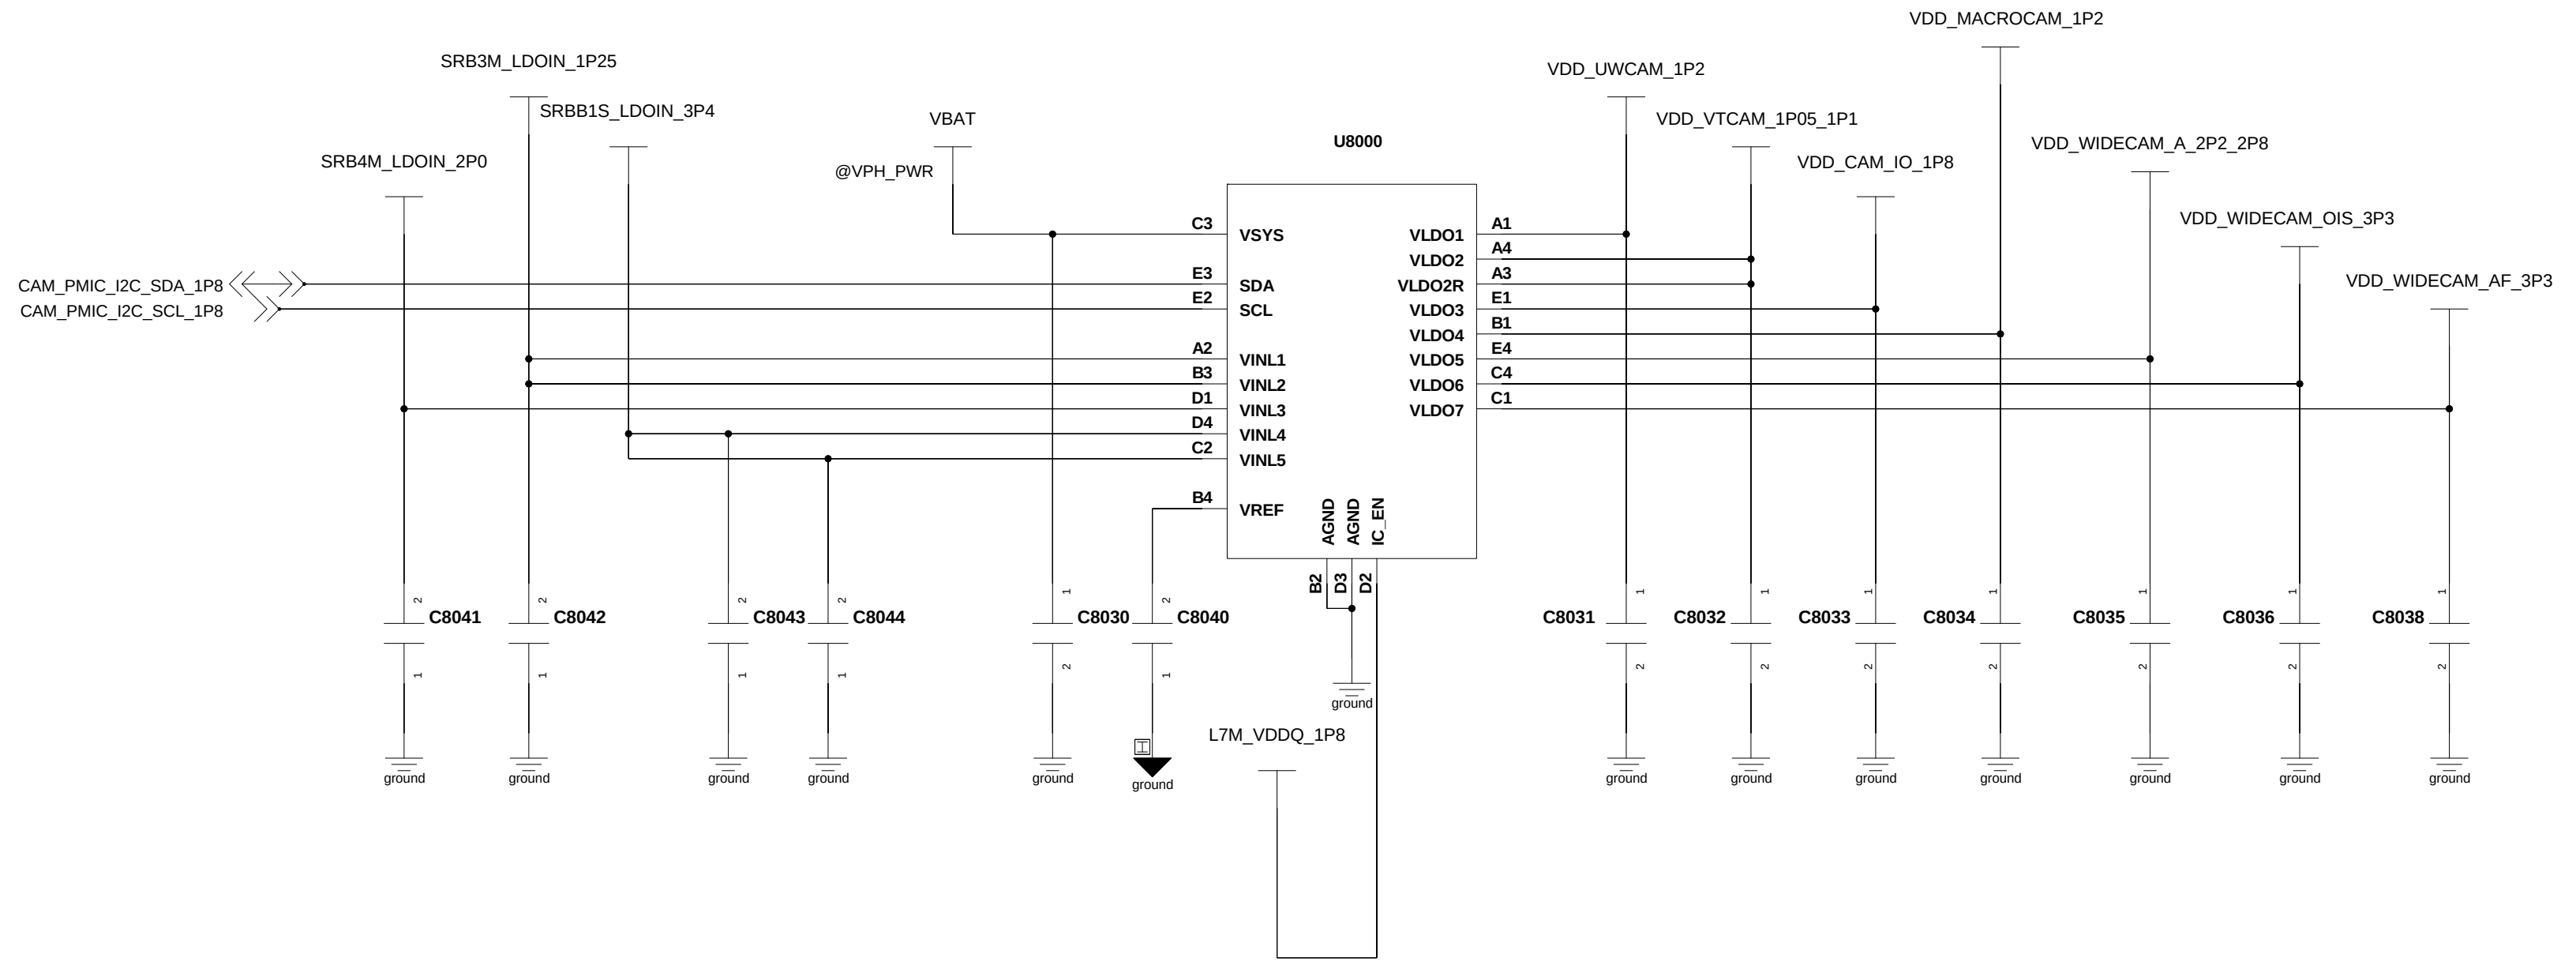
SRB3M_LDOIN_1P25
SRBB1S_LDOIN_3P4
SRB4M_LDOIN_2P0
VBAT
@VPH_PWR
U8000
CAM_PMIC_I2C_SDA_1P8
CAM_PMIC_I2C_SCL_1P8
C3 VSYS
E3 SDA
E2 SCL
A2 VINL1
B3 VINL2
D1 VINL3
D4 VINL4
C2 VINL5
B4 VREF
AGND
AGND
IC_EN
B2
D3
D2
VLDO1 A1
VLDO2 A4
VLDO2R A3
VLDO3 E1
VLDO4 B1
VLDO5 E4
VLDO6 C4
VLDO7 C1
VDD_UWCAM_1P2
VDD_VTCAM_1P05_1P1
VDD_CAM_IO_1P8
VDD_MACROCAM_1P2
VDD_WIDECAM_A_2P2_2P8
VDD_WIDECAM_OIS_3P3
VDD_WIDECAM_AF_3P3
L7M_VDDQ_1P8
C8041
C8042
C8043
C8044
C8030
C8040
C8031
C8032
C8033
C8034
C8035
C8036
C8038
ground

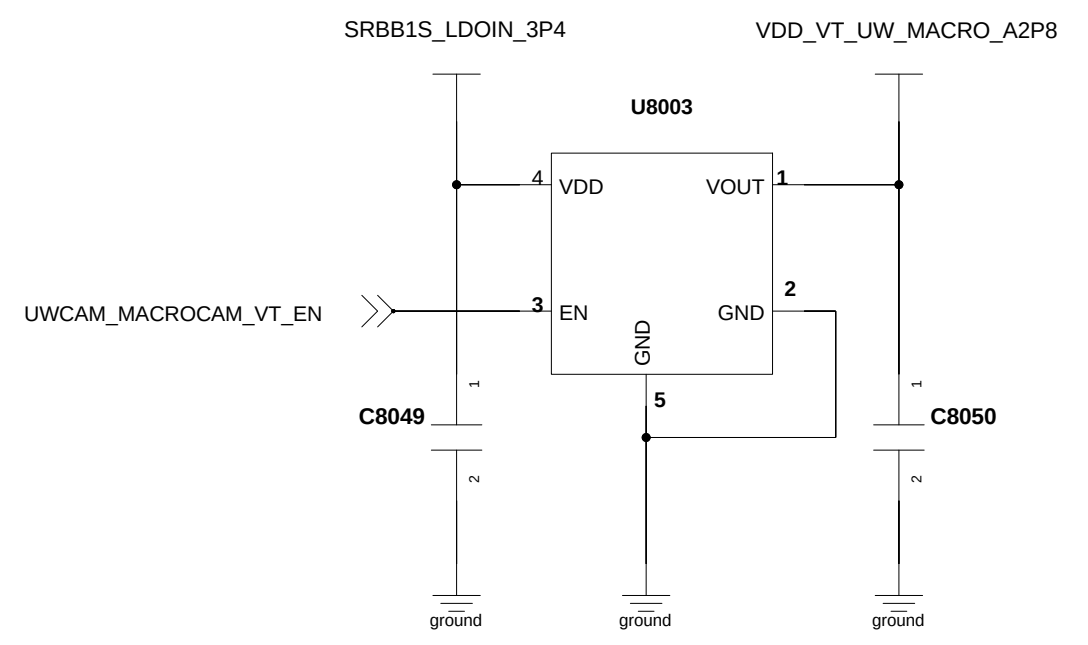
SRBB1S_LDOIN_3P4
VDD_VT_UW_MACRO_A2P8
U8003
4 VDD
VOUT 1
UWCAM_MACROCAM_VT_EN
3 EN
GND 2
GND 5
C8049
C8050
ground

DECO CONTACT

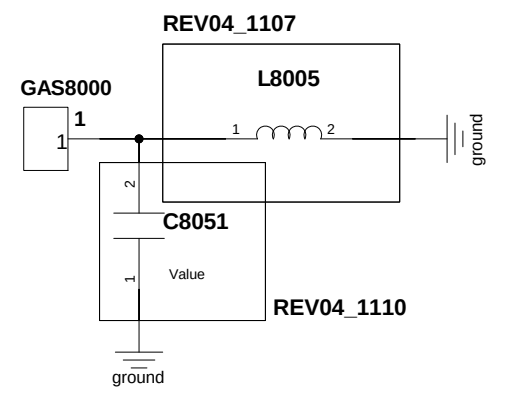
REV04_1107
L8005
GAS8000
1
C8051
Value
REV04_1110
ground

VTCAM_UWCAM_MACROCAM

Engineer:	A35
Drawn by:	
R&D CHK:	TITLE: CAMERA
DOC CTRL CHK:	Size:
MFG ENGR CHK:	

Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number:	Page:

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
PROPRIETARY INFORMATION THAT IS
SAMSUNG ELECTRONICS CO'S PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS
EXCEPT AS AUTHORIZED BY SAMSUNG.

C2C (Conn to Conn FPCB)

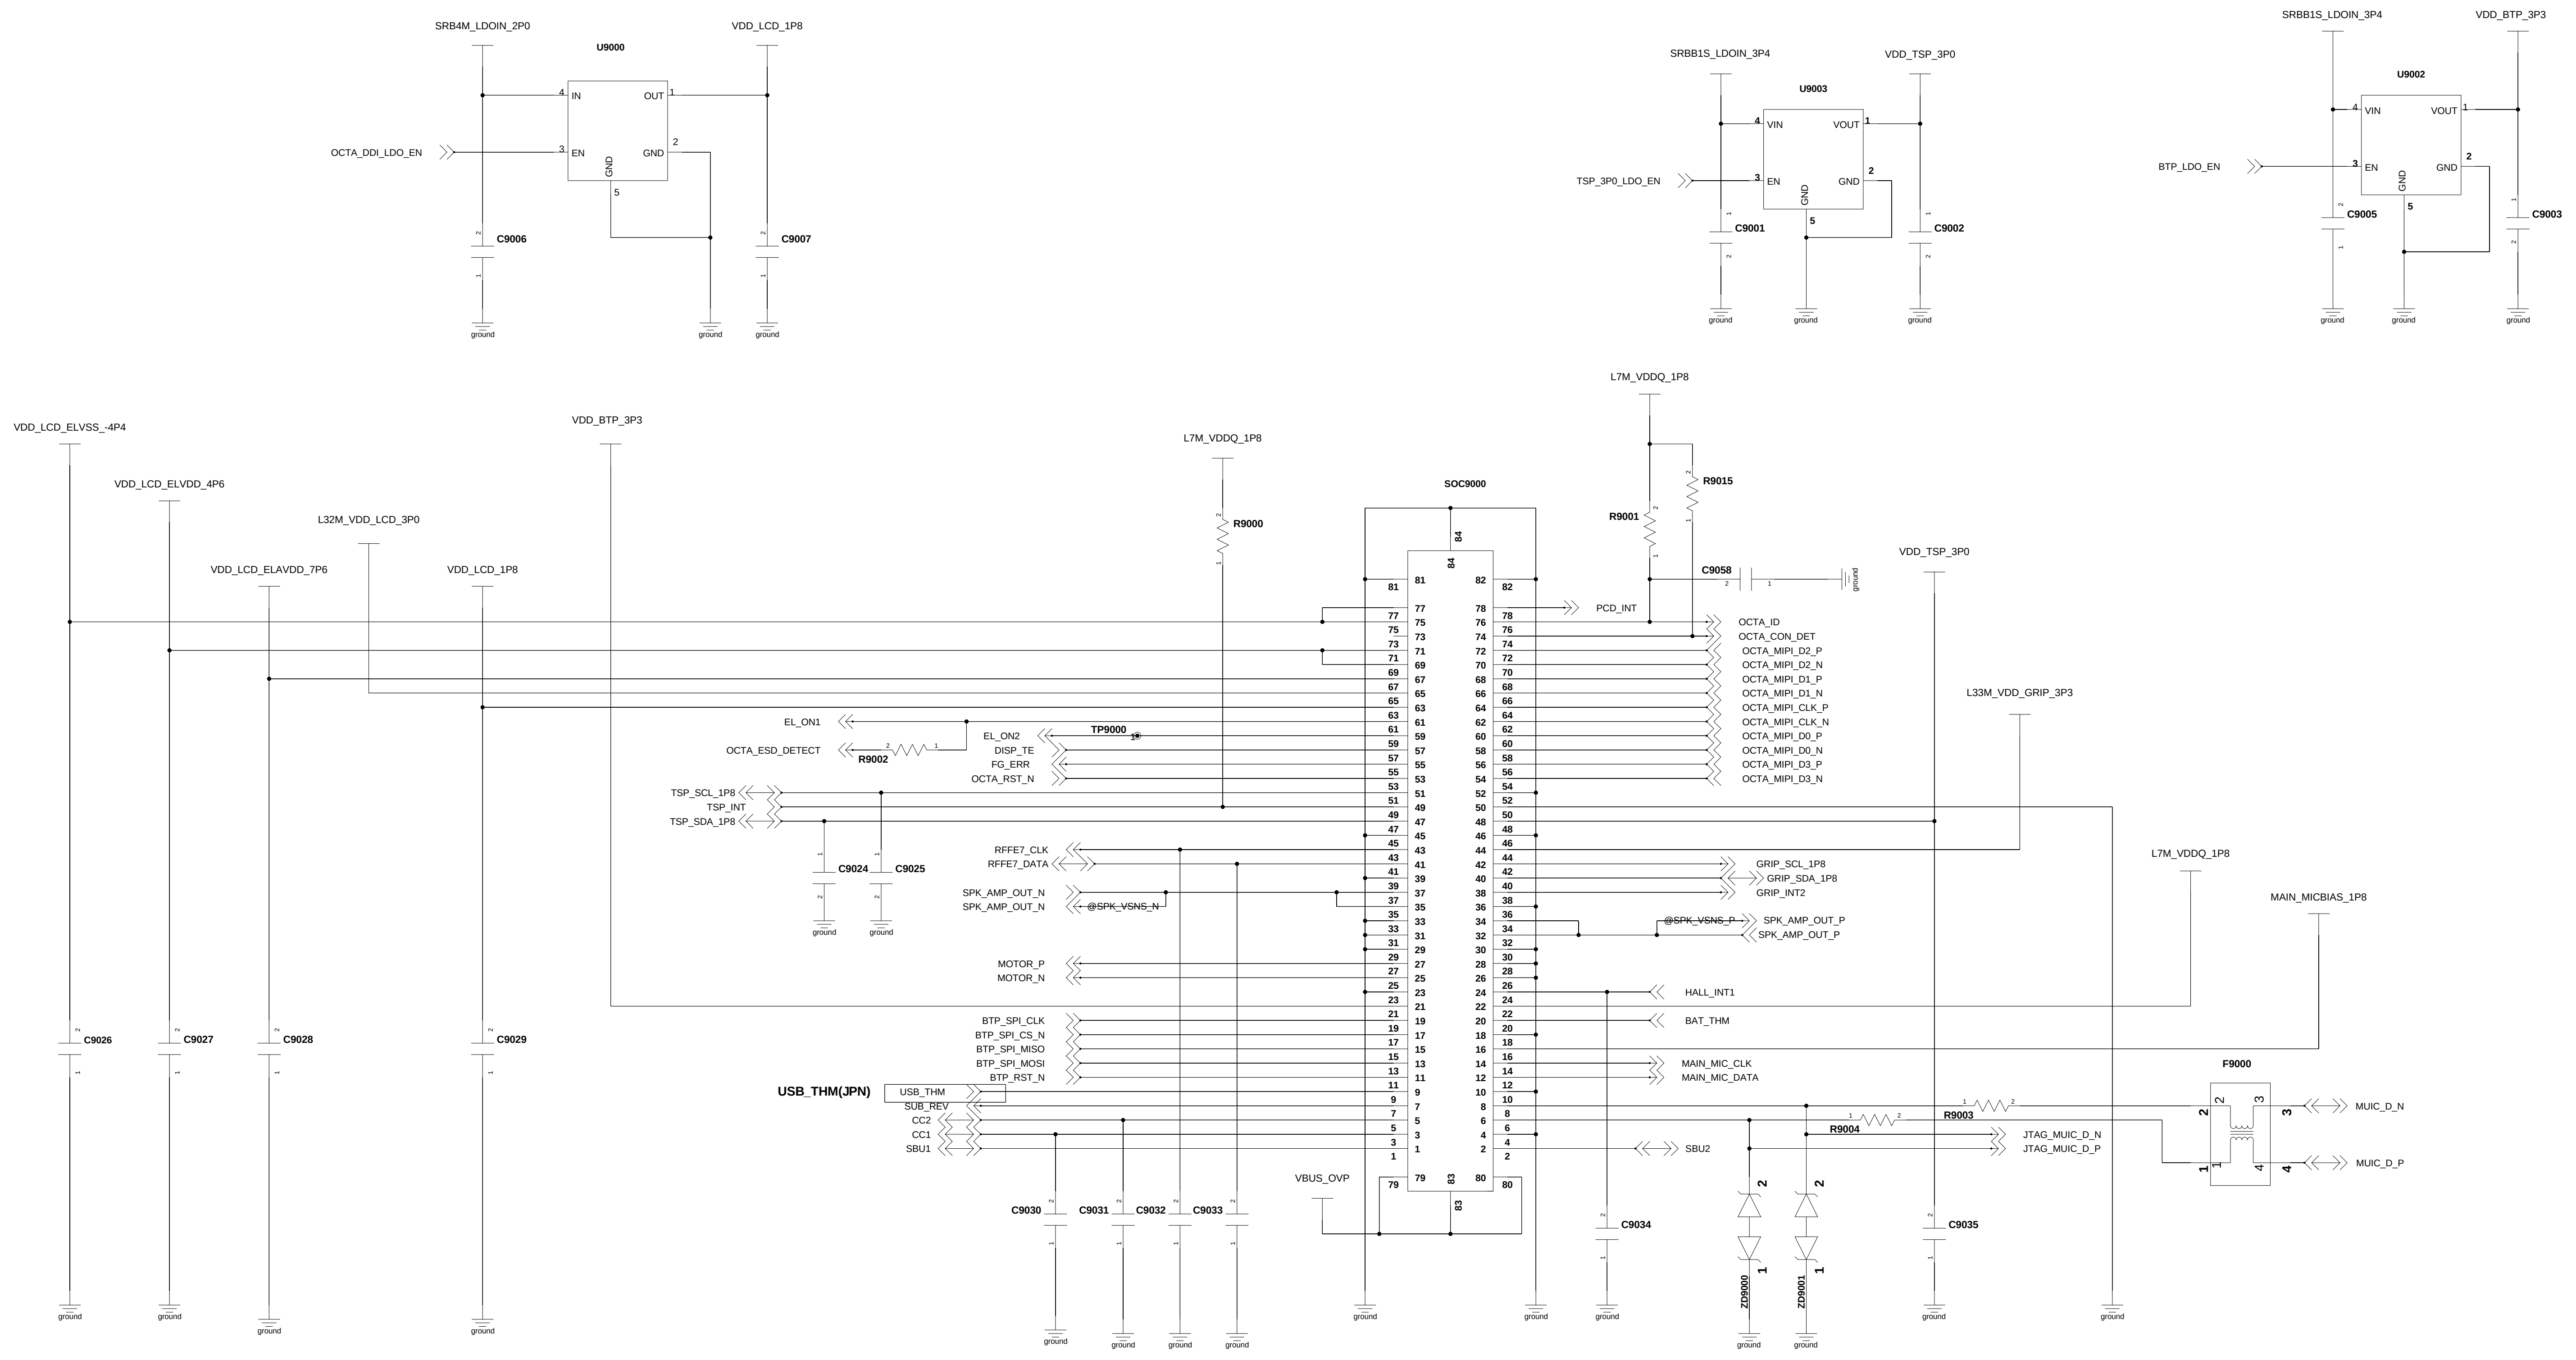
SRB4M_LDOIN_2P0
VDD_LCD_1P8
U9000
IN
OUT
EN
GND
OCTA_DDI_LDO_EN
C9006
C9007
SRBB1S_LDOIN_3P4
VDD_TSP_3P0
U9003
VIN
VOUT
TSP_3P0_LDO_EN
C9001
C9002
SRBB1S_LDOIN_3P4
VDD_BTP_3P3
U9002
BTP_LDO_EN
C9005
C9003
VDD_LCD_ELVSS_-4P4
VDD_LCD_ELVDD_4P6
L32M_VDD_LCD_3P0
VDD_LCD_ELAVDD_7P6
VDD_LCD_1P8
VDD_BTP_3P3
L7M_VDDQ_1P8
R9000
SOC9000
L7M_VDDQ_1P8
R9001
R9015
C9058
PCD_INT
OCTA_ID
OCTA_CON_DET
OCTA_MIPI_D2_P
OCTA_MIPI_D2_N
OCTA_MIPI_D1_P
OCTA_MIPI_D1_N
OCTA_MIPI_CLK_P
OCTA_MIPI_CLK_N
OCTA_MIPI_D0_P
OCTA_MIPI_D0_N
OCTA_MIPI_D3_P
OCTA_MIPI_D3_N
VDD_TSP_3P0
L33M_VDD_GRIP_3P3
EL_ON1
OCTA_ESD_DETECT
R9002
EL_ON2
TP9000
DISP_TE
FG_ERR
OCTA_RST_N
TSP_SCL_1P8
TSP_INT
TSP_SDA_1P8
C9024
C9025
RFFE7_CLK
RFFE7_DATA
SPK_AMP_OUT_N
SPK_AMP_OUT_N
@SPK_VSNS_N
GRIP_SCL_1P8
GRIP_SDA_1P8
GRIP_INT2
@SPK_VSNS_P
SPK_AMP_OUT_P
SPK_AMP_OUT_P
MOTOR_P
MOTOR_N
HALL_INT1
BAT_THM
L7M_VDDQ_1P8
MAIN_MICBIAS_1P8
BTP_SPI_CLK
BTP_SPI_CS_N
BTP_SPI_MISO
BTP_SPI_MOSI
BTP_RST_N
MAIN_MIC_CLK
MAIN_MIC_DATA
USB_THM(JPN)
USB_THM
SUB_REV
CC2
CC1
SBU1
SBU2
R9003
R9004
JTAG_MUIC_D_N
JTAG_MUIC_D_P
F9000
MUIC_D_N
MUIC_D_P
VBUS_OVP
C9026
C9027
C9028
C9029
C9030
C9031
C9032
C9033
C9034
C9035
ZD9000
ZD9001
ground

DISPLAY

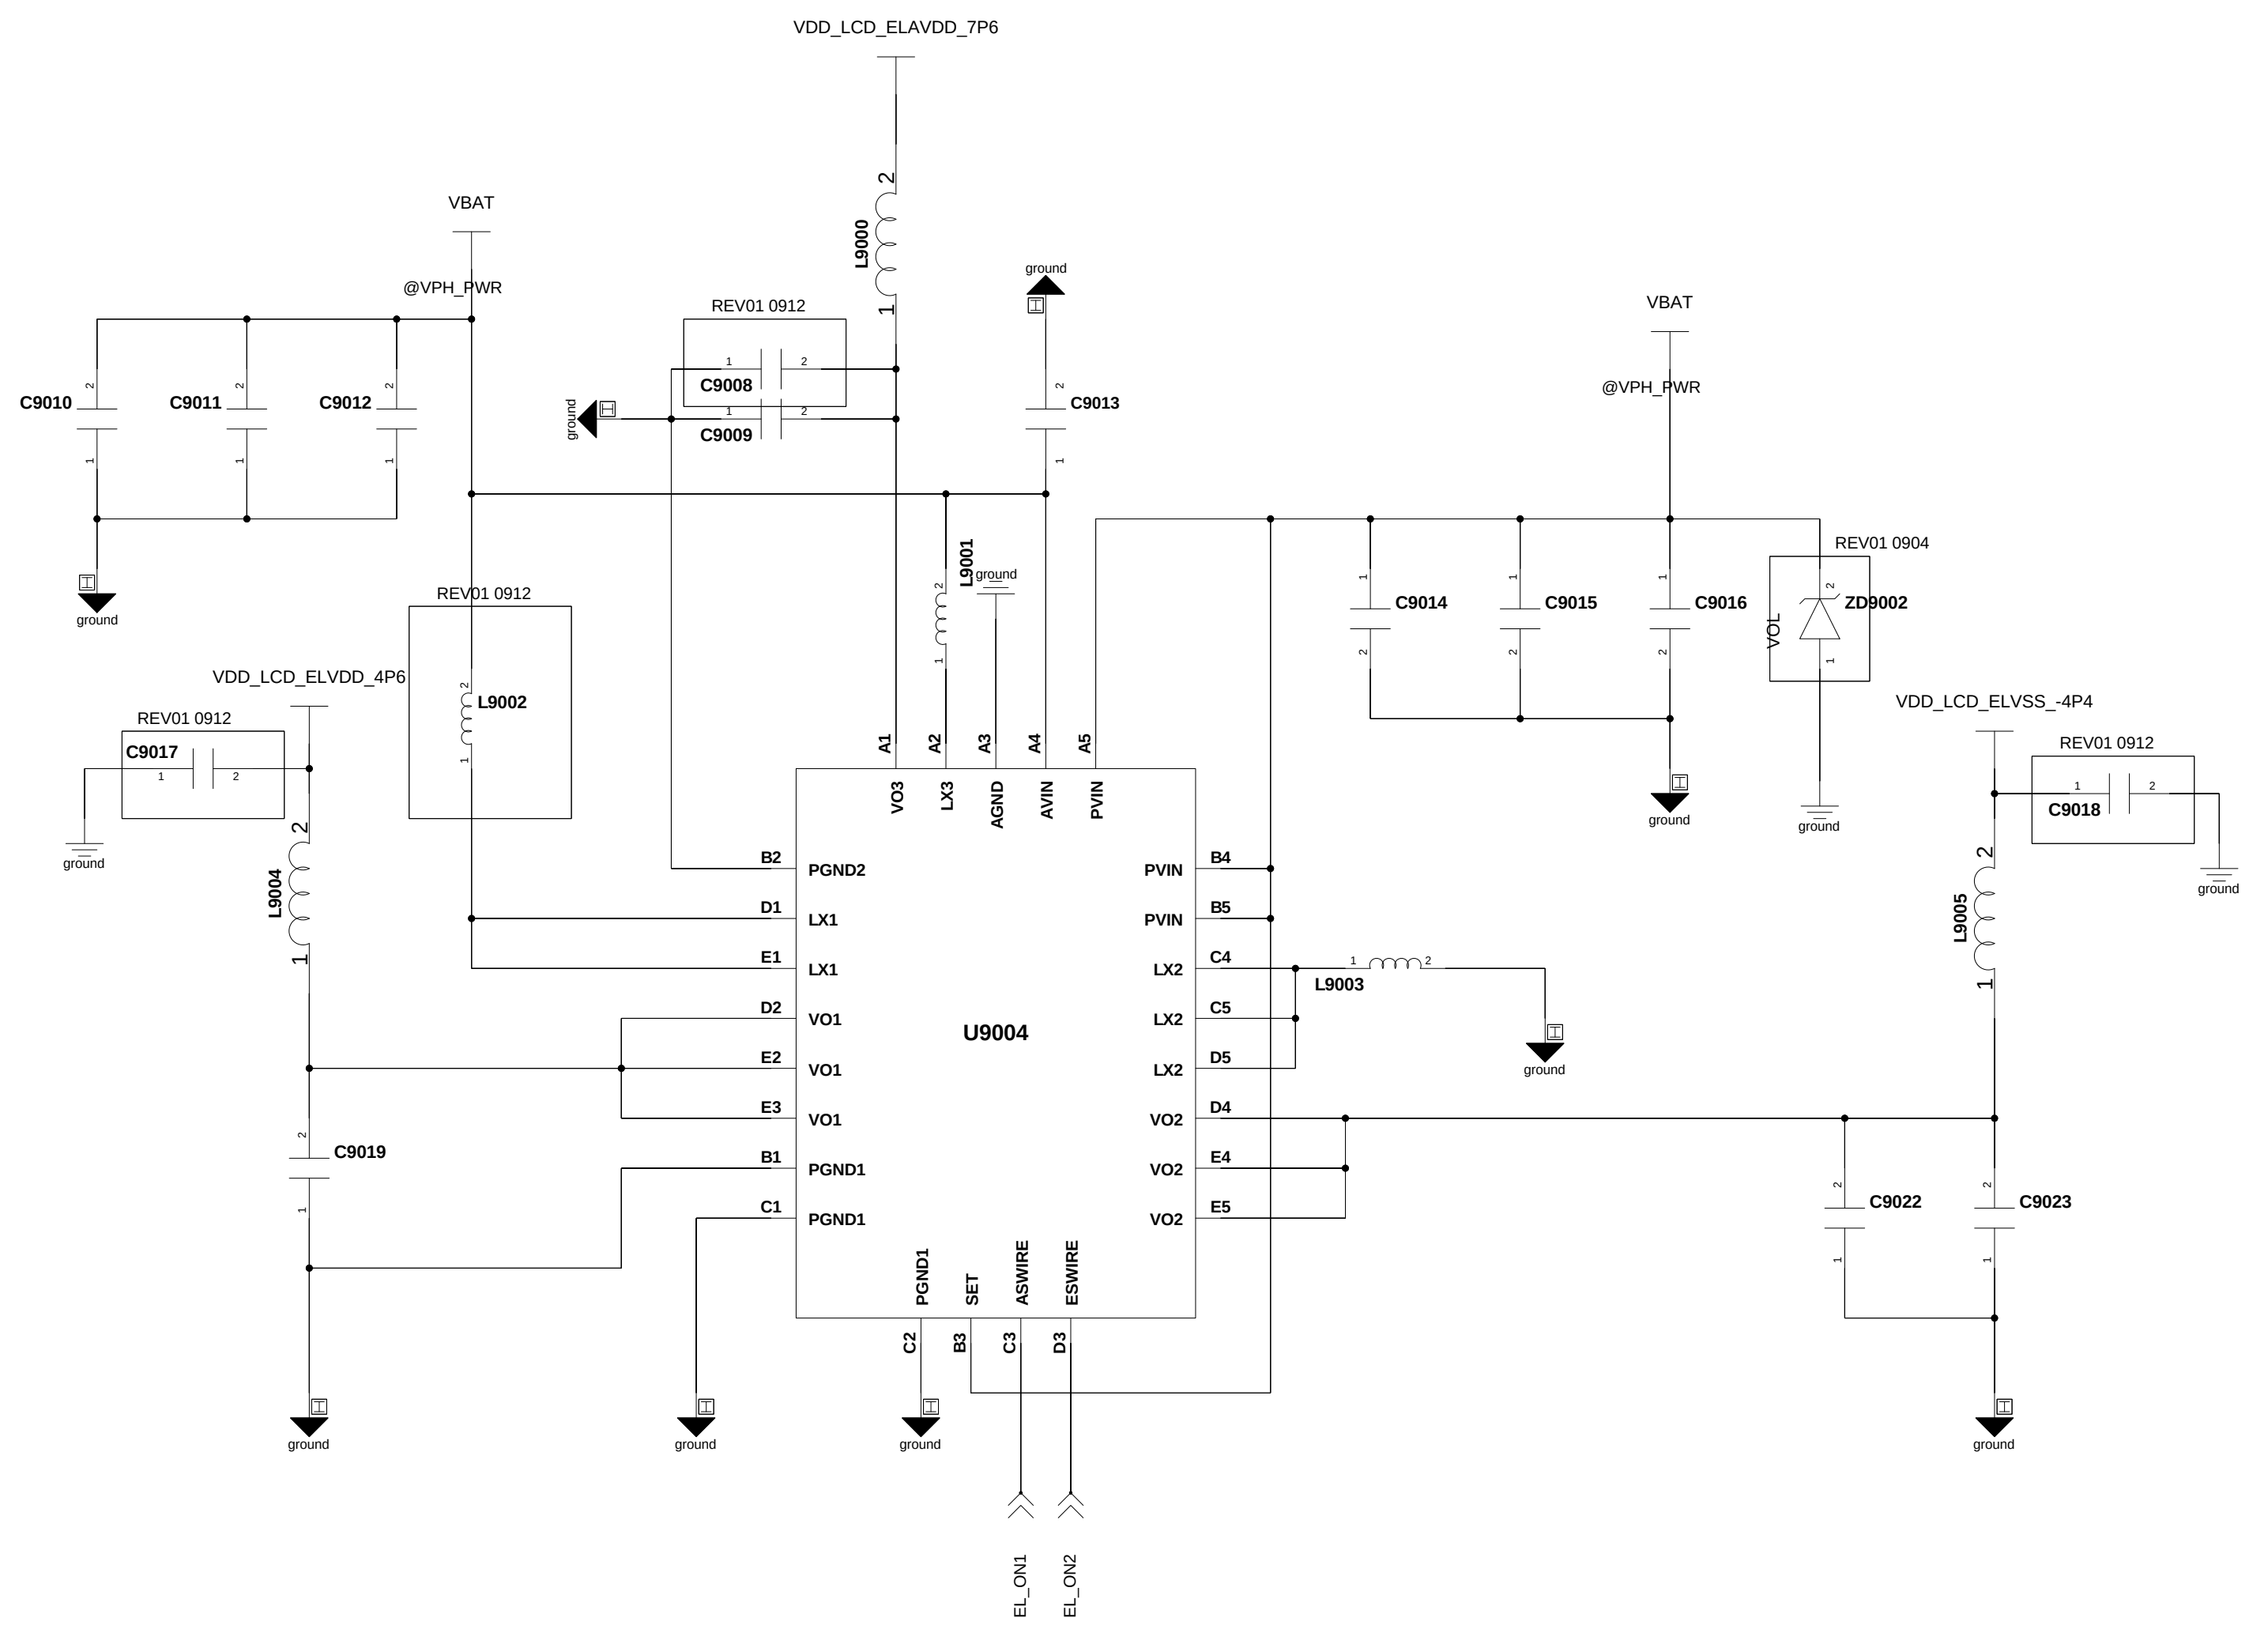
VDD_LCD_ELAVDD_7P6
L9000
VBAT
@VPH_PWR
REV01 0912
C9008
C9009
C9010
C9011
C9012
C9013
ground
L9001
REV01 0912
L9002
VDD_LCD_ELVDD_4P6
REV01 0912
C9017
L9004
C9019
U9004
VO3
LX3
AGND
AVIN
PVIN
PGND2
LX1
LX1
VO1
VO1
VO1
PGND1
PGND1
PVIN
PVIN
LX2
LX2
LX2
VO2
VO2
VO2
PGND1
SET
ASWIRE
ESWIRE
L9003
VBAT
@VPH_PWR
C9014
C9015
C9016
REV01 0904
ZD9002
VOL
VDD_LCD_ELVSS_-4P4
REV01 0912
C9018
L9005
C9022
C9023
EL_ON1
EL_ON2

DISPLAY PMIC

BOTH HOLE

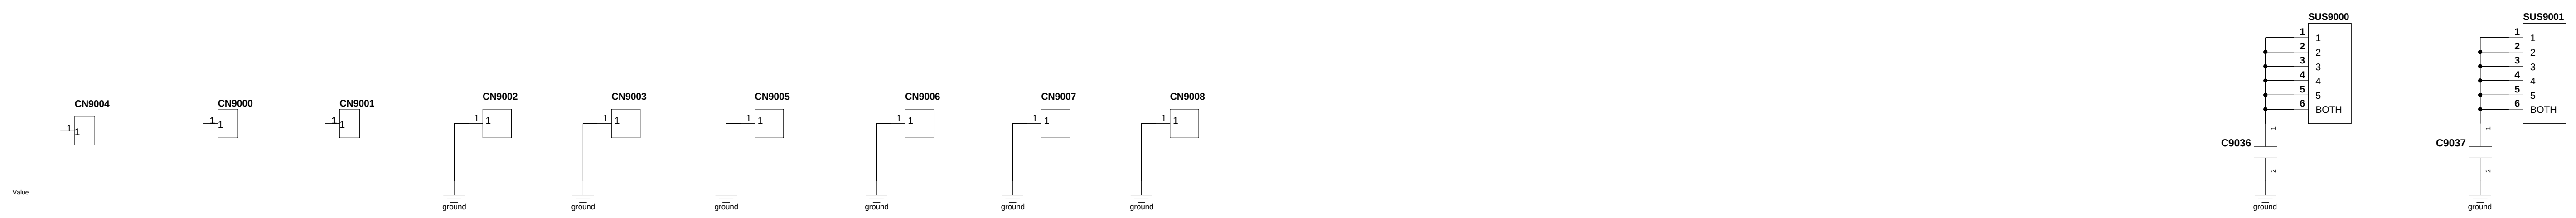
CN9004
Value
CN9000
CN9001
CN9002
CN9003
CN9005
CN9006
CN9007
CN9008
SUS9000
BOTH
C9036
SUS9001
BOTH
C9037
ground

SHIELD CAN

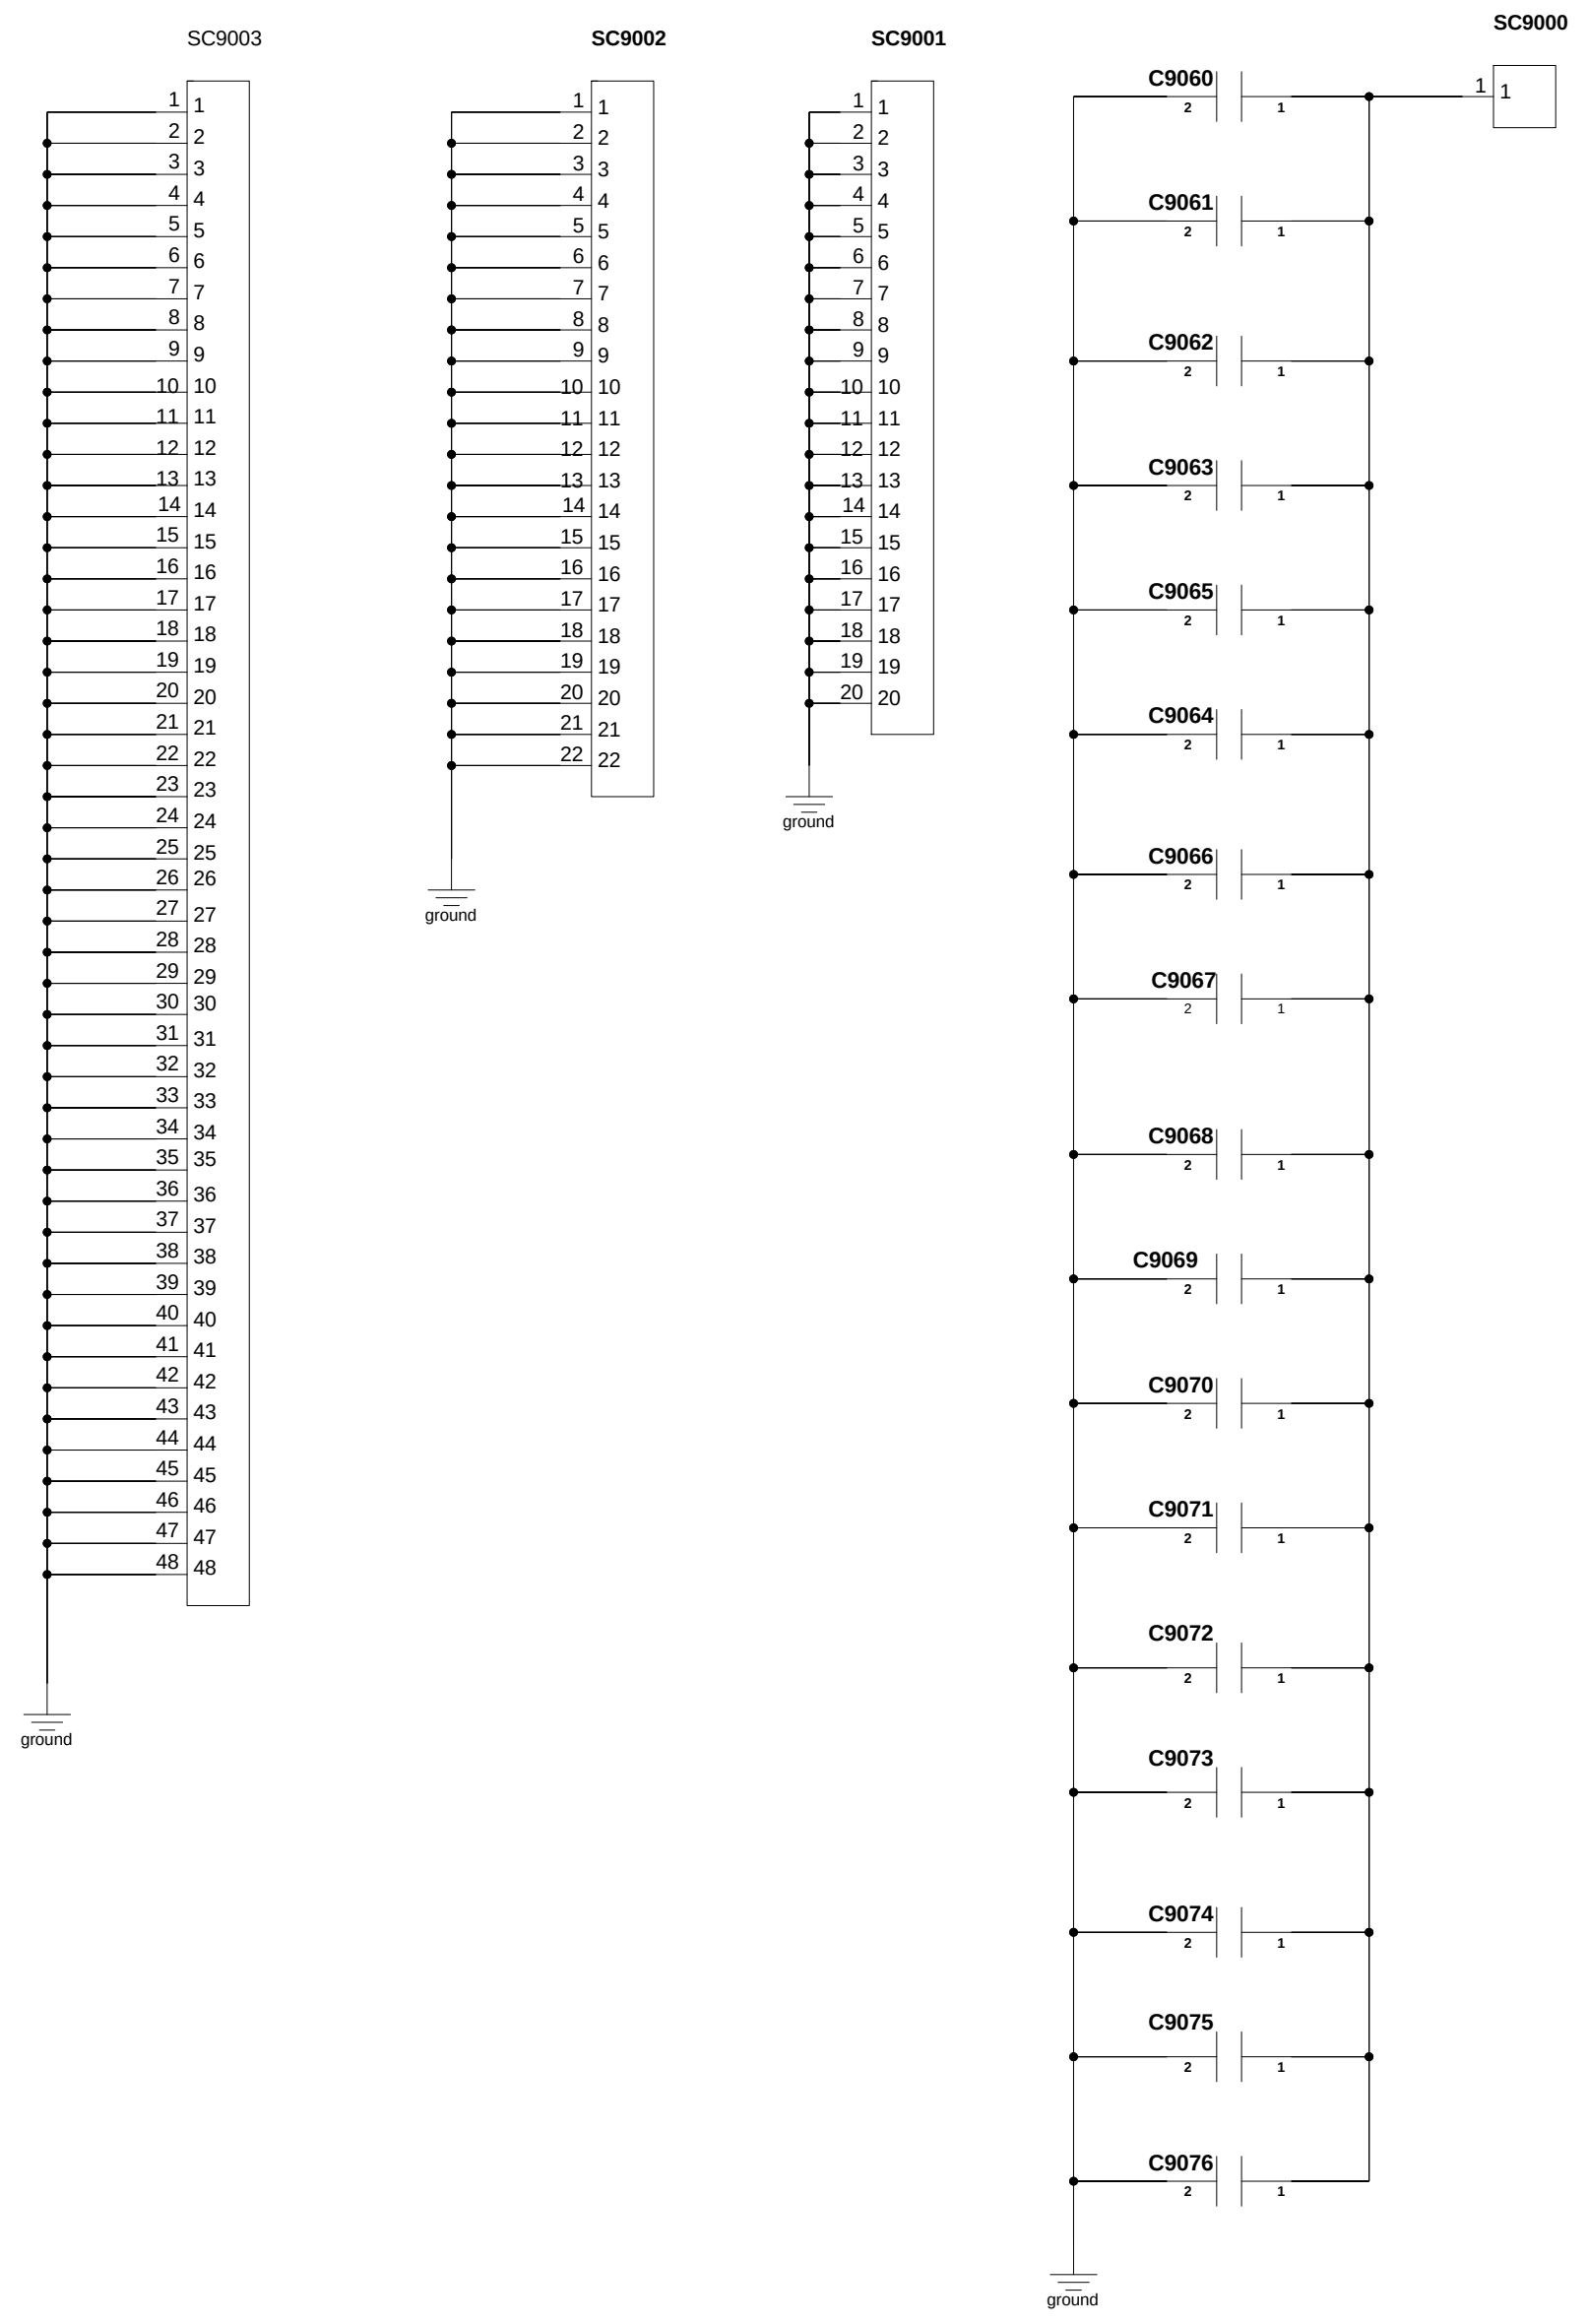
SC9003
SC9002
SC9001
SC9000
C9060
C9061
C9062
C9063
C9065
C9064
C9066
C9067
C9068
C9069
C9070
C9071
C9072
C9073
C9074
C9075
C9076
ground

REGION		MEMORY		
R9006	B : EUR	R9012	6/128	
R9007	0 : HK	R9013	8/128	
R9008	E : SEA, SWA ,LA,CIS	R9014	8/256	
R9009	M : MEA,AFR			

REV01 0904

Engineer:	A35		
Drawn by:			
R&D CHK:	TITLE:		Size:
DOC CTRL CHK:			
MFG ENGR CHK:			
Changed by:	Date Changed:	Time Changed:	QA CHK:
REV:	Drawing Number:	Page:	

A356E

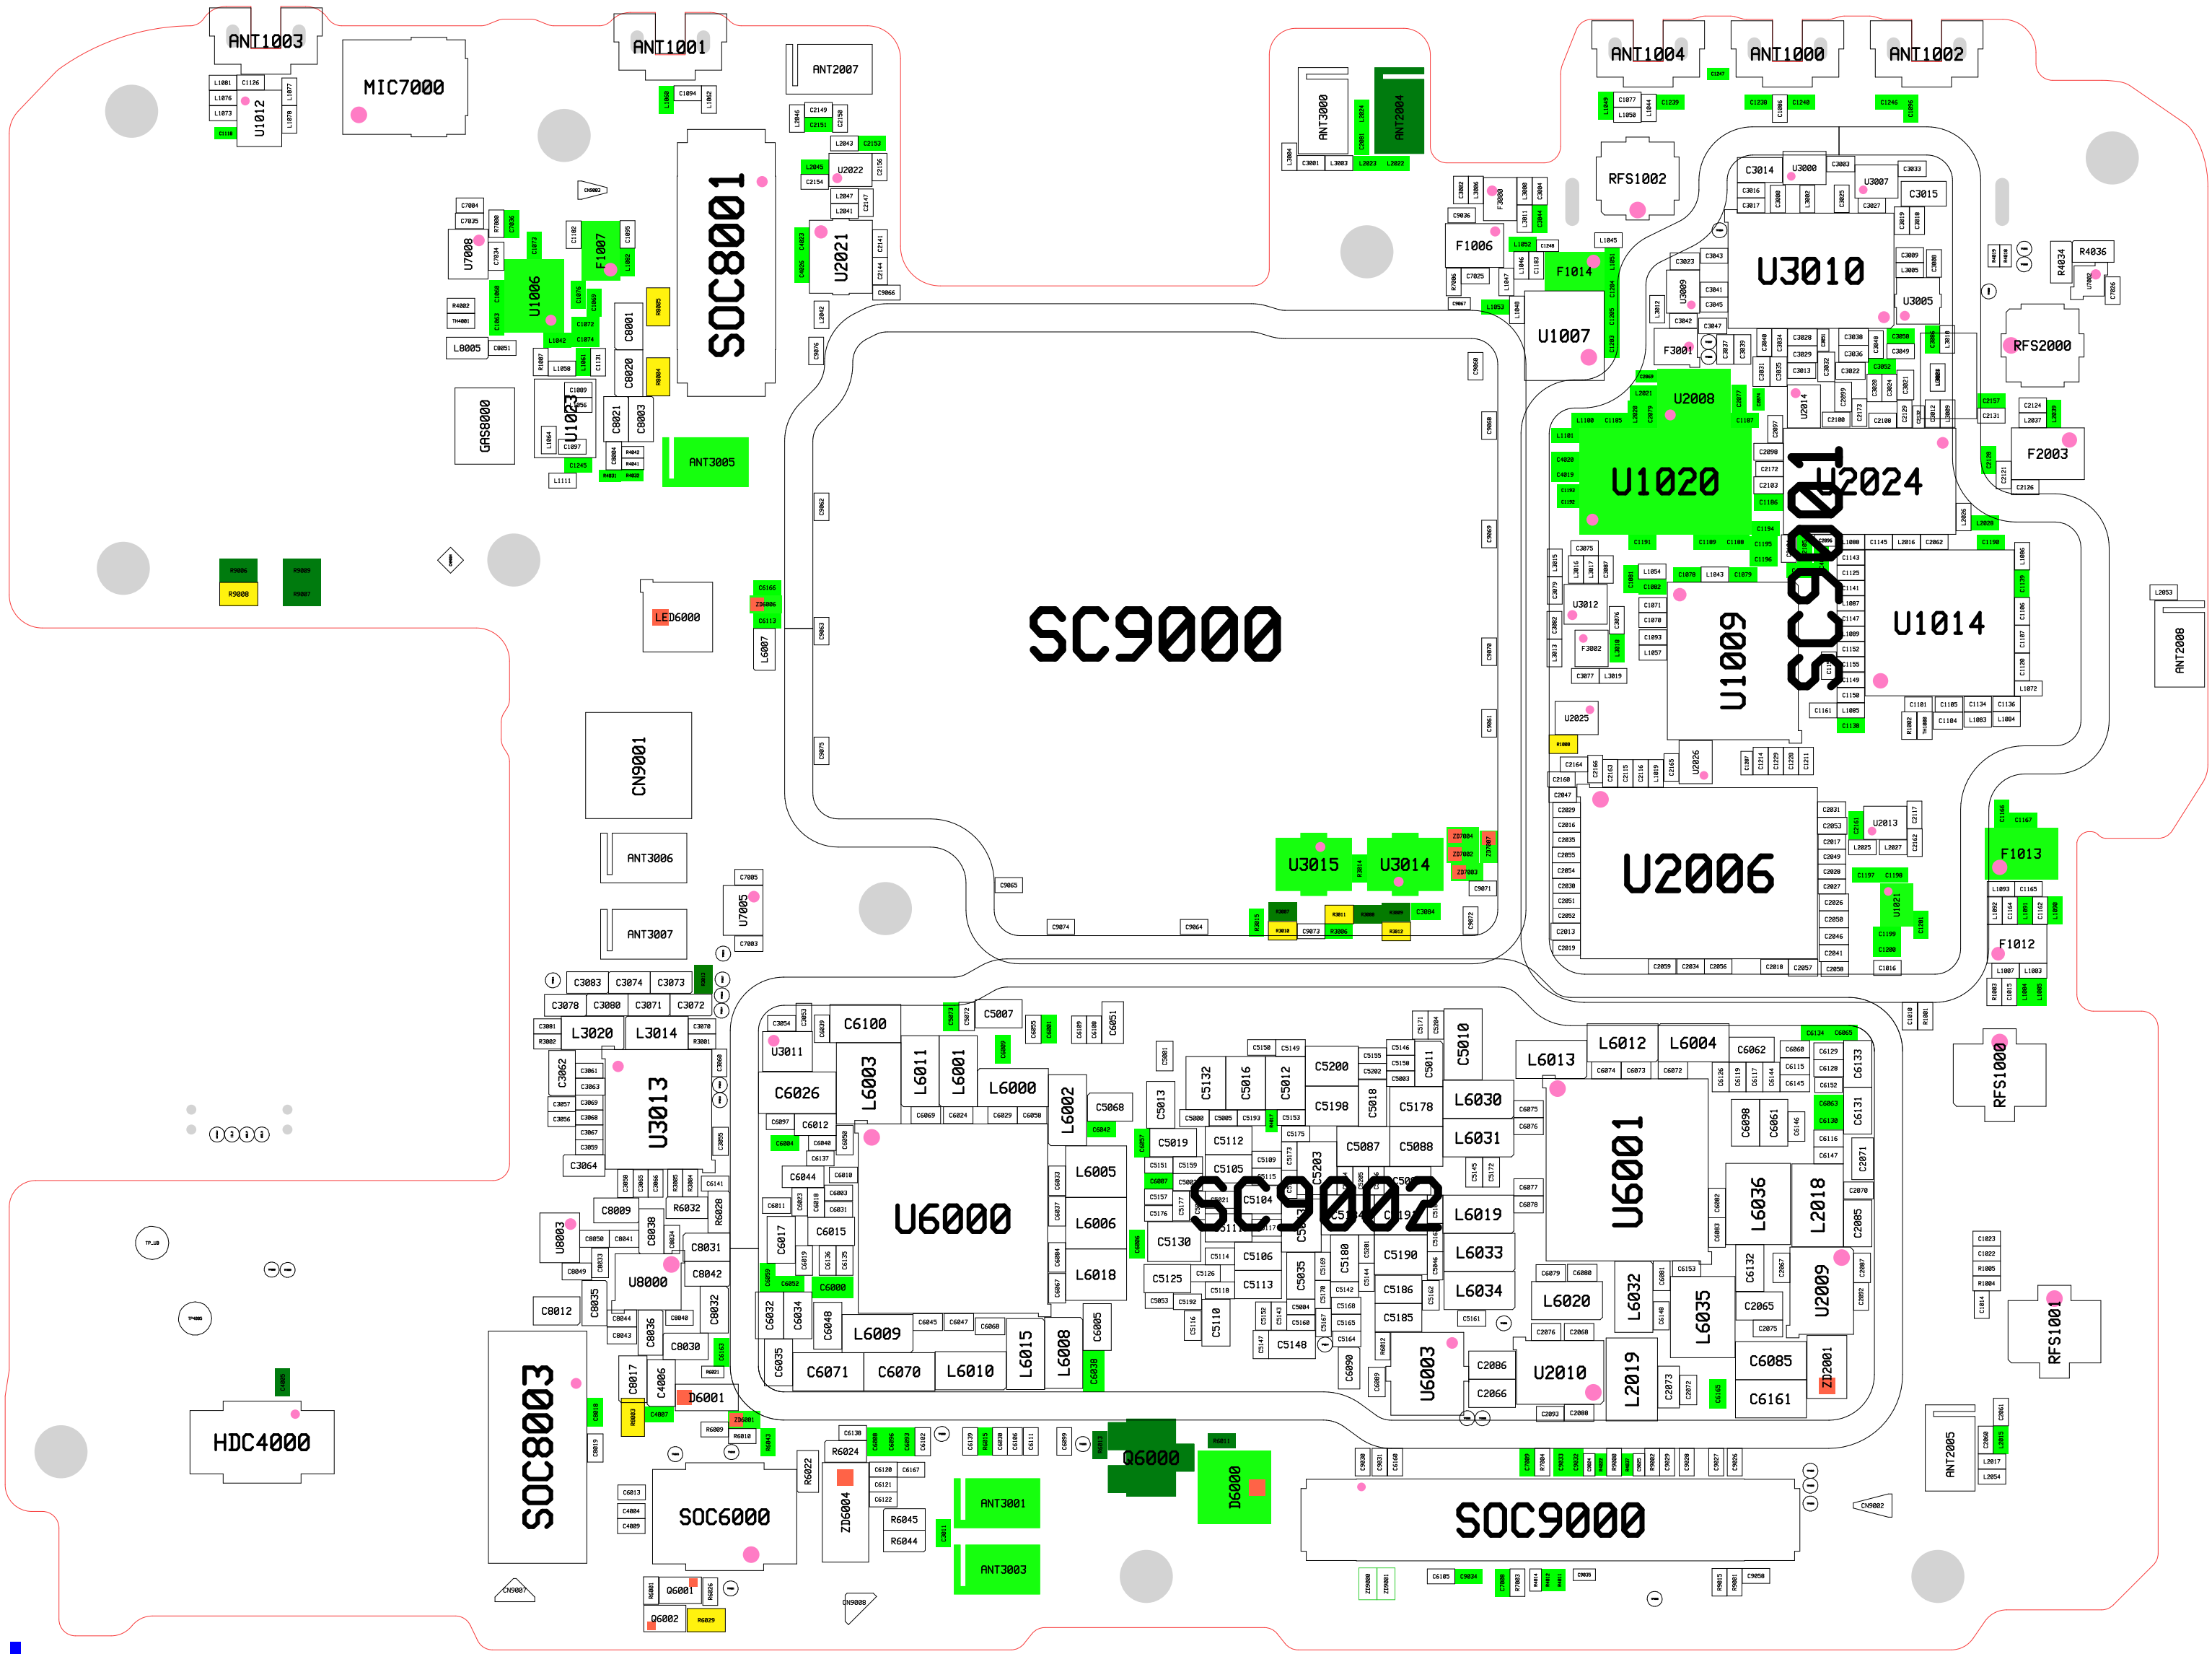
ANT1003
MIC7000
ANT1001
ANT2007
ANT3000
ANT2004
ANT1004
ANT1000
ANT1002
U1012
L1081
C1126
L1076
L1073
L1077
L1078
C1110
L1060
C1094
L1062
L2046
C2149
C2151
C2150
L2043
C2153
L2045
U2022
C2156
C2154
L2047
L2041
C2147
U2021
C4023
C4026
C2141
C2144
C9066
L2042
C9076
SOC8001
CN9003
C7004
C7035
R7000
C7036
U7008
C7034
C1073
U1006
C1068
C1063
C1076
C1069
C1072
C1074
L1042
F1007
C1182
C1095
L1082
R8005
R8004
C8001
C8020
R4002
TH4001
L8005
C8051
R1007
L1058
L1061
C1131
GAS8000
U1023
C1089
L1056
L1064
C1097
C1245
L1111
C8021
C8003
C8004
R4042
R4041
R4031
R4032
ANT3005
R9006
R9008
R9009
R9007
CN9004
LED6000
C6166
ZD6006
C6113
L6007
L3004
C3001
L3003
L2024
C2081
L2023
L2022
RFS1002
C1077
L1050
L1044
L1049
C1239
C1247
C1238
C1086
C1240
C1246
C1096
C3002
L3006
F3000
L3008
C3004
L3011
C3044
C9036
F1006
R7006
C7025
C9067
L1052
C1248
L1046
C1183
L1047
F1014
L1051
L1045
C1204
C1205
C1203
L1048
L1053
U1007
C3014
U3000
C3003
U3007
C3033
C3015
C3016
C3017
C3000
L3002
C3025
C3027
C3019
C3018
U3010
C3023
C3043
U3009
L3012
C3041
C3045
C3042
C3047
F3001
C3037
C3039
C3040
C3034
C3028
C3051
C3029
C3038
C3036
C3048
C3050
C3049
C3086
L3018
C3031
C3035
C3013
C3032
C3022
C3052
C3009
L3005
C3008
U3005
R4019
R4018
R4034
R4036
U7002
C7026
RFS2000
C2069
L2021
U2008
C2077
C2074
L2020
C2079
C1187
L1100
C1105
L1101
C4020
C4019
C1193
C1192
U1020
C1186
C2098
C2172
C2103
C2097
U2014
C2099
C2100
C2173
C2108
C2129
C2132
C3012
L3009
L3010
C2157
C2131
C2124
L2037
L2039
F2003
C2128
C2121
C2126
U2024
L2026
L2028
C1194
C1195
C1196
C1191
C1189
C1188
C1088
C1145
L2016
C2062
C1190
SC9001
C1143
C1125
C1141
L1087
C1147
L1089
C1152
C1155
C1149
C1150
U1014
L1086
C1139
C1106
C1107
C1120
L1072
C1161
L1085
C1138
C1101
C1105
C1134
C1136
R1002
TH1000
C1104
L1083
L1084
L2053
ANT2008
C3075
L3015
L3016
L3017
C3087
C3079
U3012
C3076
C3082
F3002
L3018
L3013
C3077
L3019
C1081
L1054
C1082
C1078
L1043
C1079
C1071
C1070
C1093
L1057
U1009
U2025
R1000
C2164
C2160
C2166
C2163
C2115
C2116
L1019
C2165
U2026
C1207
C1214
C1229
C1228
C1211
C2047
C2029
C2016
C2035
C2055
C2054
C2030
C2051
C2052
C2013
C2019
U2006
C2059
C2034
C2056
C2018
C2057
C2058
C2031
C2053
C2017
C2049
C2028
C2027
C2026
C2050
C2046
C2041
C2161
U2013
L2025
L2027
C2117
C2162
C1197
C1198
U1021
C1201
C1199
C1200
C1016
C1166
C1167
F1013
L1093
C1165
L1092
C1164
L1091
C1162
L1090
F1012
L1007
L1003
R1003
C1015
L1004
L1005
C1010
R1001
SC9000
C9060
C9068
C9069
C9070
C9061
C9062
C9063
C9075
C9065
C9074
C9064
R3015
R3007
R3010
C9073
R3011
R3008
R3006
R3009
R3012
C3084
C9072
C9071
U3015
R3014
U3014
ZD7004
ZD7002
ZD7003
ZD7007
CN9001
ANT3006
ANT3007
C7005
U7005
C7003
C3083
C3074
C3073
R3013
C3078
C3080
C3071
C3072
C3081
R3002
L3020
L3014
C3070
R3001
C3062
C3061
C3063
C3069
C3057
C3056
C3068
C3067
C3059
C3064
U3013
C3060
C3055
C3058
C3065
C3066
R3005
R3004
C6141
C8009
R6032
R6028
U8003
C8050
C8041
C8038
C8034
C8031
C8049
C8033
U8000
C8042
C8012
C8035
C8044
C8043
C8036
C8040
C8032
C8030
C6163
R6021
C8017
C4006
D6001
C8018
R8003
C4007
ZD6001
R6009
R6010
R6043
C8019
SOC8003
HDC4000
C4005
TP_UB
TP4005
C6013
C4004
C4009
SOC6000
CN9007
R6001
Q6001
R6026
Q6002
R6029
C3054
C3053
C6039
C6100
C5073
C5072
C5007
C6055
C6001
C6009
C6109
C6108
C6051
U3011
L6003
L6011
L6001
L6000
L6002
C5068
C6042
C6026
C6069
C6024
C6029
C6058
C6097
C6012
C6050
C6004
C6040
C6137
C6044
C6010
C6003
C6031
C6011
C6023
C6018
C6015
C6017
C6019
C6136
C6135
C6059
C6052
C6000
U6000
C6033
C6037
C6084
C6067
L6005
L6006
L6018
C6006
C6032
C6034
C6048
L6009
C6045
C6047
C6068
C6035
C6071
C6070
L6010
L6015
L6008
C6005
C6038
C5001
C5013
C5132
C5016
C5012
C5150
C5149
C5200
C5155
C5158
C5202
C5003
C5146
C5011
C5171
C5204
C5010
C5198
C5018
C5178
C5000
C5005
C5193
R4017
C5153
C6057
C5019
C5112
C5175
C5173
C5203
C5087
C5088
L6030
L6031
C5151
C5159
C5105
C5109
C5115
C6007
C5157
C5176
C5177
C5021
C5104
C5145
C5172
SC9002
C5130
C5114
C5106
C5201
C5190
L6019
L6033
C5125
C5126
C5118
C5113
C5035
C5169
C5180
C5144
C5046
C5162
C5053
C5192
C5116
C5110
C5152
C5143
C5084
C5160
C5170
C5142
C5168
C5167
C5165
C5164
C5186
C5185
L6034
C5161
C5147
C5148
C6090
C6089
R6012
U6003
C2086
C2066
L6013
L6012
L6004
C6062
C6060
C6129
C6128
C6133
C6134
C6065
C6074
C6073
C6072
C6126
C6119
C6117
C6144
C6115
C6145
C6152
C6075
C6076
C6098
C6061
C6146
C6063
C6130
C6131
C6116
C6147
C2071
U6001
C6077
C6078
C6082
C6083
L6036
L2018
C2070
C2085
C6079
C6080
L6020
L6032
C6081
C6148
C6153
C6132
C2067
U2009
C2087
C2092
L6035
C2065
C2075
C2076
C2068
U2010
L2019
C2073
C2072
C6165
C6085
C6161
ZD2001
C2093
C2088
RFS1000
C1023
C1022
R1005
R1004
C1014
RFS1001
ANT2005
C2061
C2060
L2015
L2017
L2054
C6138
R6024
C6088
C6096
C6093
C6102
C6139
R6015
C6030
C6106
C6111
C6099
R6013
Q6000
R6011
D6000
R6022
ZD6004
C6120
C6167
C6121
C6122
R6045
R6044
ANT3001
C3011
ANT3003
CN9008
C9030
C9031
C6160
SOC9000
C7009
R7004
C9033
C9032
C9024
R4022
R9000
R4037
C9025
R9002
C9029
C9028
C9027
C9026
CN9002
ZD9000
ZD9001
C6105
C9034
C7008
R7003
R4014
R4012
R4011
C9035
R9015
R9001
C9058

A356E

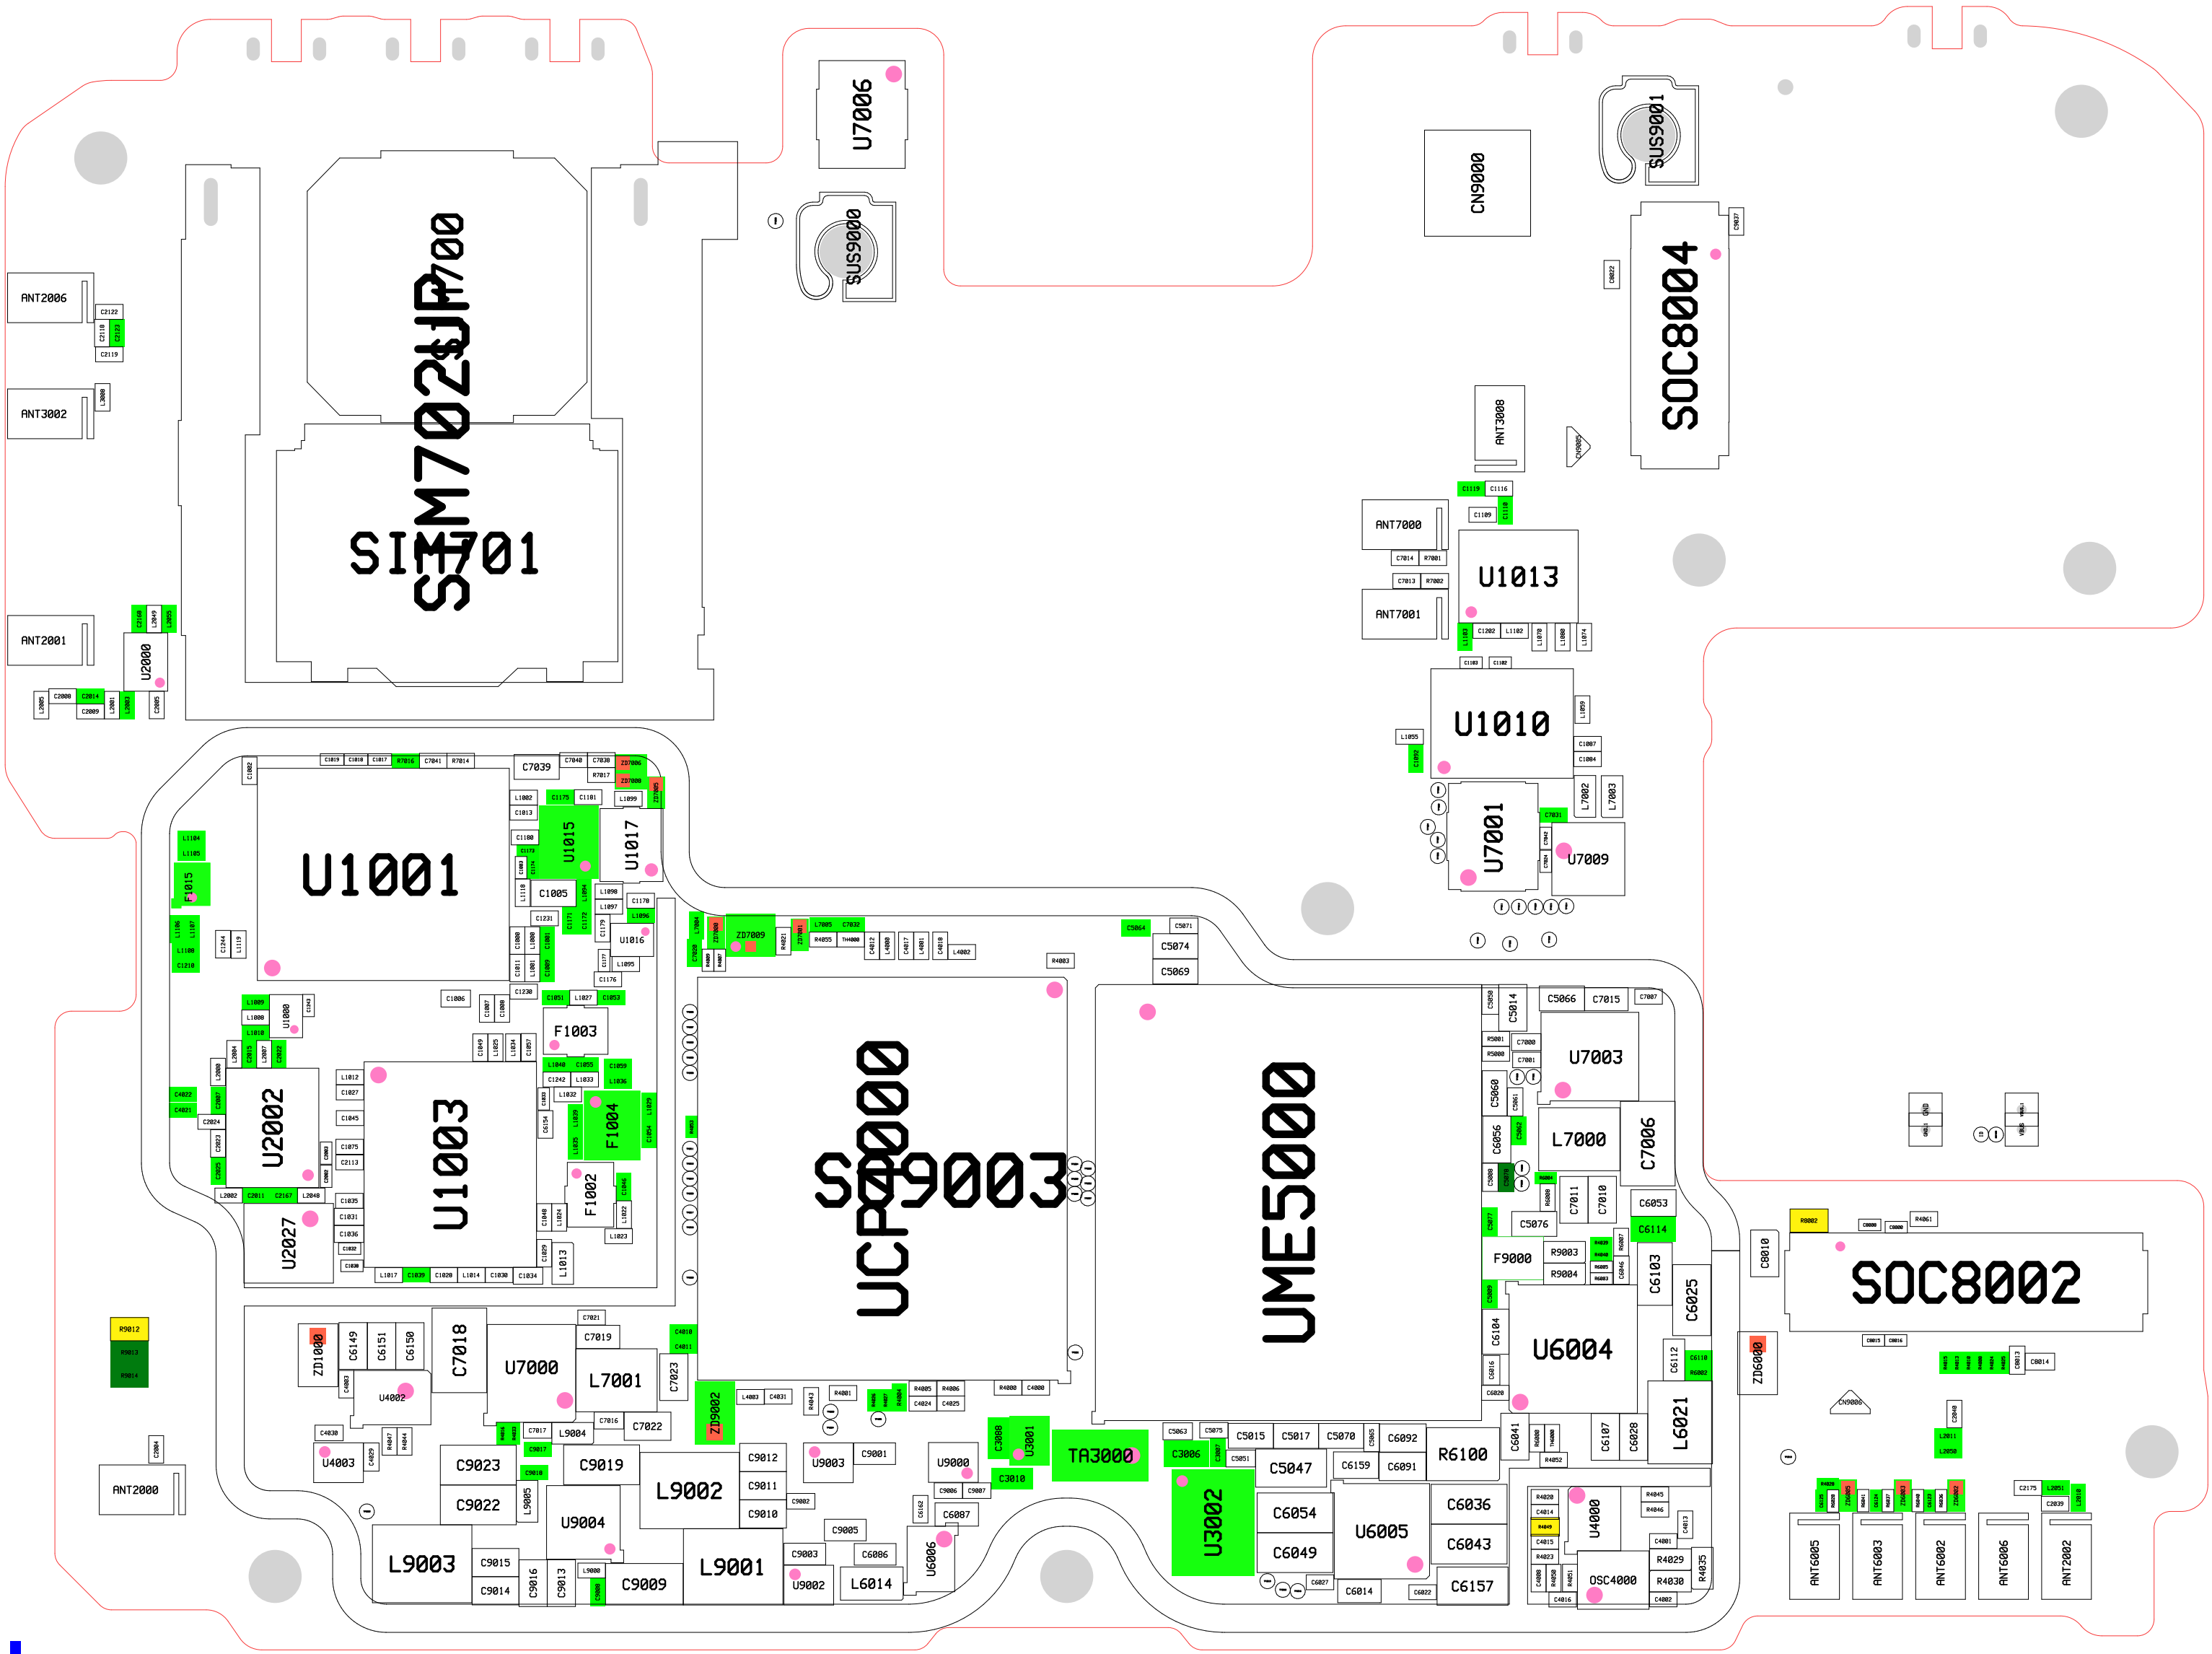
U7006
SUS9000
CN9000
SUS9001
SOC8004
C9037
C8022
CN9005
ANT3008
ANT2006
C2122
C2118
C2123
C2119
ANT3002
L3008
SIM7002
JP700
SIM701
ANT2001
U2000
C2168
L2049
L2055
L2005
C2008
C2014
C2009
L2001
L2003
C2005
ANT7000
C7014
R7001
C7013
R7002
ANT7001
C1119
C1116
C1109
C1110
U1013
L1103
C1202
L1102
L1070
L1080
L1074
C1103
C1102
U1010
L1059
C1087
C1084
L1055
C1092
U7001
L7002
L7003
C7031
C7042
C7024
U7009
C1019
C1018
C1017
R7016
C7041
R7014
C7039
C7040
C7038
R7017
ZD7006
ZD7008
ZD7005
C1002
U1001
L1002
C1175
C1181
L1099
C1013
C1180
C1173
C1003
C1174
U1015
U1017
L1118
C1005
L1094
L1098
C1178
L1097
L1096
C1231
C1171
C1172
C1179
U1016
C1000
L1008
C1001
C1011
L1001
C1009
C1177
L1095
C1176
C1230
L1104
L1105
F1015
L1106
L1107
L1108
C1210
C1244
L1119
C1006
C1007
C1008
C1051
L1027
C1053
F1003
L1009
L1008
L1010
U1000
C1243
L2004
C2015
L2007
C2022
C1049
L1025
L1034
C1057
L2000
L1040
C1055
C1059
C1242
L1033
L1036
L1032
C1033
L1012
C1027
C4022
C4021
C2007
C2024
U2002
C2023
C1045
U1003
C6154
L1039
F1004
L1029
C1054
L1035
C1075
C2113
C2003
C2002
C2025
L2002
C2011
C2167
L2048
C1035
F1002
C1046
C1031
C1048
L1024
L1022
U2027
C1036
C1032
C1029
L1023
C1030
L1013
L1017
C1039
C1028
L1014
C1030
C1034
R9012
R9013
R9014
C2004
ANT2000
ZD1000
C6149
C6151
C6150
C7018
U7000
C7021
C7019
L7001
C7023
C4010
C4011
C4003
U4002
C4030
R4047
R4044
U4003
C4029
R4016
R4033
C7017
L9004
C7016
C7022
C9017
C9023
C9018
C9019
C9022
L9005
U9004
L9002
C9012
C9011
C9010
L9003
C9015
C9014
C9016
C9013
L9000
C9008
C9009
L9001
L7004
ZD7000
ZD7009
C7020
R4009
R4007
R4021
ZD7001
L7005
C7032
R4055
TH4000
C4012
L4000
C4017
L4001
C4018
L4002
R4003
C5064
C5071
C5074
C5069
UCP0000
S99003
UME5000
R4053
ZD9002
L4003
C4031
R4043
R4001
R4026
R4027
R4004
R4005
R4006
C4024
C4025
R4000
C4000
U9003
C9001
C9002
C9005
C9003
U9002
C6086
L6014
U9000
C9006
C9007
C3088
U3001
C3010
C6162
C6087
U6006
TA3000
C5063
C5075
C3006
C3007
C5051
C5015
C5017
C5070
C5065
C6092
C5047
C6159
C6091
R6100
U3002
C6054
C6049
U6005
C6027
C6014
C6022
C6036
C6043
C6157
C5050
C5014
C5066
C7015
C7007
R5001
R5000
C7000
C7001
U7003
C5060
C5061
C6056
C5062
L7000
C7006
C5008
C5078
R6004
R6008
C7011
C7010
C6053
C5077
C5076
C6114
F9000
R9003
R9004
R4039
R4040
R6005
R6003
R6007
C6046
C6103
C6025
C5009
C6104
U6004
C6016
C6020
C6112
C6110
R6002
L6021
C6041
R6000
TH6000
R4052
C6107
C6028
R4020
C4014
R4049
C4015
R4023
C4008
R4050
R4051
C4016
U4000
OSC4000
R4045
R4046
C4013
C4001
R4029
R4030
R4035
C4002
GND
GND_1
VBUS_1
VBUS
ID
R8002
C8008
C8000
R4061
C8010
SOC8002
ZD6000
C8015
C8016
R4015
R4013
R4010
R4008
R4024
R4025
C8013
C8014
CN9006
C2040
L2011
L2050
R4028
C6125
R6028
ZD6005
R6041
C6124
R6037
ZD6003
R6040
C6123
R6036
ZD6002
C2175
L2051
C2039
L2010
ANT6005
ANT6003
ANT6002
ANT6006
ANT2002