



5. PCB Diagram


5-1. Wiring Diagram

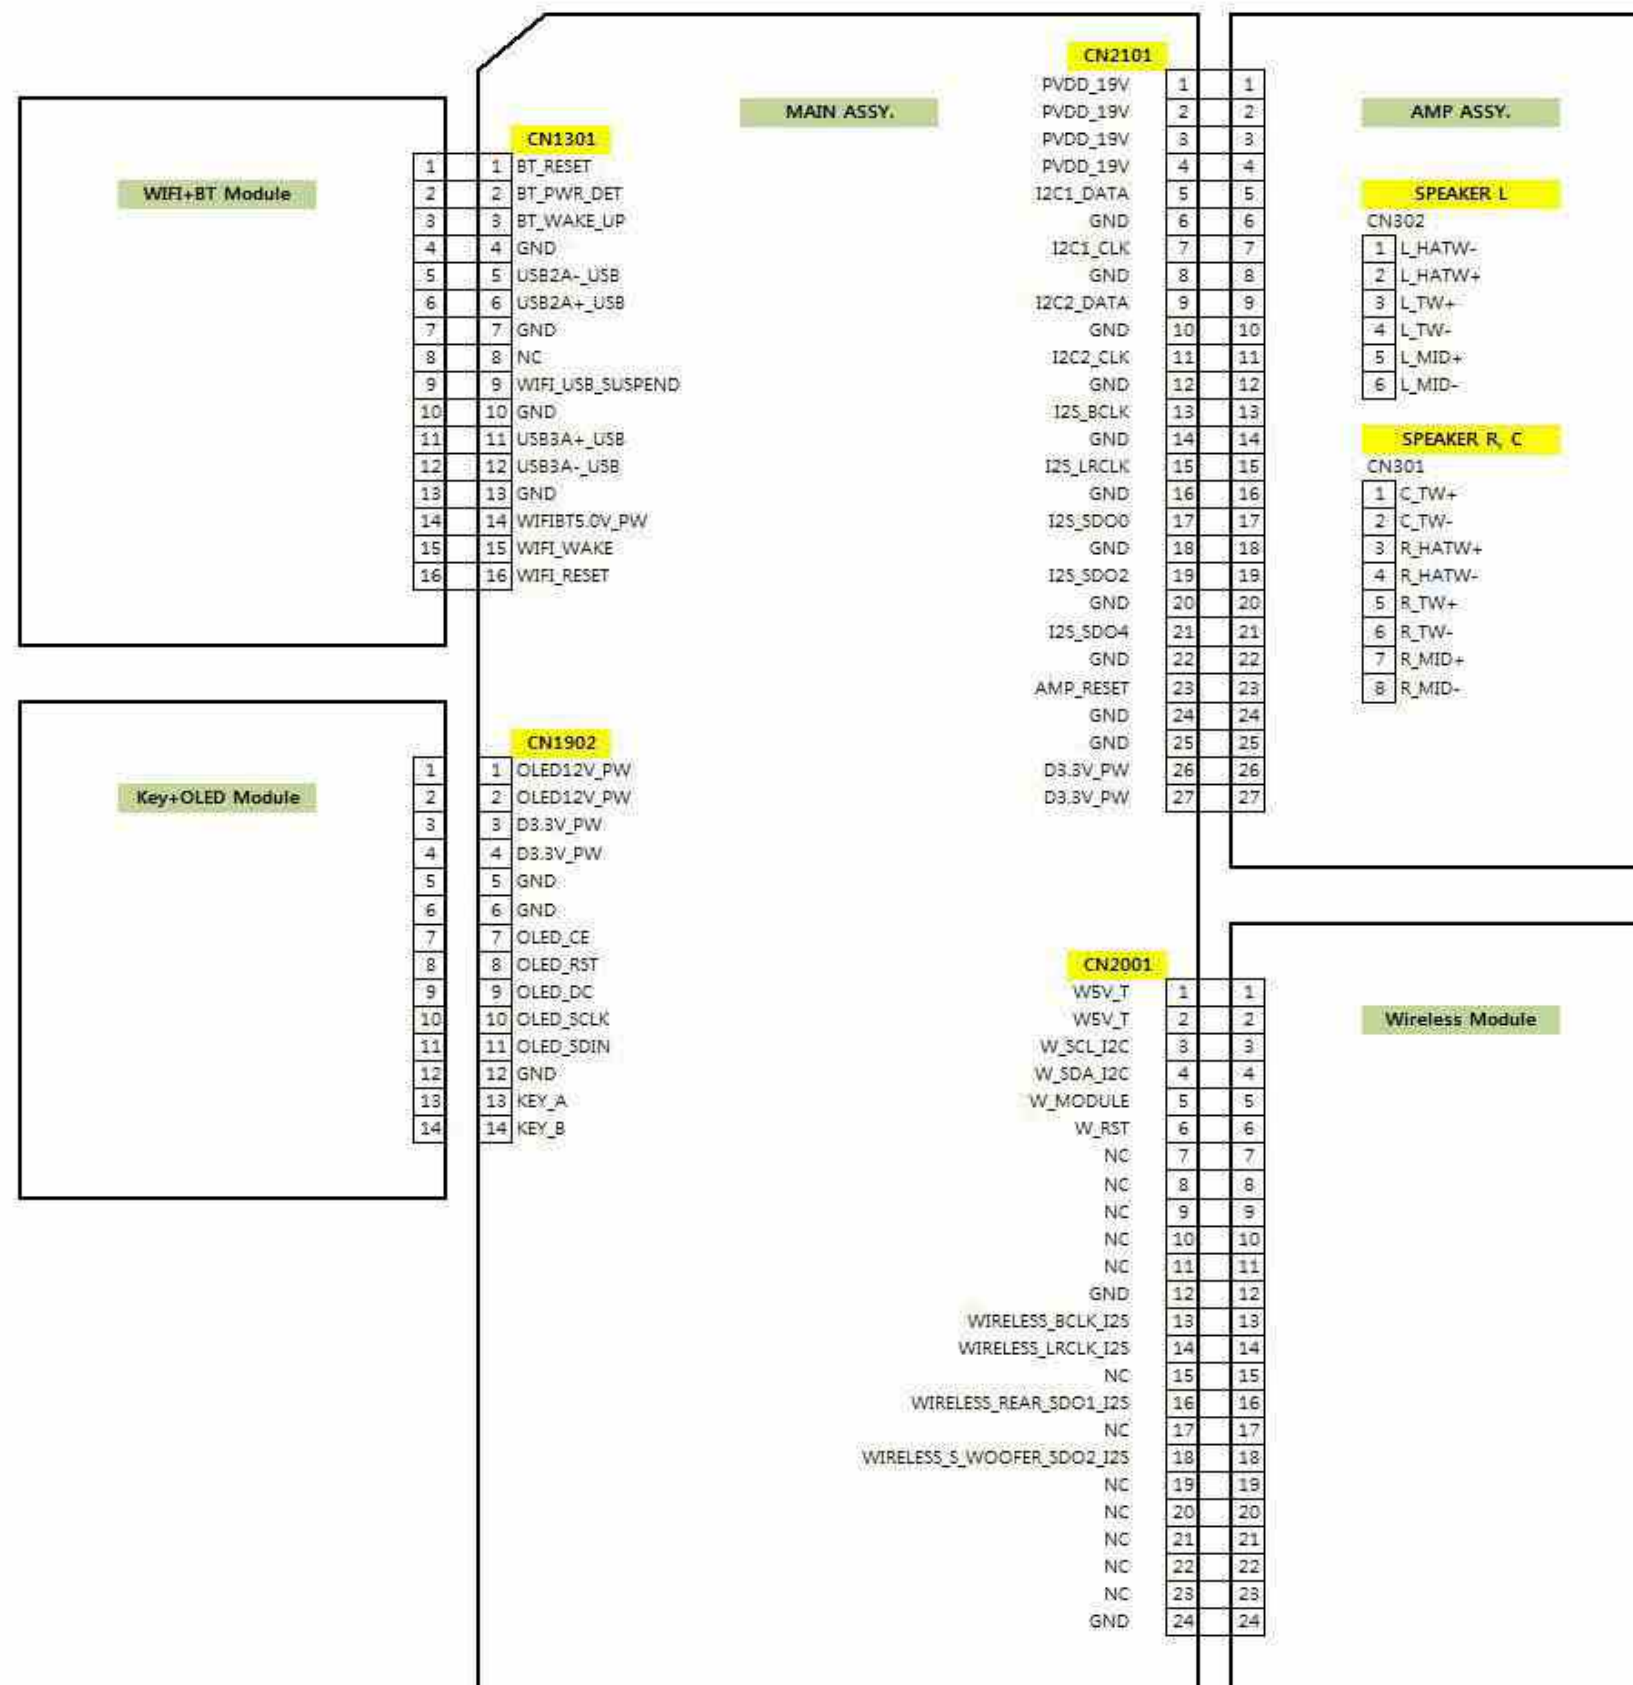



5-2. Block Diagram

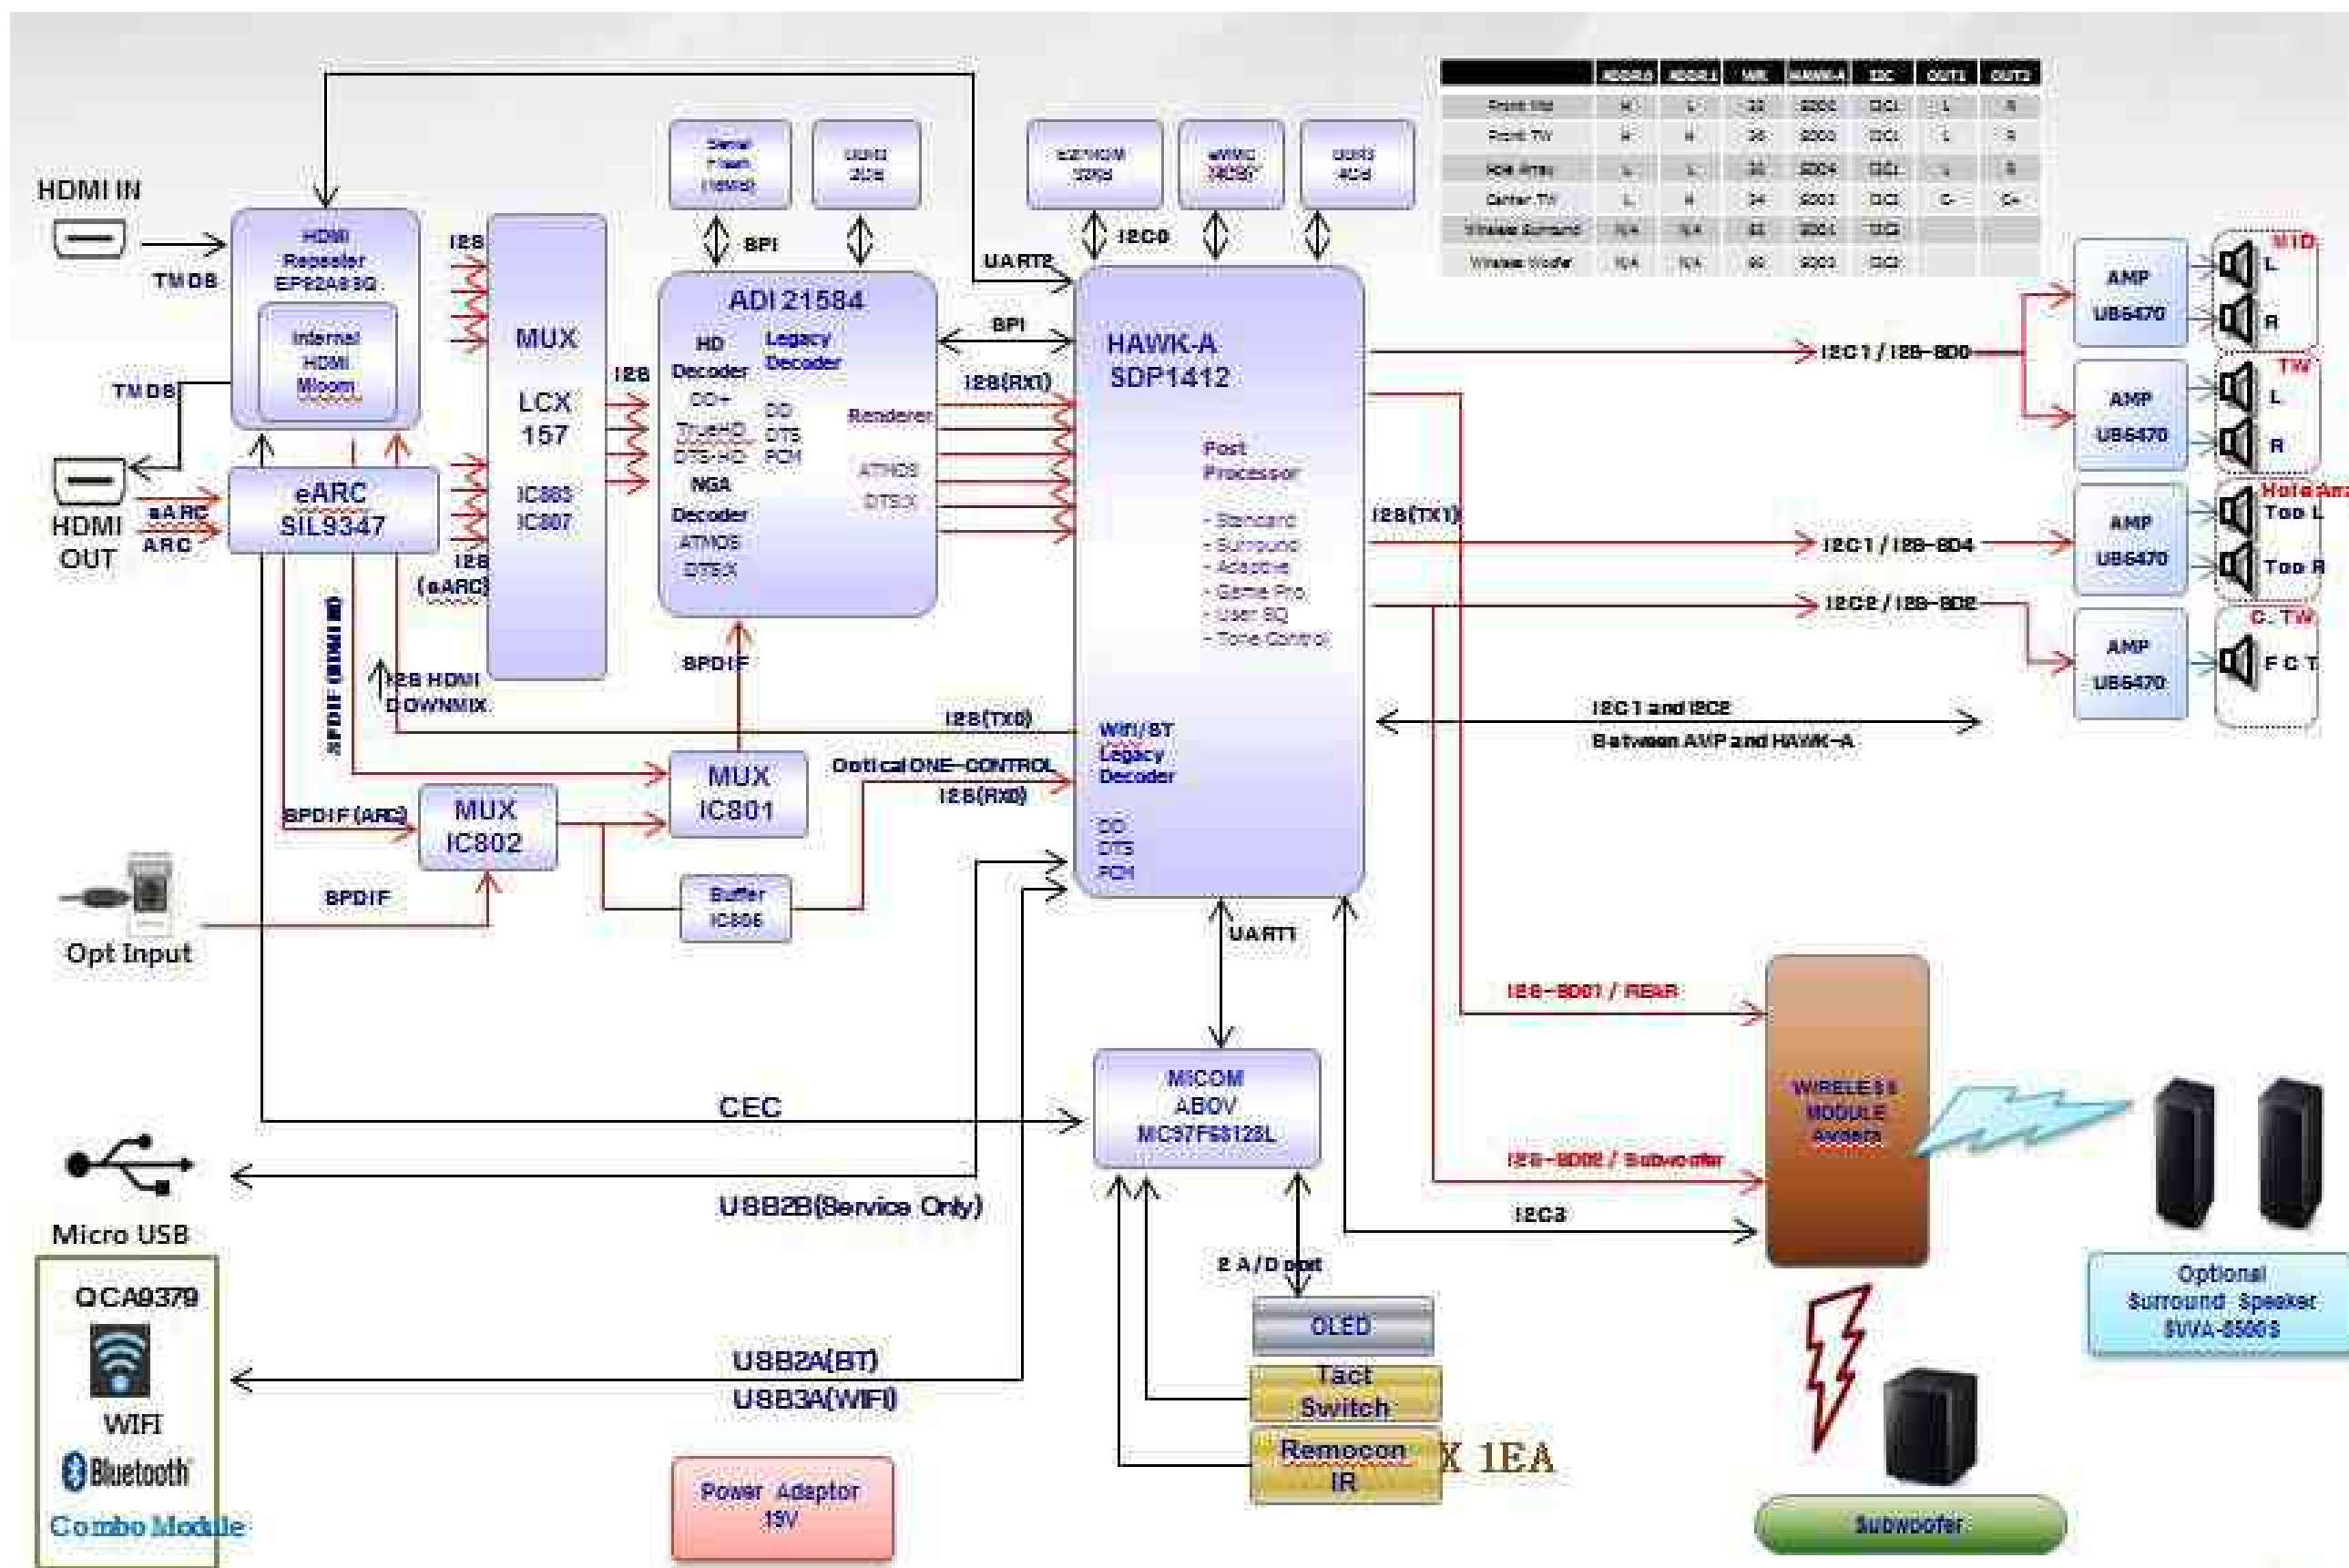


5-3. Power Tree (Main Board)

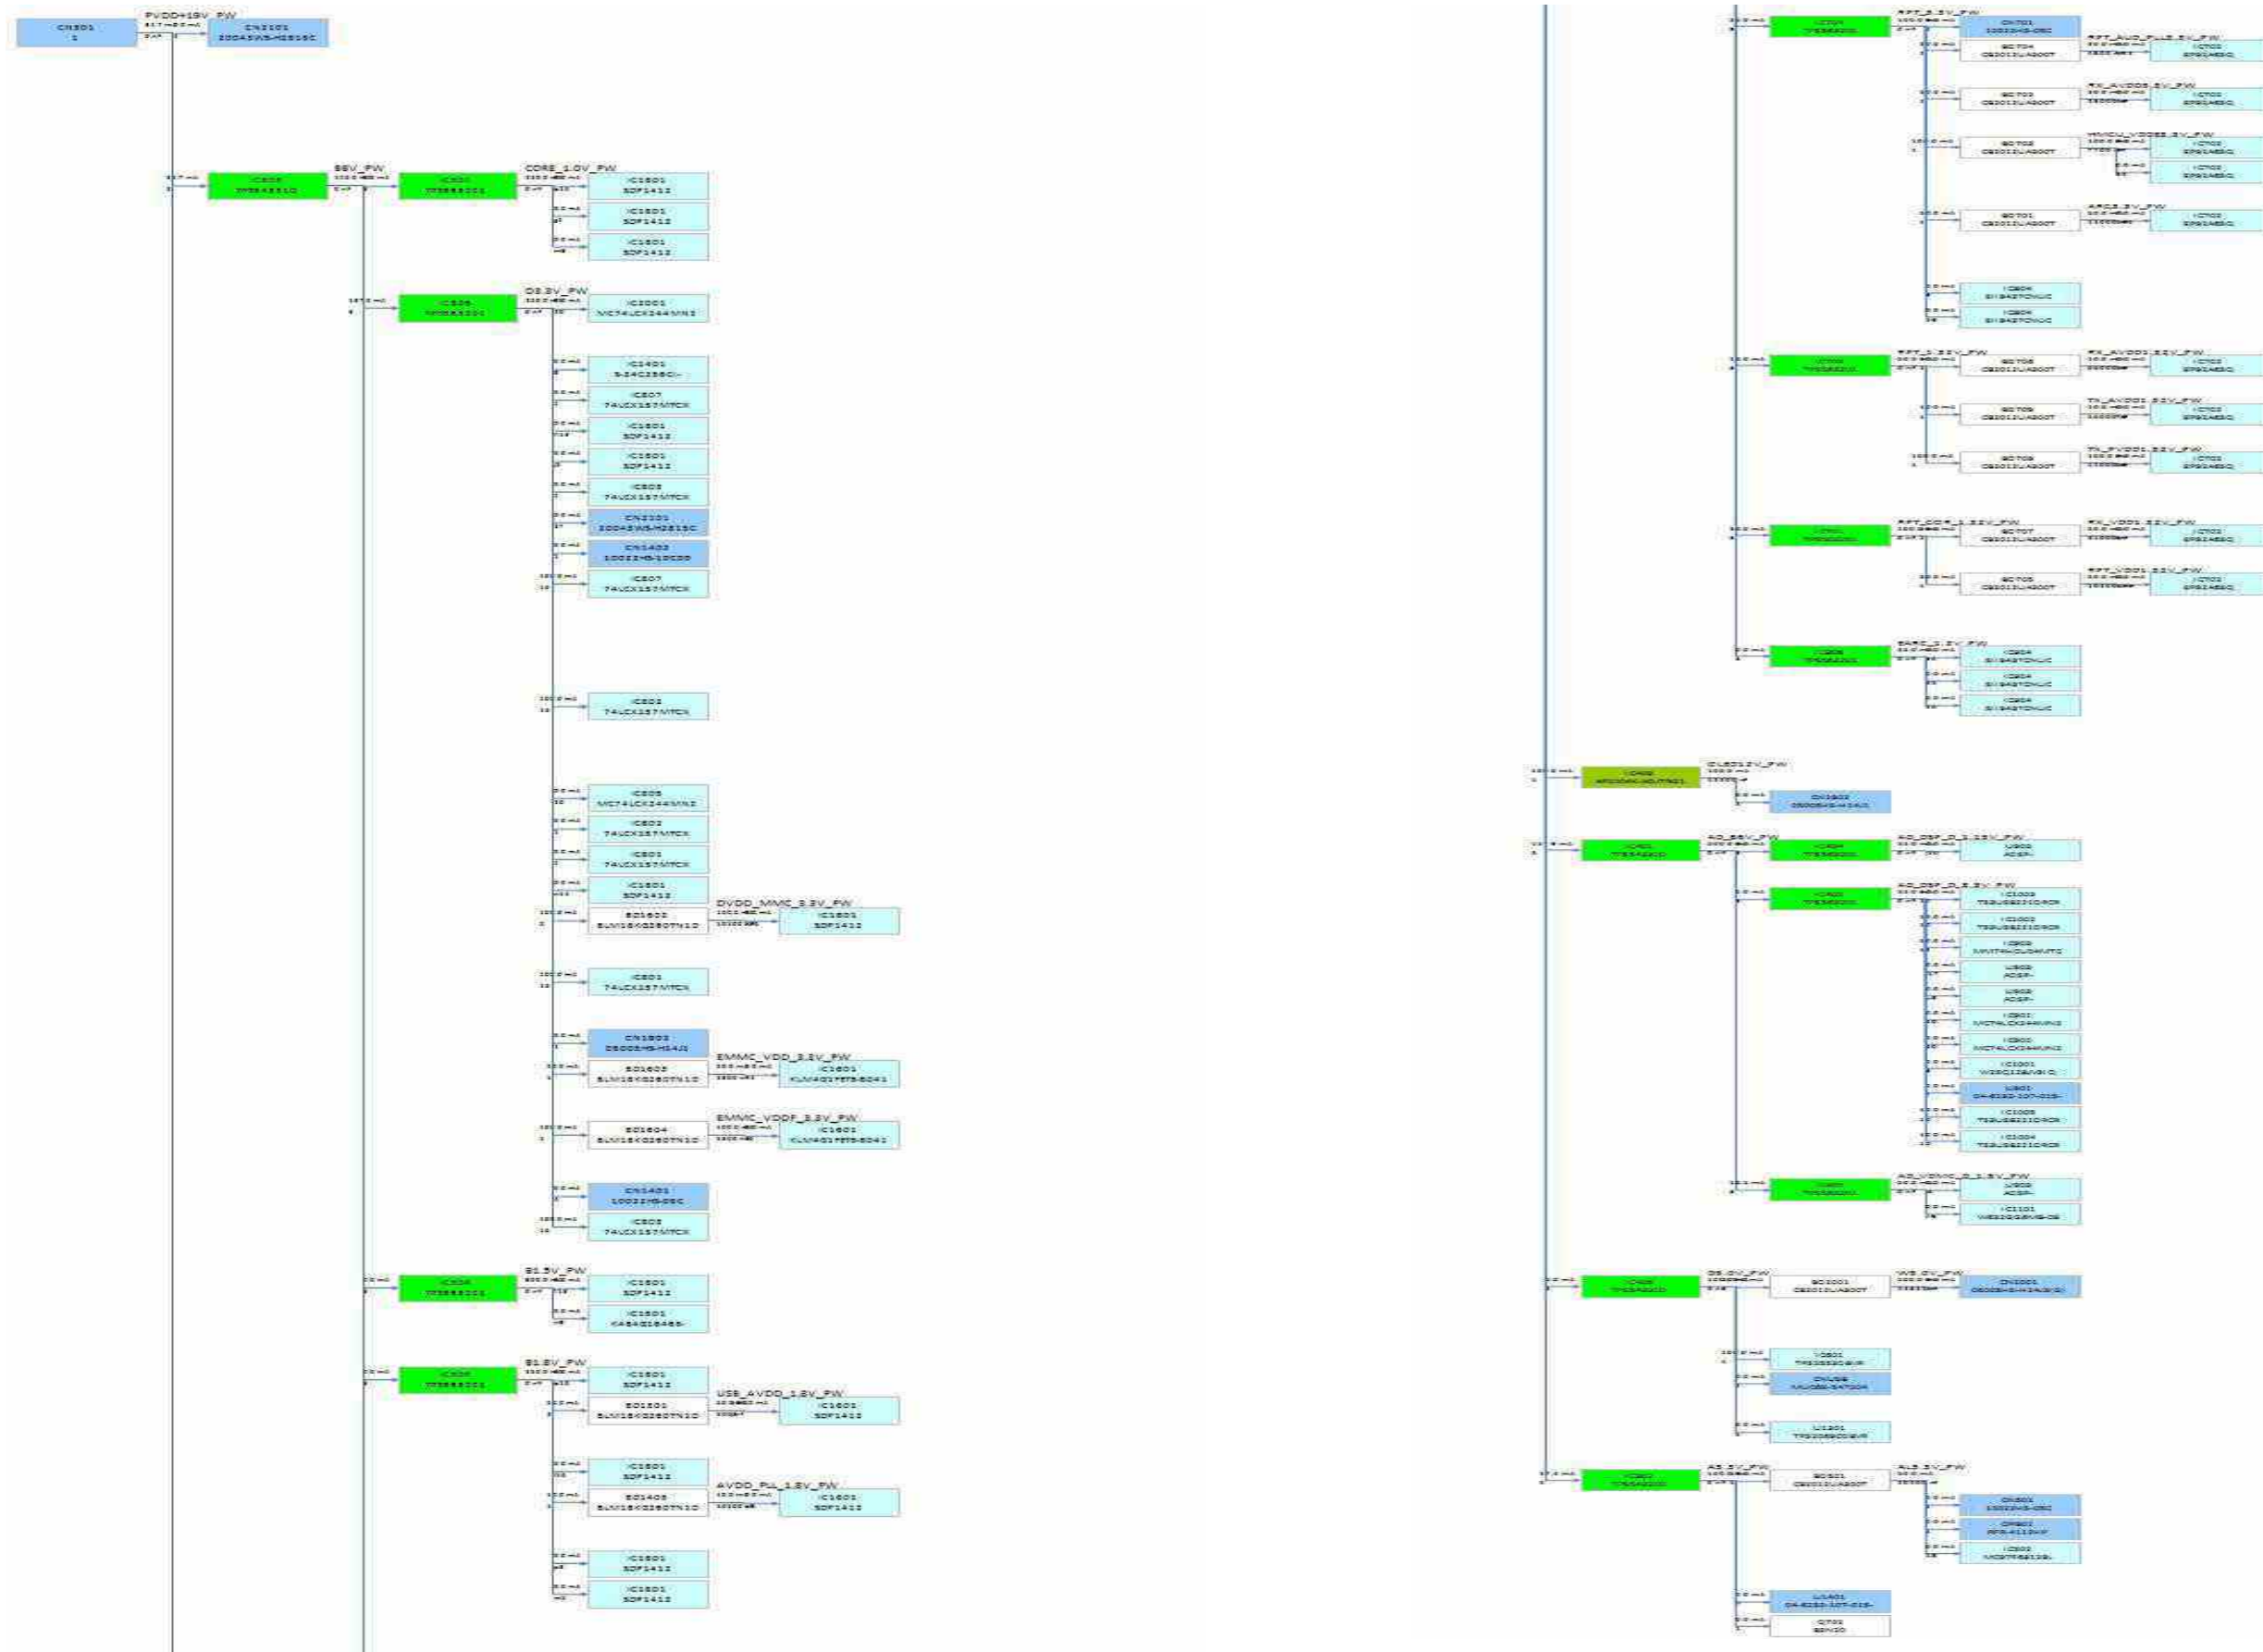

5-4. Power Tree (Amp Board)

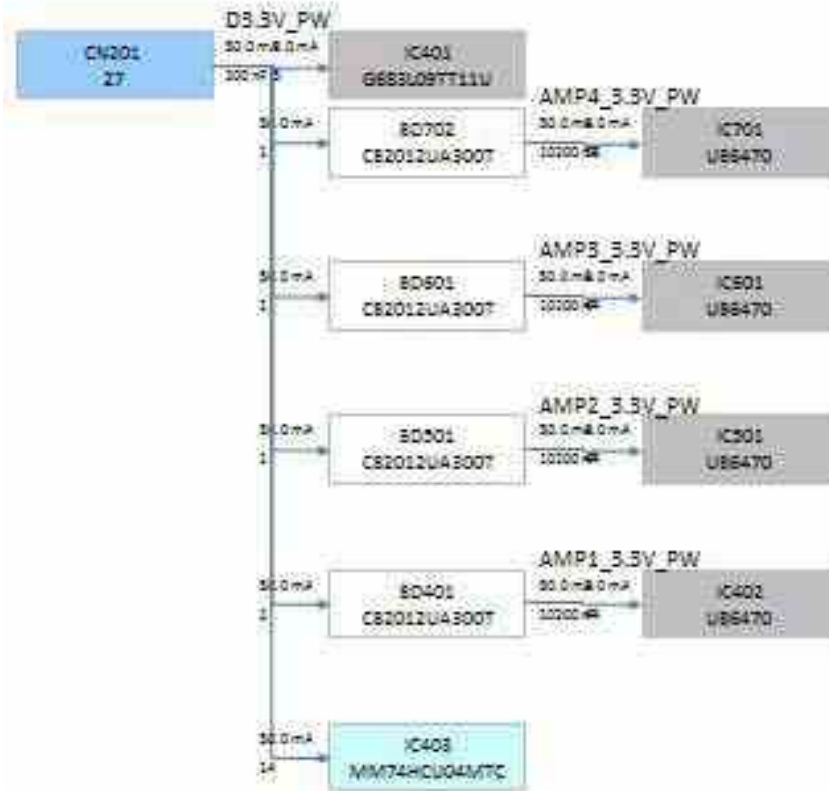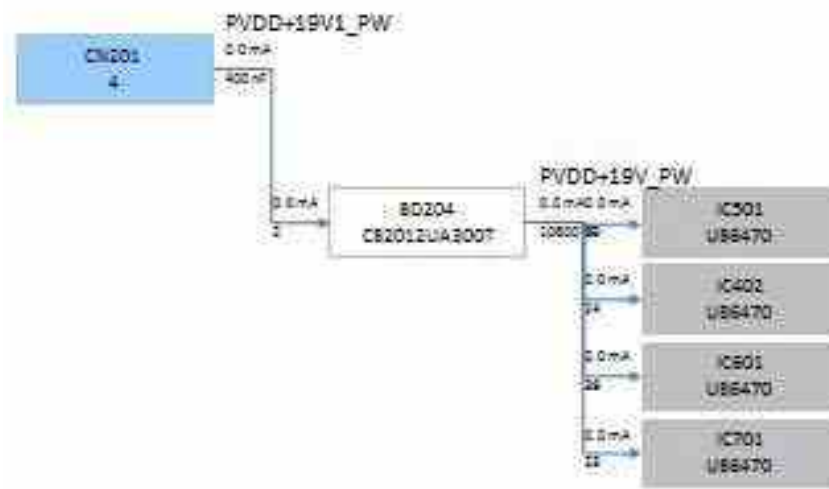

5-5. MAIN PCB(CONNECTOR)

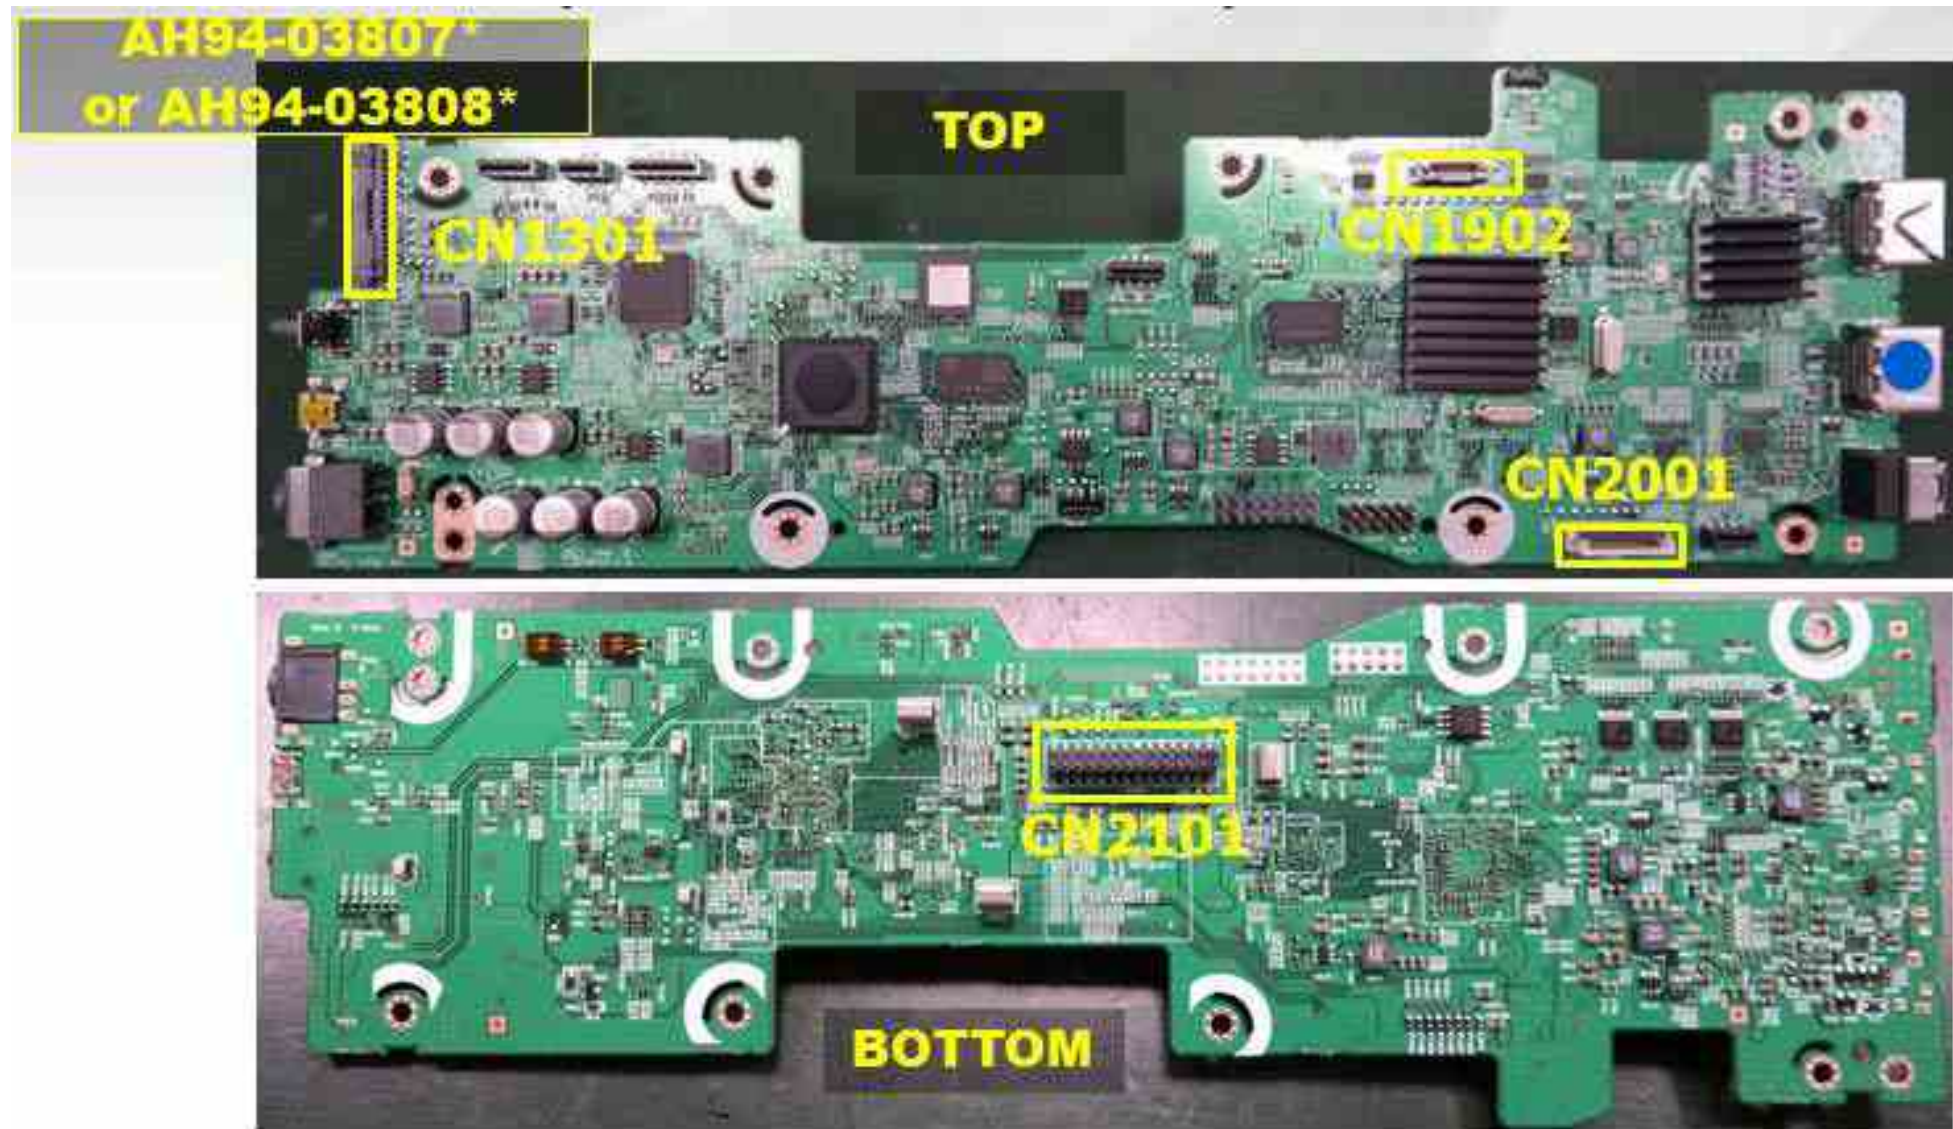


REF. NAME	PIN	CON. ASS'Y	FUNCTION
CN2001	24P	WIRELESS	Wireless CONTROL
CN1902	14P	KEY, OLED ASSY	KEY, OLED CONTROL
CN1301	16P	COMBO Module	WiFi-BT CONTROL
CN2101	27P	AMP ASSY	AMP CONTROL

5-5-1. Pin Connection

① CN1301 (WIFI+BT Module)		② CN1902 (KEY+OLED ASSY con)		③ CN2001 (Wireless Module)		④ CN2101 (AMP ASSY con)	
1	BT_RESET	1	OLED12V_PW	1	W5V_T	1	PVDD_19V
2	BT_PWR_DET	2	OLED12V_PW	2	W5V_T	2	PVDD_19V
3	BT_WAKE_UP	3	D3.3V_PW	3	W_SCL_I2C	3	PVDD_19V
4	GND	4	D3.3V_PW	4	W_SDA_I2C	4	PVDD_19V
5	USB2A-_USB	5	GND	5	W_MODULE	5	I2C1_DATA
6	USB2A+_USB	6	GND	6	W_RST	6	GND
7	GND	7	OLED_CE	7	NC	7	I2C1_CLK
8	NC	8	OLED_RST	8	NC	8	GND
9	WIFI_USB_SUSPEND	9	OLED_DC	9	NC	9	I2C2_DATA
10	GND	10	OLED_SCLK	10	NC	10	GND
11	USB3A+_USB	11	OLED_SDIN	11	NC	11	I2C2_CLK
12	USB3A-_USB	12	GND	12	GND	12	GND
13	GND	13	KEY_A	13	WIRELESS_BCLK_I2S	13	I2S_BCLK
14	WIFIBT5.0V_PW	14	KEY_B	14	WIRELESS_LRCLK_I2S	14	GND
15	WIFI_WAKE			15	NC	15	I2S_LRCLK
16	WIFI_RESET			16	WIRELESS_REAR_SDO1_I2S	16	GND
				17	NC	17	I2S_SDO0
				18	WIRELESS_S_WOOFER_SDO2_I2S	18	GND
				19	NC	19	I2S_SDO2
				20	NC	20	GND
				21	NC	21	I2S_SDO4
				22	NC	22	GND
				23	NC	23	AMP_RESET
				24	GND	24	GND
						25	GND
						26	D3.3V_PW
						27	D3.3V_PW

5-6. AMP PCB(CONNECTOR)

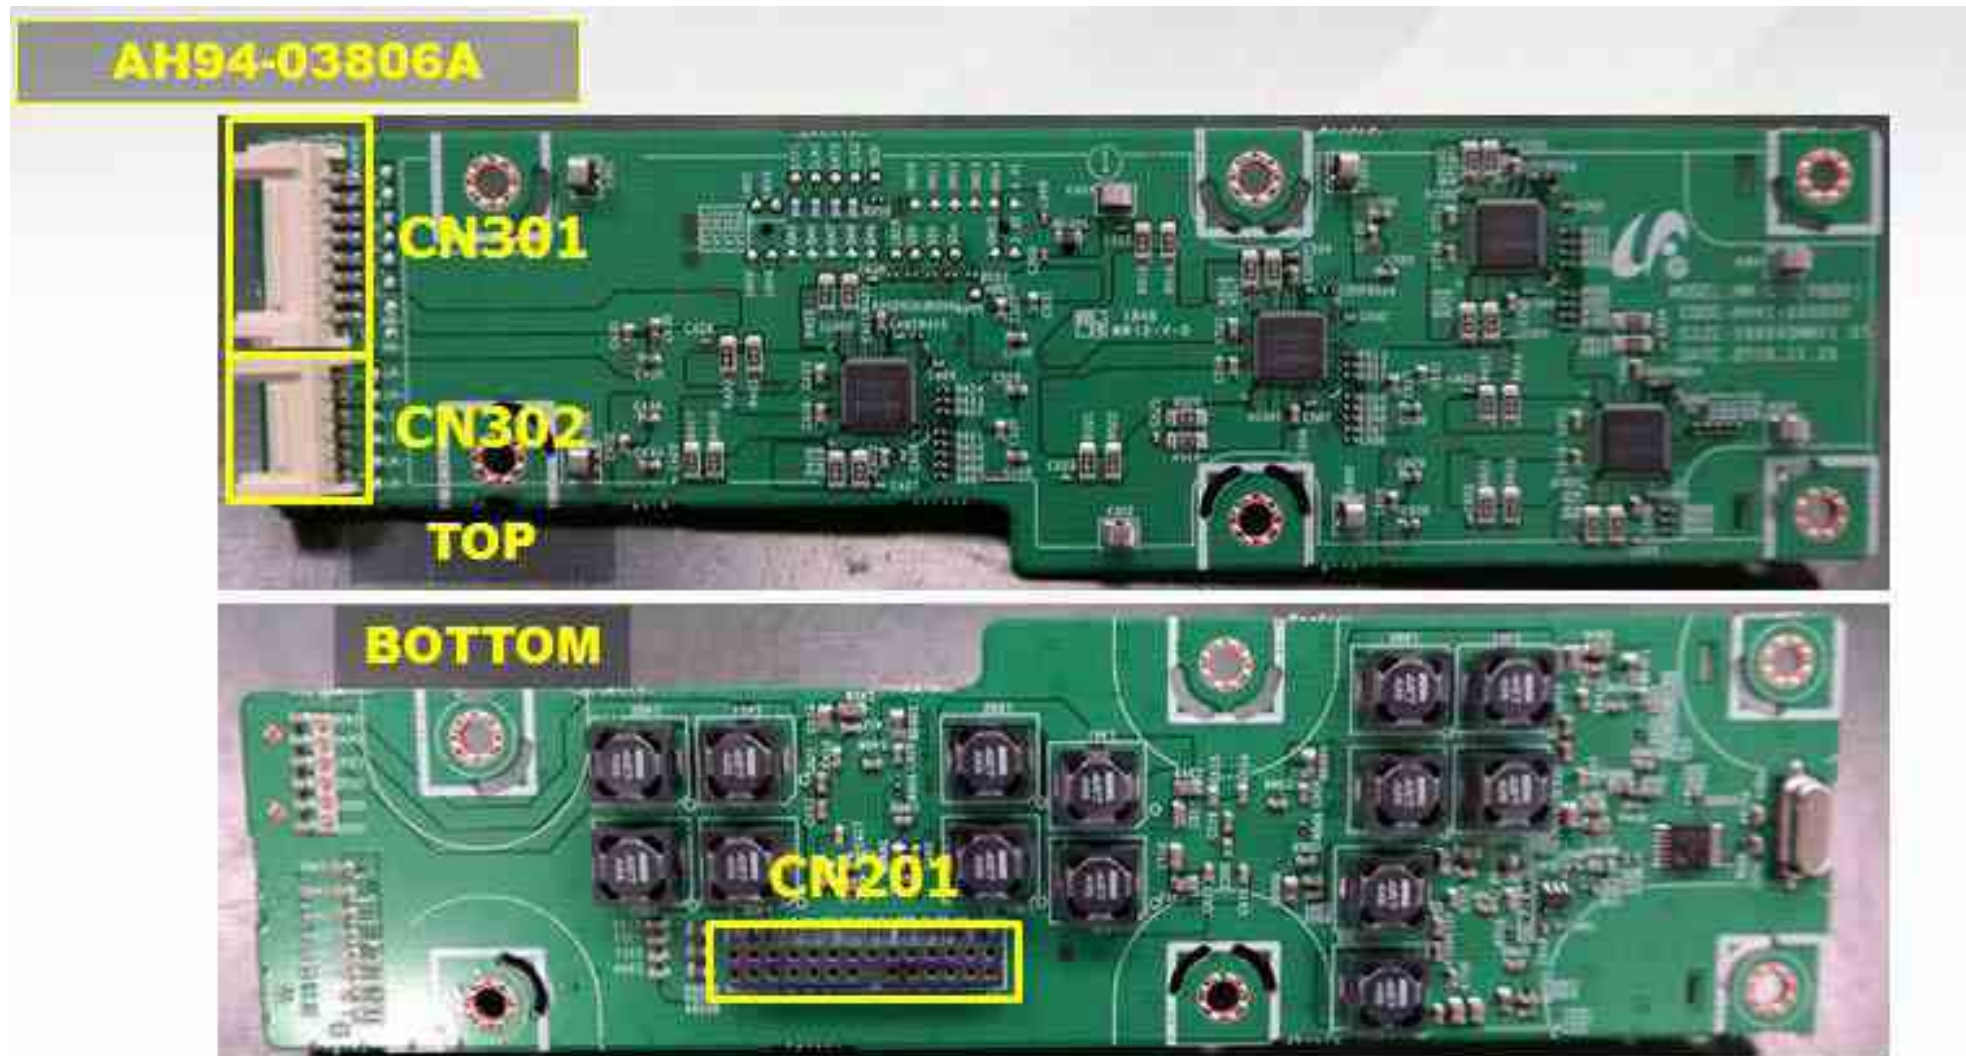


REF. NAME	PIN	CON. ASS'Y	FUNCTION
CN201	27P	MAIN ASSY	AMP CONTROL
CN302	6P	LEFT	LEFT SPEAKER
CN301	8P	RIGHT, CENTER	RIGHT, CENTER SPEAKER

5-6-1. Pin Connection

① CN301 (SPEAKER C+R)	
1	C_TW+
2	C_TW-
3	R_HATW+
4	R_HATW-
5	R_TW+
6	R_TW-
7	R_MID+
8	R_MID-


② CN302 (SPEAKER L)	
1	L_HATW-
2	L_HATW+
3	L_TW+
4	L_TW-
5	L_MID+
6	L_MID-

5-7. OLED, KEY PCB(CONNECTOR)

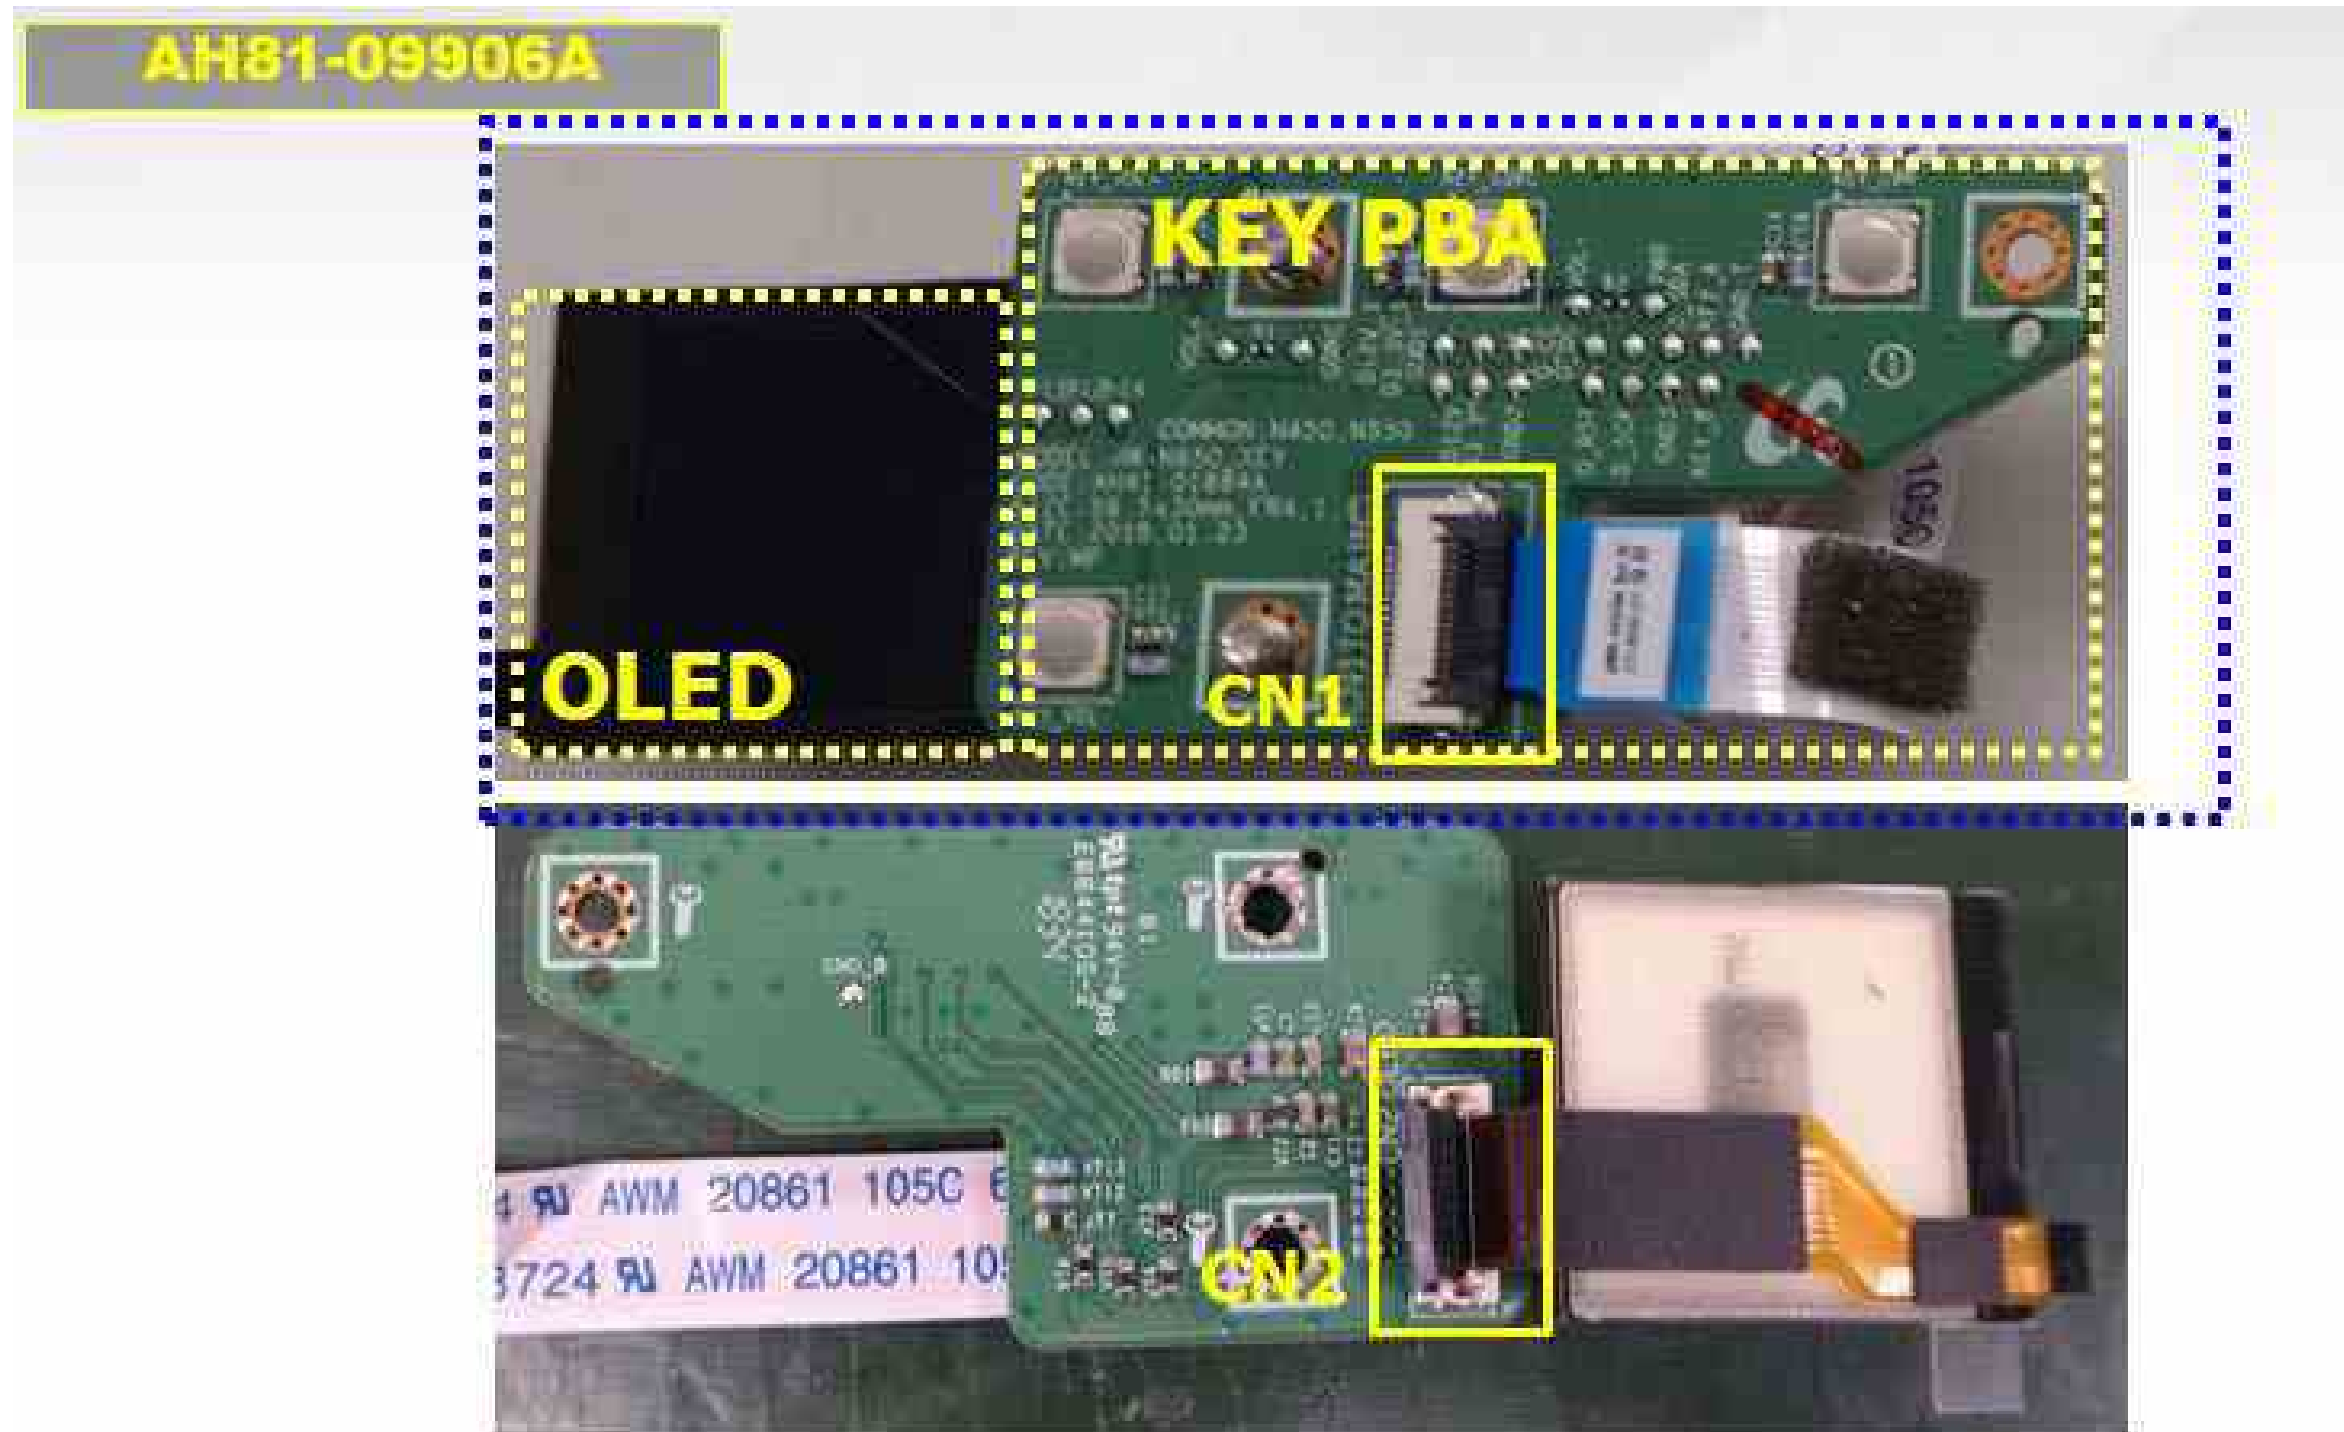


REF. NAME	PIN	CON. ASS'Y	FUNCTION
CN1	14P	MAIN ASSY	KEY, OLED CONTROL
CN2	14P	OLED Module	OLED CONTROL

5-8. MAIN PCB(LAYOUT)




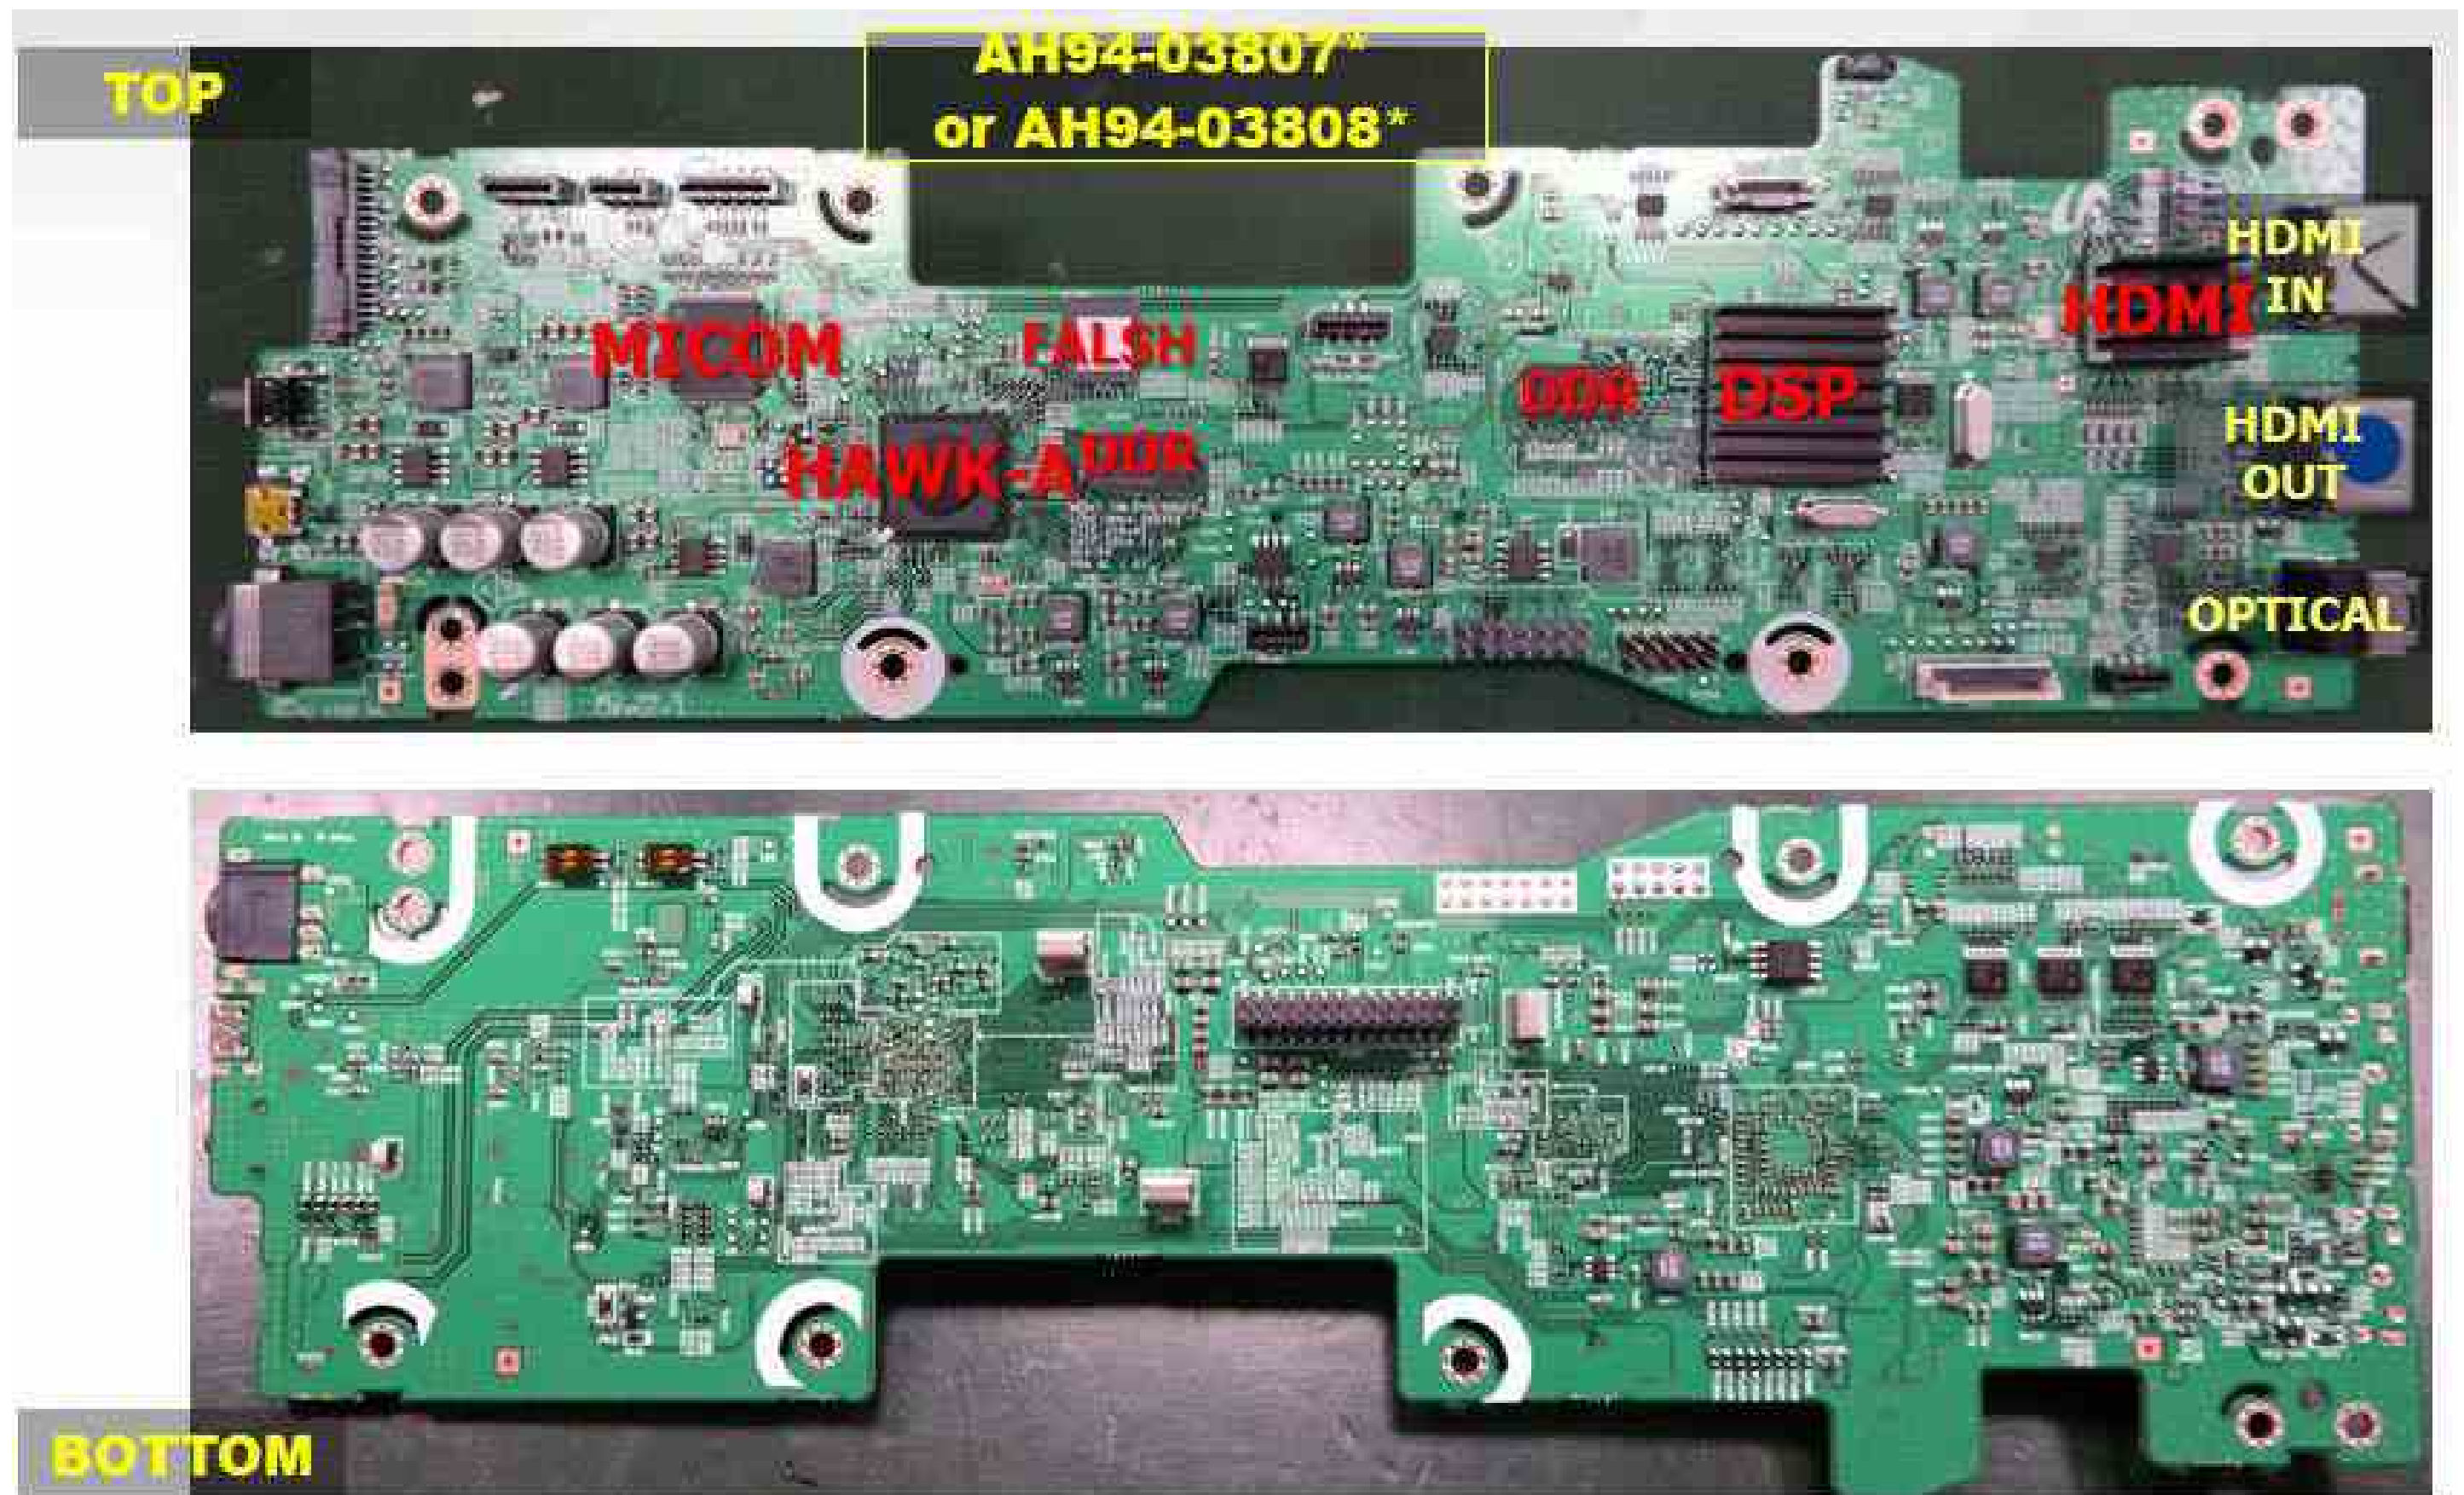


5-9. AMP PCB(LAYOUT)

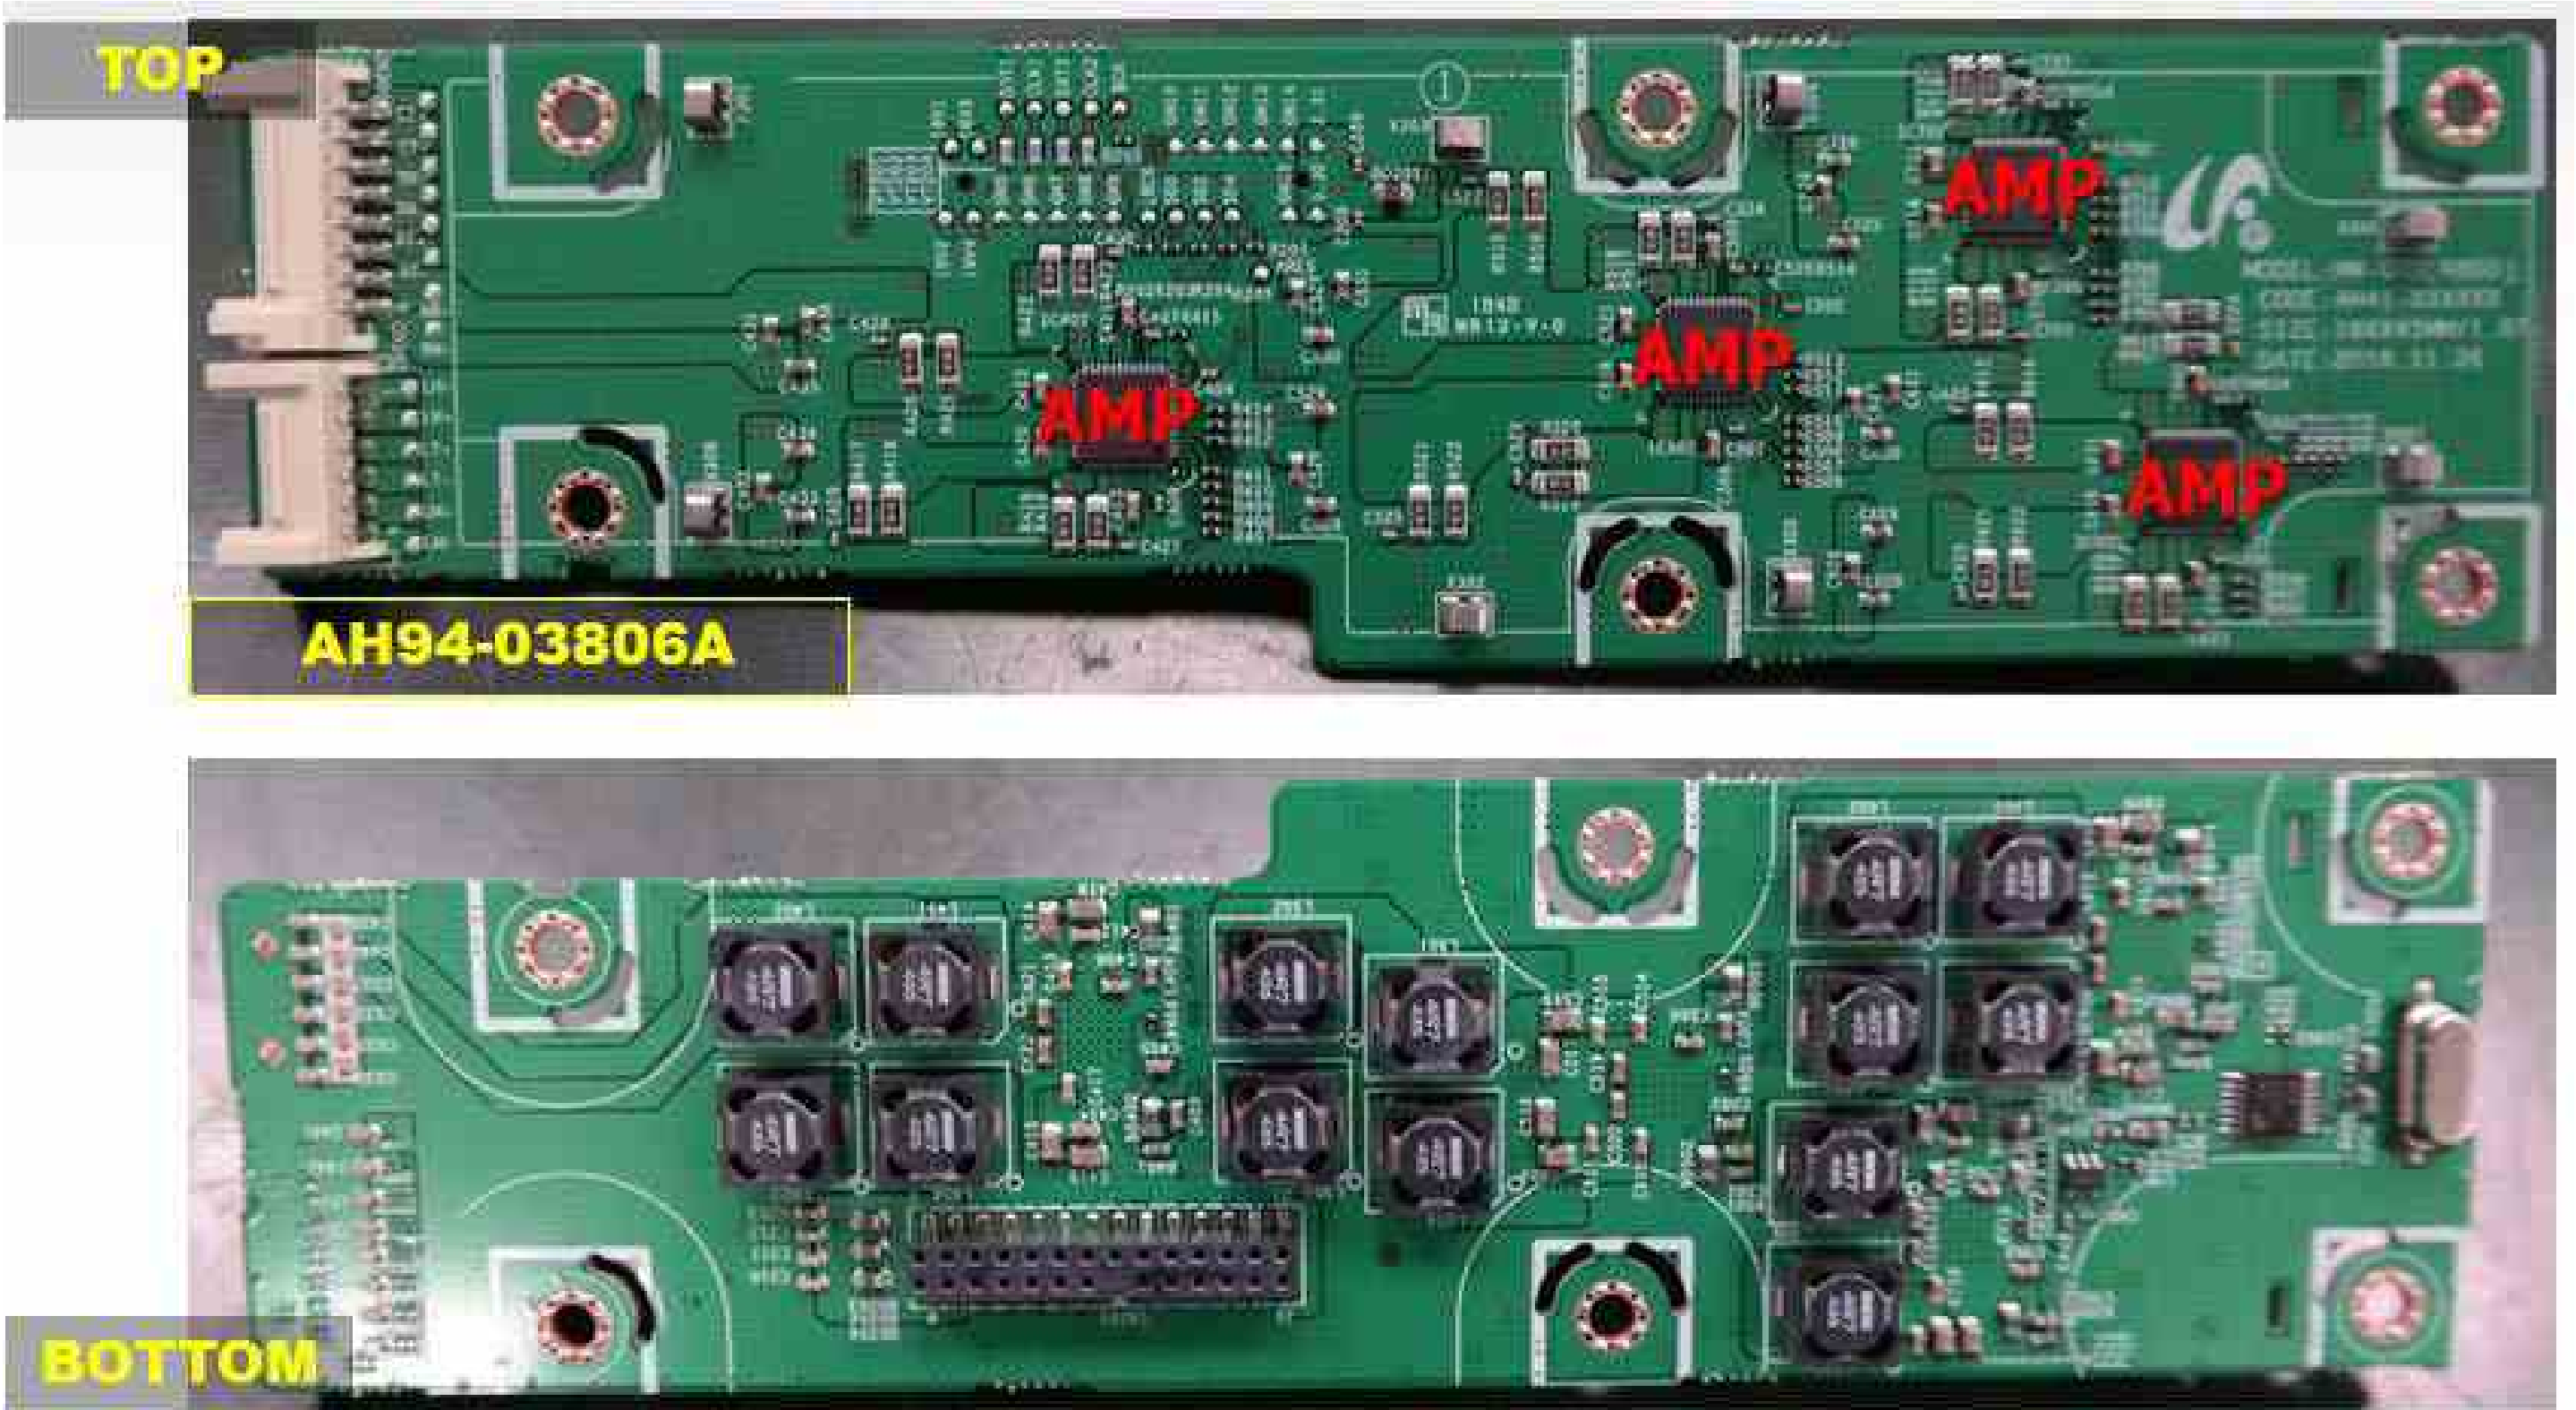


5-10. Input Part

- 1 HDMI IN
- 1 HDMI OUT
- 1 OPTICAL IN
- 1 USB (Service Only)

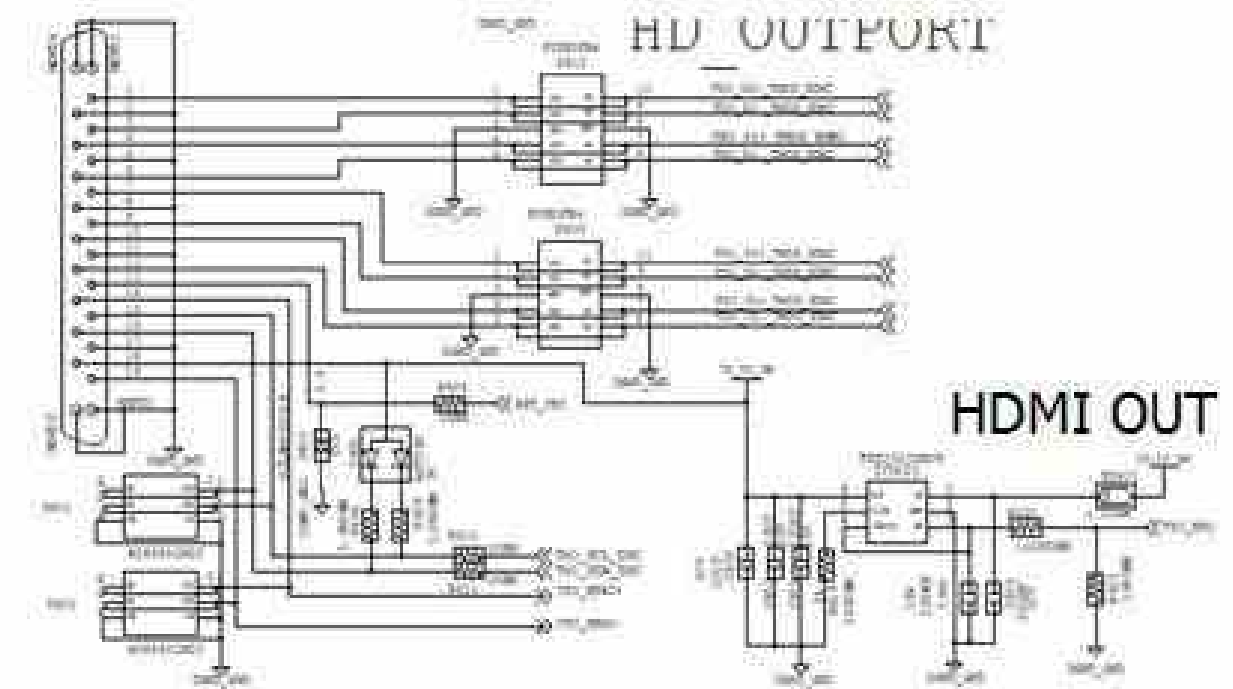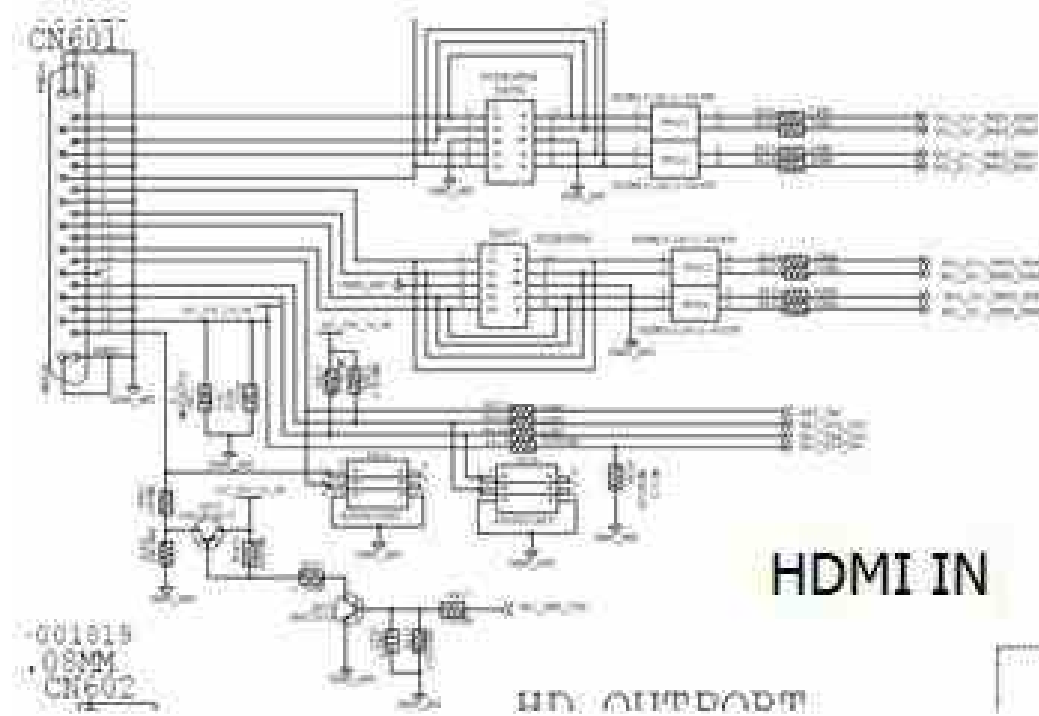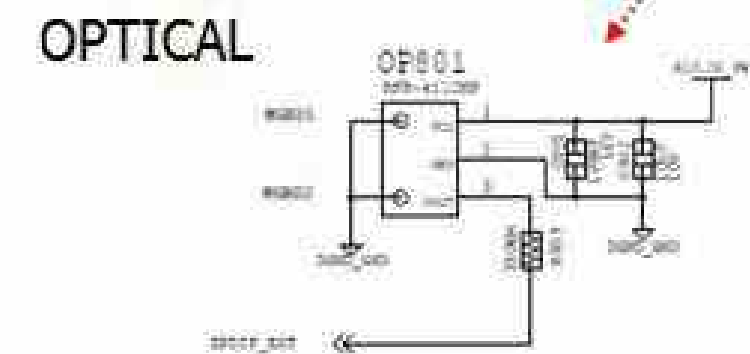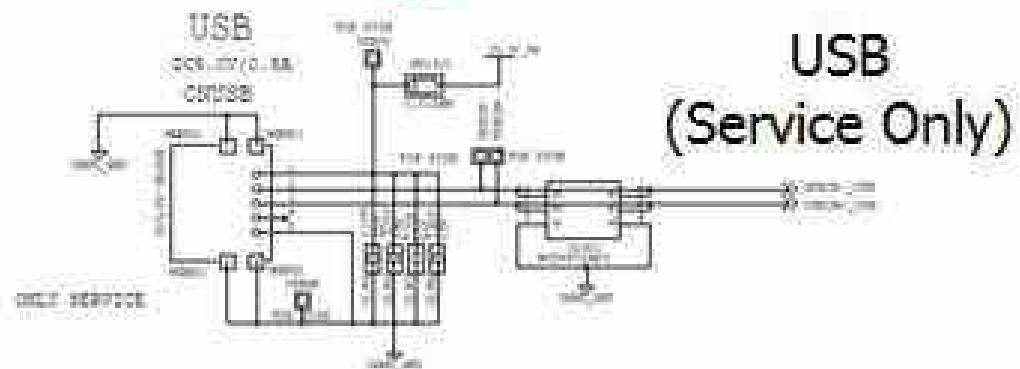


5-11.HDMI (EP92A6SQ)

- 1 HDMI IN
- 1 HDMI OUT
- 4K (4:4:4) Video Path Through

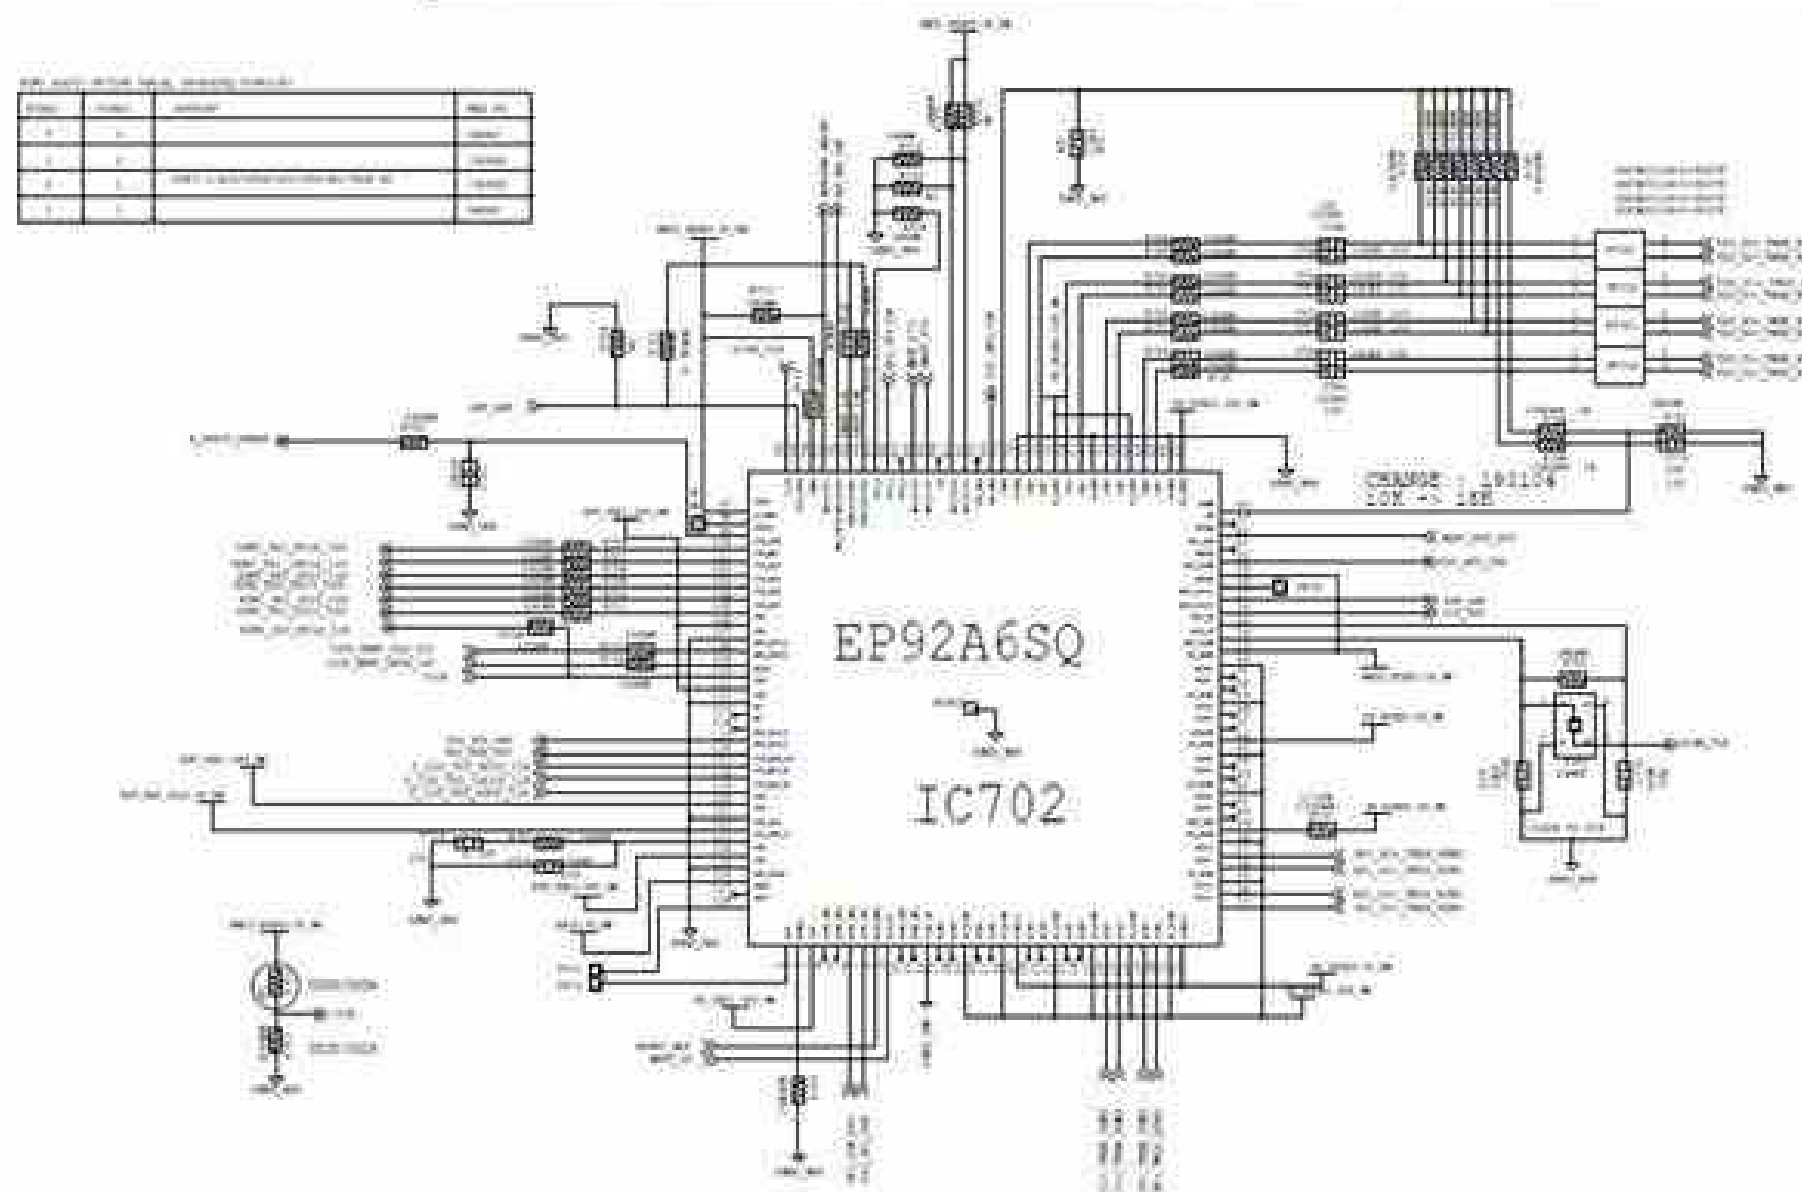

5-12. DSP(ADSP-21584)

- **Dolby**
 - . **Dolby Digital**
 - . **Dolby Digital Plus**
 - . **Dolby TrueHD**
 - . **Dolby ATMOS**
- **DTS**
 - . **DTS**
 - . **DTS-HD**
 - . **DTS:X**


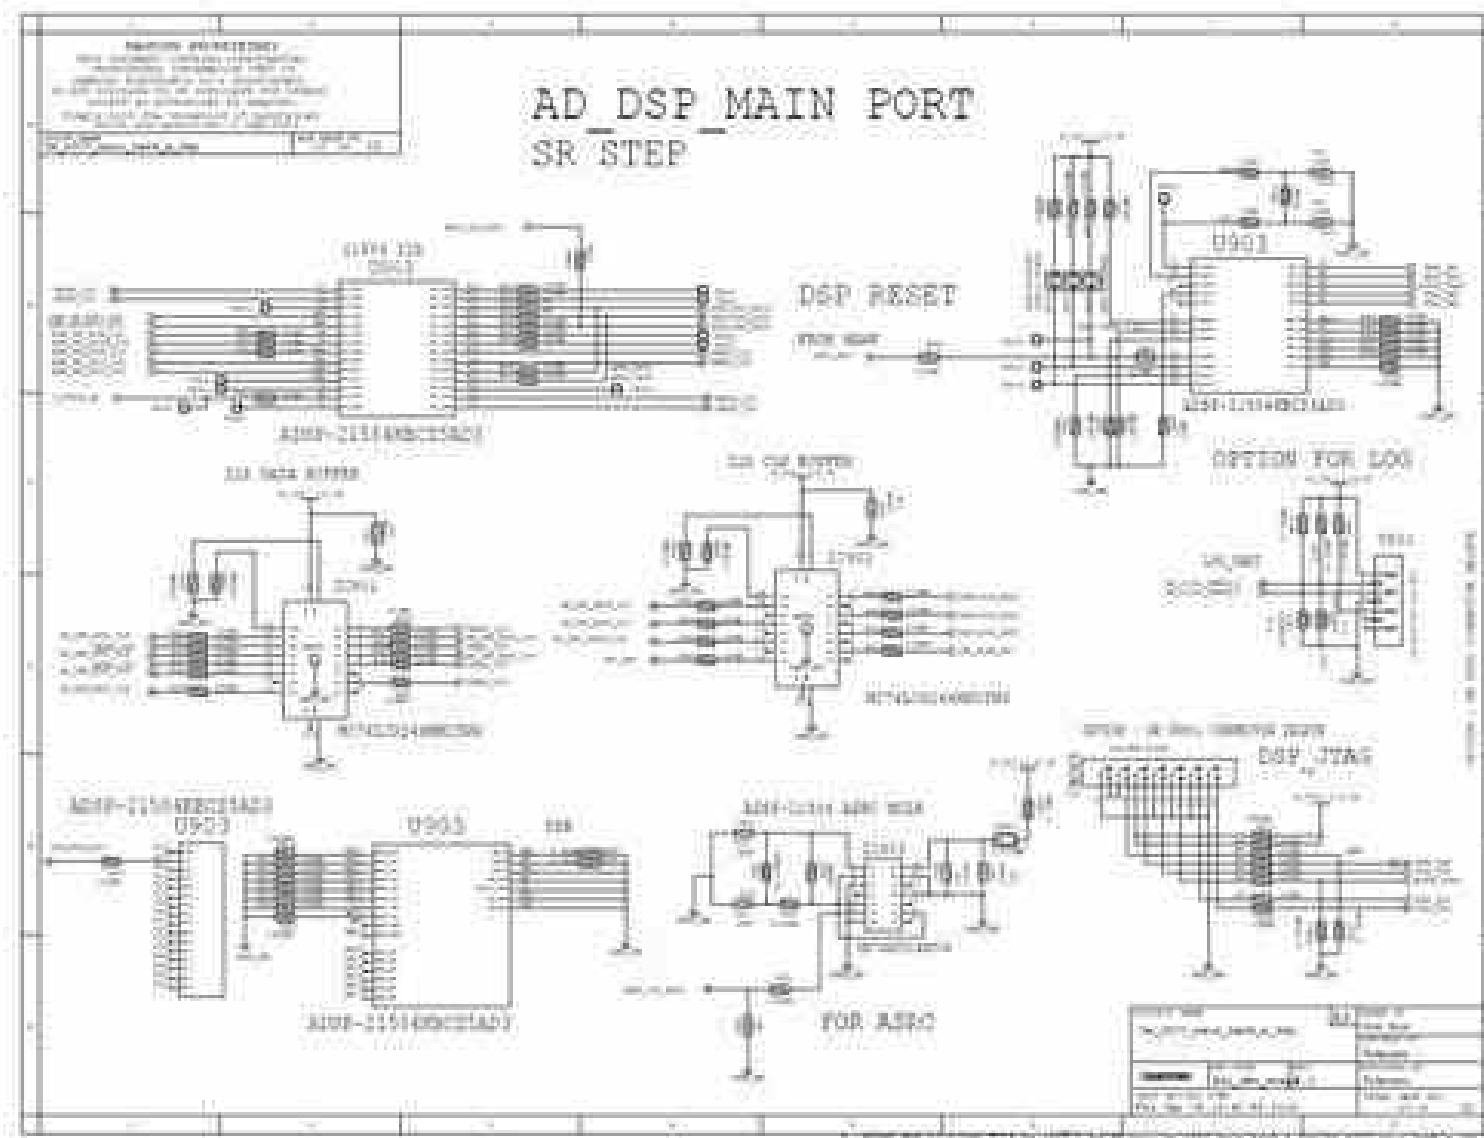


5-13. Main IC (HAWK-A)

- **Wi-Fi / BT**
- **User EQ (7 band)**
- **Sound Effect**
 - . Standard
 - . Surround
 - . Game PRO
 - . Adaptive




BT
USB
WIFI

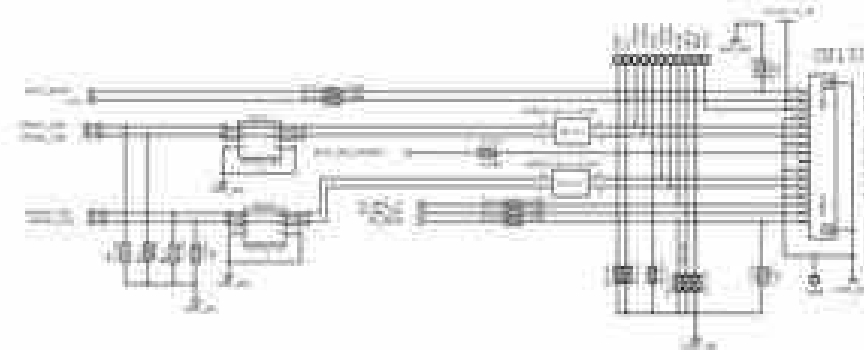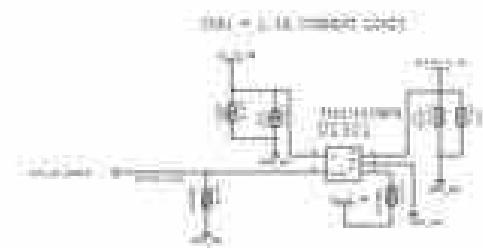

DSP1 DECODER



SDP1412
HAWK-A
IC1801

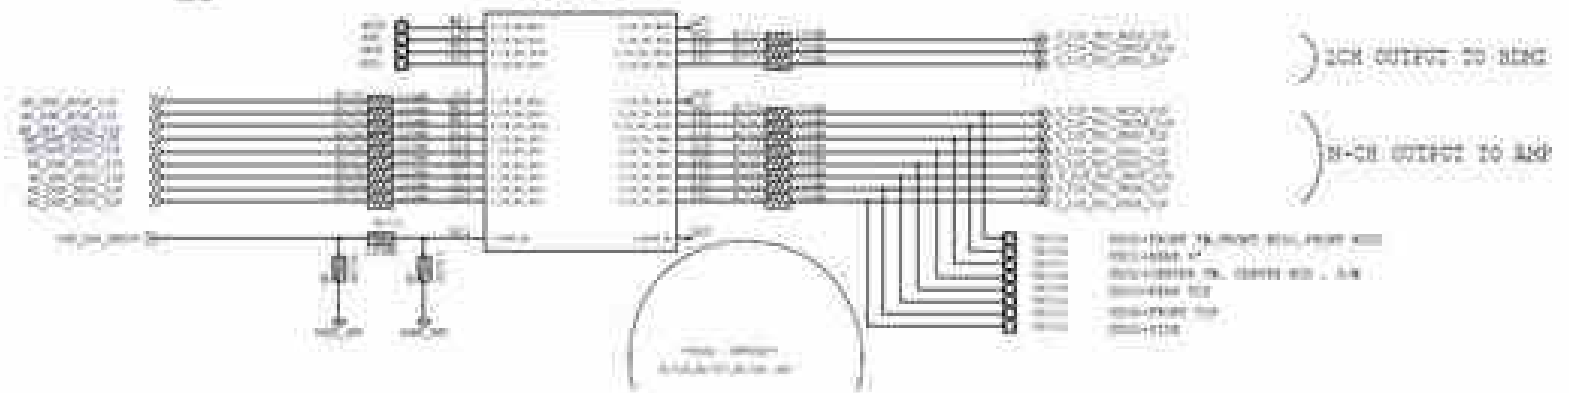



5-14. AMP(UB6470)

- 7-CH UBI AMP**. 170W****. 6CH BTL, 1CH PBTL**

(Left Mid, Left Tweeter,
Right Mid, Right Tweeter,
Left Top Hole-Array,
Right Top Hole-Array,
Center)

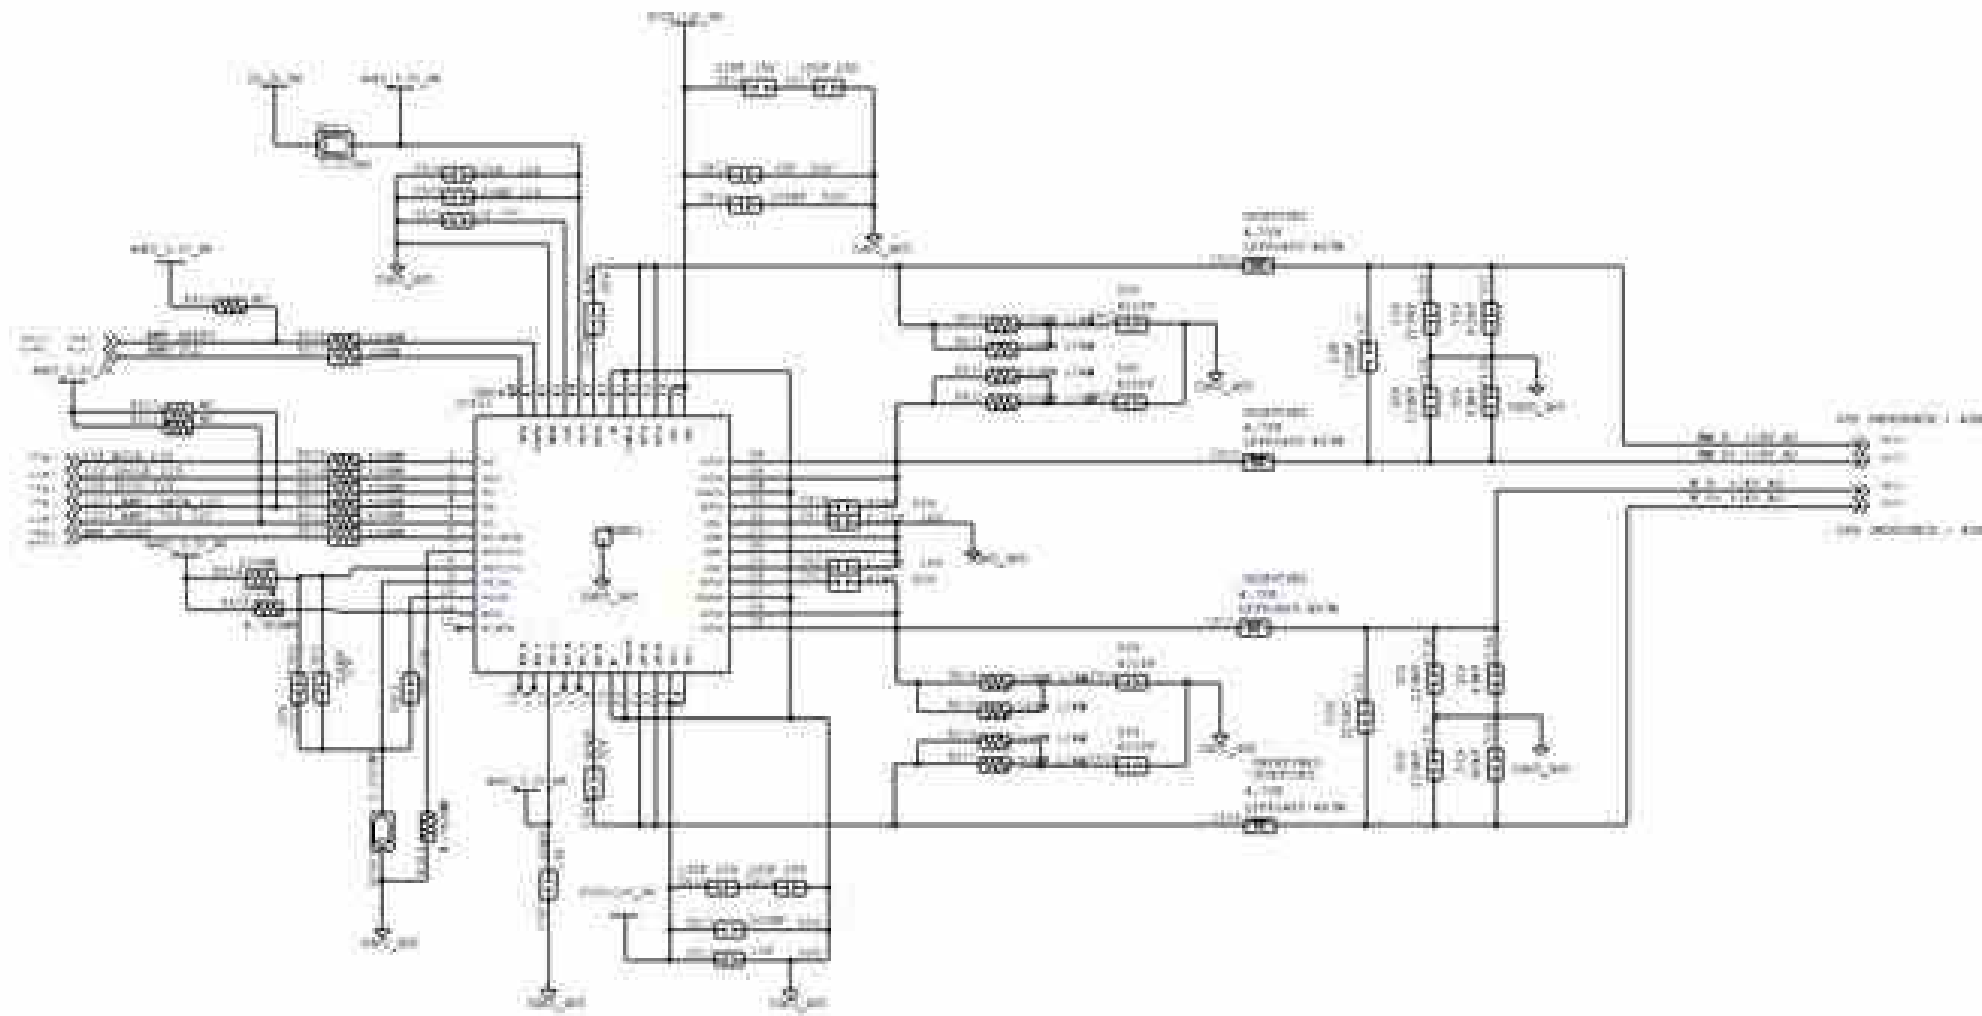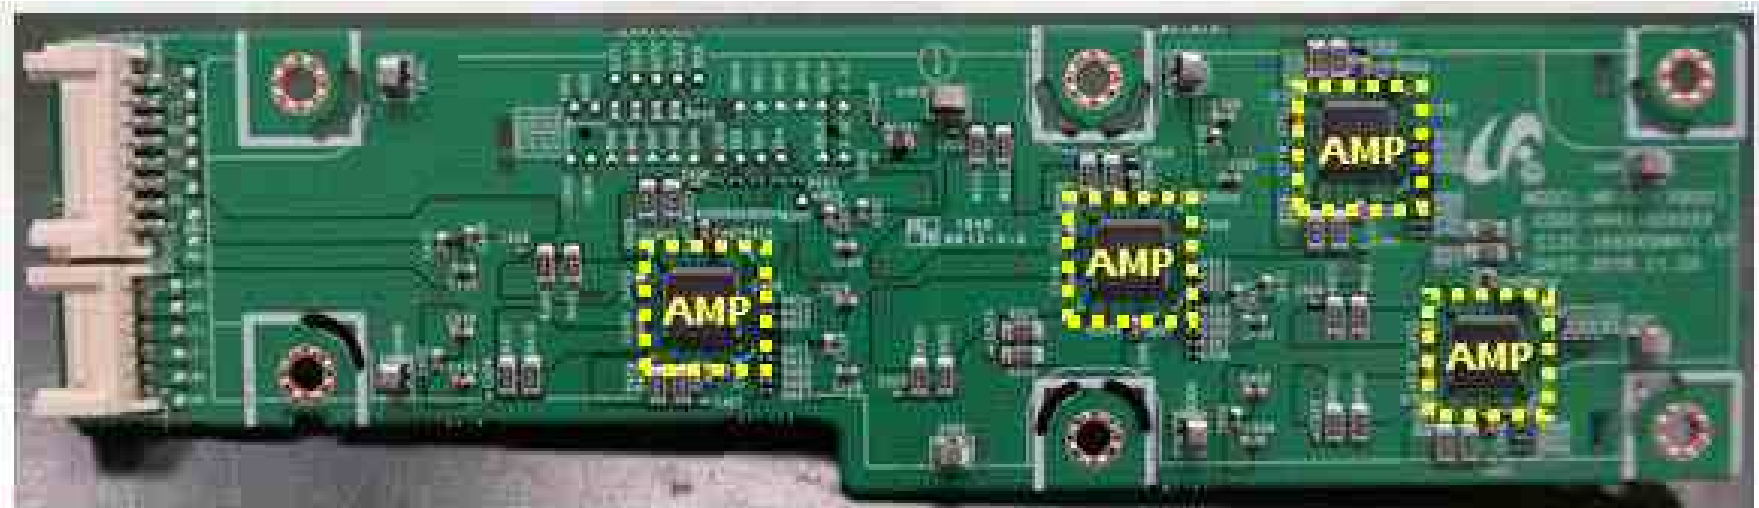

5-15. Speaker Terminals

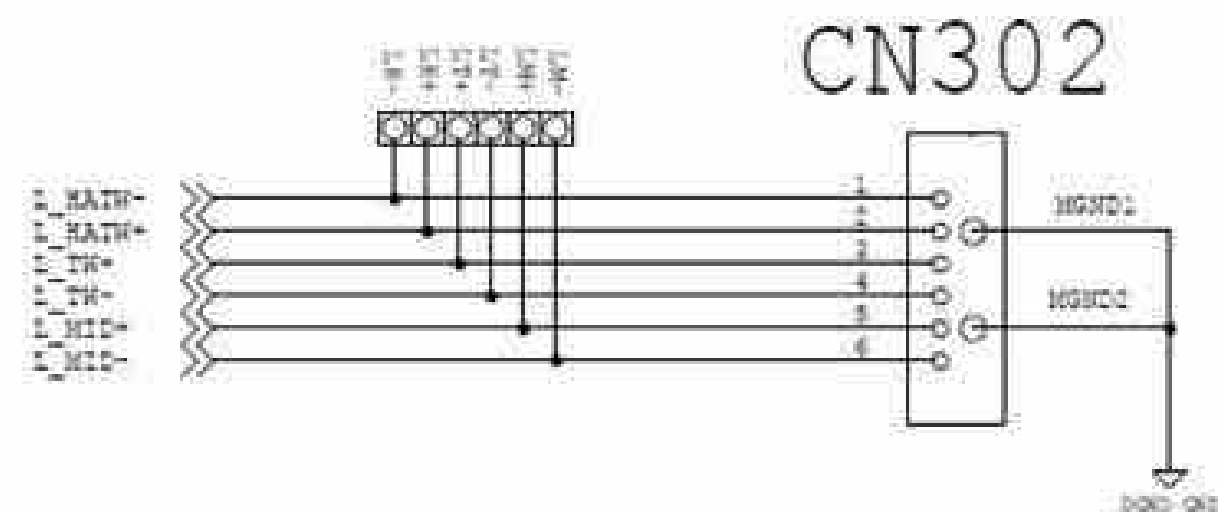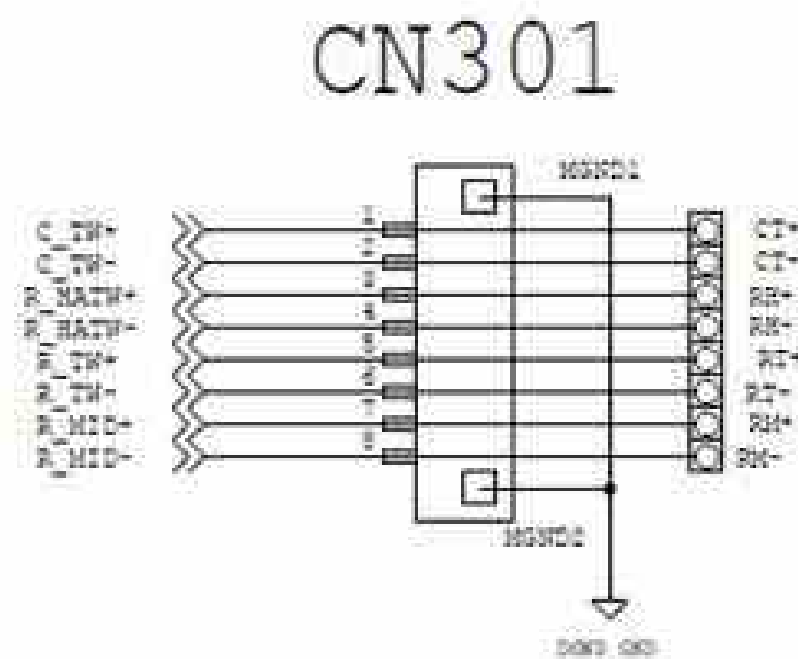

ashakaas