



6. CIRCUIT DIAGRAM




APQ8064 data

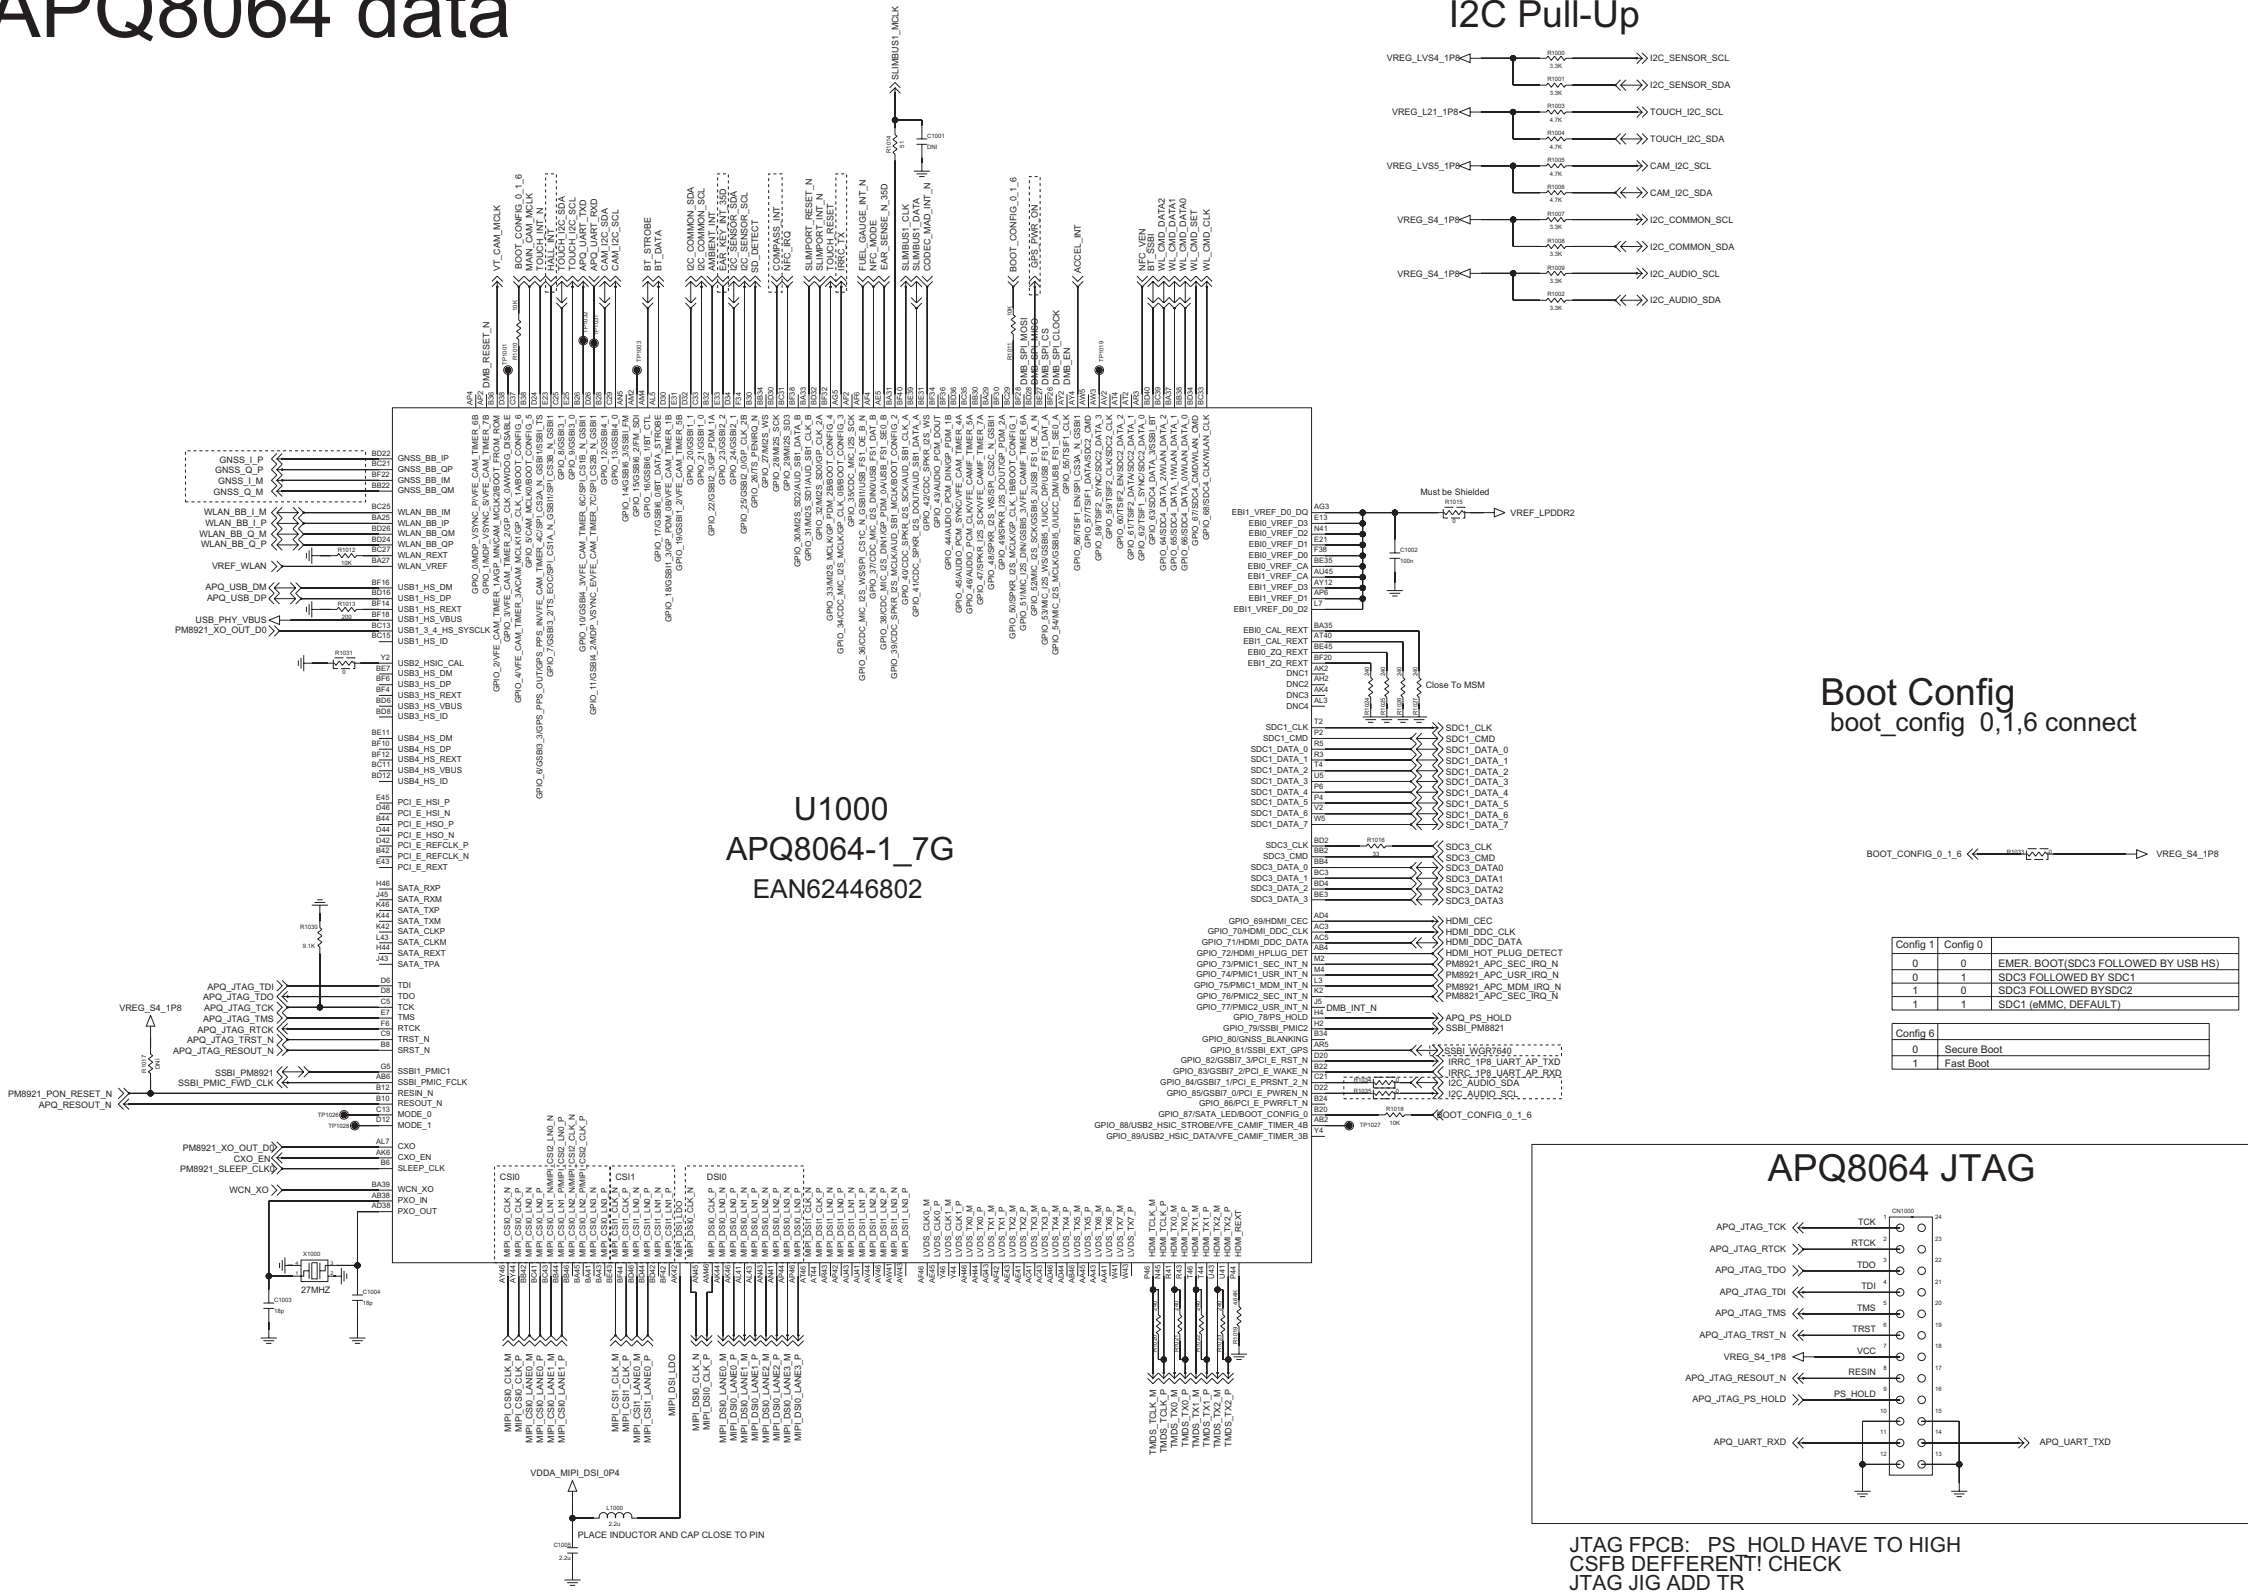

PMIC_PM8921

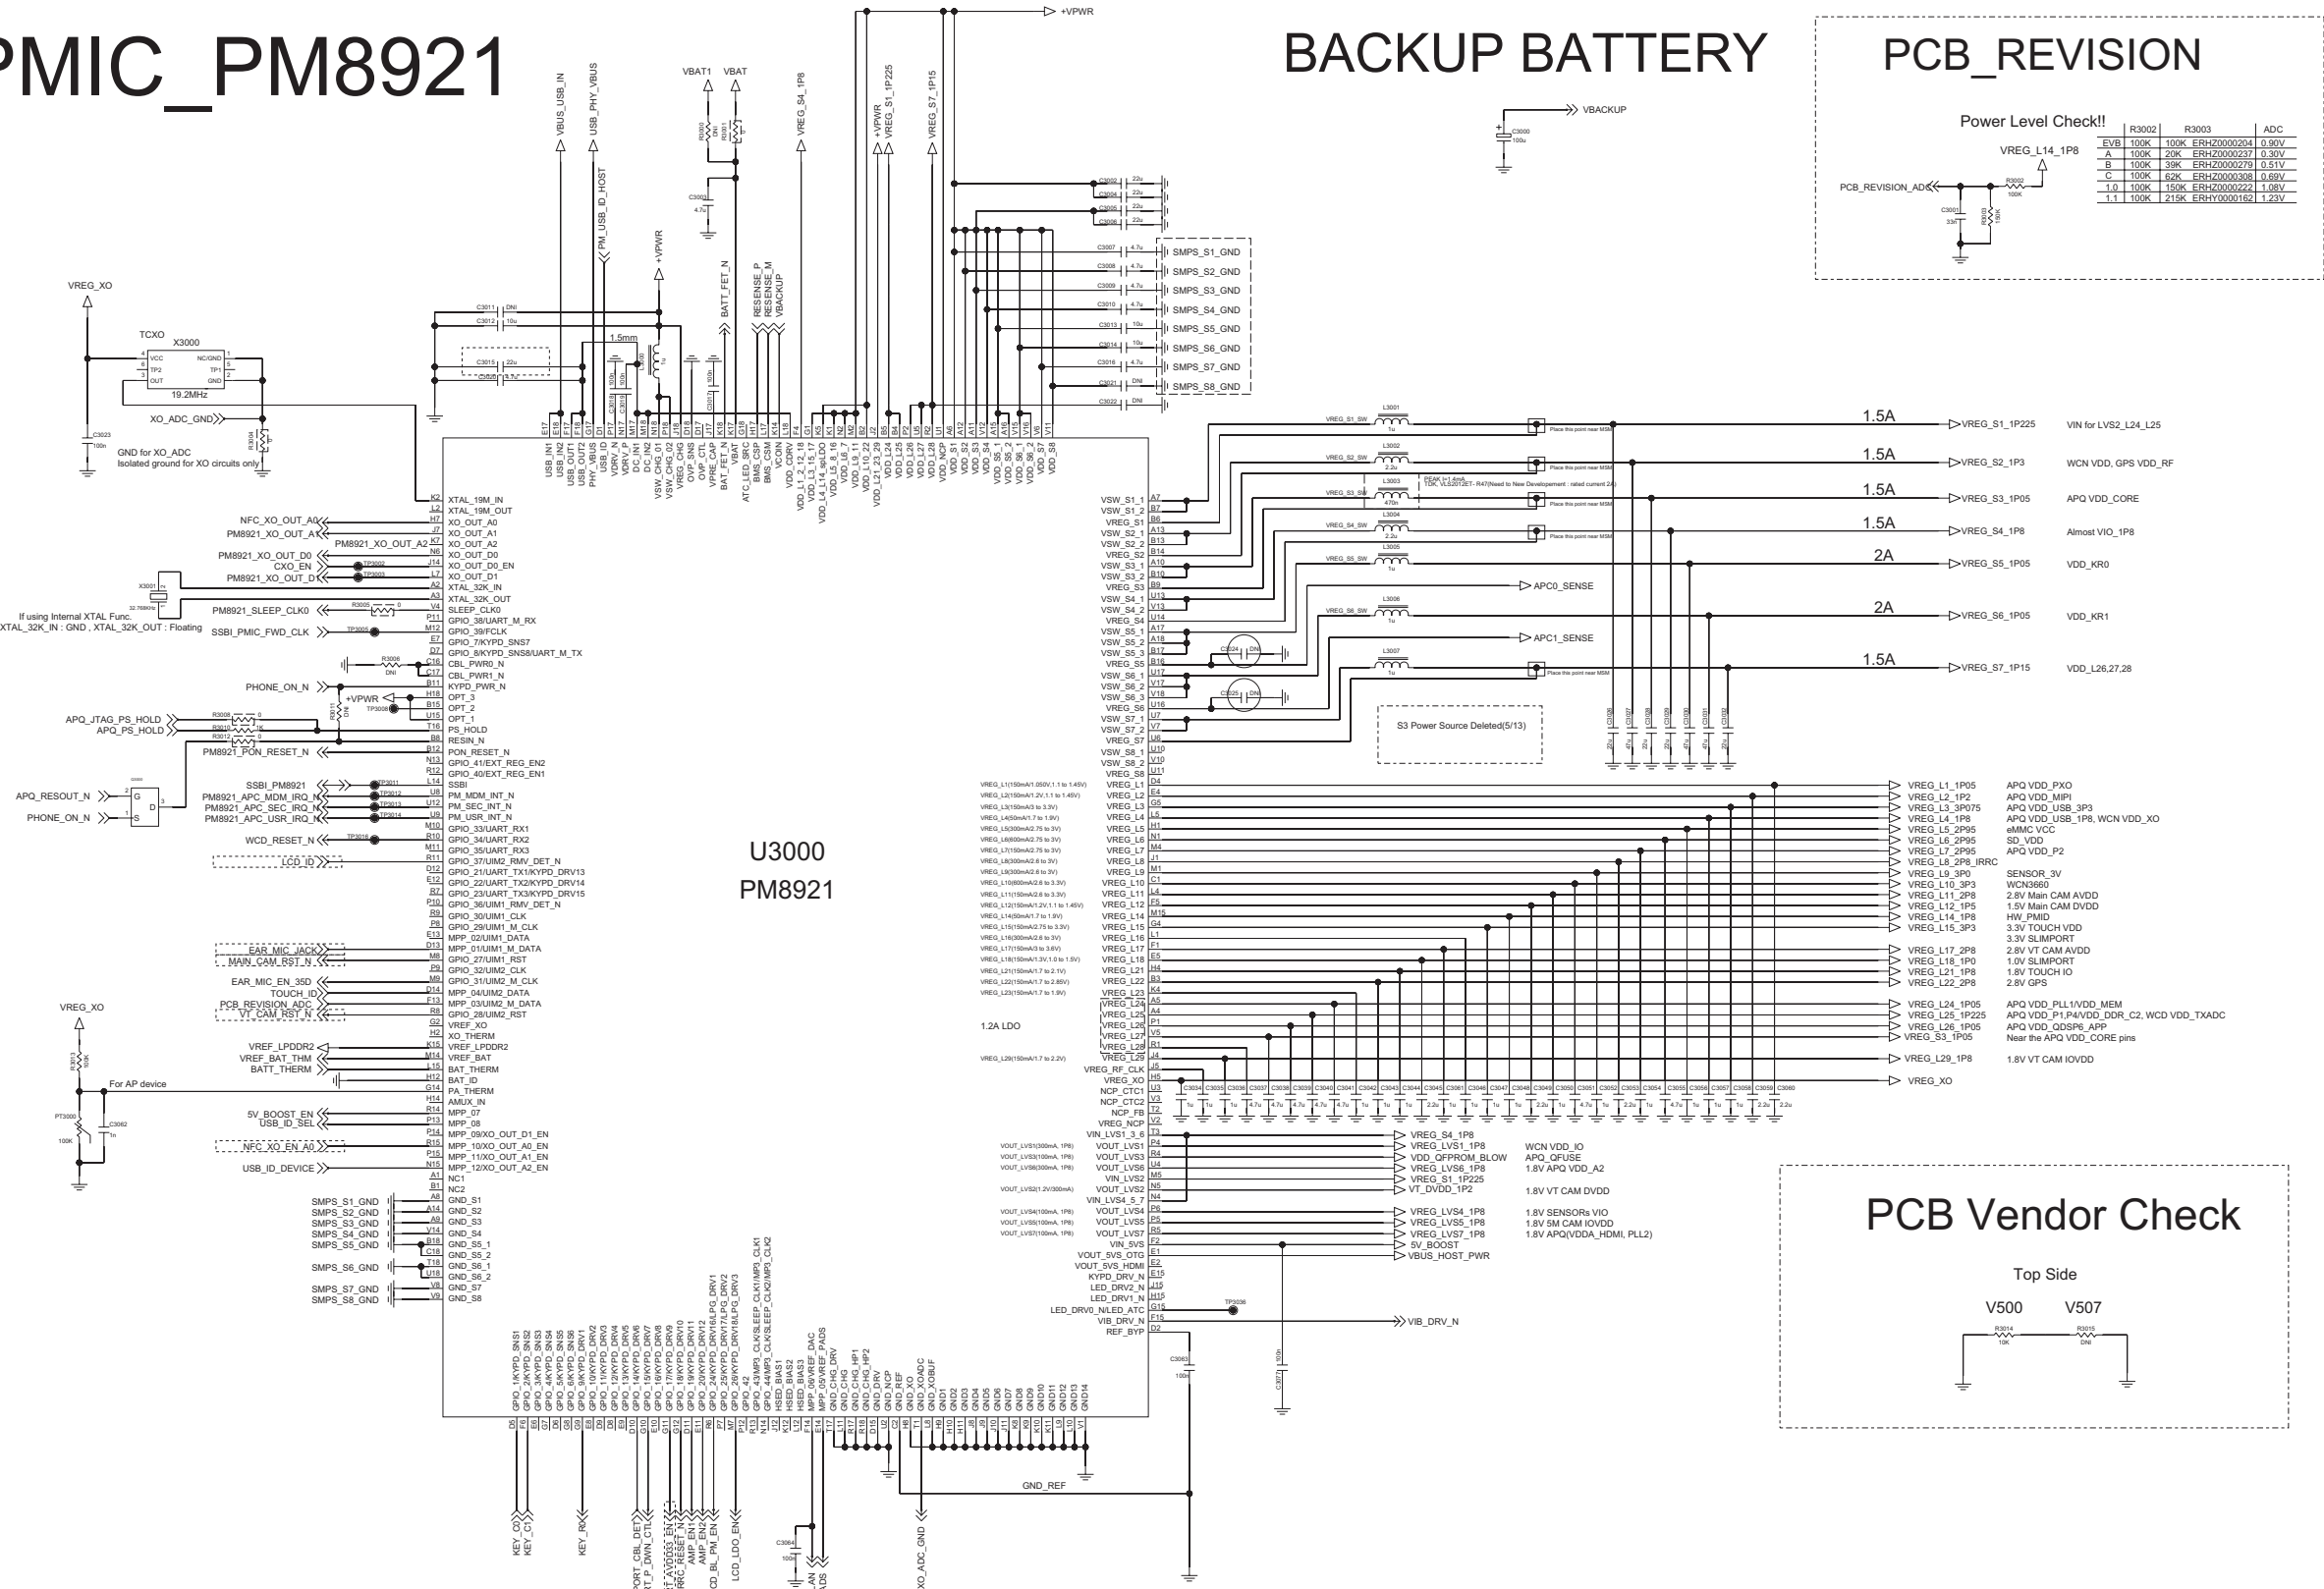


Shield Can Clip

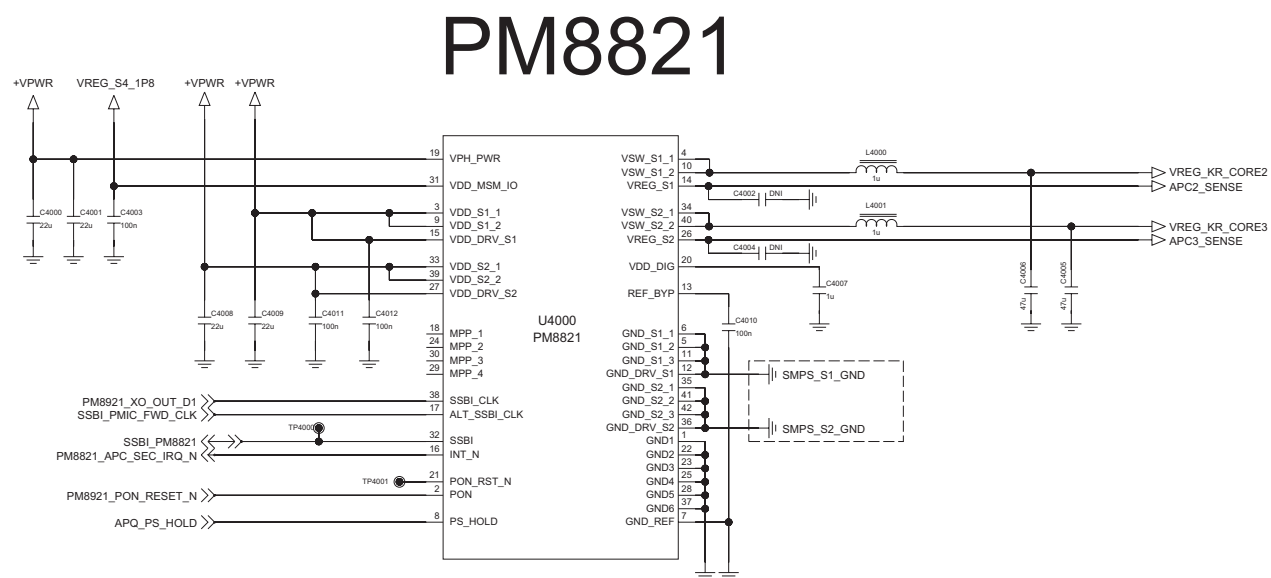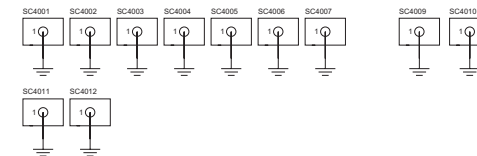


Memory

eMMC 16GB

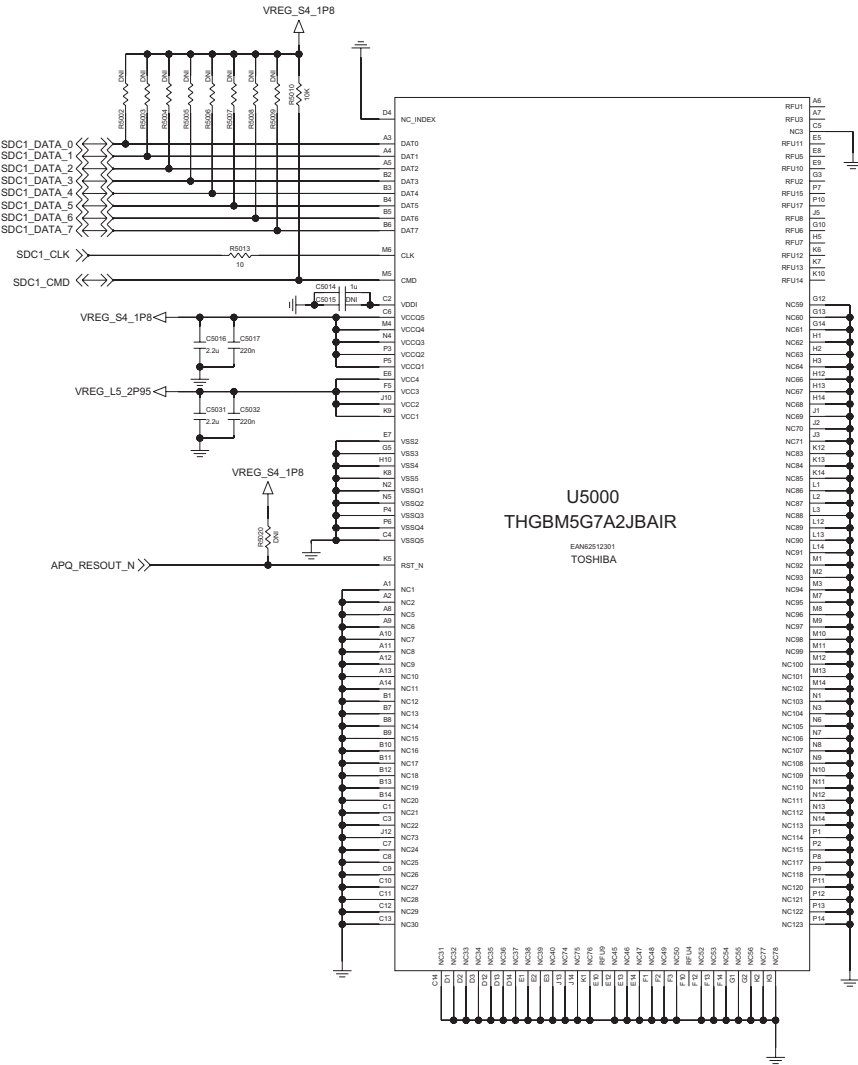

LPDDR2

16Gb 533MHz(38 nm, 4Gb X 4), SK HYNIX POP







[illegible][illegible]

Sensor Block


GYRO SENSOR

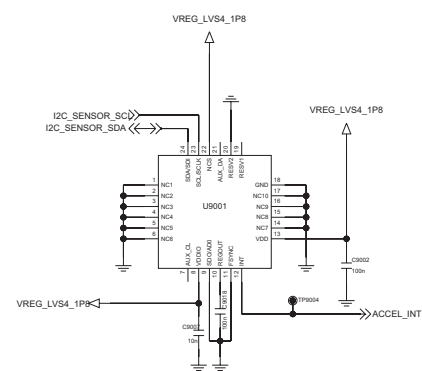


DIGITAL COMPASS

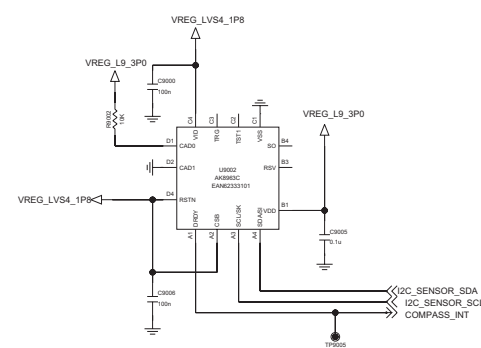


Light Sensor

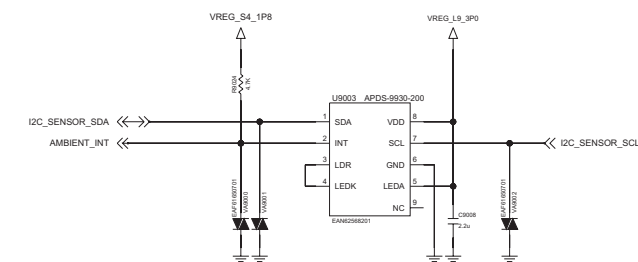

IRRC controller

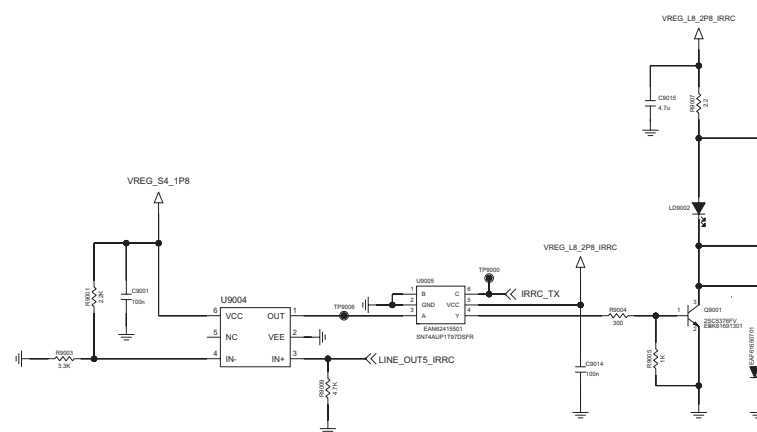


IRRC (Option)

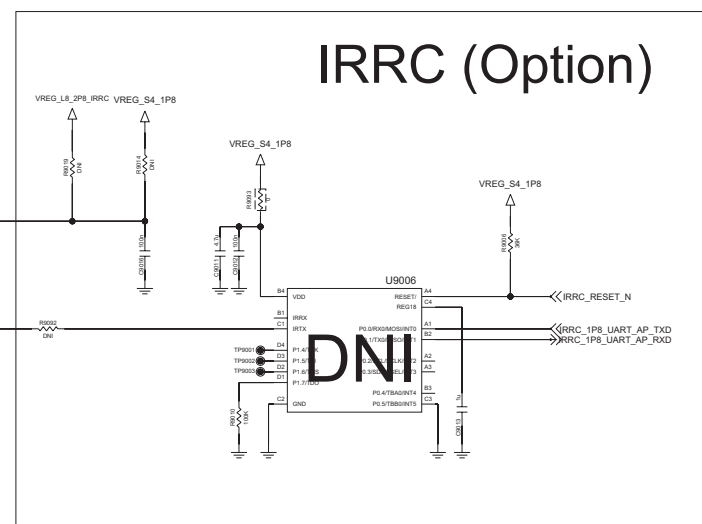


IRRC(If use Maxim IC)
Connect : U9006,R9091,R9092
Disconnect : Q9001,R9014


SLIMPORT

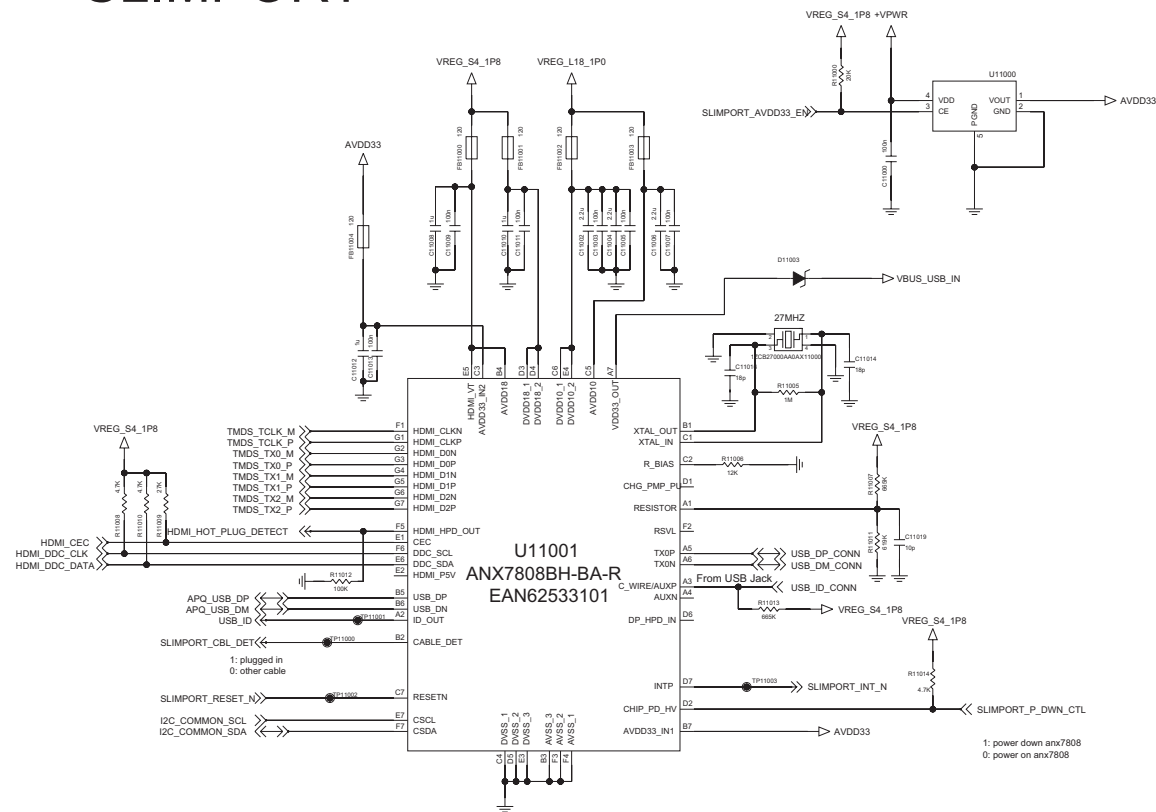

LOWER CONNECTOR

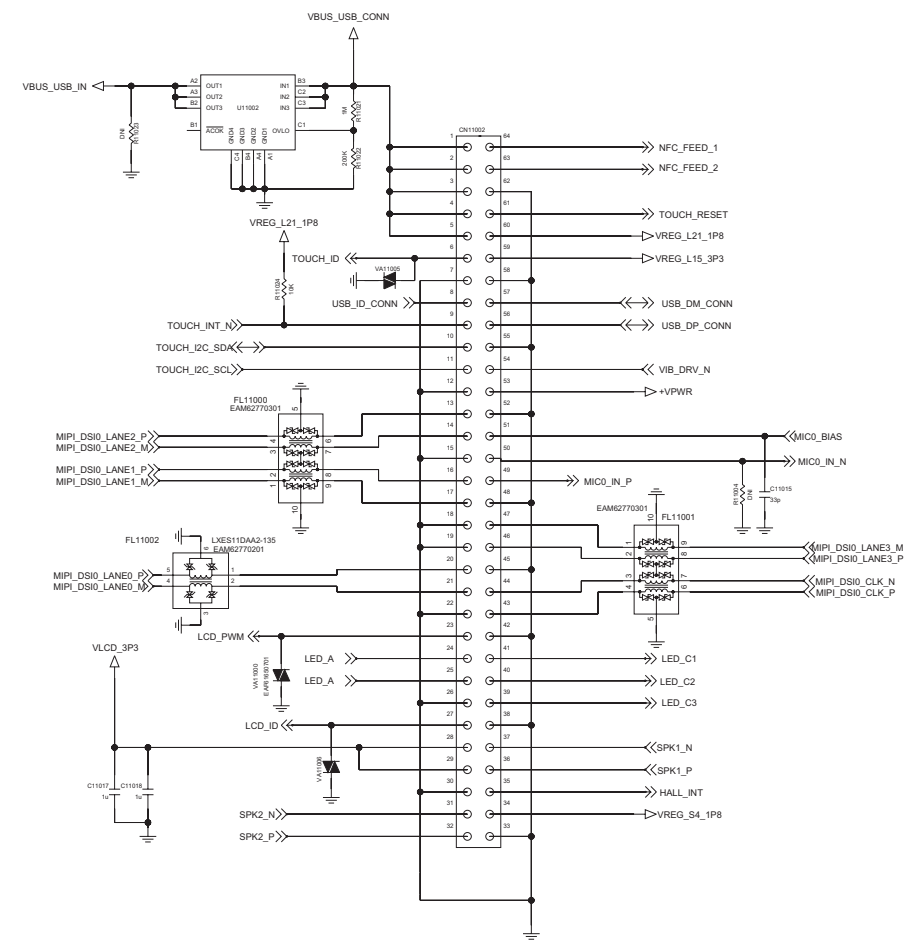


POWER & VOLUME KEY



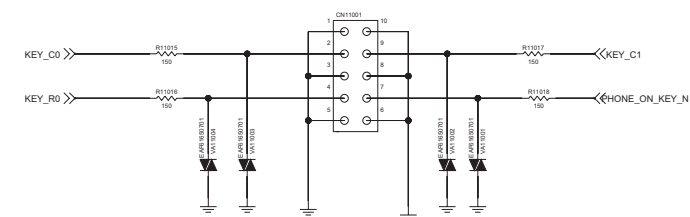


070Player

Receiver




NFC

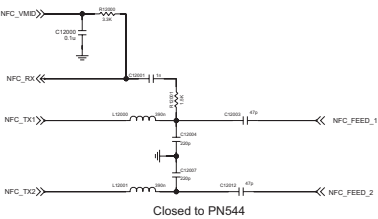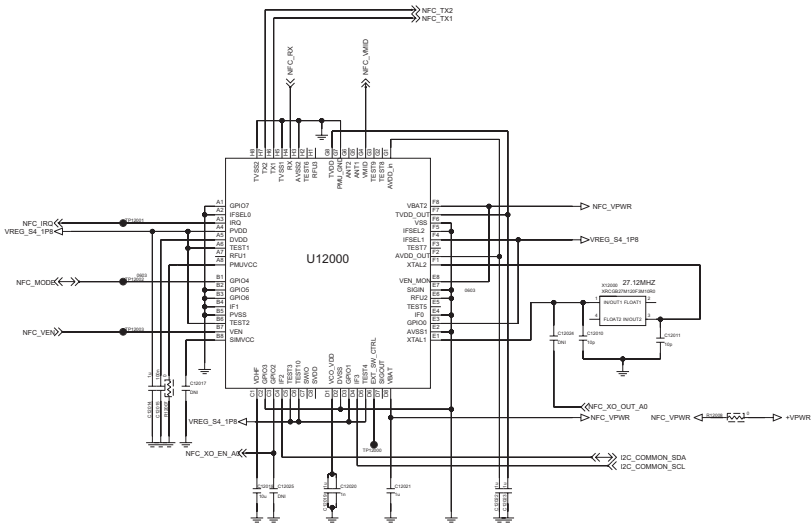


NO Delete


FPCB CONNECTOR BtoB

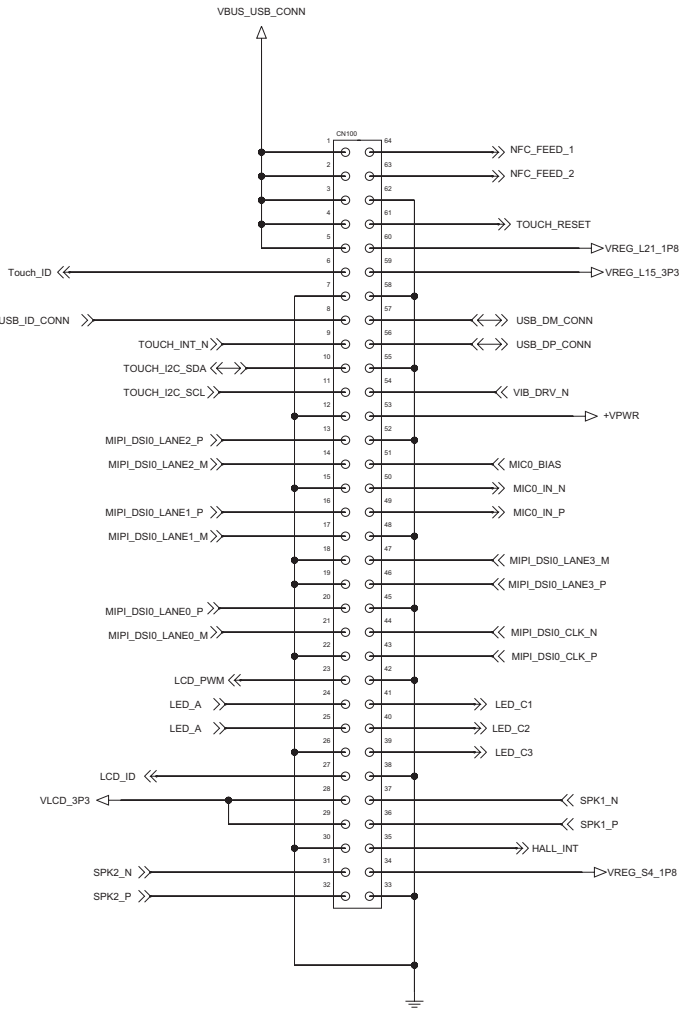


MOTOR




Main MIC

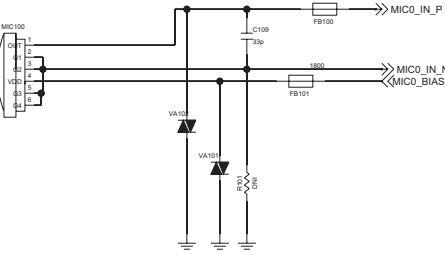


uUSB 5 pin connector

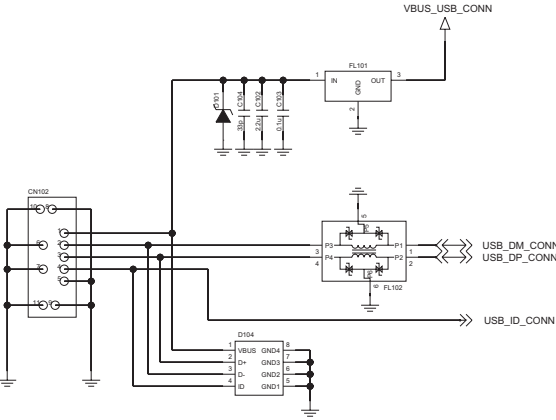


SPEAKER (Stereo)

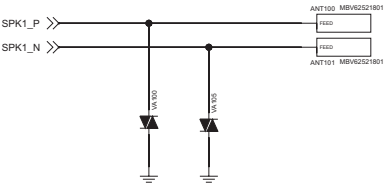


SPEAKER (Stereo)

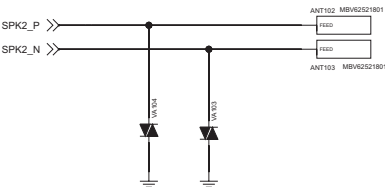


NFC

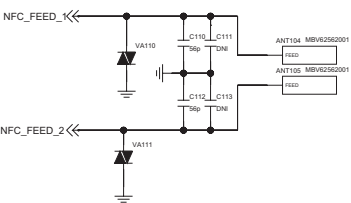


LCD CONNECTOR



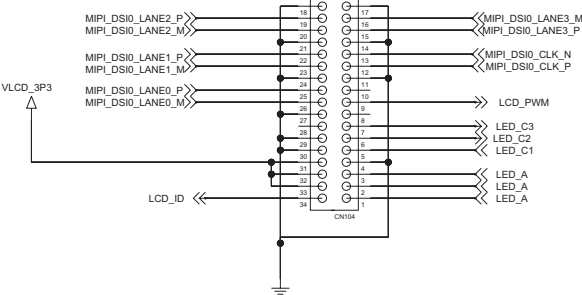


TOUCH CONNECTOR

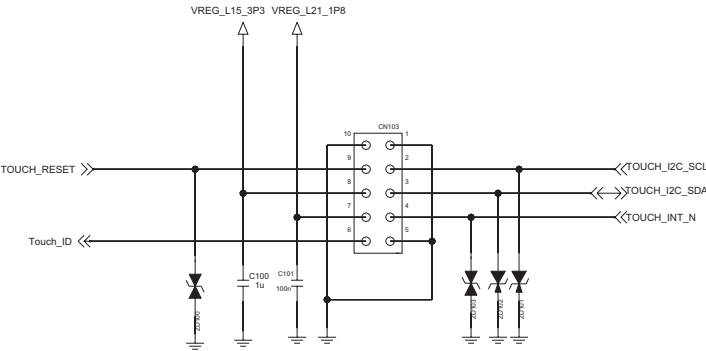

Magnetic Sensor



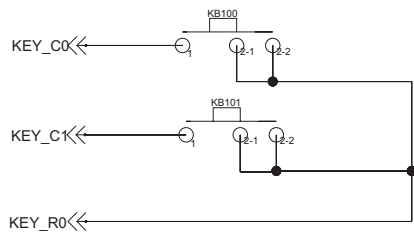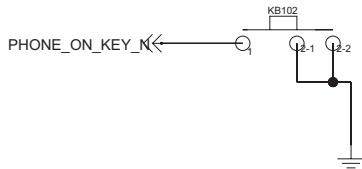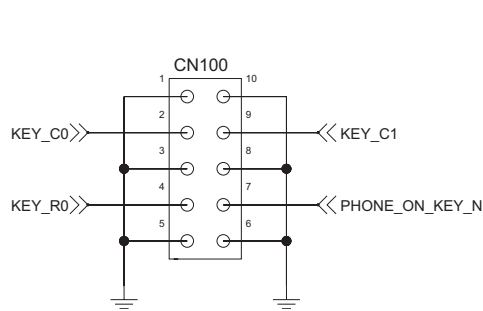

	R0
C0	UP
C1	DOWN


7. BGA PIN MAP

U1000 – APQ8064 top (Top View)

[illegible]

Not Used

U1000 – APQ8064 bottom (Top View)

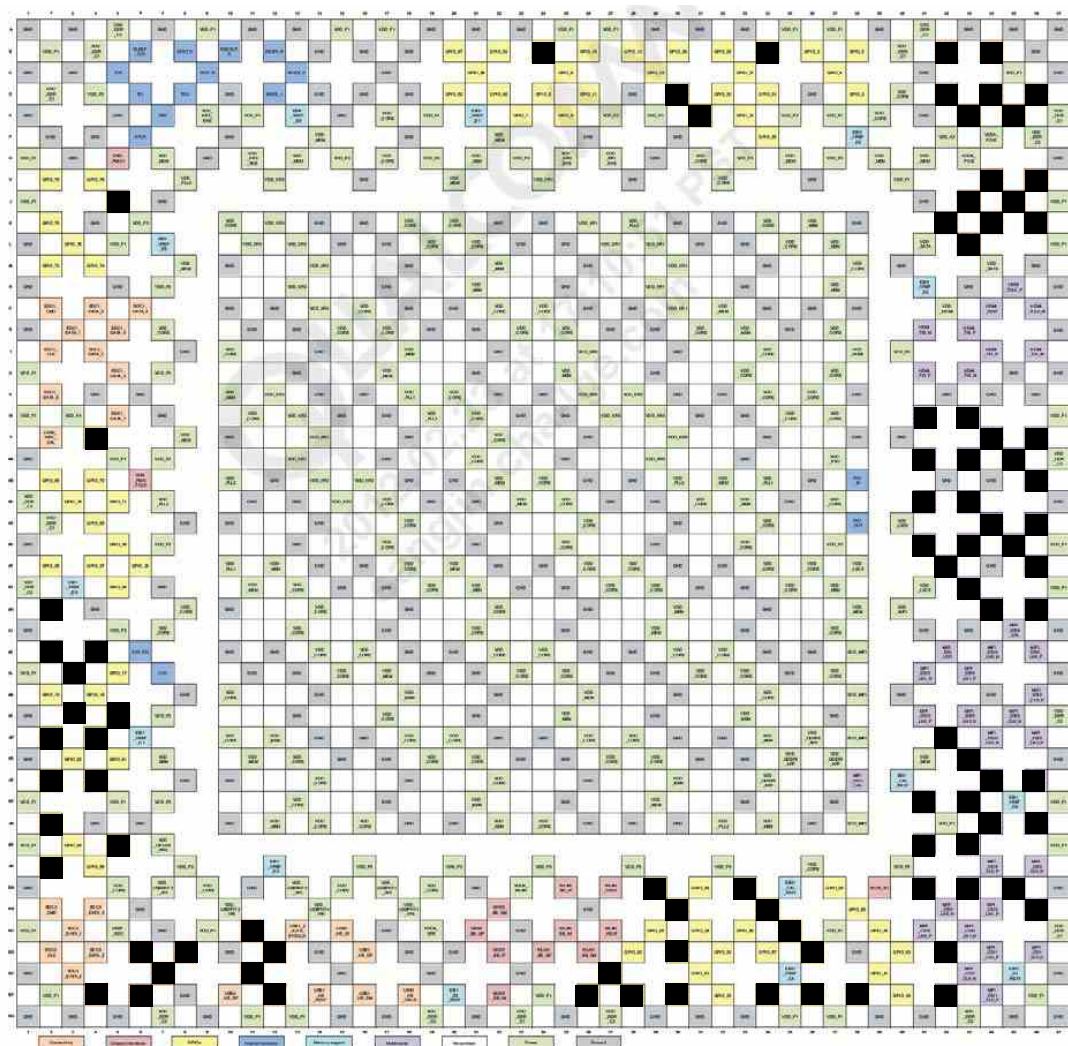

Not Used

7. BGA PIN MAP

U3000 - PM8921 (Top View)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		
A		XTAL_32K_IN	XTAL_32K_OUT	VREG_L25	VREG_L24	VDD_S1	VSW_S1	GND_S1	GND_S3	VSW_S3	VDD_S3	VDD_S2	VSW_S2	GND_S2	VDD_S5	VDD_S5	VSW_S5	VSW_S5	A	
B		VDD_L10_22	VREG_L22	VDD_L25	VDD_L24	VREG_S1	VSW_S1	RESIN_N	VREG_S3	VSW_S3	KYPD_PWR_N	PON_RESET_N	VSW_S2	VREG_S2	OPT_2	VREG_S5	VSW_S5	GND_S5	B	
C	VREG_L10	GND_REF															CBL_PWR0_N	CBL_PWR1_N	GND_S5	C
D	USB_ID	REF_BYP		VREG_L1	GPIO_1					GPIO_14	GPIO_19			MPP_01	MPP_04	GND_DRV		OVP_SNS	D	
E	VOUT_SVS_OTG			VREG_L2	VREG_L18						GPIO_20				MPP_05			USB_IN	USB_IN	E
F	VREG_L17	VIN_SVS		VDD_L1_2_12_18	VREG_L12	GPIO_2								MPP_09	MPP_06	VIB_DRV_N		USB_OUT	USB_OUT	F
G	VDD_L3_15_17			VREG_L15	VREG_L3				GPIO_9	GPIO_15	GPIO_17	GPIO_18		PA_THERM	LED_DRV0_N			PHY_VBUS		G
H	VREG_L5			VREG_L21	VREG_XO		XO_OUT_A0	GND_XO	GND	GND	GND	BAT_ID						BMS_CSP	OPT_3	H
J	VREG_L8	VDD_L21_23_29		VREG_L29	VREG_RF_CLK		XO_OUT_A1	GND	GND	GND	GND			XO_OUT_D0_EN				VPRE_CAP	VREG_CHG	J
K	VDD_L5_8_16	XTAL_19M_IN		VREG_L23	VDD_L4			GND	GND	GND	GND			VCOIN	VREF_LPDDR2			VBAT	BAT_FET_N	K
L	VREG_L16			VREG_L11	VREG_L4		XO_OUT_D1	GND_XOBUF	GND	GND	GND_CHG			SSBI	BAT_THERM			BMS_CSM	VDD_CDRV	L
M	VREG_L9	VDD_L9_11		VREG_L7	VIN_LVS2		GPIO_26	GPIO_27	GPIO_31			GPIO_39		VREF_BAT	VREG_L14			DC_IN	DC_IN	M
N	VREG_L6	VDD_L6_7		VIN_LVS4_5_7	VOUT_LVS2	XO_OUT_D0										MPP_12		VDRV_P	VSW_CHG	N
P	VREG_L26	VDD_L26		VOUT_LVS1	VOUT_LVS5	VOUT_LVS4							MPP_08					VDRV_N	VSW_CHG	P
R	VREG_L28	VDD_L28		VOUT_LVS3	VOUT_LVS7	GPIO_24		GPIO_28		GPIO_34	GPIO_37			MPP_07	MPP_10			GND_CHG_HP	GND_CHG_HP	R
T	GND_XOADC		VIN_LVS1_3_6													PS_HOLD		GND_CHG_DRV	GND_S8	T
U	VDD_NCP	GND_NCP		VOUT_LVS6	VDD_L27	VREG_S7	VSW_S7	PM_MDM_INT_N	PM_USR_INT_N			PM_SEC_INT_N	VSW_S4	VREG_S4	OPT_1	VREG_S6	VSW_S6	GND_S6	U	
V	GND		SLEEP_CLK0	VREG_L27	VDD_S7	VSW_S7	GND_S7	GND_S8			VDD_S8	VDD_S4	VSW_S4	GND_S4	VDD_S6	VDD_S6	VSW_S6	VSW_S6	V	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		
	Input Power Management	Output Power Management	General Housekeeping	User Interface	IC Interface	GPIO or MPP	NDR	Power	Ground											

Not Used


U4000 - PM8821 (Top View)

6 GND_S1	12 GND _DRV_S1				36 GND _DRV_S2	42 GND_S2
5 GND_S1	11 GND_S1	17 ALT _SSBI_CLK	23 GND		35 GND_S2	41 GND_S2
4 VSW_S1	10 VSW_S1	16 INT_N	22 GND	28 GND	34 VSW_S2	40 VSW_S2
3 VDD_S1	9 VDD_S1	15 VDD _DRV_S1	21 PON _RST_N	27 VDD _DRV_S2	33 VDD_S2	39 VDD_S2
2 PON	8 PS_HOLD	14 VREG_S1	20 VDD_DIG	26 VREG_S2	32 SSBI	38 SSBI_CLK
1 GND	7 GND_REF	13 REF_BYP	19 VPH_PWR	25 GND	31 VDD_MSM _IO	37 GND

Output power management	General housekeeping	IC interface	MPPs	Power	Ground
-------------------------	----------------------	--------------	------	-------	--------


 Not Used

U5001 - Memory MCP (Top View)

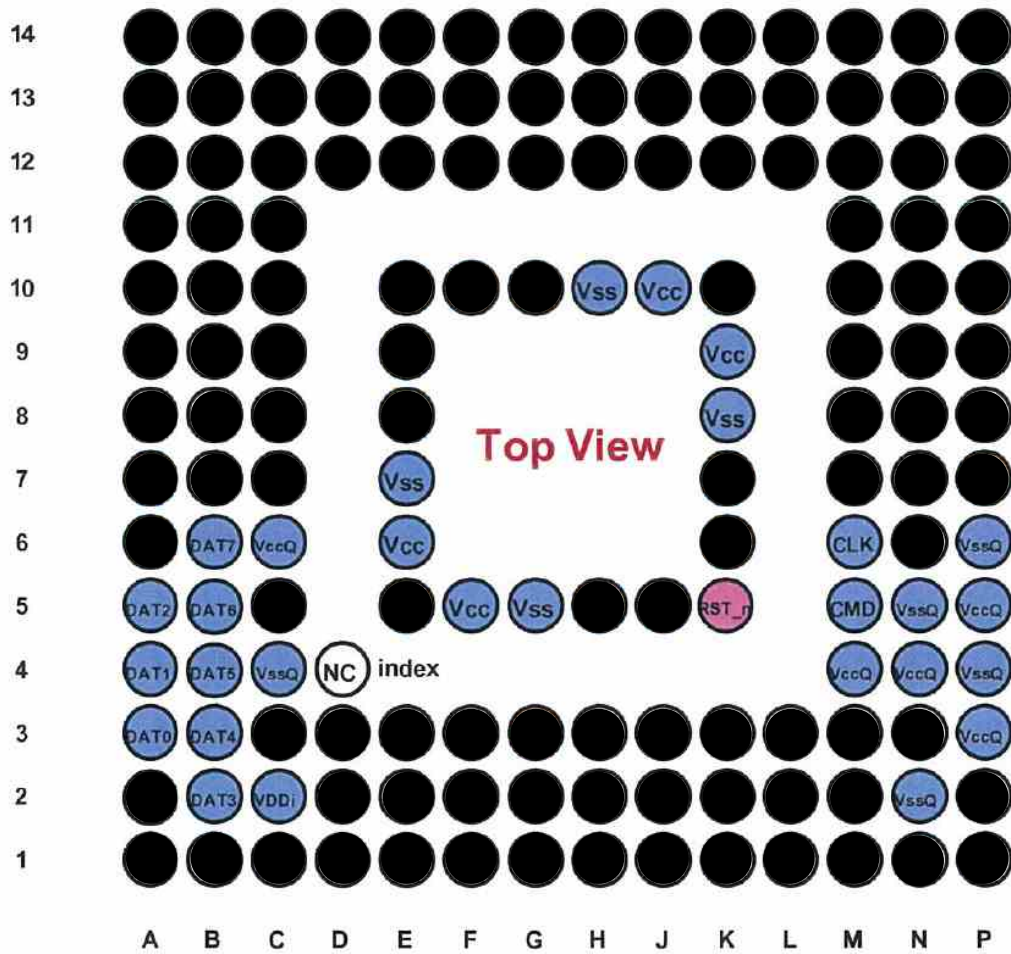


● Not Used

U6002-WCD9310 (Top View)

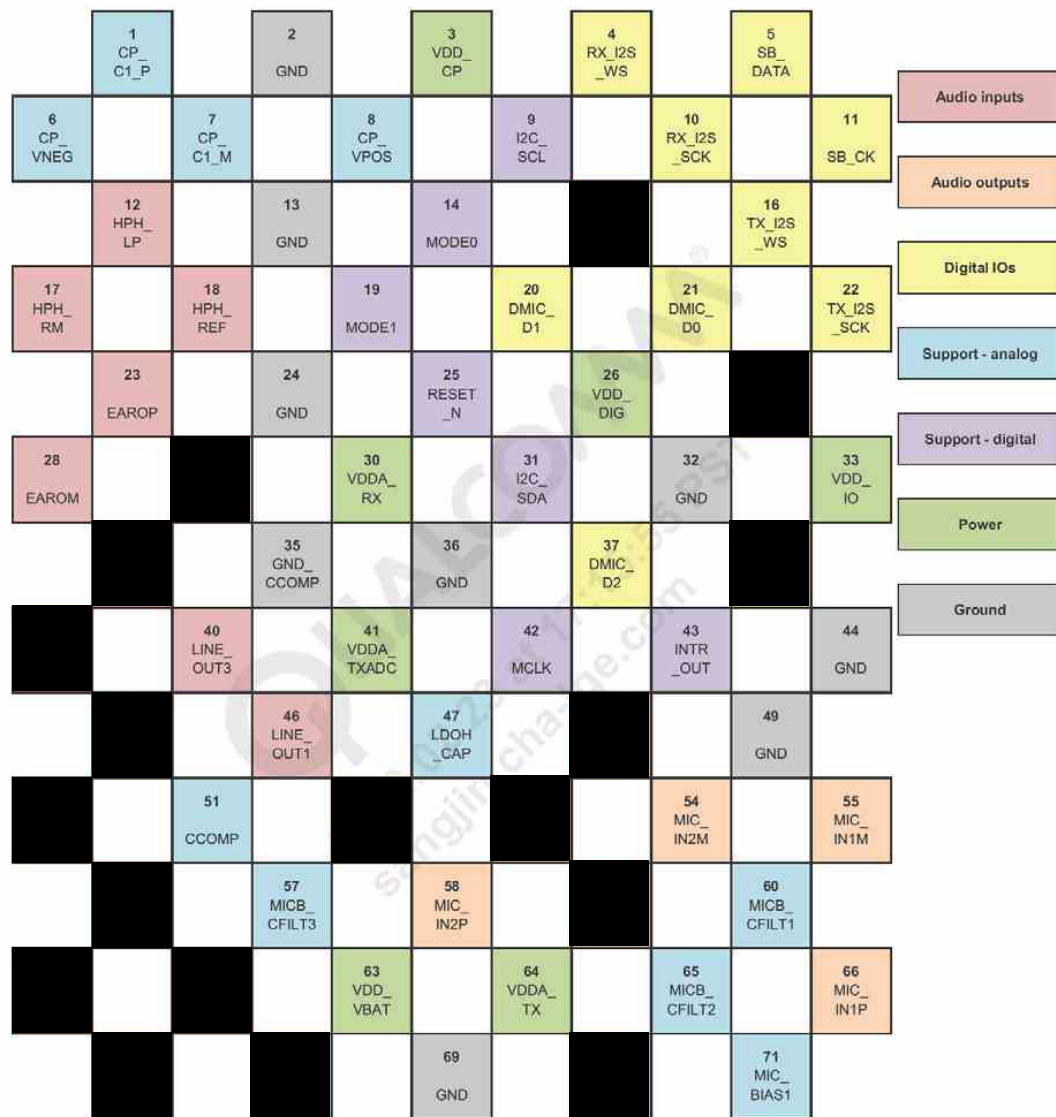

Not Used

U10002 – BT / WIFI WCN3660A (Top View)

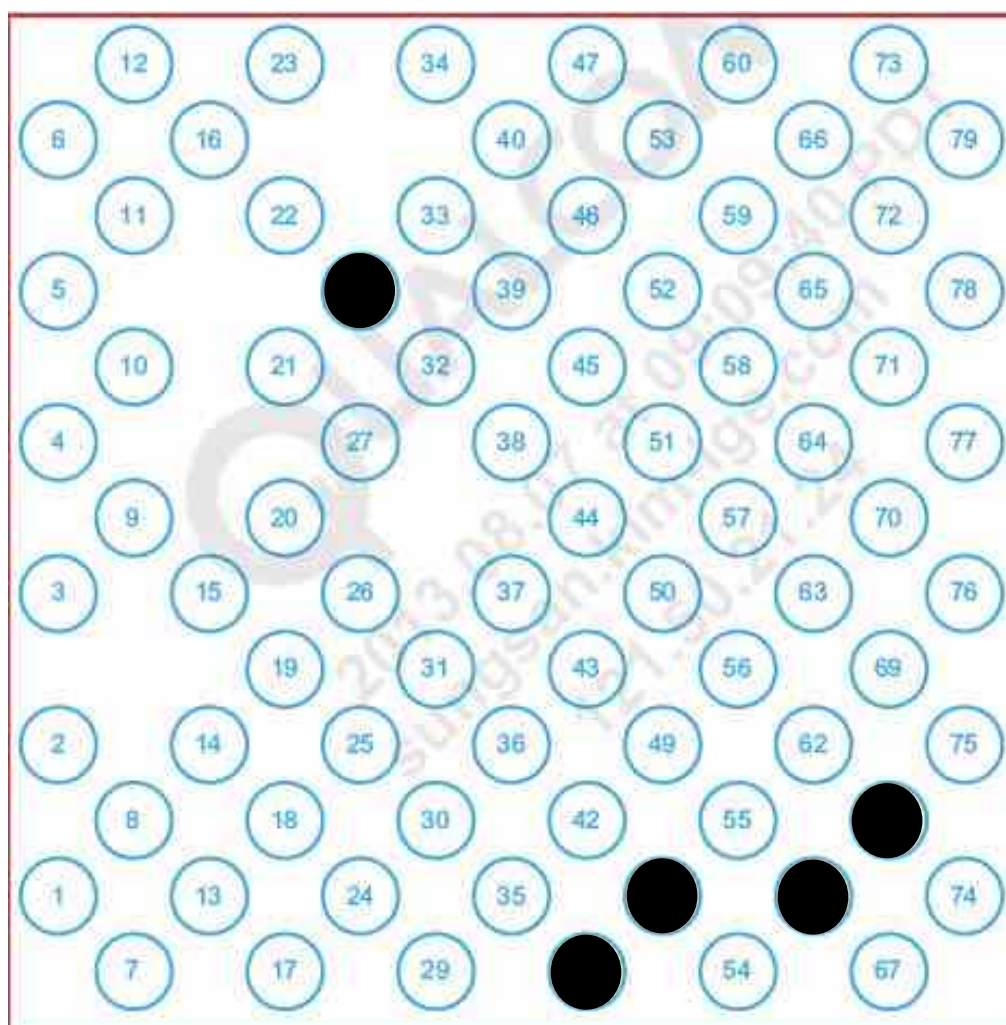

● Not Used

U10001 – GPS WGR7640 (Top View)

1 GND		2 RF_P		3 GND
	4 RF_M		5 VDD_ RF_1P3	
6 BB_I_M		7 GND		8 SSBI
	9 BB_I_P		10 GND	
11 BB_Q_M		12 GND		13 VDD_ RF_1P3
	14 BB_Q_P			
15 TCXO		16 VDD_ RF_1P3		17 VDD_ DIG_1P8

ALL USED

U11001 – Slim Port (Top View)

	1	2	3	4	5	6	7	
A	RESISTOR	ID_OUT	C-WIRE/ AUXP		TX0P	TX0N	VDD33_OUT	A
B	XTAL_OUT	CABLE_DET	AVSS	AVDD18	USB_DP	USB_DN	AVDD33_IN	B
C	XTAL_IN	R_BIAS	AVDD33_IN	DVSS	AVDD10	DVDD10	RESETN	C
D		CHIP_PD_HV	DVDD18	DVDD18	DVSS		INTP	D
E	CEC		DVSS	DVDD10	HDMI_VT	DDC_SDA	CSCL	E
F	HDMI_CLKN		AVSS	AVSS	HDMI_HPD_ OUT	DDC_SCL	CSDA	F
G	HDMI_CLKP	HDMI_D0N	HDMI_D0P	HDMI_D1N	HDMI_D1P	HDMI_D2N	HDMI_D2P	G
	1	2	3	4	5	6	7	

 Not Used