Start here

Create REAPER markers from MixRack scene recalls. For virtual soundcheck, optionally recall MixRack scenes from REAPER playback.

The Live view

dLive Listener
Start or stop the selected source. Listening means the source socket or MIDI input is open; it does not confirm marker delivery.


Marker mode

Recording Only: desk recalls create markers only while REAPER reports recording.

Always: desk recalls can create markers outside recording.

Playback recall

Starts **Off** at every app launch. Turn it On only when you want REAPER playback to recall desk scenes. Marker creation is suspended while it is On.

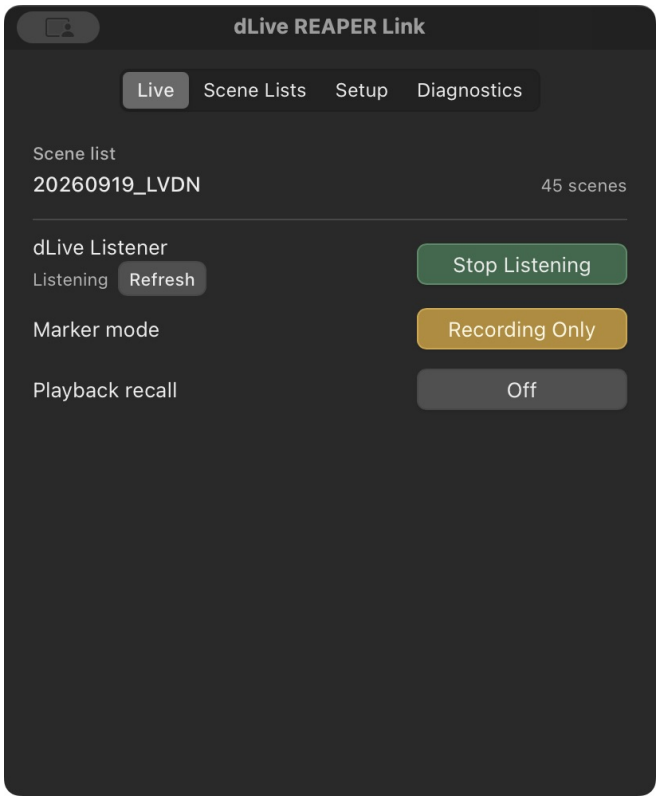

Real app screenshot. Scene-list names and scene counts are examples.

Keep the two OSC directions separate

App to REAPER: marker commands go to REAPER on port **49101** by default.


REAPER to app: transport and marker feedback returns to this app on port **49102**. Both directions are needed.

Use a test session first

Use a disposable REAPER session and a matching scene list for your first checks. This build has been tested with Director; physical MixRack/Surface validation is still pending.

Configure OSC in REAPER

Open **REAPER Preferences > Control/OSC/web**. Choose Add, or Edit the OSC entry dedicated to this app. Use the settings below for both apps on the same Mac.

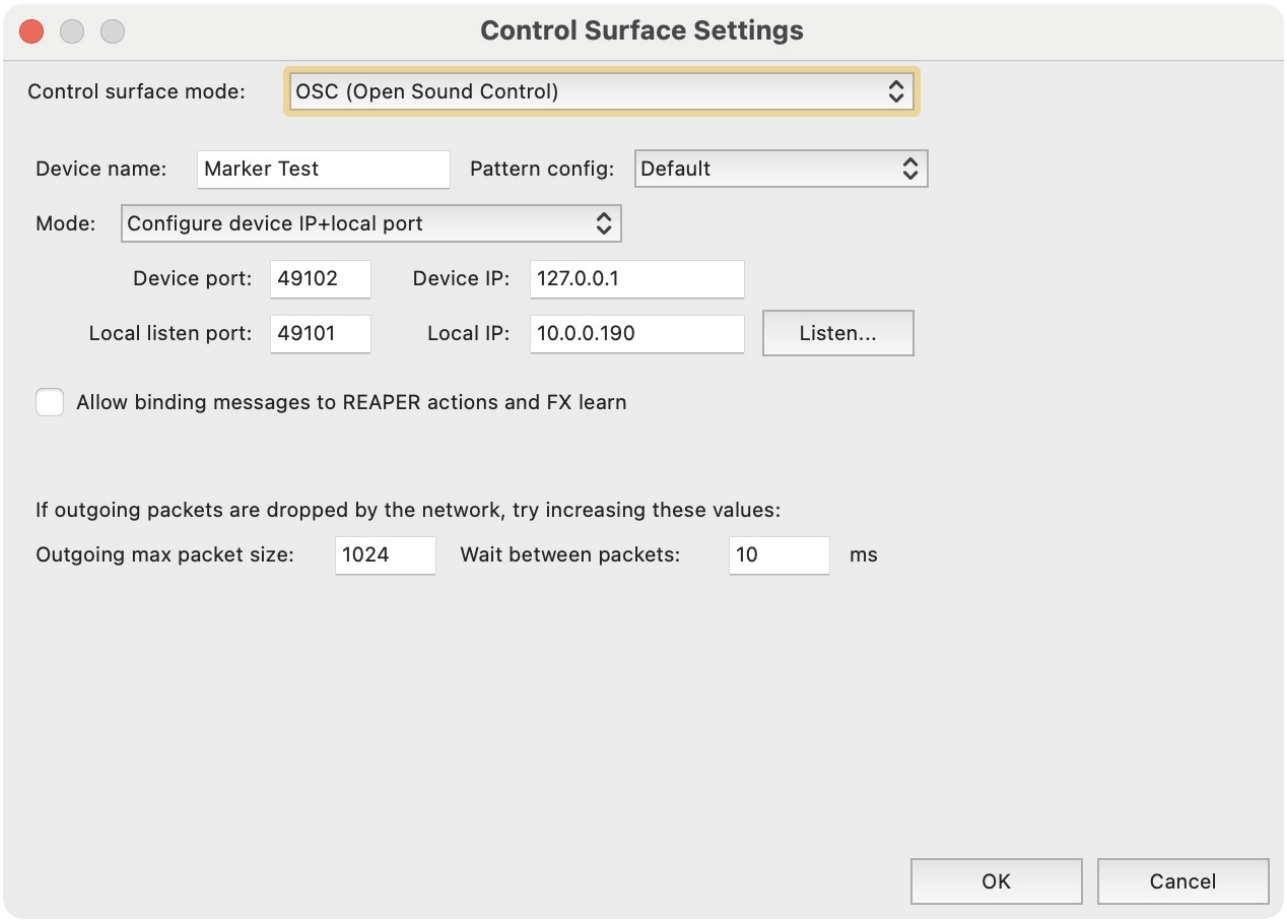


Real REAPER v7.80 dialog. The device name "Marker Test" is an example; any name is acceptable. Local IP is REAPER's displayed network address.

REAPER field	Required value
Control surface mode	OSC (Open Sound Control)
Pattern config	Default
Mode	Configure device IP+local port
Device IP	127.0.0.1 - the app's feedback destination
Device port	49102 - feedback into the app
Local listen port	49101 - commands into REAPER; match the app's Port

Configure the app and verify

In **Setup**, configure the desk source and the REAPER target. Save each section after making a change.

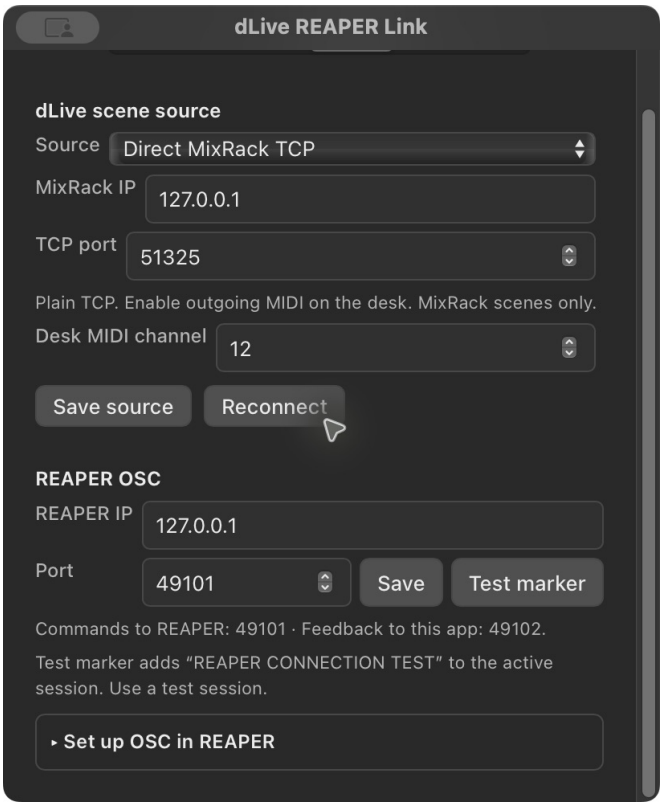

Real Setup view. The screenshot uses Director at 127.0.0.1. For physical hardware, use the actual MixRack IP.

1. Desk source

Choose **Direct MixRack TCP** for playback recall. Enter the MixRack IP, plain TCP port **51325**, and the desk's base MIDI channel (1-12). Save source, then Start Listening.

Enable the desk's outgoing scene MIDI for marker reception and incoming scene MIDI for playback recall.

2. REAPER target

On the same Mac, use **REAPER IP 127.0.0.1** and **Port 49101**. This Port must match REAPER's Local listen port. The app's feedback port is fixed at 49102.

3. Scene list

Create, import or load a scene list. REAPER marker names must match scene names exactly. Blank slots retain their scene numbers. REAPER marker numbers are not desk scene numbers.

Get the initial feedback

Confirm the REAPER OSC dialog with OK. In REAPER's Actions list, run **Control surface: Refresh all surfaces**. Wait a couple of seconds, then check Diagnostics for transport and the current marker. Playback recall needs a marker at or before the cursor.

Test marker changes the active session

Test marker adds a marker named REAPER CONNECTION TEST to the active REAPER session. Use your disposable session for this test. It checks marker creation separately from the desk connection.

REAPER on another computer

Set this app's REAPER IP to the REAPER computer's IP. In REAPER, set Device IP to the computer running this app, Device port to 49102, and Local listen port to the same Port saved in this app. Leave other OSC settings unchanged.

Playback rules and troubleshooting

Turn **Live > Playback recall** On after the source shows Listening and REAPER feedback is available. Enabling during playback can immediately recall the current mapped scene.

When this happens	What the app does
A different mapped scene	Sends that scene's bank/program-change recall. Unmatched or empty marker names send nothing.
Stop/Play, Pause/Resume, or a loop within one song	Remembers the last sent scene. Does not recall that same scene again.
Seek or loop into another song	Recalls the destination scene. Does not fire skipped scenes.
REAPER is recording	Sends no scene recalls. Recording does not update the remembered scene. Later normal playback recalls only if the mapped scene differs.
Recall is On	Suppresses desk-to-REAPER marker creation, including in Always mode. Hiding the window keeps recall running.
Connection, source, target or scene list changes	Turns recall Off. Re-enable explicitly; commands are not queued or replayed. Re-enabling starts a new recall session.

If a setup check fails

Symptom	Check
Listener is Waiting	MixRack/Director IP, port 51325, source selection and Start Listening. MIDI input fallback cannot send recalls.
Refresh feedback message	REAPER Pattern config Default; Device IP/port point to this app; app REAPER IP is correct. Run Refresh all surfaces.
No matching scene recall	Exact marker names, selected list, unique non-empty scene names, and REAPER recording state.
Surface cue list does not move	The feature recalls MixRack scenes. It does not navigate or reposition the Surface cue list.

Verify the result on the desk. Diagnostics "command sent" confirms a socket write, not desk recall. Physical network/MIDI recovery and scene sending remain unverified. Director is software validation.

References: REAPER OSC documentation | A&H dLive MIDI-over-TCP V2 protocol