L1 · BRICK


GENERAL ARRANGEMENT — ORTHOGRAPHIC VIEWS

AF-L1-101

REV A · 2026-11-12

FOR REVIEW

TOP VIEW

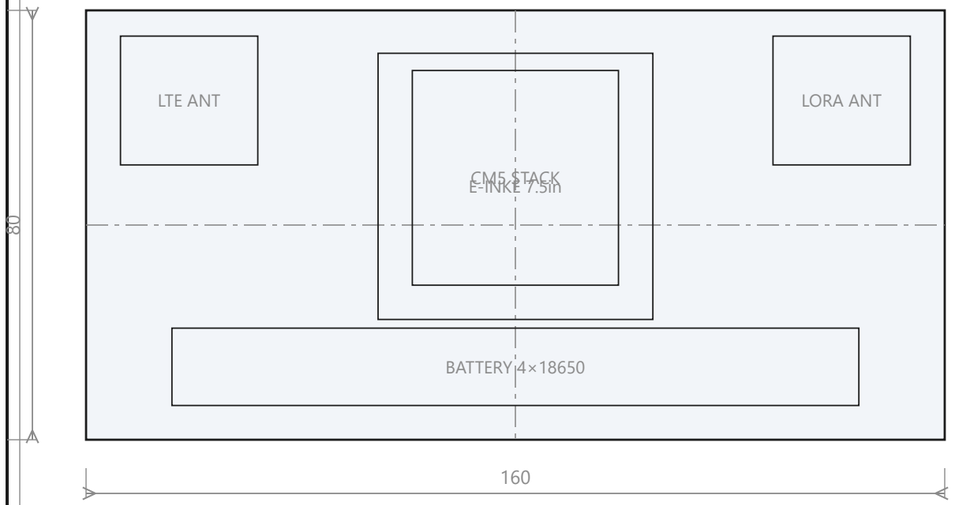


scale: shown NTS · dims in mm

FRONT VIEW



SIDE VIEW

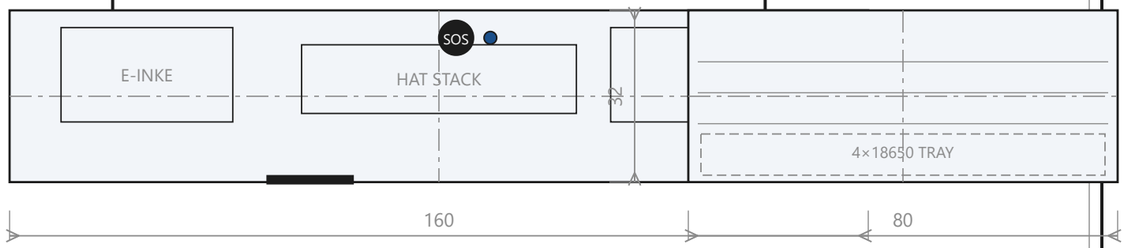

WHAT THIS NODE IS

— Handheld brick = mailbox + mesh repeater + public bulletin (E-Ink) + SOS beacon.

— Runs ArcticChain agent on :8080 — SQLite store-and-forward, signed Ed25519 envelopes.

— LoRa 915 MHz mesh to neighbors; LTE backhaul only when a tower exists.

— Works with zero connectivity — that is the product.

KEY FEATURES

FEATURE	DETAIL
Display	7.5in e-Paper 800×480 — sunlight readable, zero idle power
Mesh radio	SX1262 LoRa 915 MHz on SPI1 (GPIO 16–21)
Backhaul	SIM7600 LTE HAT (optional) + GNSS + BT
Power	4×18650 → 14.8 V → 5 V USB-C PD · ~44 Wh
Enclosure	160×80×32 mm printed PETG · ~450 g assembled

ACCEPTANCE TEST

— Unit A POST /message → Unit B GET /inbox — with LTE in airplane mode.

— Mesh delivery with no towers = the whole pitch in one test.

ARCTICCHAIN — RURAL NODE FLEET

EMEBET INC. · emebetos.ca

SOLE PROPRIETARY OWNER — SURAFEL NEGUSSIE, PLANNER/MAKER

DRAWN BY **Surafel Negussie**

CHECKED BY

DATE

PROJECT

SCALE **NTS**

SHEET **1/3**

DWG NO **AF-L1-101**

UNITS mm

PROPRIETARY & CONFIDENTIAL — UNAUTHORIZED DISTRIBUTION PROHIBITED

PARTS LIST — PER UNIT (ORDER ×2 FOR ACCEPTANCE TEST)

#	PART	SUPPLIER	APPROX CAD	QTY
1	Raspberry Pi CM5 4GB + CM5 IO Board	PiShop / Canada Computers	$90–130	1
2	7.5in e-Paper HAT 800×480 SPI	Waveshare / DFRobot	$80–110	1
3	SIM7600 4G/LTE HAT (GNSS+BT ok)	DFRobot / Waveshare	$60–90	1
4	SX1262 LoRa breakout 915 MHz (E22-900M30S class)	DFrobot / AliExpress	$15–25	1
5	Magnetic pogo-pin connector pairs ×6	AliExpress / Amazon.ca	$30–60	1
6	4×18650 flat-top protected + 14.8→5 V 3 A buck	Electronics supplier	$40–70	1
7	PETG filament (both shells + trays ~200 g)	Any filament supplier	$25–35	0.5

POWER TREE

4×18650 — 14.8 V · 44 Wh → **14.8→5 V BUCK** — 3 A · USB-C PD → **5 V RAIL** — fuse 5 A · 10 A in

Runtime est: days–weeks depending on LTE duty. Rev-B adds solar charge port and LiFePO4 cells for -45 °C service.

GPIO ALLOCATION

SIGNAL	GPIO	NOTES
E-Ink SPI	9/10/11/8	spi0 · HAT default
E-Ink busy/rst	25 / 17	poll before refresh
LoRa SPI1	16–21	dtoverlay=spi1-3cs — NOT spi0
LoRa rst/DIO1	24 / 23	interrupt RX
LTE modem	USB	CDC-ACM preferred
SOS button	27	pull-up input
Status LED	22	PWM

/BOOT/FIRMWARE/CONFIG.TXT — REQUIRED

```
dtparam=i2c_arm=on
dtparam=spi=on
dtparam=uart0=on
dtoverlay=spi1-3cs
dtoverlay=gpio-shutdown
disable_overscan=1
```

E-Ink = spi0 (GPIO 7–11) · LoRa = spi1 (GPIO 16–21). Never share a bus.

STACK ORDER (BOTTOM → TOP)

— USB-C power + battery tray (bottom bay)
— CM5 IO Board — power, HDMI, USB, GPIO
— 4G/LTE HAT — UART + USB AT commands
— E-Ink HAT — SPI0 + GPIO25 busy
— LoRa SX1262 — SPI1 GPIO16–21 (top)

ARCTICCHAIN — RURAL NODE FLEET

EMEBET INC. · emebetos.ca
SOLE PROPRIETARY OWNER — SURAFEL NEGUSSIE, PLANNER/MAKER

DRAWN BY **Surafel Negussie**
CHECKED BY
DATE
PROJECT

SCALE **NTS**
SHEET **2/3**
DWG NO **AF-L1-102**
UNITS mm

PROPRIETARY & CONFIDENTIAL — UNAUTHORIZED DISTRIBUTION PROHIBITED

ASSEMBLY SEQUENCE

1. Print chassis_shell.stl + battery_tray.stl — PETG, 40% infill, 4 walls.
2. Flash Pi OS Lite 64-bit to SD (Imager → SSH on, user 'arctic').
3. Bench-test bare CM5 first: boot, SSH, i2cdetect -y 1.
4. Stack HATs per sheet AF-L1-102; wire LoRa to GPIO 16–21 (spi1).
5. Wire power: 4×18650 → buck → USB-C; fuse 5 A rail, 10 A input.
6. Deploy agent: arcticchain_agent.py + systemd unit (poc/SETUP.md §5).
7. Acceptance test: POST /message on A → GET /inbox on B, LTE off.

AGENT API — :8080

ENDPOINT	DETAIL
GET /health	lora/lte status, uptime, queue depth
GET /inbox	pending messages (JSON)
GET /signal	mesh signal metrics
POST /message	{to, text} — queues or sends via LoRa

KNOWN GAPS (BY DESIGN)

— LoRa send/poll are TODOs — plaintext beacon until SX1262 driver lands (wk 3).
— E-Ink rendering is a stub; real Waveshare driver is Level-2.
— No power-path controller — battery swap reboots CM5 (acceptable PoC).
— Rev-B targets: -45 °C cells, IP65 gasket, glove SOS, solar input.

FIELD ACCEPTANCE CRITERIA

TEST	PASS CONDITION
Mesh exchange	message delivered A→B with LTE disabled, ≤60 s
Range	≥3 km line-of-sight at default SF
Cold soak	operates -20 °C (rev-B: -45 °C)
Power loss	SQLite inbox survives hard power cut

FILES IN REPO

— cad/level1_chassis.py → cad/level1/*.stl + dimensions.json (validated)
— poc/arcticchain_agent.py · arcticchain-agent.service · SETUP.md · WIRING.md
— docs/ORDER_LIST.md · BUILD_GUIDE.md · HARDWARE.md
— firmware-hal · mesh-net · compositor · simulator (Rust, 46 tests)

ARCTICCHAIN — RURAL NODE FLEET

EMEBET INC. · emebetos.ca
SOLE PROPRIETARY OWNER — SURAFEL NEGUSSIE, PLANNER/MAKER

DRAWN BY **Surafel Negussie**
CHECKED BY
DATE
PROJECT

SCALE **NTS**
SHEET **3/3**
DWG NO **AF-L1-103**
UNITS mm

PROPRIETARY & CONFIDENTIAL — UNAUTHORIZED DISTRIBUTION PROHIBITED