

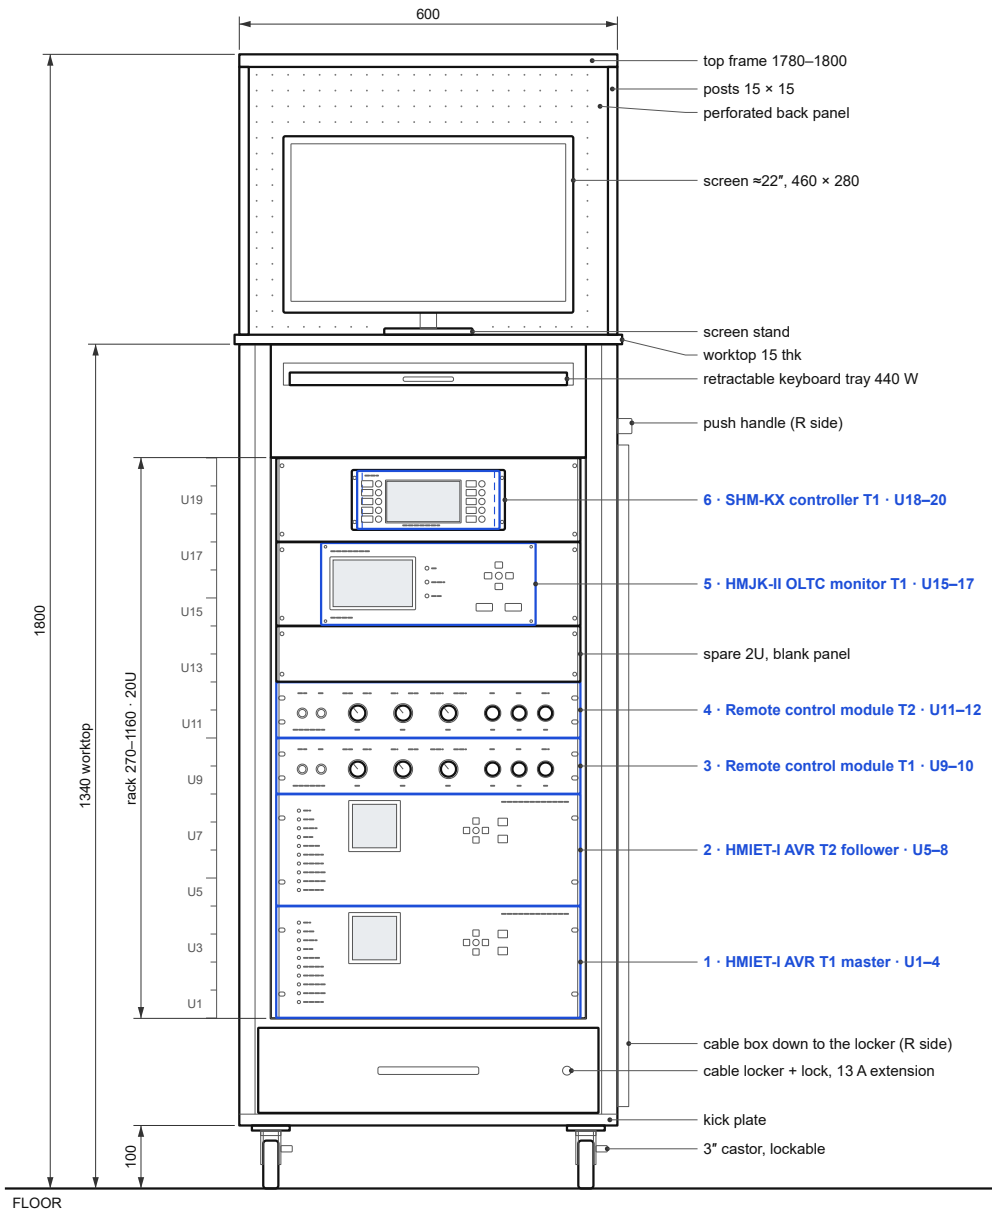


FRONT ELEVATION

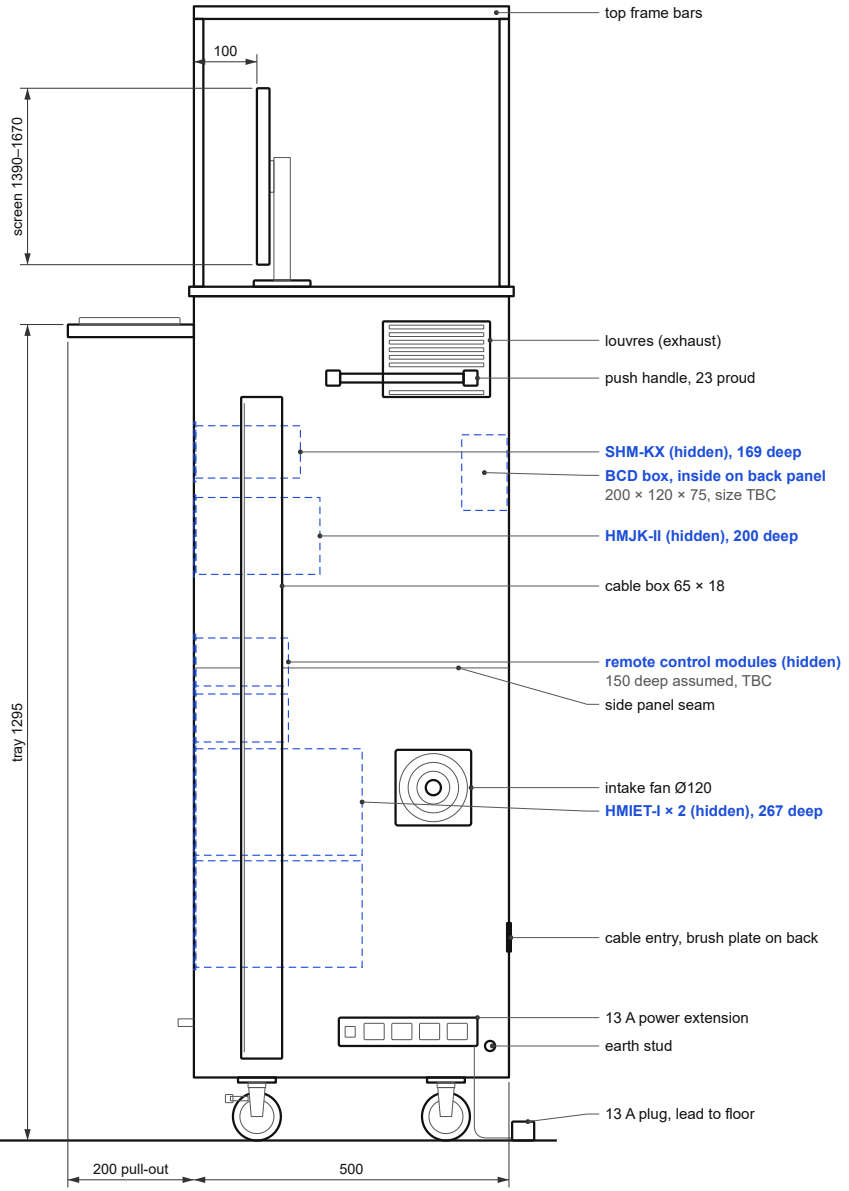

RIGHT SIDE ELEVATION

AVR DEMO CABINET	SCALE 1:12 (A4)	SHEET 1 OF 3
GENERAL ARRANGEMENT	UNITS mm	REV C · 11 NOV 2026

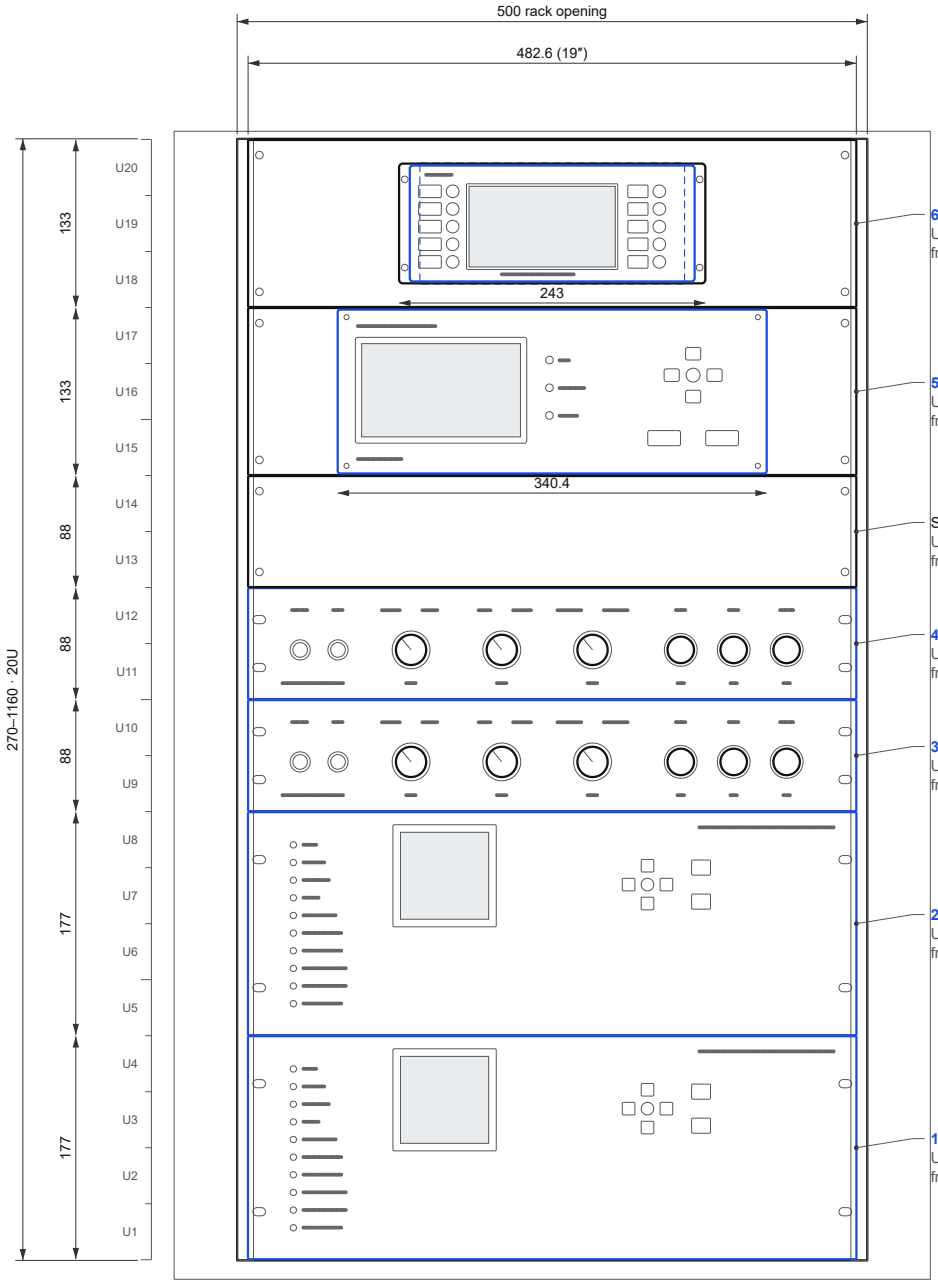

6 · SHM-KX controller T1
U18–20 · 3U · 1027–1159 mm · 169 deep
front 243 × 95, cutout 210 × 96 in a 3U plate

5 · HMJK-II OLTC monitor T1
U15–17 · 3U · 894–1025 mm · 200 deep
front 340.4 × 130 on a 3U plate

Spare
U13–14 · 2U · 805–892 mm
front 482.6 × 88

4 · Remote control module T2
U11–12 · 2U · 716–803 mm · 150 deep (TBC)
front 482.6 × 88

3 · Remote control module T1
U9–10 · 2U · 627–714 mm · 150 deep (TBC)
front 482.6 × 88

2 · HMIET-I AVR T2 follower
U5–8 · 4U · 449–625 mm · 267 deep
front 482.8 × 177


1 · HMIET-I AVR T1 master
U1–4 · 4U · 272–447 mm · 267 deep
front 482.8 × 177

Rev C changes

Order as Gerrick's sketch, system 1 at the bottom.
Remote control modules × 2 added, 2U each.
HMJK-II now one unit, landscape, on a 3U plate.
SHM-KX added, panel-mounted in a 3U plate.
Systems 5 and 6 stacked: 340.4 + 243 = 583,
wider than the 450 between the rails.
Removed: simulator, HMC-3C × 2, 2nd HMJK-II.
Rack 22U → 20U, top 1250 → 1160 mm.

RACK FRONT ELEVATION


AVR DEMO CABINET	SCALE 1:6 (A4)	SHEET 2 OF 3
RACK FRONT	UNITS mm	REV C · 11 NOV 2026

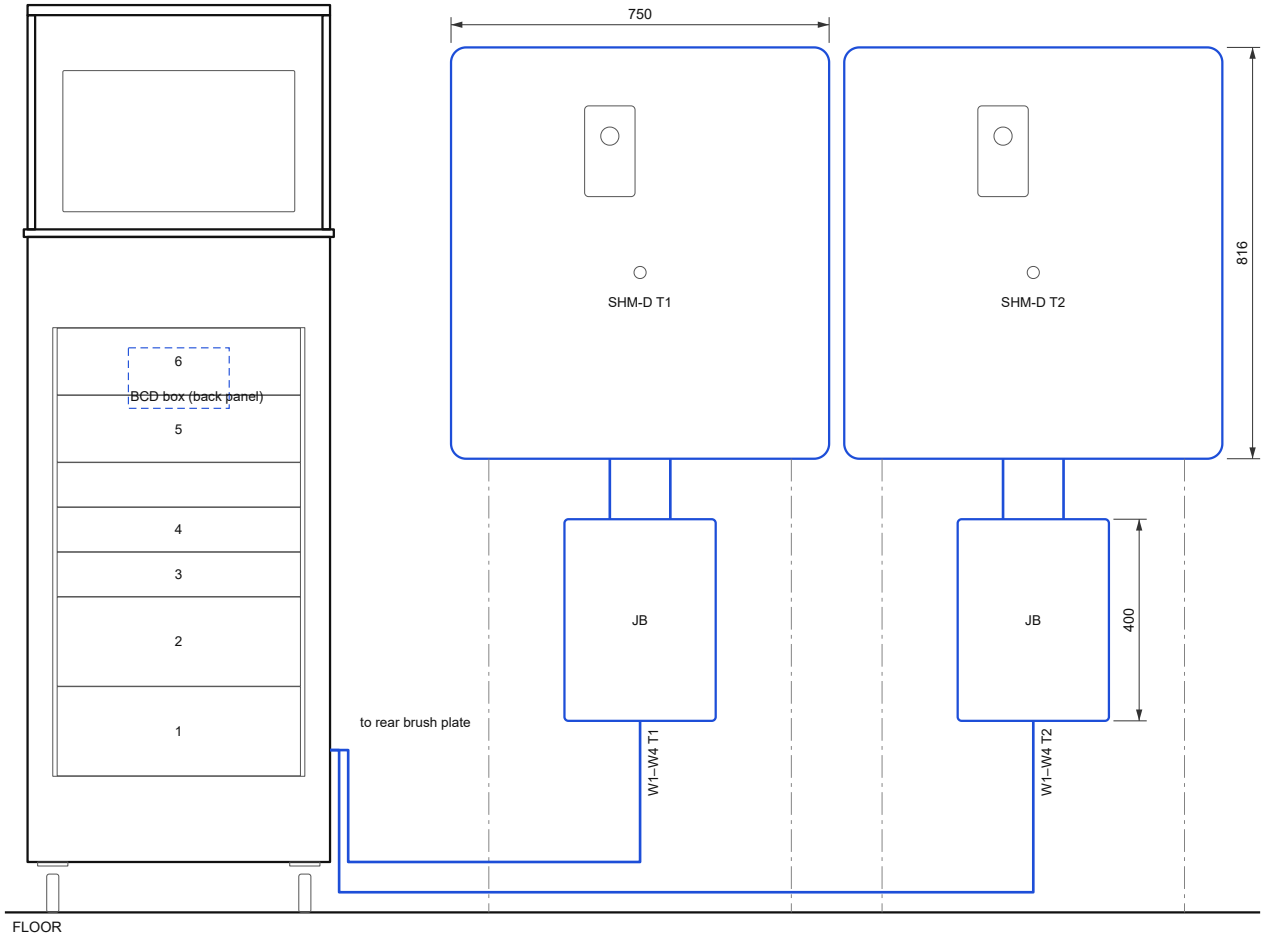

DEMO CABINET


OUTSIDE: 2 × SHM-D, ONE JUNCTION BOX EACH

positions schematic · number of SHM-D TBC

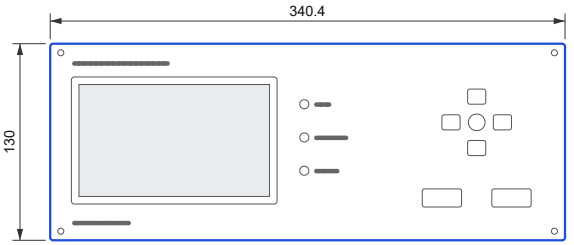


HMJK-II OLTC MONITOR × 1 · 1:5

landscape, 200 deep, on a 3U plate

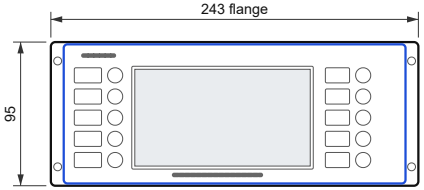

SHM-KX CONTROLLER × 1 · 1:5

cutout 210 × 96, 169 deep

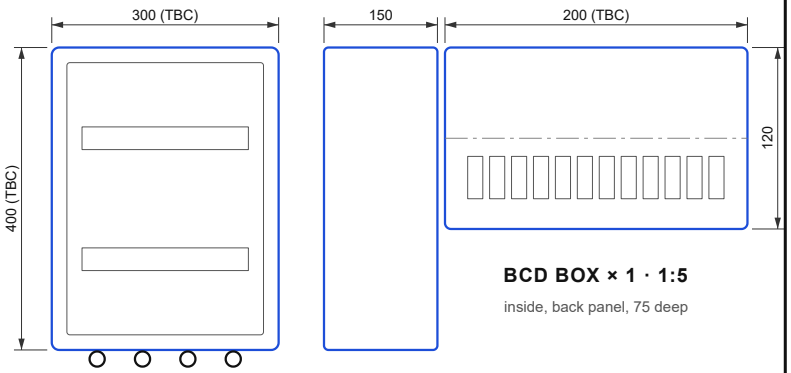

BCD BOX × 1 · 1:5

inside, back panel, 75 deep

JUNCTION BOX × 2 · 1:10

Cable	From	To	Signal	Cores
W1	Junction box	BCD box	BCD tap position	10 × 1.5
W2	Junction box	HMJK-II	Motor voltage + current	8 × 1.5
W3	Junction box	AVR, SHM-KX	Raise / lower / status	TBC
W4	Cabinet	Junction box → SHM-D	Supply 230 V	3 × 2.5

One set per motor drive. W2 and the SHM-KX on T1 only.

AVR DEMO CABINET	SCALE 1:15 (A4)	SHEET 3 OF 3
SYSTEM LAYOUT	UNITS mm	REV C · 11 NOV 2026