Fructus

Instruction Set Reference

2026-10-12 · b99d6c8

https://github.com/erikcorry/fructus

FRUCTUS · 16-BIT · FIRST-BYTE DECODE

Opcode Map

Instruction length comes from the first byte alone, so this table is the whole decoder.

157 ASSIGNED **99** FREE **17** ADDRESSING MODES **68** INSTRUCTION ENTRIES

	·0	·1	·2	·3	·4	·5	·6	·7
00	00 1B **brk**	01 1B **halt**	02 1B **rti**	03 1B **ld** r0, [r0, #0]	04 1B **ld8** r0, [r0, #0]	05 1B **add** r0, r0, #1	06 1B **add** r0, r0, #-1	07 1B **add** r0, r0, #2
08	08	09 3B **st** rs, [ra, #off10]	0a 2B **st** rs, [ra, #off3]	0b 2B **st** rs, [ra, #off3]	0c	0d	0e 2B **st** rs, [ra, rb]	0f 2B **st** rs, [ra, rb]
10	10	11 3B **st8** rs, [ra, #off10]	12 2B **st8** rs, [ra, #off3]	13 2B **st8** rs, [ra, #off3]	14	15	16 2B **st8** rs, [ra, rb]	17 2B **st8** rs, [ra, rb]
18	18 2B **ld** rd, [rd, #off5]	19 3B **ld** rd, [ra, #off10]	1a 2B **ld** rd, [ra, #off3]	1b 2B **ld** rd, [ra, #off3]	1c	1d	1e 2B **ld** rd, [ra, rb]	1f 2B **ld** rd, [ra, rb]
20	20 2B **ld8** rd, [rd, #off5]	21 3B **ld8** rd, [ra, #off10]	22 2B **ld8** rd, [ra, #off3]	23 2B **ld8** rd, [ra, #off3]	24	25	26 2B **ld8** rd, [ra, rb]	27 2B **ld8** rd, [ra, rb]
28	28 2B **mov** rd, #imm5	29 3B **movhi** rd, ra, #imm10	2a	2b	2c 2B **mov** rd, #immbit5	2d 2B **mov** rd, #immask5	2e 2B **movhi** rd, ra, rb	2f 2B **movhi** rd, ra, rb
30	30	31	32 2B **sxt8 bitrev clmul** rd, ra, #op	33 2B **clz popcount** rd, ra, #op	34	35	36	37
38	38 2B **add** rd, rd, #imm5	39 3B **add** rd, ra, #imm10	3a 2B **add** rd, ra, #imm3	3b 2B **add** rd, ra, #imm3	3c 2B **add** rd, rd, #immbit5	3d 2B **add** rd, rd, #immask5	3e 2B **add** rd, ra, rb	3f 2B **add** rd, ra, rb
40	40 2B **rsb** rd, rd, #imm5	41 3B **rsb** rd, ra, #imm10	42 2B **rsb** rd, ra, #imm3	43 2B **rsb** rd, ra, #imm3	44	45	46 2B **rsb** rd, ra, rb	47 2B **rsb** rd, ra, rb
48	48 2B **xor** rd, rd, #imm5	49 3B **xor** rd, ra, #imm10	4a 2B **xor** rd, ra, #imm3	4b 2B **xor** rd, ra, #imm3	4c 2B **xor** rd, rd, #immbit5	4d 2B **xor** rd, rd, #immask5	4e 2B **xor** rd, ra, rb	4f 2B **xor** rd, ra, rb
50	50 2B **or** rd, rd, #imm5	51 3B **or** rd, ra, #imm10	52 2B **or** rd, ra, #imm3	53 2B **or** rd, ra, #imm3	54 2B **or** rd, rd, #immbit5	55 2B **or** rd, rd, #immask5	56 2B **or** rd, ra, rb	57 2B **or** rd, ra, rb
58	58 2B **and** rd, rd, #imm5	59 3B **and** rd, ra, #imm10	5a 2B **and** rd, ra, #imm3	5b 2B **and** rd, ra, #imm3	5c 2B **and** rd, rd, #immbit5	5d 2B **and** rd, rd, #immask5	5e 2B **and** rd, ra, rb	5f 2B **and** rd, ra, rb
60	60 2B **shl** rd, rd, #imm5	61 3B **shl** rd, ra, #imm10	62 2B **shl** rd, ra, #imm3	63 2B **shl** rd, ra, #imm3	64	65	66 2B **shl** rd, ra, rb	67 2B **shl** rd, ra, rb
68	68 2B **asr** rd, rd, #imm5	69 3B **asr** rd, ra, #imm10	6a 2B **asr** rd, ra, #imm3	6b 2B **asr** rd, ra, #imm3	6c	6d	6e 2B **asr** rd, ra, rb	6f 2B **asr** rd, ra, rb
70	70 2B **lsr** rd, rd, #imm5	71 3B **lsr** rd, ra, #imm10	72 2B **lsr** rd, ra, #imm3	73 2B **lsr** rd, ra, #imm3	74	75	76 2B **lsr** rd, ra, rb	77 2B **lsr** rd, ra, rb
78	78 2B **iseq** rd, rd, #imm5	79 3B **iseq** rd, ra, #imm10	7a 2B **iseq** rd, ra, #imm3	7b 2B **iseq** rd, ra, #imm3	7c 2B **isset** rd, rd, #immbit5	7d 2B **isset** rd, rd, #immask5	7e 2B **iseq** rd, ra, rb	7f 2B **iseq** rd, ra, rb

	·0	·1	·2	·3	·4	·5	·6	·7
80	80 1B **add** r1, r1, r0	81 1B **mov** r0, r1	82 1B **mov** r1, r0	83 1B **mov** r0, #0	84 1B **xor** r0, r0, #1	85 1B **add** r0, r0, r1	86	87 1B **nop**
88	88 3B **mov** rd, #imm16	89 3B **mov** rd, #imm16	8a 3B **mov** rd, #imm16	8b 3B **mov** rd, #imm16	8c 3B **mov** rd, #imm16	8d 3B **mov** rd, #imm16	8e 3B **mov** rd, #imm16	8f 3B **mov** rd, #imm16
90	90 2B **push** ra	91 2B **stm** ra	92 2B **push** ra, rb	93 2B **stm** ra, rb	94 2B **stm** ra, rb, rc	95 2B **stm** ra, rb, rc	96 2B **push** ra, rb, rc	97 2B **push** ra, rb, rc
98	98 2B **pop** ra	99 2B **ldm** ra	9a 2B **pop** ra, rb	9b 2B **ldm** ra, rb	9c 2B **ldm** ra, rb, rc	9d 2B **ldm** ra, rb, rc	9e 2B **pop** ra, rb, rc	9f 2B **pop** ra, rb, rc
a0	a0 3B **br** cond, ra, #imm, target	a1 3B **jmp** target	a2 2B **jmp** ra	a3 2B **jmpr** target	a4 3B **brclr** ra, #immbit5, target	a5 3B **brclr** ra, #immask5, target	a6 3B **br** cond, ra, rb, target	a7 3B **br** cond, ra, rb, target
a8	a8	a9 3B **call** target	aa 2B **call** ra	ab 1B **ret**	ac 3B **brset** ra, #immbit5, target	ad 3B **brset** ra, #immask5, target	ae 1B **sei**	af 1B **cli**
b0	b0 2B **mul** rd, rd, #imm5	b1 3B **mul** rd, ra, #imm10	b2	b3	b4	b5	b6 2B **mul** rd, ra, rb	b7 2B **mul** rd, ra, rb
b8	b8	b9	ba	bb 2B **recip** rd, ra	bc	bd	be 2B **mulhu** rd, ra, rb	bf 2B **mulhu** rd, ra, rb
c0	c0	c1	c2	c3	c4	c5	c6 2B **mulhs** rd, ra, rb	c7 2B **mulhs** rd, ra, rb

Rows below c8 are omitted: 56 unbroken free opcodes run from c8 to ff.

ADDRESSING MODES

One-byte abbreviation — every operand pinned — 11	**One-byte special** — no operands at all — 7	**Three registers** — reg 3 (split) + reg 3 + reg 3 — 42
Two registers — reg 3 + reg 3 — 7	**One register** — reg 3 — 6	**Two registers, 3-bit table** — table 3 (split) + reg 3 + reg 3 — 26
Two registers, 10-bit — reg 3 + reg 3 + int 10 — 15	**One register, 5-bit signed** — reg 3 + int 5, signed — 13	**One register, 5-bit bit mask** — reg 3 + table 5 — 6
One register, 5-bit field mask — reg 3 + table 5 — 6	**One register, 16-bit** — reg 3 + int 16 (split) — 8	**Condition, two registers, target** — reg 3 (split) + cond 3 + reg 3 + int 8 — 2
Packed condition, register, target — reg 3 + cond+const 5 + int 8 — 1	**Register, bit mask, target** — reg 3 + table 5 + int 8 — 2	**Register, field mask, target** — reg 3 + table 5 + int 8 — 2
Target only, 8-bit — int 8 — 1	**Target only, 16-bit** — int 16 (split) — 2	

Generated from isa/fructus.toml by tools/gen-opcode-map.js.

Fructus Instruction Set Reference

Generated from isa/fructus.toml by tools/gen-manual.js. 16-bit registers r0–r7, a 16-bit address space, little-endian data, and instructions one to three bytes long.

Reading an Instruction Page

Section	Meaning
Opcode	The instruction's bytes in hex, byte 0 first. A range such as 3E–3F means the low bits of that byte belong to an operand field, so any value in the range is this instruction; xx is a byte made entirely of operand fields. The first byte alone decides the length of an instruction.
Instruction	The assembly syntax for that encoding. rd, ra, rb, rs and rc are any of r0–r7 (sp is r6 and lr is r7); a name such as r0 is a register the encoding pins. imm5, imm10, off8 and similar are signed fields of that many bits, sign-extended to 16 bits; immbit5, immask5, imm3 and shift3 are table fields whose values are listed on the page.
Bytes, Cycles	Length, and the cycles from this instruction's dispatch to the next one's. "odd" is the cost when a three-byte instruction, or a word in memory, is at an odd address; "taken" is a conditional branch that branches.
Form	The form's name in isa/fructus.toml, which also labels its diagram under Encodings. The assembler picks the shortest form that can hold the operands written.
Operation	The spec's semantics, which tools/sim.js executes. pc is already the address of the next instruction; R[n] is a register, M8[] and M16[] are memory (16-bit values little-endian); everything is truncated to 16 bits when stored.

Contents

	Opcode map	2
add	rd = ra + rb; rd = ra + immediate	6
and	rd = ra & rb; rd = ra & immediate	9
asr	rd = ra >> (rb & 15), sign propagating; rd = ra >> (imm & 15), sign propagating	11
bitrev	rd = ra with its 16 bits reversed	13
br	compare two registers and branch; compare against a table constant and branch	14
brclr	branch if ra & mask is zero	16
brk	software interrupt: enter the handler	18
brset	branch if ra & mask is non-zero	19
call	lr = pc of next instruction; pc = imm16; lr = pc of next instruction; pc = ra	20
cli	disable interrupts	21
clmul	rd = carry-less product of ra's low and high bytes	22
clz	rd = count of leading zeros in ra	23
halt	stop the machine until an interrupt	24
iseq	rd = 1 if ra equals rb, else 0; rd = 1 if ra equals a constant, else 0	25
isset	rd = 1 if ra and the mask share a bit, else 0	27
jmp	pc = imm16; pc = ra	28
jmpr	pc += displacement	29
ld	load 16-bit; load 16-bit through a register index	30
ld8	load 8-bit, zero extended; load 8-bit through a register index, zero extended	32
ldm	load ra through r1, stepping r1 past it; load ra then rb through r1; load ra, then rb, then rc through r1	34
lsr	rd = ra >> (rb & 15), zero filling; rd = ra >> (imm & 15), zero filling	35
mov	rd = immediate; rd = ra	37
movhi	rd = (rb << 8) | (ra & 0xff); rd = (immediate << 8) | (ra & 0xff)	40
mul	rd = low 16 bits of ra * rb; rd = low 16 bits of ra * immediate	41
mulhs	rd = high 16 bits of ra * rb, signed	42
mulhu	rd = high 16 bits of ra * rb, unsigned	43
nop	do nothing	44
or	rd = ra | rb; rd = ra | immediate	45
pop	pop a word into ra; pop two words, into ra then rb; pop three words, into ra then rb then rc	47

popcount	rd = number of set bits in ra	48
push	push ra; push ra then rb; push ra, then rb, then rc	49
recip	rd = floor((2^32 - 1) / (ra | 0x8000)) - 2^16	50
ret	pc = lr	51
rsb	rd = rb - ra (reverse subtract); rd = immediate - ra	52
rti	return from an interrupt	54
sei	enable interrupts	55
shl	rd = ra << (rb & 15); rd = ra << (imm & 15)	56
st	store 16 bits; store 16 bits through a register index	58
st8	store low 8 bits; store low 8 bits through a register index	60
stm	store ra through r5, stepping r5 past it; store ra then rb through r5; store ra, then rb, then rc through r5	62
sub	rd = ra - rb; rd = ra - immediate (alias)	64
sxt8	rd = ra sign extended from 8 bits	65
xor	rd = ra ^ rb; rd = ra ^ immediate	66

ADD — rd = ra + rb; rd = ra + immediate

Opcode	Instruction	Bytes	Cycles	Form	Operands
85	add r0, r0, r1	1	1	r0_r0_r1	All operands implicit
80	add r1, r1, r0	1	1	r1_r1_r0	All operands implicit
3E–3F xx	add rd, ra, rb	2	1	three_reg	
05	add r0, r0, #1	1	1	inc_r0	All operands implicit
06	add r0, r0, #-1	1	1	dec_r0	All operands implicit
07	add r0, r0, #2	1	1	inc2_r0	All operands implicit
38 xx	add rd, rd, #imm5	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
3C xx	add rd, rd, #immbit5	2	1	reg_immbit5	immbit5: one of the 32 values below; ra is rd
3D xx	add rd, rd, #immask5	2	1	reg_immask5	immask5: one of the 32 values below; ra is rd
3A–3B xx	add rd, ra, #imm3	2	1	reg_reg_imm3	imm3: one of the 8 values below
39 xx xx	add rd, ra, #imm10	3	1, odd 2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

r0_r0_r1 **85** `add r0, r0, r1`

byte 0: 85

0	1	2	3	4	5	6	7
1	0	1	0	0	0	0	1

Two fully implicit one-byte encodings for the two register triples that dominate in practice. Listed first only for readability - forms are tried shortest-first regardless of the order they appear here.

r1_r1_r0 **80** `add r1, r1, r0`

byte 0: 80

0	1	2	3	4	5	6	7
0	0	0	0	0	0	0	1

three_reg **3E–3F xx** `add rd, ra, rb`

byte 0: 3E–3F

0	1	2	3	4	5	6	7
b0	1	1	1	1	1	0	0
rb[0]							

byte 1: xx

0	1	2	3	4	5	6	7
d0	d1	d2	a0	a1	a2	b1	b2
rd			ra			rb[2:1]	


inc_r0 **05** `add r0, r0, #1`

byte 0: 05


0	1	2	3	4	5	6	7
1	0	1	0	0	0	0	0

Increment, decrement and step-by-two on r0, in one byte each. Everything is pinned, so these carry no fields at all.


dec_r0 **06** `add r0, r0, #-1`



inc2_r0 **07** `add r0, r0, #2`




reg_imm5 **38 xx** `add rd, rd, #imm5`




Destination doubles as the first source, which frees five bits for the immediate. Prints as ‘add r3, r3, #20‘.

reg_immbit5 **3C xx** `add rd, rd, #immbit5`




ADDING A POWER OF TWO. imm5 already reaches 1, 2, 4 and 8, so what this buys is 16 upwards and 0x8000 - and the complements, which are the subtractions: ‘add rd, rd, #0xfff0‘ is minus sixteen. The slot was reserved for immbit5 in every one of the eight ALU groups and nothing had asked for it here.

reg_immask5 **3D xx** `add rd, rd, #immask5`

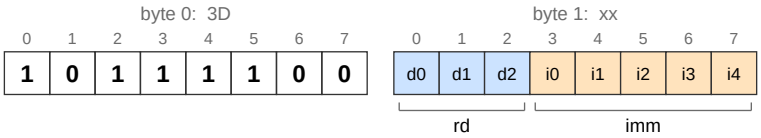


And the mask table, for the same reason it is on and/or/xor: a field is often added to as well as masked out.

reg_reg_imm3 **3A–3B xx** `add rd, ra, #imm3`

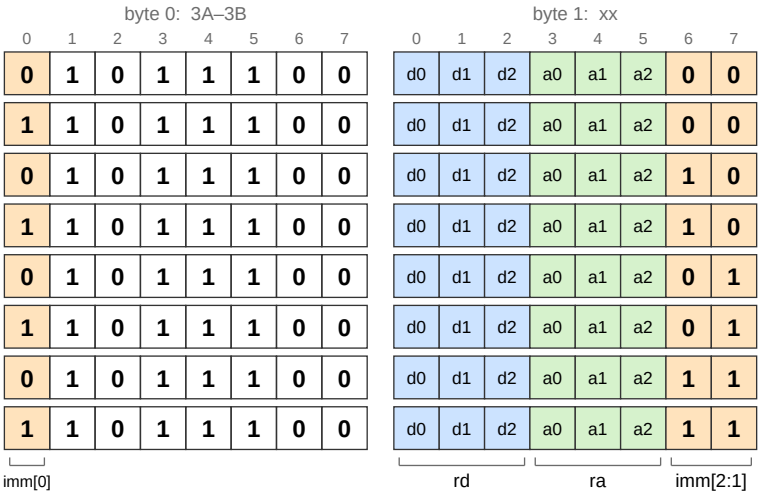

3A 00–3F	`add rd, ra, #-1`	
3B 00–3F	`add rd, ra, #0`	
3A 40–7F	`add rd, ra, #1`	
3B 40–7F	`add rd, ra, #2`	
3A 80–BF	`add rd, ra, #3`	
3B 80–BF	`add rd, ra, #4`	
3A C0–FF	`add rd, ra, #6`	
3B C0–FF	`add rd, ra, #8`	

reg_reg_imm10 **39 xx xx** `add rd, ra, #imm10`



Operand Values

immbit5: value by field value

0	0x0001	1	0x0002	2	0x0004	3	0x0008	4	0x0010	5	0x0020	6	0x0040	7	0x0080
8	0x0100	9	0x0200	10	0x0400	11	0x0800	12	0x1000	13	0x2000	14	0x4000	15	0x8000
16	0xFFFE	17	0xFFFD	18	0xFFFB	19	0xFFF7	20	0xFFEF	21	0xFFDF	22	0xFFBF	23	0xFF7F
24	0xFEFF	25	0xFDFF	26	0xFBFF	27	0xF7FF	28	0xEFFF	29	0xDFFF	30	0xBFFF	31	0x7FFF

immask5: value by field value

0	0x000F	1	0x0003	2	0xFF00	3	0x000C	4	0x00F0	5	0x0030	6	0xF0F0	7	0x00C0
8	0x0F00	9	0x0300	10	0xCCCC	11	0x0C00	12	0xF000	13	0x3000	14	0xAAAA	15	0xC000
16	0xFFF0	17	0xFFFC	18	0x00FF	19	0xFFF3	20	0xFF0F	21	0xFFCF	22	0x0F0F	23	0xFF3F
24	0xF0FF	25	0xFCFF	26	0x3333	27	0xF3FF	28	0x0FFF	29	0xCFFF	30	0x5555	31	0x3FFF

imm3: value by field value

0	-1	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

add rd, ra, rb

```
R[d] = R[a] + R[b];
```

add rd, ra, #imm

```
R[d] = R[a] + imm;
```

Notes

Six opcodes, four forms, split across two entries because the second source is a register in one shape and an immediate in the others.

All ALU operations are 16-bit only; there is no width bit in this block and no 8-bit add.

Entry 1 of 2: the three-register form. It buys its third register the same way the imm3 forms buy their bottom immediate bit - by stealing the low bit of the opcode byte, so it occupies an adjacent pair.

Entry 2 of 2: the immediate forms. These are exactly the memory block's 000 / 01i / 100 shapes, reused unchanged - a tied register with a wide 5-bit immediate, two registers with a table immediate, two registers with imm10.


AND — rd = ra & rb; rd = ra & immediate

Opcode	Instruction	Bytes	Cycles	Form	Operands
`5E–5F xx`	`and rd, ra, rb`	2	1	three_reg	
`58 xx`	`and rd, rd, #imm5`	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
`5C xx`	`and rd, rd, #immbit5`	2	1	reg_immbit5	immbit5: one of the 32 values below; ra is rd
`5D xx`	`and rd, rd, #immask5`	2	1	reg_immask5	immask5: one of the 32 values below; ra is rd
`5A–5B xx`	`and rd, ra, #imm3`	2	1	reg_reg_imm3	imm3: one of the 8 values below
`59 xx xx`	`and rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **5E–5F xx** `and rd, ra, rb`

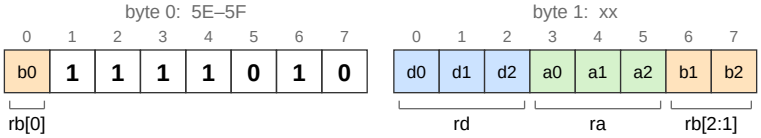

reg_imm5 **58 xx** `and rd, rd, #imm5`

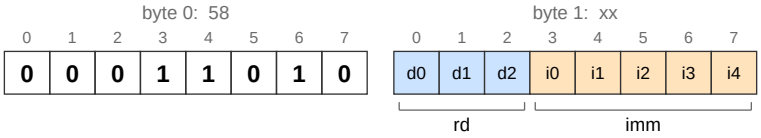


reg_immbit5 **5C xx** `and rd, rd, #immbit5`

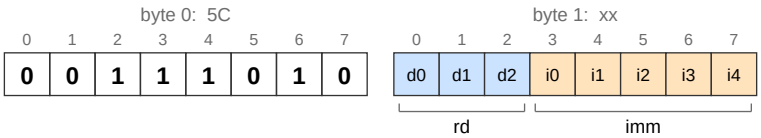


BIT CLEAR. ‘and rd, rd, #~(1<<n)‘ for any n, in two bytes. This is the half of immbit5 that would have gone to waste if the fifth bit had stayed a set/clear selector, and it is the more useful half: masking the sign bit off a value is one instruction now instead of a shl/lsr pair.

reg_immask5 **5D xx** `and rd, rd, #immask5`

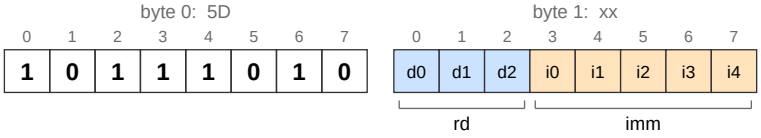


The same shape again, read through immask5: fields and stripes rather than single bits. Column .5 of the ALU block was reserved and empty.

reg_reg_imm3 **5A–5B xx** `and rd, ra, #imm3`

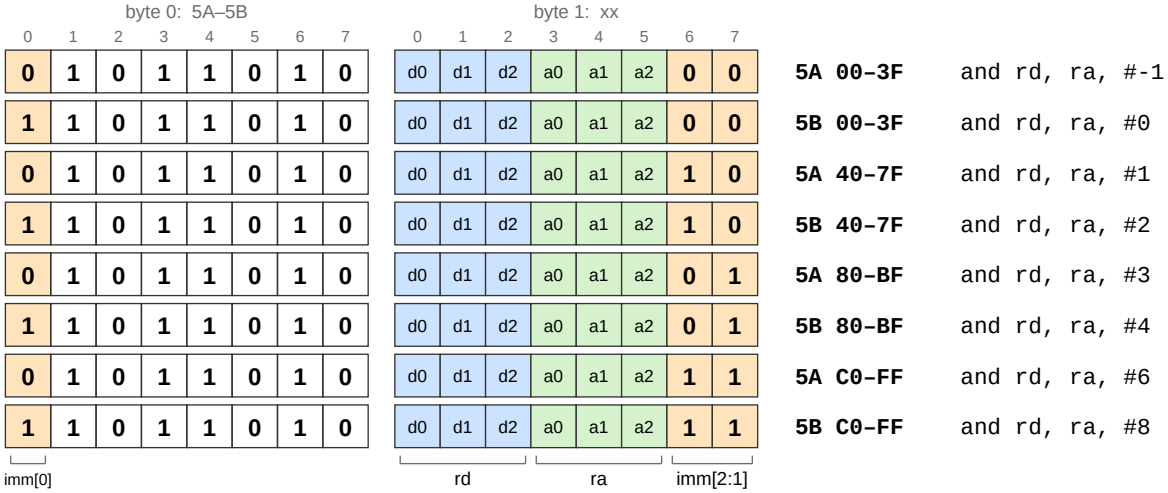

5A 00–3F	`and rd, ra, #-1`
5B 00–3F	`and rd, ra, #0`
5A 40–7F	`and rd, ra, #1`
5B 40–7F	`and rd, ra, #2`
5A 80–BF	`and rd, ra, #3`
5B 80–BF	`and rd, ra, #4`
5A C0–FF	`and rd, ra, #6`
5B C0–FF	`and rd, ra, #8`

reg_reg_imm10 **59 xx xx** `and rd, ra, #imm10`



Operand Values

immbit5: value by field value

0	0x0001	1	0x0002	2	0x0004	3	0x0008	4	0x0010	5	0x0020	6	0x0040	7	0x0080
8	0x0100	9	0x0200	10	0x0400	11	0x0800	12	0x1000	13	0x2000	14	0x4000	15	0x8000
16	0xFFFE	17	0xFFFD	18	0xFFFB	19	0xFFF7	20	0xFFEF	21	0xFFDF	22	0xFFBF	23	0xFF7F
24	0xFEFF	25	0xFDFF	26	0xFBFF	27	0xF7FF	28	0xEFFF	29	0xDFFF	30	0xBFFF	31	0x7FFF

immask5: value by field value

0	0x000F	1	0x0003	2	0xFF00	3	0x000C	4	0x00F0	5	0x0030	6	0xF0F0	7	0x00C0
8	0x0F00	9	0x0300	10	0xCCCC	11	0x0C00	12	0xF000	13	0x3000	14	0xAAAA	15	0xC000
16	0xFFF0	17	0xFFFC	18	0x00FF	19	0xFFF3	20	0xFF0F	21	0xFFCF	22	0x0F0F	23	0xFF3F
24	0xF0FF	25	0xFCFF	26	0x3333	27	0xF3FF	28	0x0FFF	29	0xCFFF	30	0x5555	31	0x3FFF

imm3: value by field value

0	-1	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

and rd, ra, rb

```
R[d] = R[a] & R[b];
```

and rd, ra, #imm

```
R[d] = R[a] & imm;
```


ASR — rd = ra >> (rb & 15), sign propagating; rd = ra >> (imm & 15), sign propagating

Opcode	Instruction	Bytes	Cycles	Form	Operands
`6E–6F xx`	`asr rd, ra, rb`	2	1	three_reg	
`68 00–7F`	`asr rd, rd, #imm5`	2	1	reg_imm5	imm5: 0 to 15; bit 4 ignored, written 0; ra is rd
`6A–6B xx`	`asr rd, ra, #shift3`	2	1	reg_reg_imm3	shift3: one of the 8 values below
`69 xx 00-03`	`asr rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: 0 to 15; bits 9:4 ignored, written 0


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **6E–6F xx** `asr rd, ra, rb`



reg_imm5 **68 00–7F** `asr rd, rd, #imm5`

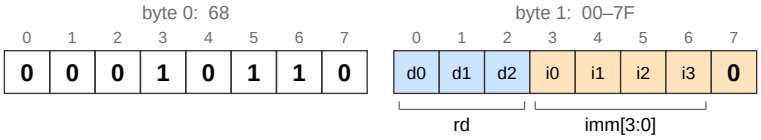


reg_reg_imm3 **6A–6B xx** `asr rd, ra, #shift3`

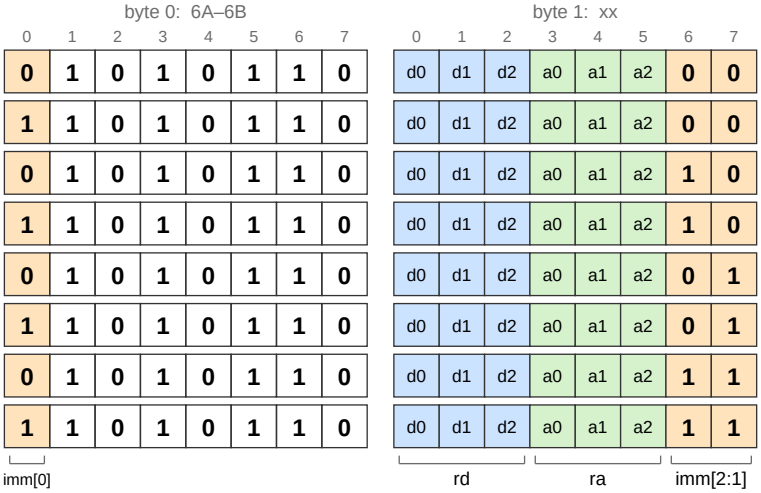

6A 00–3F	`asr rd, ra, #15`	
6B 00–3F	`asr rd, ra, #0`	
6A 40–7F	`asr rd, ra, #1`	
6B 40–7F	`asr rd, ra, #2`	
6A 80–BF	`asr rd, ra, #3`	
6B 80–BF	`asr rd, ra, #4`	
6A C0–FF	`asr rd, ra, #6`	
6B C0–FF	`asr rd, ra, #8`	

reg_reg_imm10 **69 xx 00-03** `asr rd, ra, #imm10`

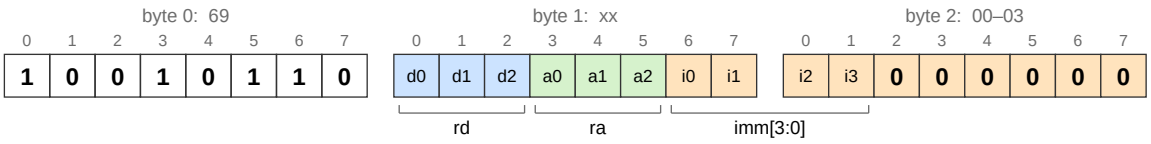

Operand Values

shift3: value by field value

0	15	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

asr rd, ra, rb

```
R[d] = asr(R[a], R[b] & 15);
```

asr rd, ra, #imm

```
R[d] = asr(R[a], imm & 15);
```


BITREV — rd = ra with its 16 bits reversed

Opcode	Instruction	Bytes	Cycles	Form	Operands
32 80–BF	bitrev rd, ra	2	1	reg_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **32 80–BF** bitrev rd, ra

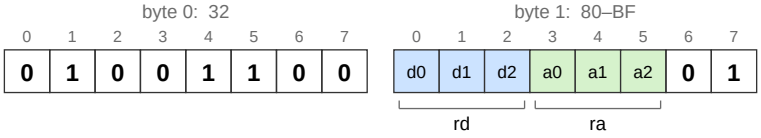

Operation

```
R[d] = bitrev(R[a]);
```


BR — compare two registers and branch; compare against a table constant and branch

Opcode	Instruction	Bytes	Cycles	Form	Operands
`A6–A7 xx xx`	`br cond, ra, rb, off8`	3	1, taken 4	cond_reg_reg	off8: -128 to 127, sign-extended to 16 bits
`A0 xx xx`	`br cond, ra, #imm, off8`	3	1, taken 4	cond_reg_imm	(cond, imm): one of the 32 pairs below; off8: -128 to 127, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

cond_reg_reg **A6–A7 xx xx** `br cond, ra, rb, off8`



cond_reg_imm **A0 xx xx** `br cond, ra, #imm, off8`



Operand Values

cond3: condition by field value

0 `lt`	1 `lo`	2 `le`	3 `ls`	4 `eq`	5 `ne`	6 `vs`	7 `vc`

Also accepted: cc is lo; gt is lt with the two operands exchanged; ge is le with the two operands exchanged; hi is lo with the two operands exchanged; hs is ls with the two operands exchanged; cs is ls with the two operands exchanged.

condimm5: (cond, imm) by field value

0 `eq 0`	1 `ne 0`	2 `lt 0`	3 `ge 0`	4 `eq 1`	5 `ne 1`	6 `lt 1`	7 `ge 1`
8 `eq -1`	9 `ne -1`	10 `lt -1`	11 `ge -1`	12 `eq 2`	13 `ne 2`	14 `lt 2`	15 `ge 2`
16 `lt 4`	17 `ge 8`	18 `ge 32767`	19 `ge 32766`	20 `lt -32767`	21 `lt -32766`	22 `lo 2`	23 `hs 2`
24 `hs 3`	25 `lo 4`	26 `hs 4`	27 `lo 6`	28 `lo 8`	29 `hs 8`	30 `lo 256`	31 `hs 256`

Operation

br cond, ra, rb, off

```
if (test(cond, R[a], R[b], 16)) pc = pc + off;
```

A condition the encoding lacks is written by exchanging a and b; see the condition table.

br cond, ra, #imm, off

```
if (test(k.cond, R[a], k.imm, 16)) pc = pc + off;
```

Notes

Conditional subtract-and-branch. The comparison is a subtract whose result is discarded; only the condition it sets is used, at 16-bit width.

The two-register form is the ‘rsb‘ three-register encoding with its DESTINATION field replaced by a 3-bit condition, plus a displacement byte:

BIT 3 IS CLEAR IN BOTH FORMS. It was a width bit, putting a byte-wide row eight opcodes below this one the way st/st8 and ld/ld8 sit. That row is free now and the bit is a constant.

THE TWO REGISTERS ARE THE OTHER WAY ROUND FROM THE SYNTAX, and that is what lets the comparison be an ‘rsb‘ with no extra multiplexing. ‘rsb rd, ra, rb‘ computes rb - ra: the SPLIT field minus the byte1[5:3] field. ‘br cond, ra, rb‘ tests the flags

of R[a] - R[b]. For those to be the same subtraction, the first register NAMED has to sit in the split field, so ‘a‘ takes z and ee while ‘b‘ takes byte1[5:3].

Read as datapath rather than as syntax there is no reversal at all:

```
byte1[5:3]              always ALU port A
{byte1[7:6], opcode[0]} always ALU port B
```

and every three-operand instruction in the map obeys it - the ALU triples, the shift triples, push and pop’s triples, and now both branches. rtl/immgen.sv emits port B’s register number at +6 and +7 for all of them.

Three of the register bits and all of the register decode are therefore shared with the ALU three-register forms; only byte 1’s top field changes meaning. Eight encoded conditions cover more than eight spellings because the two registers can be exchanged - see ‘cond3‘.

The single-register form replaces both the second register and the condition with one 5-bit index into the ‘condimm5‘ table, which supplies a condition and a constant together:

BYTE 1 IS THE MASK BRANCHES’ BYTE 1. ‘aaak_kkkk‘ here and ‘aaam_mmmm‘ in brclr and brset are one register and five bits in the same places; only the table reading those five bits differs. So these three share a row the way an ALU group’s +0, +4 and +5 forms do, and for the same reason - see the opcode map at the top of this file.


BRCLR — branch if ra & mask is zero

Opcode	Instruction	Bytes	Cycles	Form	Operands
A4 xx xx	brclr ra, #immbit5, off8	3	1, taken 4	reg_mask	immbit5: one of the 32 values below; off8: -128 to 127, sign-extended to 16 bits
A5 xx xx	brclr ra, #immask5, off8	3	1, taken 4	reg_mask5	immask5: one of the 32 values below; off8: -128 to 127, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_mask **A4 xx xx** brclr ra, #immbit5, off8



reg_mask5 **A5 xx xx** brclr ra, #immask5, off8



The same test against the mask table instead of a single bit - branch on whether a whole FIELD is empty. Same byte 1, same 5 bits, different table: +4 of the row reads them as immbit5 and +5 reads them as immask5, which is the relationship every ALU group has between its two mask forms. Clear and set are separated by BIT 3 rather than bit 0 - brclr is the upper row and brset the row eight below - so both spellings of each land in one column.

Operand Values

immbit5: value by field value

0 0x0001	1 0x0002	2 0x0004	3 0x0008	4 0x0010	5 0x0020	6 0x0040	7 0x0080
8 0x0100	9 0x0200	10 0x0400	11 0x0800	12 0x1000	13 0x2000	14 0x4000	15 0x8000
16 0xFFFE	17 0xFFFD	18 0xFFFB	19 0xFFF7	20 0xFFEF	21 0xFFDF	22 0xFFBF	23 0xFF7F
24 0xFEFF	25 0xFDFF	26 0xFBFF	27 0xF7FF	28 0xEFFF	29 0xDFFF	30 0xBFFF	31 0x7FFF

immask5: value by field value

0 0x000F	1 0x0003	2 0xFF00	3 0x000C	4 0x00F0	5 0x0030	6 0xF0F0	7 0x00C0
8 0x0F00	9 0x0300	10 0xCCCC	11 0x0C00	12 0xF000	13 0x3000	14 0xAAAA	15 0xC000
16 0xFFF0	17 0xFFFC	18 0x00FF	19 0xFFF3	20 0xFF0F	21 0xFFCF	22 0x0F0F	23 0xFF3F
24 0xF0FF	25 0xFCFF	26 0x3333	27 0xF3FF	28 0x0FFF	29 0xCFFF	30 0x5555	31 0x3FFF

Operation

```
if ((R[a] & mask) == 0) pc = pc + off;
```

Notes

Branch on a masked test of one register: ‘ra & mask‘ against zero.

```
brclr ra, #mask, target      taken when (ra & mask) == 0
brset ra, #mask, target      taken when (ra & mask) != 0
```

The mask is an immbit5, so the two of them together cover every single bit of every register in both senses - which is all they used to do - plus every ALL-BUT-ONE-BIT test, which is new and is what the fifth bit used to be spent on. ‘brclr r0, #0x7fff, L‘ branches when nothing but the sign bit is set.

THESE ARE TWO OPCODES NOW, and the bit that separates them is exactly the bit that separates ‘eq‘ from ‘ne‘ in cond3 - which is what they are: the mask feeds the ALU, the result is compared with zero, and the opcode carries the condition. Nothing new is needed in the compare path.

THE OPERAND IS A MASK, NOT A BIT NUMBER. ‘brset ra, #0x8000‘ tests the sign bit; ‘brset ra, #7‘ is not an instruction, because 7 is in neither immbit5 nor immask5, and the assembler rejects it rather than guessing. That catches most bit numbers written by mistake, but not all: 1, 2, 4 and 8 are single-bit masks and 3, 12 and 15 are immask5 entries, so ‘brset ra, #15‘ assembles - and tests the low four bits, not bit 15.


BRK — software interrupt: enter the handler

Opcode	Instruction	Bytes	Cycles	Form	Operands
`00`	`brk`	1	6	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **`00`** `brk`



Operation

```
shadow_lr = lr;
lr = pc;
shadow_sp = sp;
sp = shadow_isp;
ie = 0;
pc = vector;
```

Notes

THE THREE LOWEST OPCODES ARE THE THREE EXCEPTION INSTRUCTIONS - enter one, wait for one, return from one - and they are at 0x00, 0x01 and 0x02 for the reason halt used to be at zero on its own. Erased memory, an unwritten ROM and a wild jump into a zeroed page all land on 0x00, and the useful thing for the machine to do there is stop in a way somebody can find afterwards.

BRK IS STRICTLY BETTER AT ZERO THAN HALT WAS. A halt at the point of the mistake leaves the pc sitting on the instruction that was wrong, which is already far better than a nop sled - but it stops the machine dead and the only way to learn anything is to attach something to the bus. brk traps to the handler with the faulting address in lr, so a monitor can print it. The sled argument that put halt at zero is unchanged and now buys more.

NOP IS STILL AT THE FAR END, at 0x87, which is the same argument run the other way: the low opcodes are what a mistake lands on, so they hold the three instructions that stop or divert, and nop sits as far from them as the block reaches. A nop sled through erased memory produces a machine that looks alive while executing nothing, which is the harder failure to diagnose of the two.

THEY ARE ALL IN THE ONE-BYTE REGION ALREADY, and that is not a coincidence worth ignoring: ‘(op & 0x78) == 0‘ is the one-byte test, and 0x00, 0x01 and 0x02 all satisfy it. So three new one-byte instructions cost the length decode nothing at all. See the control row for what ‘sei‘ and ‘cli‘ cost it instead, which is not nothing.

WHY THESE THREE WRITE THE PC FROM OUTSIDE 1010_xxxx. The control row’s rule is about PROGRAM control flow - the transfers a compiler emits, a disassembler follows and a decoder predicts. An exception is not that: it is not reached from the instruction stream and its destination is not in the instruction. So the row keeps its meaning and these keep theirs, and the map is read as ‘1010_xxxx is every branch, jump, call and return‘ rather than as a claim about the pc that now has three exceptions.

brk 1 byte

A SOFTWARE INTERRUPT, and it takes the same path as a hardware one: the same microcode routine, the same shadow registers, the same vector. What differs is only that it is reached by executing an opcode rather than by a pin, and so it is NOT maskable - ‘ie‘ gates the pin and nothing else. A syscall that could be ignored because the caller happened to be inside a critical section would be useless.

IT RESUMES AFTER ITSELF, where a hardware interrupt restarts the instruction it preempted. ‘pc‘ is advanced before the semantics run - see the semantics section at the top of this file - so ‘lr = pc‘ saves the address FOLLOWING the brk, and ‘rti‘ returns there. That is what a syscall wants. The hardware path saves the address of the instruction that had not started yet, so that one is restarted instead; both are ‘lr = pc‘ and the difference is entirely in which cycle the interrupt is taken in.


BRSET — branch if ra & mask is non-zero

Opcode	Instruction	Bytes	Cycles	Form	Operands
`AC xx xx`	`brset ra, #immbit5, off8`	3	1, taken 4	reg_mask	immbit5: one of the 32 values below; off8: -128 to 127, sign-extended to 16 bits
`AD xx xx`	`brset ra, #immask5, off8`	3	1, taken 4	reg_mask5	immask5: one of the 32 values below; off8: -128 to 127, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_mask **`AC xx xx`** `brset ra, #immbit5, off8`



reg_mask5 **`AD xx xx`** `brset ra, #immask5, off8`



The same test against the mask table instead of a single bit - branch on whether a whole FIELD is empty. Same byte 1, same 5 bits, different table: +4 of the row reads them as immbit5 and +5 reads them as immask5, which is the relationship every ALU group has between its two mask forms. Clear and set are separated by BIT 3 rather than bit 0 - brclr is the upper row and brset the row eight below - so both spellings of each land in one column.

Operand Values

immbit5: value by field value

0 `0x0001`	1 `0x0002`	2 `0x0004`	3 `0x0008`	4 `0x0010`	5 `0x0020`	6 `0x0040`	7 `0x0080`
8 `0x0100`	9 `0x0200`	10 `0x0400`	11 `0x0800`	12 `0x1000`	13 `0x2000`	14 `0x4000`	15 `0x8000`
16 `0xFFFE`	17 `0xFFFD`	18 `0xFFFB`	19 `0xFFF7`	20 `0xFFEF`	21 `0xFFDF`	22 `0xFFBF`	23 `0xFF7F`
24 `0xFEFF`	25 `0xFDFF`	26 `0xFBFF`	27 `0xF7FF`	28 `0xEFFF`	29 `0xDFFF`	30 `0xBFFF`	31 `0x7FFF`

immask5: value by field value

0 `0x000F`	1 `0x0003`	2 `0xFF00`	3 `0x000C`	4 `0x00F0`	5 `0x0030`	6 `0xF0F0`	7 `0x00C0`
8 `0x0F00`	9 `0x0300`	10 `0xCCCC`	11 `0x0C00`	12 `0xF000`	13 `0x3000`	14 `0xAAAA`	15 `0xC000`
16 `0xFFF0`	17 `0xFFFC`	18 `0x00FF`	19 `0xFFF3`	20 `0xFF0F`	21 `0xFFCF`	22 `0x0F0F`	23 `0xFF3F`
24 `0xF0FF`	25 `0xFCFF`	26 `0x3333`	27 `0xF3FF`	28 `0x0FFF`	29 `0xCFFF`	30 `0x5555`	31 `0x3FFF`

Operation

```
if ((R[a] & mask) != 0) pc = pc + off;
```


CALL — lr = pc of next instruction; pc = imm16; lr = pc of next instruction; pc = ra

Opcode	Instruction	Bytes	Cycles	Form	Operands
`A9 xx xx`	`call imm16`	3	3	abs16	imm16: any 16-bit value
`AA 00–07`	`call ra`	2	4 (lr: 3)	reg	


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

abs16 **`A9 xx xx`** `call imm16`



reg **`AA 00–07`** `call ra`

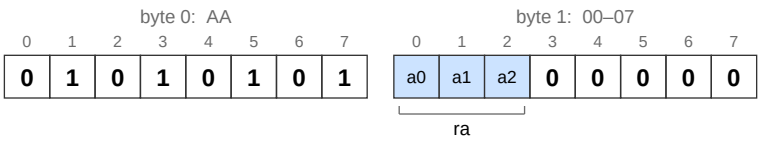

Operation

call target

```
lr = pc;
pc = target;
```

call ra

```
lr = pc;
pc = R[a];
```

Notes

Return is just pc = lr, so it needs no operands and fits in one byte - and being one byte is what decides where it lives.

IT IS A PC WRITER OUTSIDE 1001_xxxx, deliberately - one of two now that ‘jmp r5‘ has joined it at 0x02. The control-flow block is exactly two rows and holds exactly sixteen instructions once the two mask branches come home to their columns; ret is the seventeenth, and it was the only one-byte instruction living out there until jmp arrived. Every other one-byte opcode is in x000_0xxx, so that is where both of them go.

It fits that region on its own terms rather than as an exile. The one-byte block is instructions with nothing left to say - ‘add r0, r0, #1‘, ‘mov r0, #0‘, ‘ld‘ with its register implied - and ‘ret‘ is ‘jmp lr‘ with its operand implied, which is the same kind of thing. It is also, after the ALU, the most executed instruction in any program, which is what a one-byte opcode is for.

Nothing decodes worse for it: decode is a flat 256-entry table and always was, so "the pc writers are 1001_xxxx" is a claim about how the map READS, not a mask any hardware applies.

‘call rX‘ is ‘call imm16‘ with the target coming from the register file instead of the instruction stream: same lr write, same jump, one less fetch. Two bytes.

IT IS NOT OPTIONAL FOR C. Before it existed, ‘ret‘ was the only transfer that read a register, so a function pointer could be tail called - ‘mov lr, rX‘ then ‘ret‘ - and nothing else. There was no way to arrange a return address, because the only instruction that could jump to a register was the one that consumed the register holding it. Function pointers, vtables and qsort all need this opcode.

There is deliberately no ‘jmp rX‘. An indirect tail call is ‘mov lr, rX‘ followed by ‘ret‘, three bytes, and it is rare enough not to be worth an opcode of its own - whereas the two-byte indirect call is on the hot path of every dynamic dispatch.


CLI — disable interrupts

Opcode	Instruction	Bytes	Cycles	Form	Operands
AF	`cli`	1	5	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **AF** `cli`



Operation

```
ie = 0;
```


CLMUL — rd = carry-less product of ra's low and high bytes

Opcode	Instruction	Bytes	Cycles	Form	Operands
32 40–7F	clmul rd, ra	2	1	reg_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **32 40–7F** clmul rd, ra



Operation

```
R[d] = clmul(R[a]);
```

Notes

clmul: the carry-less product of ra's two bytes, as a polynomial over GF(2). The operands are the low byte and the high byte of ONE register, which is what makes it a unary operation and lets it fit the two-register shape: the product of two bytes is 15 bits, so it fits the register the pair came from. The operation is commutative, so which byte is which does not matter.

IT IS FAST, BECAUSE SLOW BOUGHT NOTHING. It can sit on either opcode: at index 2 of 0x32 it is two LUT levels in the single-cycle ALU, at index 3 of 0x33 with 'extra_cycles' its partial products are registered like popcount's counts. Measured both ways on the byte-serial processor alone behind one SPRAM, medians of sixteen seeds:

```
                      LUT4    cells     MHz      spread
without clmul         1292    1562    29.22   28.0 .. 30.3
clmul fast, 0x32      1345    1615    29.80   28.6 .. 30.3
clmul slow, 0x33      1344    1615    28.61   25.8 .. 29.8
```

The same fifty-three cells either way - the slow form's flops sit in the cells of the LUT level in front of them - and neither median moves by more than the spread, so the extra cycle buys no clock. Moving it back is the encoding's first byte, 0011_0011, and 'extra_cycles = 3' - byte 1 is 01aa_addd at both, and the byte-serial core's gen-unary.js builds either.


CLZ — rd = count of leading zeros in ra

Opcode	Instruction	Bytes	Cycles	Form	Operands
33 00–3F	clz rd, ra	2	2	reg_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **33 00–3F** clz rd, ra



Operation

```
R[d] = clz(R[a]);
```

Takes 1 cycle beyond the one an ALU instruction costs.

Notes

Two cycles: its result is registered halfway. See ‘extra_cycles‘ in the cost model, and the slow pair above.


HALT — stop the machine until an interrupt

Opcode	Instruction	Bytes	Cycles	Form	Operands
`01`	`halt`	1	1	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **01** `halt`



Operation

```
halted = 1;
```

Notes

halt 1 byte

STOP UNTIL AN INTERRUPT, and with interrupts disabled that is stop forever - which is the old halt, unchanged, and is what a wild jump still finds. The two behaviours are one instruction because ‘ie‘ already distinguishes them.

IT RESUMES AFTER ITSELF, like the 65C02’s WAI. Dispatching the halt consumes its opcode, so the pc is already past it while the machine waits, and the interrupt saves the address FOLLOWING the halt in lr - as brk does, and for the same reason: ‘pc‘ is advanced before the semantics run. An ‘rti‘ goes on from there.

SO THE POLICY IS THE IDLE LOOP’S. One that wants to keep sleeping through an interrupt says so, in two bytes: ‘idle: halt‘ and then ‘br idle‘, or a test of whatever the handler left behind before branching back. Making the interrupt save the halt’s own address instead, so that rti waited again, would need the pc less one on the path that saves it: a decrementer, a mux and a flop to say the entry came from a halt.


ISEQ — rd = 1 if ra equals rb, else 0; rd = 1 if ra equals a constant, else 0

Opcode	Instruction	Bytes	Cycles	Form	Operands
`7E–7F xx`	`iseq rd, ra, rb`	2	1	three_reg	
`78 xx`	`iseq rd, rd, #imm5`	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
`7A–7B xx`	`iseq rd, ra, #imm3`	2	1	reg_reg_imm3	imm3: one of the 8 values below
`79 xx xx`	`iseq rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **7E–7F xx** `iseq rd, ra, rb`



reg_imm5 **78 xx** `iseq rd, rd, #imm5`

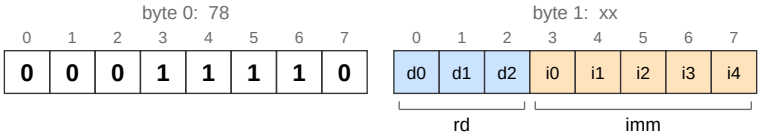


reg_reg_imm3 **7A–7B xx** `iseq rd, ra, #imm3`

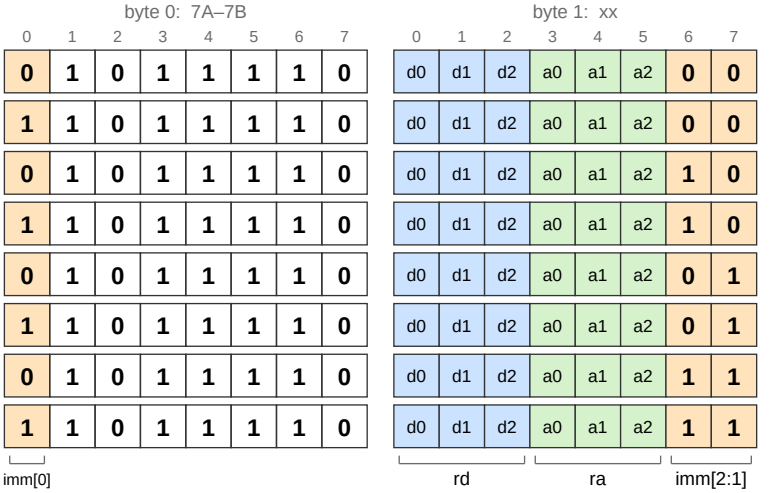

7A 00–3F	`iseq rd, ra, #-1`
7B 00–3F	`iseq rd, ra, #0`
7A 40–7F	`iseq rd, ra, #1`
7B 40–7F	`iseq rd, ra, #2`
7A 80–BF	`iseq rd, ra, #3`
7B 80–BF	`iseq rd, ra, #4`
7A C0–FF	`iseq rd, ra, #6`
7B C0–FF	`iseq rd, ra, #8`

reg_reg_imm10 **79 xx xx** `iseq rd, ra, #imm10`



Operand Values

imm3: value by field value

`0` `-1` `1` `0` `2` `1` `3` `2` `4` `3` `5` `4` `6` `6` `7` `8`

Operation

iseq rd, ra, rb

```
R[d] = R[a] == R[b];
```

iseq rd, ra, #imm

```
R[d] = R[a] == (imm & 0xffff);
```

imm5 and imm10 are sign-extended to 16 bits before use.

Notes

The immediate is compared as a 16-bit PATTERN. Written ‘R[a] == imm’ this compared a register, which is 0..65535, against the signed value decoded from imm10 - so ‘iseq r0, r0, #-205’ was false for r0 = -205, where the comparator sees 0xff33 on both ports. The compiler found it.


ISSET — rd = 1 if ra and the mask share a bit, else 0

Opcode	Instruction	Bytes	Cycles	Form	Operands
`7C xx`	`isset rd, rd, #immbit5`	2	1	reg_immbit5	immbit5: one of the 32 values below; ra is rd
`7D xx`	`isset rd, rd, #immask5`	2	1	reg_immask5	immask5: one of the 32 values below; ra is rd


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_immbit5 **`7C xx`** `isset rd, rd, #immbit5`



reg_immask5 **`7D xx`** `isset rd, rd, #immask5`

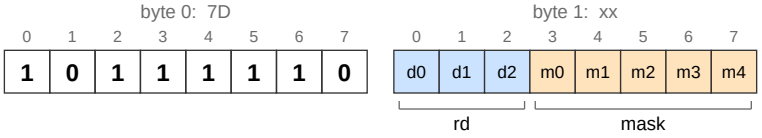

Operand Values

immbit5: value by field value

0	`0x0001`	1	`0x0002`	2	`0x0004`	3	`0x0008`	4	`0x0010`	5	`0x0020`	6	`0x0040`	7	`0x0080`
8	`0x0100`	9	`0x0200`	10	`0x0400`	11	`0x0800`	12	`0x1000`	13	`0x2000`	14	`0x4000`	15	`0x8000`
16	`0xFFFE`	17	`0xFFFD`	18	`0xFFFB`	19	`0xFFF7`	20	`0xFFEF`	21	`0xFFDF`	22	`0xFFBF`	23	`0xFF7F`
24	`0xFEFF`	25	`0xFDFF`	26	`0xFBFF`	27	`0xF7FF`	28	`0xEFFF`	29	`0xDFFF`	30	`0xBFFF`	31	`0x7FFF`

immask5: value by field value

0	`0x000F`	1	`0x0003`	2	`0xFF00`	3	`0x000C`	4	`0x00F0`	5	`0x0030`	6	`0xF0F0`	7	`0x00C0`
8	`0x0F00`	9	`0x0300`	10	`0xCCCC`	11	`0x0C00`	12	`0xF000`	13	`0x3000`	14	`0xAAAA`	15	`0xC000`
16	`0xFFF0`	17	`0xFFFC`	18	`0x00FF`	19	`0xFFF3`	20	`0xFF0F`	21	`0xFFCF`	22	`0x0F0F`	23	`0xFF3F`
24	`0xF0FF`	25	`0xFCFF`	26	`0x3333`	27	`0xF3FF`	28	`0x0FFF`	29	`0xCFFF`	30	`0x5555`	31	`0x3FFF`

Operation

```
R[d] = (R[a] & mask) != 0;
```


JMP — pc = imm16; pc = ra

Opcode	Instruction	Bytes	Cycles	Form	Operands
A1 xx xx	jmp imm16	3	3	abs16	imm16: any 16-bit value
A2 00–07	jmp ra	2	4	reg	


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

abs16 **A1 xx xx** jmp imm16



reg **A2 00–07** jmp ra



Operation

jmp target

```
pc = target;
```

jmp ra

```
pc = R[a];
```

Notes

A JUMP THROUGH A REGISTER, WHICH THE MACHINE OTHERWISE HAS NO WAY TO SPELL. Without it an indirect jump has to go ‘mov lr, ra‘ and ‘ret‘, which costs three bytes and, far worse, destroys lr - so a function with a switch table had to save lr as if it made calls, and a tail call through a function pointer was impossible outright, since lr is holding the return address the tail call exists to pass on.

IT TAKES ANY REGISTER, IN TWO BYTES. It was one byte with r5 pinned, on the argument that a general form would want eight opcodes and that every use - a switch table, a tail call through a pointer, a dispatch - can choose which register holds the address. The second half of that is true and the first half was the wrong shape: one opcode and a byte of register field is two bytes, not eight opcodes, and it costs the SAME FOUR CYCLES either way, because what this instruction pays for is reading a register, not fetching a byte. So the pin bought one byte of code and charged for it in register allocation - every indirect jump had to get its address into the one register the assembler is also free to clobber.

ret IS THE COMPACT FORM THAT SURVIVES, and it is the one worth keeping: ‘pc = lr‘ needs no operand at all, so it is one byte with nothing implied that a caller has to arrange.

IT SITS AT 1010_1011 RATHER THAN 0x01, which trades one argument for two. What it gives up: at 0x01 a wild jump into erased memory found halt and then an unwind, which was a deliberate bit of damage control. What it buys: the one-byte region is sixteen opcodes and the control block had a free slot, so the scarcer space keeps its slot; and ‘every program transfer of control is 1010_xxxx‘ holds without exception, which is worth more than it sounds - it is the kind of claim a decoder, a disassembler and a reader all lean on.

THE SLOT IT LEFT IS HALT, and the damage control came back stronger than it went away. 0x00, 0x01 and 0x02 are brk, halt and rti now, so a wild jump into a zeroed page traps to a handler that can name the faulting address rather than unwinding to wherever lr happened to point.


JMPR — pc += displacement

Opcode	Instruction	Bytes	Cycles	Form	Operands
A3 xx	jmpr off8	2	3	rel8	off8: -128 to 127, sign-extended to 16 bits

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

rel8 **A3 xx** jmpr off8



THE SHORT FORM IS A BRANCH WEARING A JUMP'S NAME, and the encoding says so: 0xa1 is the compare-and-branch datapath with its condition pinned to 'eq, r0, r0'. A register compared for equality with itself is always true, so the condition field costs nothing and the whole instruction is an opcode and a displacement byte.

It used to be spelled 'br' and it is not a branch to a programmer: it takes no condition and no registers, it is exactly 'jmpr' with a shorter reach. So it is a FORM rather than an instruction, and the assembler picks between two and three bytes by how far the target is - which is what it does for every other operand that has more than one width.

Operation

```
pc = pc + target;
```

Notes

Five opcodes. The wide immediate is the 'mov rd, #imm16' shape with the register field spent on the opcode instead, so these reuse the same fetch path: opcode byte, then a 16-bit value low byte first.

Relative and absolute both take a full 16 bits and both reach the whole address space, so the choice between them is not about range - it is whether the code is position independent. Short relative jumps are already covered by the two-byte 'jmpr' form at 0xa1, +/-127.

THE WIDE RELATIVE FORMS ARE GONE, and what they cost is why. 'jmpr target' and 'callr target' were three bytes reaching the whole address space relatively; 'jmp' and 'call' are three bytes reaching it absolutely. On the byte-serial core a relative target cost a CYCLE MORE, because the adder and the verdict landed in flops an edge later than the instruction's own bytes did: three bytes and four cycles against three and three. On the pipeline both would be three cycles, so what they cost now is two opcodes, for position independence that a machine with a linker and no address-space randomisation never asked for.

So .2 and .a hold jmp and call, one bit apart with the same byte 1, and .3 and .b are free. What is lost with them is real and worth writing down: code that must run at an address it was not linked for can no longer jump further than a byte's displacement without a register. The short 'jmpr' at .1 stays, because two bytes for a local jump is worth having and its reach is exactly a loop's.

MNEMONICS. 'jmp' and 'call' are absolute; 'jmpr' is the two-byte relative form and the only relative transfer left. An assembler that wanted one mnemonic could relax 'jmpr' into 'jmp' when the displacement does not fit - a byte longer and no slower - which is what gcc's jump pattern does for itself.

LD — load 16-bit; load 16-bit through a register index

Opcode	Instruction	Bytes	Cycles	Form	Operands
`03`	`ld r0, [r0, #0]`	1	4, odd 5	implicit	All operands implicit
`18 xx`	`ld ra, [ra, #imm5]`	2	4, odd 5	reg_off5	imm5: -16 to 15, sign-extended to 16 bits; rd is ra
`1A–1B xx`	`ld rd, [ra, #imm3]`	2	4, odd 5	reg_reg	imm3: one of the 8 values below
`19 xx xx`	`ld rd, [ra, #imm10]`	3	4, odd 5	reg_reg10	imm10: -512 to 511, sign-extended to 16 bits
`1E–1F xx`	`ld rd, [ra, rb]`	2	4, odd 5	reg_reg_reg	


Assembler Aliases

Written	Assembles as	Description
`ld rd, [ra]`	`ld rd, [ra, #0]`	rd = memory16[ra]


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


implicit **03** `ld r0, [r0, #0]`



reg_off5 **18 xx** `ld ra, [ra, #imm5]`

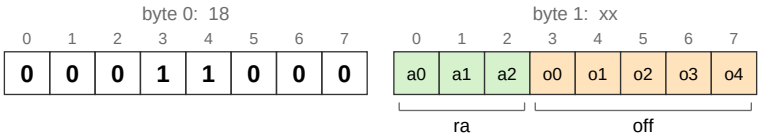


reg_reg **1A–1B xx** `ld rd, [ra, #imm3]`

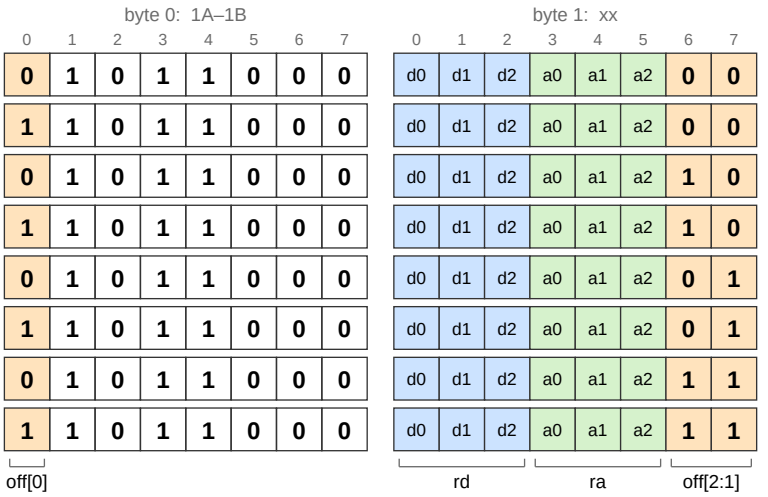


1A 00–3F	`ld rd, [ra, #-1]`	
1B 00–3F	`ld rd, [ra, #0]`	
1A 40–7F	`ld rd, [ra, #1]`	
1B 40–7F	`ld rd, [ra, #2]`	
1A 80–BF	`ld rd, [ra, #3]`	
1B 80–BF	`ld rd, [ra, #4]`	
1A C0–FF	`ld rd, [ra, #6]`	
1B C0–FF	`ld rd, [ra, #8]`	

reg_reg10 **19 xx xx** `ld rd, [ra, #imm10]`

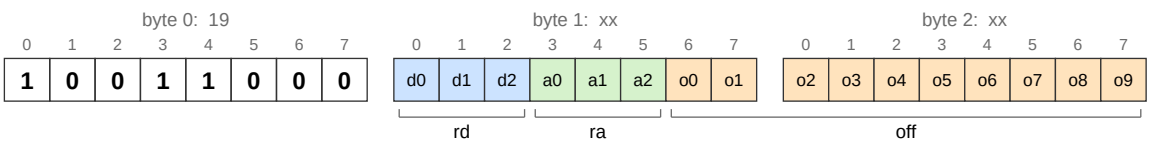

reg_reg_reg **1E–1F xx** `ld rd, [ra, rb]`



Operand Values

imm3: value by field value

0	1	2	3	4	5	6	7
-1	0	1	2	3	4	6	8

Operation

ld rd, [ra, #off]

```
R[d] = M16[R[a] + off];
```

ld rd, [ra, rb]

```
R[d] = M16[R[a] + R[b]];
```

Notes

Load a 16-bit value. Structurally identical to ld8 - same four addressing forms, same operand shape, same field layouts - differing only in opcode bit 3, which is the width bit for the whole load block.

DECIDED: displacements count BYTES and are NOT scaled by the access width, for ld and st alike. Scaling would have doubled the reach of the off5 and imm10 forms for almost no hardware cost, and it is still rejected, because POINTERS ARE TAGGED. A heap reference carries a tag in its low bit, so the displacement is what removes it:

```
ld rd, [rp, #-1]     first word of an object behind a tag-1 pointer
ld rd, [rp, #1]      second word
ld rd, [rp, #3]      third
```

Those displacements are ODD. A scaled offset cannot express them at all, and would put a shift or an add in front of every single field access. Byte displacements are not a conservative default here; they are load bearing.

ALSO DECIDED: unaligned accesses are allowed. An odd effective address reads or writes two consecutive bytes, in the ‘endian‘ order declared at the top, with no fault and no penalty visible to software. Given that displacements do the tag arithmetic, a correct field access lands aligned anyway - this just means the hardware never has to say no.

LD8 — load 8-bit, zero extended; load 8-bit through a register index, zero extended

Opcode	Instruction	Bytes	Cycles	Form	Operands
`04`	`ld8 r0, [r0, #0]`	1	4	implicit	All operands implicit
`20 xx`	`ld8 ra, [ra, #imm5]`	2	4	reg_off5	imm5: -16 to 15, sign-extended to 16 bits; rd is ra
`22–23 xx`	`ld8 rd, [ra, #imm3]`	2	4	reg_reg	imm3: one of the 8 values below
`21 xx xx`	`ld8 rd, [ra, #imm10]`	3	4	reg_reg10	imm10: -512 to 511, sign-extended to 16 bits
`26–27 xx`	`ld8 rd, [ra, rb]`	2	4	reg_reg_reg	

Assembler Aliases

Written	Assembles as	Description
`ld8 rd, [ra]`	`ld8 rd, [ra, #0]`	rd = memory8[ra], zero extended

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

implicit **04** `ld8 r0, [r0, #0]`

byte 0: 04

0	1	2	3	4	5	6	7
0	0	1	0	0	0	0	0

reg_off5 **20 xx** `ld8 ra, [ra, #imm5]`

byte 0: 20

0	1	2	3	4	5	6	7
0	0	0	0	0	1	0	0

byte 1: xx

0	1	2	3	4	5	6	7
a0	a1	a2	o0	o1	o2	o3	o4
ra			off				

reg_reg **22–23 xx** `ld8 rd, [ra, #imm3]`

byte 0: 22–23


byte 1: xx

0	1	2	3	4	5	6	7									
0	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	0	0	`22 00–3F ld8 rd, [ra, #-1]`
1	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	0	0	`23 00–3F ld8 rd, [ra, #0]`
0	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	1	0	`22 40–7F ld8 rd, [ra, #1]`
1	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	1	0	`23 40–7F ld8 rd, [ra, #2]`
0	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	0	1	`22 80–BF ld8 rd, [ra, #3]`
1	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	0	1	`23 80–BF ld8 rd, [ra, #4]`
0	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	1	1	`22 C0–FF ld8 rd, [ra, #6]`
1	1	0	0	0	1	0	0	d0	d1	d2	a0	a1	a2	1	1	`23 C0–FF ld8 rd, [ra, #8]`
off[0]								rd			ra			off[2:1]		

The 3-bit table immediate is split across the instruction: its LOW bit is the low bit of the opcode byte, so this form burns two adjacent opcodes (0x22 and 0x23). Its other two bits sit at the bottom of byte 1.


Paying an opcode bit to widen the register fields is the whole trick here: it is what makes room for a separate destination and address in two bytes.

reg_reg10 **21 xx xx** `ld8 rd, [ra, #imm10]`



Three bytes, and in exchange everything is independent and nothing is scattered: a whole opcode byte, then dest, address and a signed 10-bit displacement laid out in significance order.

reg_reg_reg **26–27 xx** `ld8 rd, [ra, rb]`



Operand Values

imm3: value by field value

0	1	2	3	4	5	6	7
-1	0	1	2	3	4	6	8

Operation

ld8 rd, [ra, #off]

```
R[d] = M8[R[a] + off];
```

ld8 rd, [ra, rb]

```
R[d] = M8[R[a] + R[b]];
```

Notes

Load an 8-bit value, zero-extended into a 16-bit register.

Four encodings, in increasing size. The assembler tries them in the order listed and takes the first whose constraints the written operands satisfy:

```
implicit    1 byte   everything pinned: dest r0, address r0, offset 0
reg_off5    2 bytes  wide offset, but destination is TIED to the address
reg_reg     2 bytes  separate destination and address, but the offset must
                     come from the 8-entry imm3 table
reg_reg10   3 bytes  separate registers AND a -512..+511 offset
```

The two-byte forms trade against each other rather than one dominating: one buys offset range at the cost of a register, the other buys a register at the cost of offset range. The three-byte form buys both.

imm10 is deliberately where the ladder stops. If a displacement will not fit in -512..+511, the compiler computes the address into a spare register first; with eight registers that is cheap, and it saves the encoding from growing a four-byte tier that would earn its keep only rarely. So the assembler CAN legitimately reject an ‘ld8‘ - a displacement out of imm10 range is a source error, not a missing form.

fff = 11i, the last of the memory block’s addressing forms and the only one whose displacement is a REGISTER. Two opcodes each, for the reason the imm3 forms take two: a third register needs three bits and byte 1 has two to spare, so the low bit rides the opcode. The index is {byte1[7:6], opcode[0]} - the same three bits, in the same places, that the three-register ALU forms use, which is why nothing in the datapath is new: the address register arrives on port A, the index on port B, and the adder that was already computing ‘R[a] + off‘ computes ‘R[a] + R[b]‘ instead.

THE INDEX IS UNSCALED, at both widths and for loads and stores alike. That is the same decision the displacements took and it is the same argument: pointers are tagged, so the arithmetic that lands on a field is odd as often as not, and a scaled index cannot express an odd address at all. Scaling would also put a shift in front of the adder for every indexed access, including the untagged ones that would never use it.

THESE ARE SEPARATE ENTRIES RATHER THAN FORMS, because a form shares its instruction’s operand list: ‘off‘ is an int16 and ‘b‘ is a register, and no one entry can say both. The mnemonic is the same and the assembler chooses on the syntax, which is unambiguous - ‘#3‘ is a displacement and ‘r3‘ is an index. add, jmp and call are split the same way for the same reason.


LDM — load ra through r1, stepping r1 past it; load ra then rb through r1; load ra, then rb, then rc through r1

Opcode	Instruction	Bytes	Cycles	Form	Operands
`99 00–07`	`ldm ra`	2	4, odd 5	single	
`9B 00–3F`	`ldm ra, rb`	2	5, odd 7	double	
`9C–9D xx`	`ldm ra, rb, rc`	2	6, odd 9	triple	


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


single **`99 00–07`** `ldm ra`



double **`9B 00–3F`** `ldm ra, rb`



triple **`9C–9D xx`** `ldm ra, rb, rc`



Operation

ldm ra

```
base = r1;
R[a] = M16[base];
r1 = base + 2;
```

ldm ra, rb

```
base = r1;
R[a] = M16[base];
R[b] = M16[base + 2];
r1 = base + 4;
```

ldm ra, rb, rc

```
base = r1;
R[a] = M16[base];
R[b] = M16[base + 2];
R[c] = M16[base + 4];
r1 = base + 6;
```


LSR — rd = ra >> (rb & 15), zero filling; rd = ra >> (imm & 15), zero filling

Opcode	Instruction	Bytes	Cycles	Form	Operands
`76–77 xx`	`lsr rd, ra, rb`	2	1	three_reg	
`70 00–7F`	`lsr rd, rd, #imm5`	2	1	reg_imm5	imm5: 0 to 15; bit 4 ignored, written 0; ra is rd
`72–73 xx`	`lsr rd, ra, #shift3`	2	1	reg_reg_imm3	shift3: one of the 8 values below
`71 xx 00-03`	`lsr rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: 0 to 15; bits 9:4 ignored, written 0


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **76–77 xx** `lsr rd, ra, rb`



reg_imm5 **70 00–7F** `lsr rd, rd, #imm5`




reg_reg_imm3 **72–73 xx** `lsr rd, ra, #shift3`

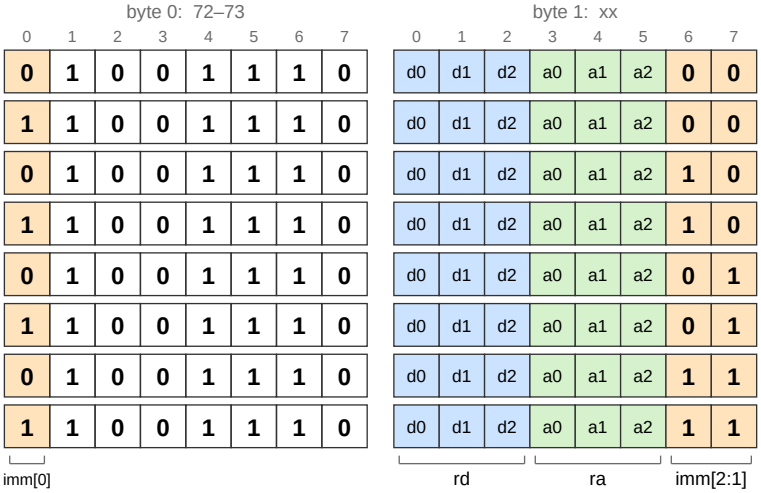

72 00–3F	`lsr rd, ra, #15`	
73 00–3F	`lsr rd, ra, #0`	
72 40–7F	`lsr rd, ra, #1`	
73 40–7F	`lsr rd, ra, #2`	
72 80–BF	`lsr rd, ra, #3`	
73 80–BF	`lsr rd, ra, #4`	
72 C0–FF	`lsr rd, ra, #6`	
73 C0–FF	`lsr rd, ra, #8`	

reg_reg_imm10 **71 xx 00-03** `lsr rd, ra, #imm10`

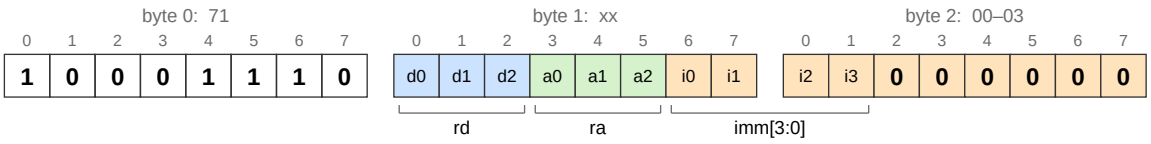

Operand Values

shift3: value by field value

0	15	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

lsr rd, ra, rb

```
R[d] = lsr(R[a], R[b] & 15);
```

lsr rd, ra, #imm

```
R[d] = lsr(R[a], imm & 15);
```

MOV — rd = immediate; rd = ra

Opcode	Instruction	Bytes	Cycles	Form	Operands
83	mov r0, #0	1	1	r0_zero	All operands implicit
28 xx	mov rd, #imm5	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits
2C xx	mov rd, #immbit5	2	1	reg_immbit5	immbit5: one of the 32 values below
2D xx	mov rd, #immask5	2	1	reg_immask5	immask5: one of the 32 values below
88–8F xx xx	mov rd, #imm16	3	1, odd 2	reg_imm16	imm16: any 16-bit value
81	mov r0, r1	1	1	or.mov_r0_r1	Same encoding as or r0, r1, #0
82	mov r1, r0	1	1	or.mov_r1_r0	Same encoding as or r1, r0, #0
53 00–3F	mov rd, ra	2	1	or.reg_reg_imm3	Same encoding as or rd, ra, #0

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

r0_zero **83** `mov r0, #0`

byte 0: 83

0	1	2	3	4	5	6	7
1	1	0	0	0	0	0	1

ZEROING r0 IS ONE BYTE. The 65C02 added STZ for exactly this reason - clearing a location was the commonest thing a program did that the 6502 had no short way to say - and setting a register to zero is the same observation one level in. Loop counters, accumulators, null pointers and cleared flags are all this instruction, and r0 is where a return value and a first argument live, so it is the register they most often want.

It costs one of the free one-byte slots and pins both operands, which is what an abbreviation is: a form of ‘mov‘ with nothing left to say. Three are left after this and ‘ret‘.

reg_imm5 **28 xx** `mov rd, #imm5`

byte 0: 28

0	1	2	3	4	5	6	7
0	0	0	1	0	1	0	0

byte 1: xx

0	1	2	3	4	5	6	7
d0	d1	d2	i0	i1	i2	i3	i4
rd			imm				

reg_immbit5 **2C xx** `mov rd, #immbit5`

byte 0: 2C

0	1	2	3	4	5	6	7
0	0	1	1	0	1	0	0

byte 1: xx

0	1	2	3	4	5	6	7
d0	d1	d2	i0	i1	i2	i3	i4
rd			imm				

The same two-byte shape, the same five bits, read through immbit5 instead of as a signed integer. That is what puts every power of two - and every value one bit short of all-ones - into two bytes rather than three.

imm5 already reaches 1, 2, 4 and 8, so the assembler drops those entries from this form; what it is really buying is 16 upwards, 0x8000, and the complements from -17 down. ‘mov rd, #16‘ was three bytes before this form existed, which is a bad cliff to have one past the end of a signed 5-bit field.

reg_immask5 **2D xx** `mov rd, #immask5`

byte 0: 2D


0	1	2	3	4	5	6	7
1	0	1	1	0	1	0	0

byte 1: xx

0	1	2	3	4	5	6	7
d0	d1	d2	i0	i1	i2	i3	i4
rd			imm				

And the mask table. Loading 0x00ff or 0xf000 was three bytes before this; a routine that masks with a constant usually has to build it first.


reg_imm16 **88–8F xx xx** `mov rd, #imm16`




Destination in the opcode byte, then a whole 16-bit immediate. No narrowing happens here - the encoded type is the logical type - which is the one case where a form can represent everything the programmer writes.

The immediate is stored LOW BYTE FIRST, matching ‘endian‘, so the fetch unit assembles a 16-bit instruction immediate exactly the way it assembles a 16-bit data word. The bit map is written most-significant-first, so saying that takes an explicit split: ‘i‘ carries bits 7..0 and ‘j‘ carries bits 15..8.


or.mov_r0_r1 **81** `mov r0, r1`



or.mov_r1_r0 **82** `mov r1, r0`



or.reg_reg_imm3 **53 00–3F** `mov rd, ra`



Operand Values

immbit5: value by field value

0 0x0001	1 0x0002	2 0x0004	3 0x0008	4 0x0010	5 0x0020	6 0x0040	7 0x0080
8 0x0100	9 0x0200	10 0x0400	11 0x0800	12 0x1000	13 0x2000	14 0x4000	15 0x8000
16 0xFFFE	17 0xFFFD	18 0xFFFB	19 0xFFF7	20 0xFFEF	21 0xFFDF	22 0xFFBF	23 0xFF7F
24 0xFEFF	25 0xFDFF	26 0xFBFF	27 0xF7FF	28 0xEFFF	29 0xDFFF	30 0xBFFF	31 0x7FFF

immask5: value by field value

0 0x000F	1 0x0003	2 0xFF00	3 0x000C	4 0x00F0	5 0x0030	6 0xF0F0	7 0x00C0
8 0x0F00	9 0x0300	10 0xCCCC	11 0x0C00	12 0xF000	13 0x3000	14 0xAAAA	15 0xC000
16 0xFFF0	17 0xFFFC	18 0x00FF	19 0xFFF3	20 0xFF0F	21 0xFFCF	22 0x0F0F	23 0xFF3F
24 0xF0FF	25 0xFCFF	26 0x3333	27 0xF3FF	28 0x0FFF	29 0xCFFF	30 0x5555	31 0x3FFF

Operation

mov rd, #imm

```
R[d] = imm;
```

mov rd, ra

```
R[d] = R[a] | 0;
```

Notes

mov rd, ra has no opcode of its own: it is an assembler alias for or rd, ra, #0, and shares that instruction’s encodings, so a disassembler prints it as or.

There is no register-to-register move opcode. ‘or rd, rs, #0‘ is a copy, and 0 is in the imm3 table, so the two-register form is two bytes for free. When the registers are r0 and r1 the pinned one-byte forms on ‘or‘ take over, so ‘mov r0, r1‘ costs a single byte - all without a mov opcode existing.

This is two mechanisms composing: the alias rewrites to ‘or‘, and then shortest-first form selection finds the implicit encoding.

Neither knows about the other.

Two forms. The short one is a register and a signed 5-bit immediate, laid out exactly like an ALU +0 form. The wide one carries a full 16-bit value.

The wide form costs EIGHT opcodes, and that is the cheap option rather than the expensive one. Three bytes is 24 bits; 16 of immediate plus 3 of register leave only 5 for the opcode, so the destination has to live in the opcode byte. Giving it a full 8-bit opcode instead would push the instruction to four bytes to say the same thing.

The imm16 field is the general wide-immediate form, and jmp and call will want it too - so those eight opcodes buy an addressing shape, not just a mov.

There is no register-to-register mov opcode; that is a preferred alias onto ‘or‘, defined at the end of this file.


MOVHI — rd = (rb << 8) | (ra & 0xff); rd = (immediate << 8) | (ra & 0xff)

Opcode	Instruction	Bytes	Cycles	Form	Operands
2E–2F xx	movhi rd, ra, rb	2	1	three_reg	
29 xx 00–3F	movhi rd, ra, #imm10	3	1, odd 2	reg_reg_imm10	imm10: 0 to 255; bits 9:8 ignored, written 0


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

three_reg **2E–2F xx** movhi rd, ra, rb



reg_reg_imm10 **29 xx 00–3F** movhi rd, ra, #imm10



Operation

movhi rd, ra, rb

```
R[d] = ((R[b] & 0xff) << 8) | (R[a] & 0xff);
```

movhi rd, ra, #imm

```
R[d] = ((imm & 0xff) << 8) | (R[a] & 0xff);
```

Notes

ra with its high byte replaced: rd = (x << 8) | (ra & 0xff), where x is the low byte of rb or of the immediate. One ALU operation - the result's high byte is rhs[7:0] and its low byte lhs[7:0] - so the two forms share it, and they sit in the mov row's imm10 and three-register columns, 0x29 and 0x2e/0x2f, with exactly the byte-1 layouts those columns have everywhere else. No addressing mode is new: the immediate is imm10, and the operation reads its low eight bits.

WHAT IT IS FOR. A register's low byte and something else's in one register:

```
- clmul's operands, which are the two bytes of one register.  clmul is
  commutative, so the variable can go low and the constant high, and
  'movhi r4, r3, #m' packs a CRC's Barrett constant with no register to
  hold it - three bytes, where 'or r4, r3, #0xf600' is five through r5.
- the 6502's page-indexed addressing: with a 256-byte table on a page
  boundary, 'movhi r, idx, #page' then 'ld8 r, [r]' is the lookup, and
  it cleans the index's high byte on the way.
- the three-register form packs two variables, which is what an elliptic
  curve multiply's clmul inner loop does; measured, about 12% faster.
```

THE IMMEDIATE GOES HIGH AND THE REGISTER LOW, and not the other way round. For clmul the two orders are equal; beyond it, a constant under a shifted register - '(ra << 8) | #k' - is rare, and '#0' would only repeat 'shl rd, ra, #8'. This order is page indexing, and zero extension and setting the high byte in one, where the alternative is 'and', 'mov r5' and 'add'.

IT COSTS THREE CELLS: one more arm on the ALU's result mux, wiring into it. Measured on the processor behind one SPRAM, medians of sixteen seeds, 1345 LUT4 at 29.80 MHz before and 1348 at 29.40 after - a move well inside the spread of 27.7 .. 30.6, so no clock the seeds can see.

It is not a 'movhi' in the sense of a load-high-immediate: with the low byte also constant that is 'mov rd, #imm16', which exists. And '#0' is zero extension, which 'and rd, rd, #0xff' already is in two bytes.


MUL — rd = low 16 bits of ra * rb; rd = low 16 bits of ra * immediate

Opcode	Instruction	Bytes	Cycles	Form	Operands
`B6–B7 xx`	`mul rd, ra, rb`	2	2	three_reg	
`B0 xx`	`mul rd, rd, #imm5`	2	2	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
`B1 xx xx`	`mul rd, ra, #imm10`	3	2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **`B6–B7 xx`** `mul rd, ra, rb`



reg_imm5 **`B0 xx`** `mul rd, rd, #imm5`

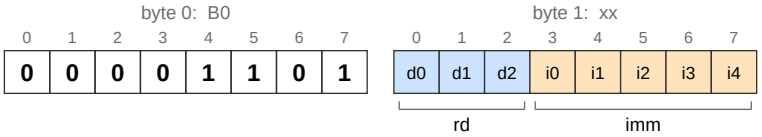

reg_reg_imm10 **`B1 xx xx`** `mul rd, ra, #imm10`



Operation

mul rd, ra, rb

```
R[d] = R[a] * R[b];
```

Takes 1 cycle beyond the one an ALU instruction costs.

mul rd, ra, #imm

```
R[d] = R[a] * imm;
```

Takes 1 cycle beyond the one an ALU instruction costs.


MULHS — rd = high 16 bits of ra * rb, signed

Opcode	Instruction	Bytes	Cycles	Form	Operands
C6–C7 xx	mulhs rd, ra, rb	2	2	three_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

three_reg **C6–C7 xx** mulhs rd, ra, rb



Operation

```
R[d] = mulhs(R[a], R[b]);
```

Takes 1 cycle beyond the one an ALU instruction costs.


MULHU — rd = high 16 bits of ra * rb, unsigned

Opcode	Instruction	Bytes	Cycles	Form	Operands
`BE–BF xx`	`mulhu rd, ra, rb`	2	2	three_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

three_reg **BE–BF xx** `mulhu rd, ra, rb`



Operation

```
R[d] = mulhu(R[a], R[b]);
```

Takes 1 cycle beyond the one an ALU instruction costs.


NOP — do nothing

Opcode	Instruction	Bytes	Cycles	Form	Operands
87	nop	1	1	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **87** nop



Operation

```
(nothing)
```


OR — rd = ra | rb; rd = ra | immediate

Opcode	Instruction	Bytes	Cycles	Form	Operands
`56–57 xx`	`or rd, ra, rb`	2	1	three_reg	
`81`	`or r0, r1, #0`	1	1	mov_r0_r1	All operands implicit
`82`	`or r1, r0, #0`	1	1	mov_r1_r0	All operands implicit
`50 xx`	`or rd, rd, #imm5`	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
`54 xx`	`or rd, rd, #immbit5`	2	1	reg_immbit5	immbit5: one of the 32 values below; ra is rd
`55 xx`	`or rd, rd, #immask5`	2	1	reg_immask5	immask5: one of the 32 values below; ra is rd
`52–53 xx`	`or rd, ra, #imm3`	2	1	reg_reg_imm3	imm3: one of the 8 values below
`51 xx xx`	`or rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

three_reg **56–57 xx** `or rd, ra, rb`




mov_r0_r1 **81** `or r0, r1, #0`




One-byte register moves. ‘or rd, ra, #0‘ is a copy, so pinning the two hot registers both ways gives single-byte ‘mov r0, r1‘ and ‘mov r1, r0‘ without a mov opcode existing at all. The ‘mov‘ alias rewrites to ‘or‘, and shortest-first selection lands on these.


mov_r1_r0 **82** `or r1, r0, #0`



reg_imm5 **50 xx** `or rd, rd, #imm5`




reg_immbit5 **54 xx** `or rd, rd, #immbit5`




BIT SET. ‘or rd, rd, #1<<n‘ for any n, in two bytes.

reg_immask5 **55 xx** `or rd, rd, #immask5`




The same shape again, read through immask5: fields and stripes rather than single bits. Column .5 of the ALU block was reserved and empty.

reg_reg_imm3 **52–53 xx** `or rd, ra, #imm3`

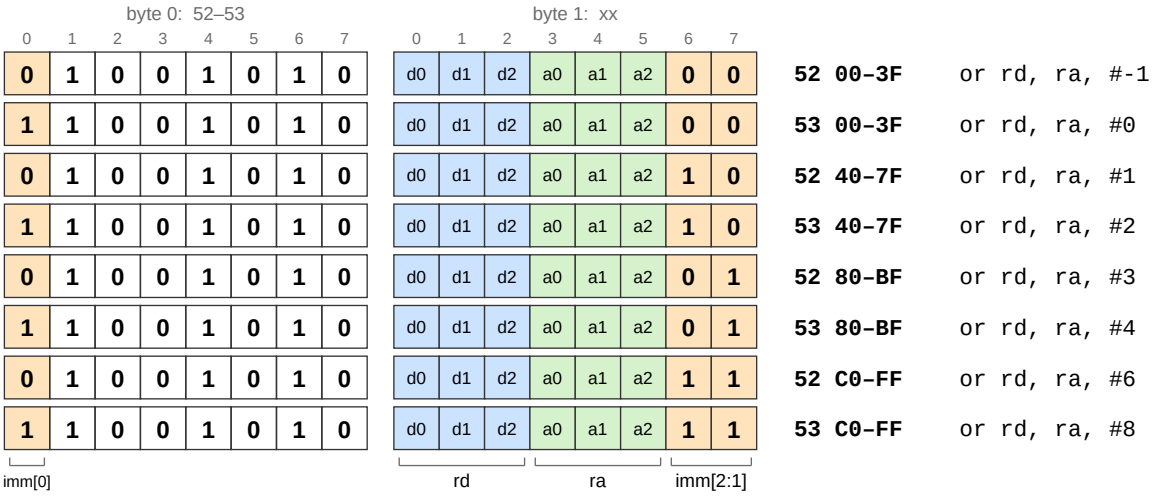

reg_reg_imm10 **51 xx xx** `or rd, ra, #imm10`



Operand Values

immbit5: value by field value

0	0x0001	1	0x0002	2	0x0004	3	0x0008	4	0x0010	5	0x0020	6	0x0040	7	0x0080
8	0x0100	9	0x0200	10	0x0400	11	0x0800	12	0x1000	13	0x2000	14	0x4000	15	0x8000
16	0xFFFE	17	0xFFFD	18	0xFFFB	19	0xFFF7	20	0xFFEF	21	0xFFDF	22	0xFFBF	23	0xFF7F
24	0xFEFF	25	0xFDFF	26	0xFBFF	27	0xF7FF	28	0xEFFF	29	0xDFFF	30	0xBFFF	31	0x7FFF

immask5: value by field value

0	0x000F	1	0x0003	2	0xFF00	3	0x000C	4	0x00F0	5	0x0030	6	0xF0F0	7	0x00C0
8	0x0F00	9	0x0300	10	0xCCCC	11	0x0C00	12	0xF000	13	0x3000	14	0xAAAA	15	0xC000
16	0xFFF0	17	0xFFFC	18	0x00FF	19	0xFFF3	20	0xFF0F	21	0xFFCF	22	0x0F0F	23	0xFF3F
24	0xF0FF	25	0xFCFF	26	0x3333	27	0xF3FF	28	0x0FFF	29	0xCFFF	30	0x5555	31	0x3FFF

imm3: value by field value

0	-1	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

or rd, ra, rb

```
R[d] = R[a] | R[b];
```

or rd, ra, #imm

```
R[d] = R[a] | imm;
```

Notes

or rd, ra, #0 is also written mov rd, ra; see MOV.


POP — pop a word into ra; pop two words, into ra then rb; pop three words, into ra then rb then rc

Opcode	Instruction	Bytes	Cycles	Form	Operands
`98 00–07`	`pop ra`	2	4, odd 5	single	
`9A 00–3F`	`pop ra, rb`	2	5, odd 7	double	
`9E–9F xx`	`pop ra, rb, rc`	2	6, odd 9	triple	


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


single **`98 00–07`** `pop ra`



double **`9A 00–3F`** `pop ra, rb`



triple **`9E–9F xx`** `pop ra, rb, rc`



Operation

pop ra

```
base = sp;
R[a] = M16[base];
sp = base + 2;
```

pop ra, rb

```
base = sp;
R[a] = M16[base];
R[b] = M16[base + 2];
sp = base + 4;
```

pop ra, rb, rc

```
base = sp;
R[a] = M16[base];
R[b] = M16[base + 2];
R[c] = M16[base + 4];
sp = base + 6;
```

Notes

THERE ARE NO BYTE-WIDE STACK OPERATIONS. ‘push8‘ and ‘pop8‘ were here and are gone; the four opcodes they held are the three-register stm and ldm below, which could not have existed without them.

WHAT IT COSTS: NOTHING NOW. While the ABI passed a byte argument on the stack unpadded, a caller wrote ‘add sp, sp, #-1‘ and then ‘st8‘, four bytes where ‘push8‘ was two. The ABI now gives a byte argument a word slot with the value in its low byte - see isa/abi.s - so the word ‘push‘ of the register holding it is the byte push, and sp stays even.

‘pop8‘ was rarer still - nothing in libc, nothing in libgcc, and no pattern in the compiler emitted it.


POPCOUNT — rd = number of set bits in ra

Opcode	Instruction	Bytes	Cycles	Form	Operands
33 80–BF	popcount rd, ra	2	2	reg_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **33 80–BF** popcount rd, ra



Operation

```
R[d] = popcount(R[a]);
```

Takes 1 cycle beyond the one an ALU instruction costs.

Notes

Two cycles, like clz.


PUSH — push ra; push ra then rb; push ra, then rb, then rc

Opcode	Instruction	Bytes	Cycles	Form	Operands
`90 00–07`	`push ra`	2	5, odd 6	single	
`92 00–3F`	`push ra, rb`	2	6, odd 8	double	
`96–97 xx`	`push ra, rb, rc`	2	7, odd 10	triple	


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


single **`90 00–07`** `push ra`



double **`92 00–3F`** `push ra, rb`



triple **`96–97 xx`** `push ra, rb, rc`

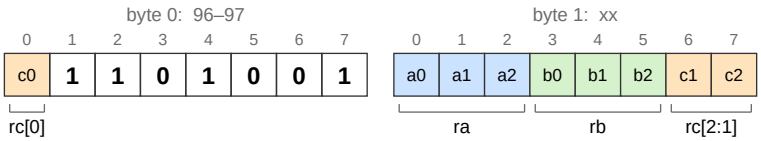

Operation

push ra

```
base = sp;
M16[base - 2] = R[a];
sp = base - 2;
```

push ra, rb

```
base = sp;
M16[base - 2] = R[a];
M16[base - 4] = R[b];
sp = base - 4;
```

push ra, rb, rc

```
base = sp;
M16[base - 2] = R[a];
M16[base - 4] = R[b];
M16[base - 6] = R[c];
sp = base - 6;
```


RECIP — rd = floor((2^32 - 1) / (ra | 0x8000)) - 2^16

Opcode	Instruction	Bytes	Cycles	Form	Operands
`BB 00–3F`	`recip rd, ra`	2	5	reg_reg_zero	imm = 0, implicitly

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg_zero **`BB 00–3F`** `recip rd, ra`



Only #0, and the assembler does not write it: byte 1's top two bits are imm3's index bits 2:1, pinned at 00.

Operation

```
R[d] = recip(R[a], imm);
```

Takes 4 cycles beyond the one an ALU instruction costs.


RET — pc = lr

Opcode	Instruction	Bytes	Cycles	Form	Operands
AB	`ret`	1	4	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **AB** `ret`



Operation

```
pc = lr;
```


RSB — rd = rb - ra (reverse subtract); rd = immediate - ra

Opcode	Instruction	Bytes	Cycles	Form	Operands
`46–47 xx`	`rsb rd, ra, rb`	2	1	three_reg	
`40 xx`	`rsb rd, rd, #imm5`	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
`42–43 xx`	`rsb rd, ra, #imm3`	2	1	reg_reg_imm3	imm3: one of the 8 values below
`41 xx xx`	`rsb rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **46–47 xx** `rsb rd, ra, rb`



reg_imm5 **40 xx** `rsb rd, rd, #imm5`




reg_reg_imm3 **42–43 xx** `rsb rd, ra, #imm3`

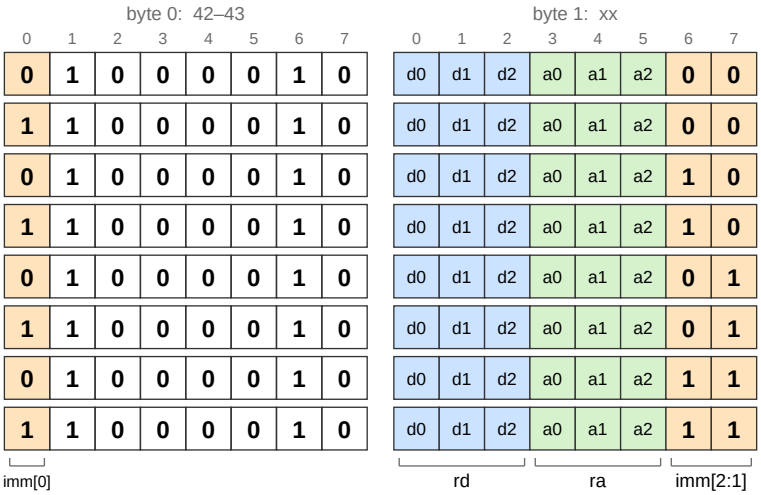

42 00–3F	`rsb rd, ra, #-1`	
43 00–3F	`rsb rd, ra, #0`	
42 40–7F	`rsb rd, ra, #1`	
43 40–7F	`rsb rd, ra, #2`	
42 80–BF	`rsb rd, ra, #3`	
43 80–BF	`rsb rd, ra, #4`	
42 C0–FF	`rsb rd, ra, #6`	
43 C0–FF	`rsb rd, ra, #8`	

reg_reg_imm10 **41 xx xx** `rsb rd, ra, #imm10`



Operand Values

imm3: value by field value

0	1	2	3	4	5	6	7
-1	0	1	2	3	4	6	8

Operation

rsb rd, ra, rb

```
R[d] = R[b] - R[a];
```

rsb rd, ra, #imm

```
R[d] = imm - R[a];
```


RTI — return from an interrupt

Opcode	Instruction	Bytes	Cycles	Form	Operands
02	rti	1	6	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **02** rti



Operation

```
pc = lr;
lr = shadow_lr;
shadow_isp = sp;
sp = shadow_sp;
ie = 1;
```

Notes

rti 1 byte

THE EXACT INVERSE OF THE ENTRY, statement for statement, which is what makes the pair safe to reason about. Note that it is not a swap in either direction: there are TWO shadow stack pointers, and each move is one way.

‘sp‘ AND ‘shadow_isp‘ ARE NEVER EXCHANGED IN ONE CYCLE, and that is the whole reason there are two shadows rather than one. A swap needs the old value of each side while the new one arrives, which on this machine means a mux in front of the register file’s write port - measured at 3.3 MHz, see the byte-serial core’s cpu.sv, and paid by every instruction rather than by the two that need it. Two one-way moves in two cycles cost the datapath nothing and the exception a cycle, and the exception is where a cycle is affordable.

IT IS ALSO THE BOOT SEQUENCE. With interrupts disabled at reset, the stub

```
mov lr, #user_entry_point
mov sp, #interrupt_stack_base
rti
```

loads the interrupt stack into ‘shadow_isp‘ on its way past and lands on user_entry_point with interrupts on - seven bytes, and both stack pointers are then set up. The garbage it leaves in sp is overwritten by the first thing user_entry_point does, and an interrupt arriving in that window is harmless because it swaps sp away before the handler can touch it.


SEI — enable interrupts

Opcode	Instruction	Bytes	Cycles	Form	Operands
AE	`sei`	1	5	—	All operands implicit

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

— **AE** `sei`



Operation

```
ie = 1;
```

Notes

THE INTERRUPT-ENABLE FLAG IS WRITE-ONLY, and deliberately so. There is no instruction that reads it and no way to save and restore it, so a critical section is ‘cli‘ ... ‘sei‘ and the code is expected to know which state it was in. A readable flag invites the save-and-restore idiom, which needs a register to hold it and a conditional to act on it - and on a machine with eight registers that is a real cost paid at every critical section, to buy nesting that hand-written kernel code can simply not do.

THEY ARE ONE BYTE AND THEY ARE IN THE CONTROL ROW, which costs the length decode something and is the one place this pair is not free. ‘ret‘ at .b was the row’s only one-byte member; .e and .f make three, so a decoder reading length from the bits alone needs ‘.b, .e, .f‘ rather than a single exception. The alternative was two of the sixteen one-byte opcodes, and those are worth more: they hold abbreviations that save a byte at thousands of sites, where sei and cli appear a few dozen times in a whole kernel. Spending the scarcer space on the rarer instruction is the wrong way round.


SHL — rd = ra << (rb & 15); rd = ra << (imm & 15)

Opcode	Instruction	Bytes	Cycles	Form	Operands
66–67 xx	shl rd, ra, rb	2	1	three_reg	
60 00–7F	shl rd, rd, #imm5	2	1	reg_imm5	imm5: 0 to 15; bit 4 ignored, written 0; ra is rd
62–63 xx	shl rd, ra, #shift3	2	1	reg_reg_imm3	shift3: one of the 8 values below
61 xx 00–03	shl rd, ra, #imm10	3	1, odd 2	reg_reg_imm10	imm10: 0 to 15; bits 9:4 ignored, written 0


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


three_reg **66–67 xx** shl rd, ra, rb



reg_imm5 **60 00–7F** shl rd, rd, #imm5




reg_reg_imm3 **62–63 xx** shl rd, ra, #shift3

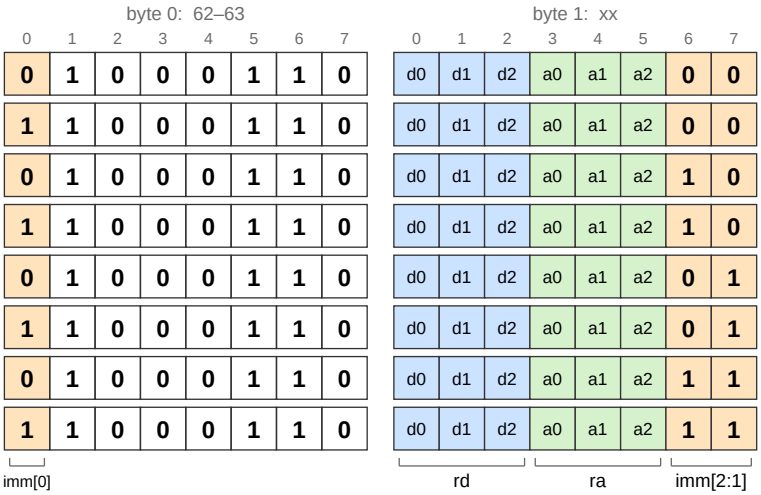

62 00–3F	shl rd, ra, #15	
63 00–3F	shl rd, ra, #0	
62 40–7F	shl rd, ra, #1	
63 40–7F	shl rd, ra, #2	
62 80–BF	shl rd, ra, #3	
63 80–BF	shl rd, ra, #4	
62 C0–FF	shl rd, ra, #6	
63 C0–FF	shl rd, ra, #8	

reg_reg_imm10 **61 xx 00–03** shl rd, ra, #imm10

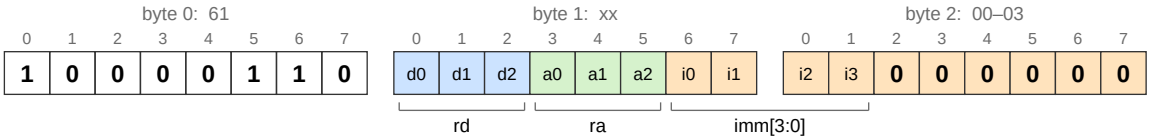

Operand Values

shift3: value by field value

0	15	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

shl rd, ra, rb

```
R[d] = shl(R[a], R[b] & 15);
```

shl rd, ra, #imm

```
R[d] = shl(R[a], imm & 15);
```

Notes

Four forms each, six opcodes each: a tied register with a count, three registers, two registers with a table immediate, and two registers with any count. No one-byte encodings.

THE imm10 COLUMN IS FOR THE UNTIED PAIR, not for ten bits of count. The tied form at +0 has every count but only rd = ra, and the table at +2 has a free destination but only eight counts - so ‘lsr r1, r0, #13‘, which SHA-256’s rotations are made of, took a mov and a tied shift. +1 is the three-byte form that has both, and it costs the RTL nothing: the column’s immediate is imm10 for every row, and the shifter reads its low four bits.

Every shift uses only the low 4 bits of its count, whether that count comes from a register or an immediate. So a shift by 16 is a shift by 0, and a register count of -1 is a shift by 15. The ‘shift3‘ table spells that last one as 15 directly.

AN IMMEDIATE COUNT IN THE +0 AND +1 FORMS IS 0..15. There is never a reason to set the bits above those four, so the encodings that do are RESERVED - room for something later - and what they do is undefined. The hardware does not check: it reads the low four bits, so today a high bit changes nothing. The forms below still carry the whole imm5 and imm10, since the binutils generators take only fields of those shapes; until the assemblers learn the range, ‘shl r0, r0, #-1‘ assembles, and is a reserved encoding. The imm3 form keeps ‘shift3‘, whose -1 slot is what spells 15.

ST — store 16 bits; store 16 bits through a register index

Opcode	Instruction	Bytes	Cycles	Form	Operands
`0A–0B xx`	`st rs, [ra, #imm3]`	2	5, odd 6	reg_reg	imm3: one of the 8 values below
`09 xx xx`	`st rs, [ra, #imm10]`	3	5, odd 6	reg_reg10	imm10: -512 to 511, sign-extended to 16 bits
`0E–0F xx`	`st rs, [ra, rb]`	2	5, odd 6	reg_reg_reg	


Assembler Aliases

Written	Assembles as	Description
`st rs, [ra]`	`st rs, [ra, #0]`	memory16[ra] = rs

Encodings


Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **0A–0B xx** `st rs, [ra, #imm3]`

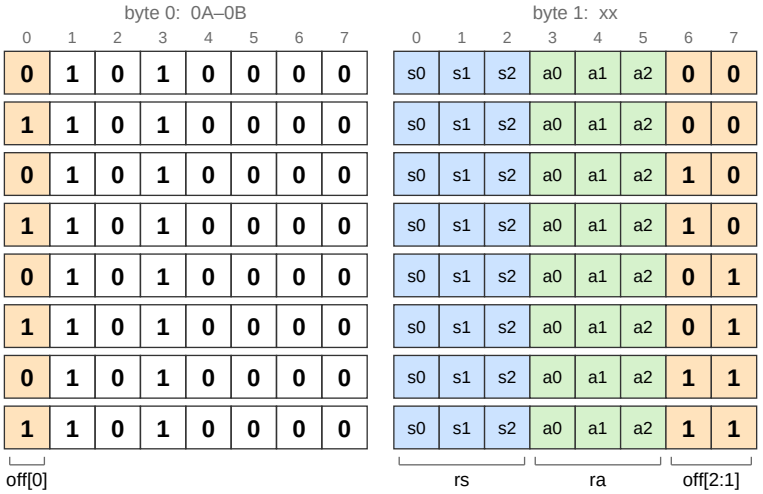


0A 00–3F	`st rs, [ra, #-1]`
0B 00–3F	`st rs, [ra, #0]`
0A 40–7F	`st rs, [ra, #1]`
0B 40–7F	`st rs, [ra, #2]`
0A 80–BF	`st rs, [ra, #3]`
0B 80–BF	`st rs, [ra, #4]`
0A C0–FF	`st rs, [ra, #6]`
0B C0–FF	`st rs, [ra, #8]`

reg_reg10 **09 xx xx** `st rs, [ra, #imm10]`



reg_reg_reg **0E–0F xx** `st rs, [ra, rb]`

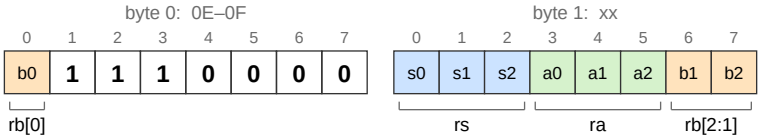

Operand Values

imm3: value by field value

0	-1	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

st rs, [ra, #off]

```
M16[R[a] + off] = R[s];
```

st rs, [ra, rb]

```
M16[R[a] + R[b]] = R[s];
```

ST8 — store low 8 bits; store low 8 bits through a register index

Opcode	Instruction	Bytes	Cycles	Form	Operands
`12–13 xx`	`st8 rs, [ra, #imm3]`	2	5	reg_reg	imm3: one of the 8 values below
`11 xx xx`	`st8 rs, [ra, #imm10]`	3	5	reg_reg10	imm10: -512 to 511, sign-extended to 16 bits
`16–17 xx`	`st8 rs, [ra, rb]`	2	5	reg_reg_reg	

Assembler Aliases

Written	Assembles as	Description
`st8 rs, [ra]`	`st8 rs, [ra, #0]`	memory8[ra] = rs

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **12–13 xx** `st8 rs, [ra, #imm3]`

byte 0: 12–13								byte 1: xx									
0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7		
0	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	0	0	**12 00–3F**	`st8 rs, [ra, #-1]`
1	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	0	0	**13 00–3F**	`st8 rs, [ra, #0]`
0	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	1	0	**12 40–7F**	`st8 rs, [ra, #1]`
1	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	1	0	**13 40–7F**	`st8 rs, [ra, #2]`
0	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	0	1	**12 80–BF**	`st8 rs, [ra, #3]`
1	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	0	1	**13 80–BF**	`st8 rs, [ra, #4]`
0	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	1	1	**12 C0–FF**	`st8 rs, [ra, #6]`
1	1	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	1	1	**13 C0–FF**	`st8 rs, [ra, #8]`
off[0]								rs			ra			off[2:1]			

reg_reg10 **11 xx xx** `st8 rs, [ra, #imm10]`

byte 0: 11								byte 1: xx								byte 2: xx							
0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
1	0	0	0	1	0	0	0	s0	s1	s2	a0	a1	a2	o0	o1	o2	o3	o4	o5	o6	o7	o8	o9
								rs			ra			off									

reg_reg_reg **16–17 xx** `st8 rs, [ra, rb]`

byte 0: 16–17								byte 1: xx							
0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
b0	1	1	0	1	0	0	0	s0	s1	s2	a0	a1	a2	b1	b2
rb[0]								rs			ra			rb[2:1]	

Operand Values

imm3: value by field value

0	1	2	3	4	5	6	7
-1	0	1	2	3	4	6	8

Operation

st8 rs, [ra, #off]

```
M8[R[a] + off] = R[s];
```

st8 rs, [ra, rb]

```
M8[R[a] + R[b]] = R[s];
```

Notes

Stores get exactly two forms each - the two-register forms from the load block, and nothing else. There is no tied form (a store's source register is not usefully its own address register) and no implicit one-byte form (storing r0 through r0 at offset 0 is not a shape that occurs).

So a store is always at least two bytes, and its byte 1 is laid out exactly like a load's: register, address register, then the immediate remainder.


STM — store ra through r5, stepping r5 past it; store ra then rb through r5; store ra, then rb, then rc through r5

Opcode	Instruction	Bytes	Cycles	Form	Operands
`91 00–07`	`stm ra`	2	5, odd 6	single	
`93 00–3F`	`stm ra, rb`	2	6, odd 8	double	
`94–95 xx`	`stm ra, rb, rc`	2	7, odd 10	triple	


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.


single **`91 00–07`** `stm ra`



double **`93 00–3F`** `stm ra, rb`



triple **`94–95 xx`** `stm ra, rb, rc`



Operation

stm ra

```
base = r5;
M16[base] = R[a];
r5 = base + 2;
```

stm ra, rb

```
base = r5;
M16[base] = R[a];
M16[base + 2] = R[b];
r5 = base + 4;
```

stm ra, rb, rc

```
base = r5;
M16[base] = R[a];
M16[base + 2] = R[b];
M16[base + 4] = R[c];
r5 = base + 6;
```

Notes

push and pop walk the stack; these walk a buffer, and they are the same hardware doing it. ‘stm‘ stores through r5 and ‘ldm‘ loads through r1, each stepping its pointer past what it moved - so a copy loop is ‘ldm‘ then ‘stm‘ with no pointer arithmetic between them at all, and the two pointers advance themselves.

THE POINTER IS NAMED, NOT ENCODED, exactly as sp is for push and pop. That is what leaves all of byte 1 for the registers being moved, which is what makes a three-register form fit in two bytes. Two registers, so that a copy can hold both at once, and neither is sp.

r1 FOR THE LOAD because it is argument 1, which is the source in memcpy, memmove, strcmp and the rest: the routine reads through the register its caller already put the pointer in. r5 FOR THE STORE because it is the one register that is caller saved under every signature - see isa/abi.s - so a routine may walk it without saving it, and it never holds an argument that would have to be moved out of the way first. memcpy copies dest into r5 and leaves r0 alone as its return value; memset puts its fill word in r1, where c arrived. They were r1 for the store and r2 for the load until the RTL measured the change as free: the pointer is a register number in the predecode table, so a different one is a different constant, and nothing else in rtl/ moved.

THEY COUNT UP, where push counts down. A block move runs forwards, and the post-update leaves each pointer one past the last byte it moved - ready for the next iteration with nothing to add.

WHY THEY ARE WORTH FOUR OPCODES. snippets/memcpy.s's fastest rung reaches its speed by pointing sp at the buffers and using push and pop, and then spends more than a third of its cycles handing sp back and forth between the source and the destination. These have no handover at all: the pointers are different registers and each one updates itself.

THE ORDER IS THE SAME AS push's: the first register named is stored first, so with a pointer that counts up it lands at the LOWEST address. A save through stm and a reload through ldm therefore take the SAME register list, where a push/pop pair reverses it.

SUB — rd = ra - rb; rd = ra - immediate

An assembler alias: it has no encoding of its own.

Assembler Aliases

Written	Assembles as	Description
`sub rd, ra, rb`	`rsb rd, rb, ra`	rd = ra - rb
`sub rd, ra, #imm`	`add rd, ra, #-imm`	rd = ra - immediate

Encodings: see RSB.

Encodings: see ADD.


SXT8 — rd = ra sign extended from 8 bits

Opcode	Instruction	Bytes	Cycles	Form	Operands
32 C0–FF	sxt8 rd, ra	2	1	reg_reg	

Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

reg_reg **32 C0–FF** sxt8 rd, ra



Operation

```
R[d] = sxt8(R[a]);
```


XOR — rd = ra ^ rb; rd = ra ^ immediate

Opcode	Instruction	Bytes	Cycles	Form	Operands
`4E–4F xx`	`xor rd, ra, rb`	2	1	three_reg	
`84`	`xor r0, r0, #1`	1	1	r0_not	All operands implicit
`48 xx`	`xor rd, rd, #imm5`	2	1	reg_imm5	imm5: -16 to 15, sign-extended to 16 bits; ra is rd
`4C xx`	`xor rd, rd, #immbit5`	2	1	reg_immbit5	immbit5: one of the 32 values below; ra is rd
`4D xx`	`xor rd, rd, #immask5`	2	1	reg_immask5	immask5: one of the 32 values below; ra is rd
`4A–4B xx`	`xor rd, ra, #imm3`	2	1	reg_reg_imm3	imm3: one of the 8 values below
`49 xx xx`	`xor rd, ra, #imm10`	3	1, odd 2	reg_reg_imm10	imm10: -512 to 511, sign-extended to 16 bits


Encodings

Byte 0 is at the lowest address, and within each byte bit 0 is on the left, so an operand that runs on from one byte into the next reads left to right. Shaded bits are operand fields; a bracket names the operand and, where it is split, which of its bits it holds.

three_reg **4E–4F xx** `xor rd, ra, rb`




r0_not **84** `xor r0, r0, #1`




NEGATING A PREDICATE IS ONE BYTE. iseq and isset return 1 or 0 and never anything else, so ‘xor rd, rd, #1‘ is exactly ‘!‘ on their result - and r0 is where a return value lives, so a bool-returning function that wants ‘!=‘ where it computed ‘==‘ ends with this and a ‘ret‘, two bytes in total.

It costs one of the three free one-byte slots, and pins both operands, which is what an abbreviation is.

reg_imm5 **48 xx** `xor rd, rd, #imm5`



reg_immbit5 **4C xx** `xor rd, rd, #immbit5`




BIT FLIP, completing the set. ‘or #1<<n‘ sets a bit and ‘and #~(1<<n)‘ clears one; this toggles one, in the same two bytes and through the same 4-to-16 decoder. It costs an opcode the group had already reserved: slot +4 of every eight is the immbit5 slot, and it was free here only because nothing had asked for it yet.

The inverted half of the table is not wasted on xor either. ‘xor rd, rd, #~(1<<n)‘ flips every bit EXCEPT one, which is a complement with a single bit held back.


The PLAIN complement is not in this form and does not need to be: 0xffff is not ~(1<<n) for any n, but it is -1, which imm5 reaches - so ‘xor rd, rd, #-1‘ is already two bytes at 0x50. Where the two forms overlap the assembler prefers imm5, which is listed first, and drops the duplicate entries here.

reg_immask5 **4D xx** `xor rd, rd, #immask5`




The same shape again, read through immask5: fields and stripes rather than single bits. Column .5 of the ALU block was reserved and empty.

reg_reg_imm3 **4A–4B xx** `xor rd, ra, #imm3`

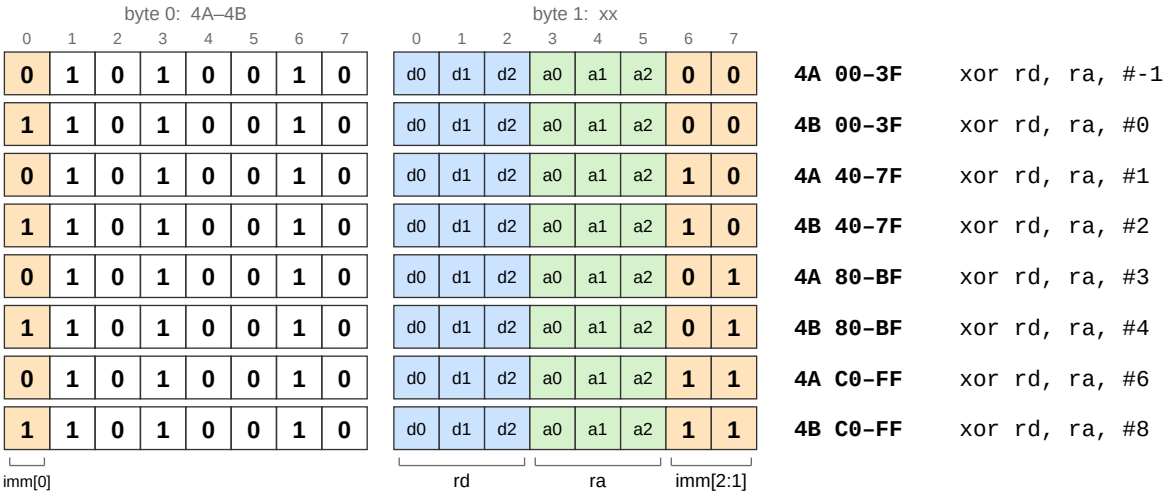

4A 00–3F	`xor rd, ra, #-1`
4B 00–3F	`xor rd, ra, #0`
4A 40–7F	`xor rd, ra, #1`
4B 40–7F	`xor rd, ra, #2`
4A 80–BF	`xor rd, ra, #3`
4B 80–BF	`xor rd, ra, #4`
4A C0–FF	`xor rd, ra, #6`
4B C0–FF	`xor rd, ra, #8`

reg_reg_imm10 **49 xx xx** `xor rd, ra, #imm10`



Operand Values

immbit5: value by field value

0	0x0001	1	0x0002	2	0x0004	3	0x0008	4	0x0010	5	0x0020	6	0x0040	7	0x0080
8	0x0100	9	0x0200	10	0x0400	11	0x0800	12	0x1000	13	0x2000	14	0x4000	15	0x8000
16	0xFFFE	17	0xFFFD	18	0xFFFB	19	0xFFF7	20	0xFFEF	21	0xFFDF	22	0xFFBF	23	0xFF7F
24	0xFEFF	25	0xFDFF	26	0xFBFF	27	0xF7FF	28	0xEFFF	29	0xDFFF	30	0xBFFF	31	0x7FFF

immask5: value by field value

0	0x000F	1	0x0003	2	0xFF00	3	0x000C	4	0x00F0	5	0x0030	6	0xF0F0	7	0x00C0
8	0x0F00	9	0x0300	10	0xCCCC	11	0x0C00	12	0xF000	13	0x3000	14	0xAAAA	15	0xC000
16	0xFFF0	17	0xFFFC	18	0x00FF	19	0xFFF3	20	0xFF0F	21	0xFFCF	22	0x0F0F	23	0xFF3F
24	0xF0FF	25	0xFCFF	26	0x3333	27	0xF3FF	28	0x0FFF	29	0xCFFF	30	0x5555	31	0x3FFF

imm3: value by field value

0	-1	1	0	2	1	3	2	4	3	5	4	6	6	7	8

Operation

xor rd, ra, rb

```
R[d] = R[a] ^ R[b];
```

xor rd, ra, #imm

```
R[d] = R[a] ^ imm;
```