

# VIBRATION ANALYSIS AND VIBROACOUSTICS

---

## VIBRATION ANALYSIS

### Assignment 2 - A.Y. 2023/24

---

ERNEST OUALI

242311

FRANCESCO PANETTIERI

250266

GIULIANO DI LORENZO


242712



**POLITECNICO**  
MILANO 1863

# 1 Equations of Motion and system matrices

In order to describe the mechanical system in figure, a reference system convention is defined: all displacements along the positive  $x$  and positive  $y$  directions are positive, all counterclockwise rotations are positive and all springs/dampers elongation are positive.

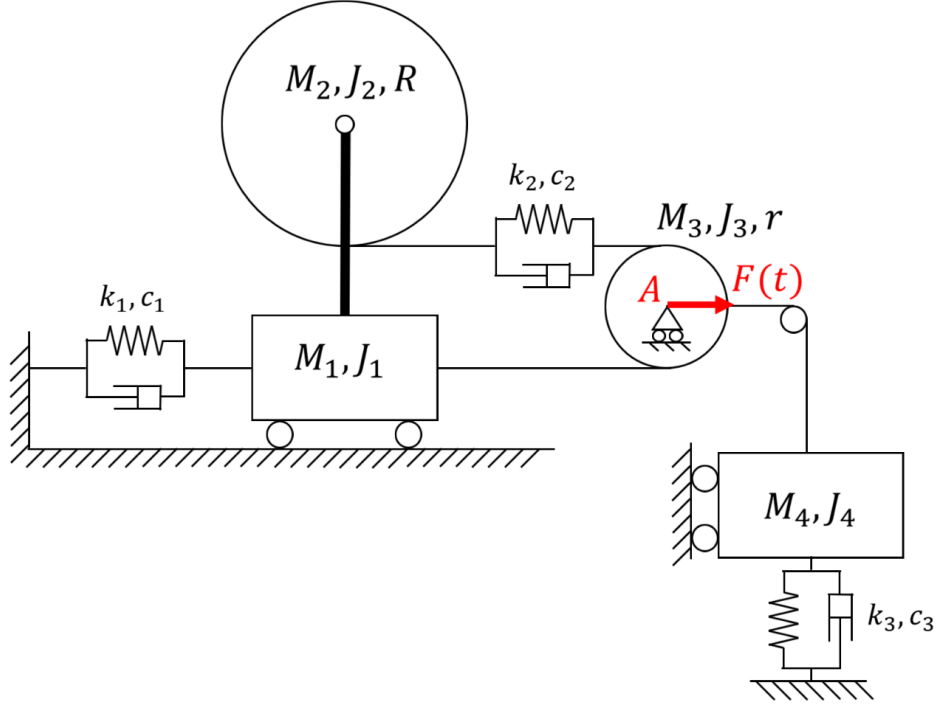

The number of degrees of freedom (dof) has to be determined as:

$$n_{dof} = 3n_b - n_{con}$$

Where  $n_b$  is the total number of rigid bodies (4 in this system) and  $n_{con}$  the number of constraints. An equation of motion (EoM) for each dof allow to completely describe the mechanical system. Each EoM is the result of the Lagrange equation:

$$\frac{d}{dt} \left( \frac{\partial E_K}{\partial \dot{x}} \right) + \frac{\partial E_K}{\partial x} + \frac{\partial D}{\partial \dot{x}} + \frac{\partial V}{\partial x} = Q_x$$

In which  $x$  represents the single independent variable of a mechanical system. By combining all contributions in a matrix form:

$$\left\{ \frac{\partial}{\partial t} \left( \frac{\partial E_K}{\partial \dot{\underline{x}}} \right) \right\}^T - \left\{ \frac{\partial E_K}{\partial \underline{x}} \right\}^T + \left\{ \frac{\partial D}{\partial \dot{\underline{x}}} \right\}^T + \left\{ \frac{\partial V}{\partial \underline{x}} \right\}^T = \underline{Q}$$


Where all independent variables have been gathered in the vector  $\underline{x}$ , as well as their first time derivatives in  $\dot{\underline{x}}$ .

## 1.1 Equations of Motion around the equilibrium position

The first goal is to determine the number of dof by evaluating all constraints:

- $M_2$  is constrained (through a hinge) to a mass-less vertical beam, rigidly connected to the mass  $M_1$ 
  - hinge  $\longrightarrow y_2 = y_1$
  - rigid connection  $\longrightarrow \dot{x}_2 = \dot{x}_1$
- $M_1$  can only slide horizontally
  - slider  $\longrightarrow y_1 = 0, \theta_1 = 0$

- $M_3$  can slide horizontally and rotate through an inextensible rope that connects the disk to both  $M_2$  and  $M_1$ 
  - slider and hinge  $\rightarrow y_3 = 0$
  - inextensible rope  $\rightarrow \dot{x}_1 = \dot{x}_E$
- $M_4$  can slide vertically and is rigidly connected to  $M_3$  through an inextensible rope
  - slider  $\rightarrow x_4 = 0, \theta_4 = 0$
  - inextensible rope  $\rightarrow y_4 = -x_3$

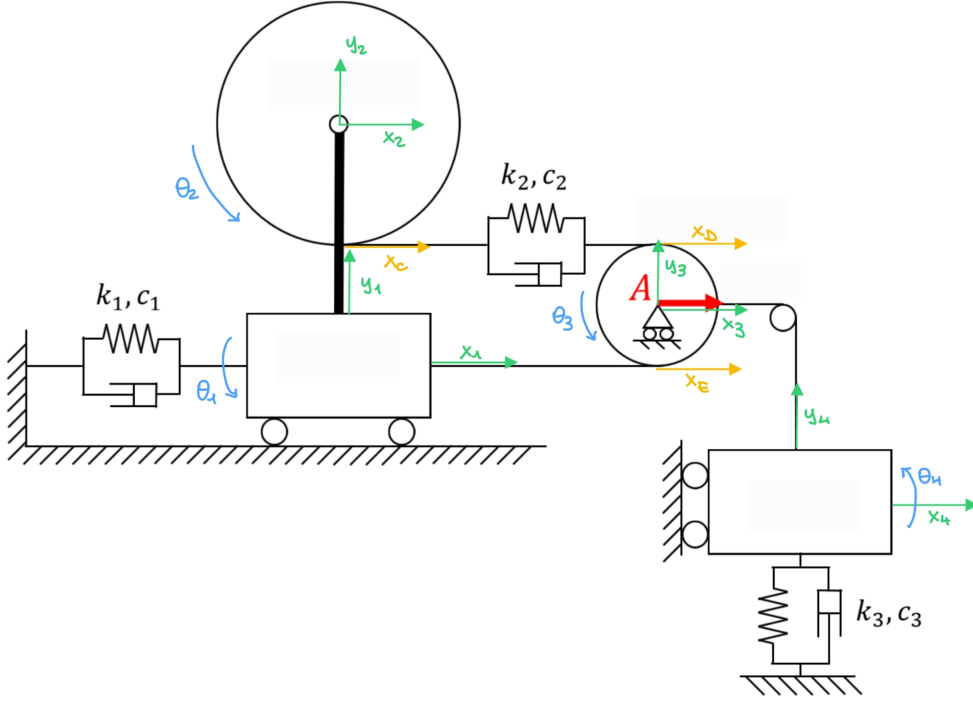

To conclude, the number of constraints  $n_{con}$  is equal to  $2 + 2 + 2 + 3$ , so the number of dof is:

$$n_{dof} = 3n_b - n_{con} = 12 - 9 = 3$$

After that, it is necessary to describe all existing relations between independent variables (3 in this system) and physical variables:

$$\begin{cases} \dot{x}_2 = \dot{x}_1 \\ \dot{x}_1 = \dot{x}_E \end{cases} \Rightarrow x_1 = x_2 = x_E$$

$$\dot{x}_C = \dot{x}_2 + R\dot{\theta}_2, \quad \dot{x}_D = \dot{x}_1 - 2r\dot{\theta}_3, \quad y_4 = -x_3 = -(x_E - r\theta_3)$$

$$\Rightarrow \begin{cases} x_1 = x_2 = x_E \\ \dot{x}_C = \dot{x}_2 + R\dot{\theta}_2 \\ \dot{x}_D = \dot{x}_1 - 2r\dot{\theta}_3 \\ y_4 = -x_1 + r\theta_3 \end{cases}$$

Springs and dampers appear in the Lagrange equations by means of elongations  $\Delta l$  and their first time derivative  $\dot{\Delta l}$ :

$$\begin{cases} \dot{\Delta l}_1 = \dot{x}_1 \\ \dot{\Delta l}_2 = \dot{x}_D - \dot{x}_C = -R\dot{\theta}_2 - 2r\dot{\theta}_3 \\ \dot{\Delta l}_3 = \dot{y}_4 = -\dot{x}_1 + r\dot{\theta}_3 \end{cases} \Rightarrow \begin{cases} \Delta l_1 = x_1 \\ \Delta l_2 = -R\theta_2 - 2r\theta_3 \\ \Delta l_3 = -x_1 + r\theta_3 \end{cases}$$

Being the system in static equilibrium position, all springs pre-load are neglected.

### 1.1.1 Kinetic energy $E_K$

It is now possible to compute, in matrix form, all energies of the Lagrange equation.

Regarding the kinetic energy, four rigid bodies may contribute to the total  $E_K$  with four translations and four rotations. In this system, all bodies can translate but not rotate (only  $M_2$  and  $M_3$ ):

$$E_K = \frac{1}{2}M_1v_1^2 + \frac{1}{2}M_2v_2^2 + \frac{1}{2}J_2\omega_2^2 + \frac{1}{2}M_3v_3^2 + \frac{1}{2}J_3\omega_3^2 + \frac{1}{2}M_4v_4^2$$

Let's gather all physical coordinates (and their first time derivatives) in two column vectors  $\underline{z}$  (and  $\dot{\underline{z}}$  respectively):

$$\underline{z}_{6 \times 1} = (x_1, x_2, \theta_2, x_3, \theta_3, y_4)^T, \quad \dot{\underline{z}}_{6 \times 1} = (v_1, v_2, \omega_2, v_3, \omega_3, v_4)^T$$

By defining the following physical mass matrix  $[M]$  as:

$$[M]_{6 \times 6} = \begin{bmatrix} M_1 & 0 & 0 & 0 & 0 & 0 \\ 0 & M_2 & 0 & 0 & 0 & 0 \\ 0 & 0 & J_2 & 0 & 0 & 0 \\ 0 & 0 & 0 & M_3 & 0 & 0 \\ 0 & 0 & 0 & 0 & J_3 & 0 \\ 0 & 0 & 0 & 0 & 0 & M_4 \end{bmatrix}$$

It is now possible to express the total kinetic energy  $E_K$  in matrix form as:

$$E_K = \frac{1}{2}\dot{\underline{z}}^T[M]\dot{\underline{z}}$$

It is of interest to get the energy in function of the independent variables:

$$\underline{x}_{3 \times 1} = (x_1, \theta_2, \theta_3)^T$$

expressed respectively in  $m$ ,  $rad$  and  $rad$ . Let's introduce a relation between physical variables  $\underline{z}$  and independent ones  $\underline{x}$  by using their first time derivative:

$$\dot{\underline{z}} = \left( \frac{\partial \underline{z}}{\partial \underline{x}} \right) \dot{\underline{x}} = [\Lambda_M] \dot{\underline{x}}$$

Where  $[\Lambda_M]$  is the Jacobian matrix and describes the relation between velocities  $v$  and angular velocities  $\omega$  with respect to the independent variables.

Its entries are obtained by looking at the following table:

	$\dot{x}_1$	$\dot{\theta}_2$	$\dot{\theta}_3$
$v_1$	1	0	0
$v_2$	1	0	0
$\omega_2$	0	1	0
$v_3$	1	0	$-r$
$\omega_3$	0	0	1
$v_4$	$-1$	0	$r$

So the Jacobian matrix is defined as:

$$[\Lambda_M]_{6 \times 3} = \begin{bmatrix} 1 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1 & 0 & -r \\ 0 & 0 & 1 \\ -1 & 0 & r \end{bmatrix}$$

By using the relation described by the Jacobian matrix  $[\Lambda_M]$  in the kinetic energy formulation:

$$E_K = \frac{1}{2}\dot{\underline{z}}^T[M]\dot{\underline{z}} = \frac{1}{2}\dot{\underline{x}}^T[\Lambda_M]^T[M][\Lambda_M]\dot{\underline{x}} = \frac{1}{2}\dot{\underline{x}}^T[M^*]\dot{\underline{x}}$$

Where the mass matrix  $[M^*]$  is defined as:

$$[M^*]_{3 \times 3} = [\Lambda_M]^T[M][\Lambda_M] = \begin{bmatrix} M_1 + M_2 + M_3 + M_4 & 0 & -r(M_3 + M_4) \\ 0 & J_2 & 0 \\ -r(M_3 + M_4) & 0 & J_3 + r^2(M_3 + M_4) \end{bmatrix}$$

### 1.1.2 Potential energy $V$

Regarding the potential energy, the springs give a contribution in terms of elastic energy, while the mass  $M_4$  gives a contribution in terms of gravitational energy:

$$V = V_{el} + V_g = \frac{1}{2}k_1\Delta l_1^2 + \frac{1}{2}k_2\Delta l_2^2 + \frac{1}{2}k_3\Delta l_3^2 + \frac{1}{2}M_4gy_4$$

The gravitational term can be neglected due to the linearity of the system, so it does not affect the Lagrange equations, i.e. :  $V_g = 0$ .

Similarly to the kinetic case, a matrix approach is needed and the Jacobian matrix  $[\Lambda_k]$  describes the relation between elongations  $\Delta l$  and independent variables.

By defining the physical stiffness matrix  $[k]$  and the elongation vector  $\underline{\Delta l}$  as:

$$[k]_{3 \times 3} = \begin{bmatrix} k_1 & 0 & 0 \\ 0 & k_2 & 0 \\ 0 & 0 & k_3 \end{bmatrix}, \quad \underline{\Delta l}_{3 \times 1} = \{\Delta l_1, \Delta l_2, \Delta l_3\}^T$$

It is possible to express the elastic potential energy in matrix form as:

$$V = V_{el} = \frac{1}{2}\underline{\Delta l}^T[k]\underline{\Delta l}$$

The Jacobian matrix  $[\Lambda_k]$  entries are obtained by looking at the following table:

	$x_1$	$\theta_2$	$\theta_3$
$\Delta l_1$	1	0	0
$\Delta l_2$	0	$-R$	$-2r$
$\Delta l_3$	$-1$	0	$r$

So the Jacobian matrix is defined as:

$$[\Lambda_k]_{3 \times 3} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -R & -2r \\ -1 & 0 & r \end{bmatrix}$$

By using the relation described by the Jacobian matrix  $[\Lambda_k]$  in the potential energy formulation:

$$V = V_{el} = \frac{1}{2}\dot{\underline{z}}^T[k]\dot{\underline{z}} = \frac{1}{2}\dot{\underline{x}}^T[\Lambda_k]^T[k][\Lambda_k]\dot{\underline{x}} = \frac{1}{2}\dot{\underline{x}}^T[k^*]\dot{\underline{x}}$$

Where the stiffness matrix  $[k^*]$  is defined as:

$$[k^*]_{3 \times 3} = [\Lambda_k]^T[k][\Lambda_k] = \begin{bmatrix} k_1 + k_3 & 0 & -rk_3 \\ 0 & R^2k_2 & 2Rk_2r \\ -rk_3 & 2Rk_2r & 4k_2r^2 + k_3r^2 \end{bmatrix}$$

### 1.1.3 Dissipative energy $D$

Regarding the dissipative energy, the dampers give a contribution in terms of first time derivative of the elongations:

$$D = \frac{1}{2}c_1\dot{\Delta l}_1^2 + \frac{1}{2}c_2\dot{\Delta l}_2^2 + \frac{1}{2}c_3\dot{\Delta l}_3^2$$

Similarly to the previous cases, a matrix approach is needed and the Jacobian matrix  $[\Lambda_c]$  describes the relation between the elongations derivatives  $\dot{\Delta l}$  and independent variables.

By defining the physical damping matrix  $[c]$  and the elongation derivatives vector  $\underline{\dot{\Delta l}}$  as:

$$[c]_{3 \times 3} = \begin{bmatrix} c_1 & 0 & 0 \\ 0 & c_2 & 0 \\ 0 & 0 & c_3 \end{bmatrix}, \quad \underline{\dot{\Delta l}}_{3 \times 1} = \{\dot{\Delta l}_1, \dot{\Delta l}_2, \dot{\Delta l}_3\}^T$$

It is possible to express the dissipative energy in matrix form as:

$$D = \frac{1}{2}\underline{\dot{\Delta l}}^T[c]\underline{\dot{\Delta l}}$$

The Jacobian matrix  $[\Lambda_c]$  entries are the very same of  $[\Lambda_k]$ :

$$[\Lambda_c]_{3 \times 3} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -R & -2r \\ -1 & 0 & r \end{bmatrix}$$

By using the relation described by the Jacobian matrix  $[\Lambda_c]$  in the potential energy formulation:

$$D = \frac{1}{2} \dot{\underline{z}}^T [c] \dot{\underline{z}} = \frac{1}{2} \dot{\underline{x}}^T [\Lambda_c]^T [c] [\Lambda_c] \dot{\underline{x}} = \frac{1}{2} \dot{\underline{x}}^T [c^*] \dot{\underline{x}}$$

Where the damping matrix  $[c^*]$  is defined as:

$$[c^*]_{3 \times 3} = [\Lambda_c]^T [c] [\Lambda_c] = \begin{bmatrix} c_1 + c_3 & 0 & -rc_3 \\ 0 & R^2 c_2 & 2Rc_2 r \\ -rc_3 & 2Rc_2 r & 4c_2 r^2 + c_3 r^2 \end{bmatrix}$$

#### 1.1.4 Virtual works $\delta W$

The principle of virtual works declares that an external force, applied at a given force point generates an infinitesimal work  $\delta W$  proportional to an infinitesimal displacement  $\delta x$ . In this system, the only existing external force  $F(t)$  is applied horizontally at the point A, resulting in an infinitesimal displacement  $\delta x_3$  and an infinitesimal work:

$$\delta W = F \cdot \delta x_3$$

Similarly to the previous cases, it is of interest to express the infinitesimal displacement  $\delta x_3$  as function of the infinitesimal independent variables  $\underline{\delta x}_{3 \times 1} = (\delta x_1, \delta \theta_2, \delta \theta_3)^T$ :

$$\delta x_3 = \delta x_1 - \delta \theta_3 r$$

$$\Rightarrow \delta W = F \delta x_1 - F \delta \theta_3 r = (F, 0, -rF) \begin{pmatrix} \delta x_1 \\ \delta \theta_2 \\ \delta \theta_3 \end{pmatrix} = \underline{F}_{1 \times 3} \cdot \underline{\delta x}$$

For the Lagrange equation, it is possible to identify the Lagrangian vector  $\underline{Q}$  as:

$$\underline{Q}_{3 \times 1} = \begin{pmatrix} F \\ 0 \\ -rF \end{pmatrix}$$

#### 1.1.5 Lagrange equations

It is now possible to express the Lagrange equations in matrix form:

$$\begin{aligned} \left\{ \frac{\partial}{\partial t} \left( \frac{\partial E_K}{\partial \dot{\underline{x}}} \right) \right\}^T - \left\{ \frac{\partial E_K}{\partial \underline{x}} \right\}^T + \left\{ \frac{\partial D}{\partial \dot{\underline{x}}} \right\}^T + \left\{ \frac{\partial V}{\partial \underline{x}} \right\}^T &= \underline{Q} \\ \left\{ \frac{d}{dt} \left( \frac{\partial E_K}{\partial \dot{\underline{x}}} \right) \right\}^T &= [M^*] \cdot \ddot{\underline{x}}, \quad \left\{ \frac{\partial E_K}{\partial \underline{x}} \right\}^T = \underline{0} \\ \left\{ \frac{\partial D}{\partial \dot{\underline{x}}} \right\}^T &= [c^*] \cdot \dot{\underline{x}}, \quad \left\{ \frac{\partial V}{\partial \underline{x}} \right\}^T = [k^*] \cdot \underline{x} \end{aligned}$$

The total matrix expression of all Equations of Motion is:

$$[M^*] \cdot \ddot{\underline{x}} + [c^*] \cdot \dot{\underline{x}} + [k^*] \cdot \underline{x} = \underline{Q}$$

## 1.2 Eigenfrequencies and eigenvectors

### 1.2.1 Undamped system

The eigenfrequencies and eigenvectors computation problem consists in analyzing the system as undamped and in free motion, which results in setting  $[c^*] = [0]$  and  $\underline{Q} = \underline{0}$  in the matrix expression of the Equations of Motion:

$$[M^*] \cdot \ddot{\underline{x}} + [k^*] \cdot \underline{x} = \underline{0}$$

By assuming as a solution  $\underline{x} = \underline{X}e^{\lambda t}$ , the equation becomes:

$$(\lambda^2 [M^*] + [k^*]) \underline{X} = \underline{0}$$

The non-trivial solution consists in solving the characteristic equation:

$$\det(\lambda^2 [M^*] + [k^*]) = 0 \implies \lambda^2 = -[M^*]^{-1} [k^*]$$

By solving the above expression for  $\lambda$ , six imaginary conjugate values are obtained:

$$\lambda_{1,4} = \pm j\omega_{0_1} = \pm j0.8017, \quad \lambda_{2,5} = \pm j\omega_{0_2} = \pm j4.6974, \quad \lambda_{3,6} = \pm j\omega_{0_3} = \pm j10.1326$$

It is of interest to consider real frequencies (positive values), so it is possible to identify the three natural angular frequencies of the system as:

$$\omega_{0_1} = \text{Im}\{\lambda_1\} = 0.8017 \text{ rad/s}, \quad \omega_{0_2} = \text{Im}\{\lambda_2\} = 4.6974 \text{ rad/s}, \quad \omega_{0_3} = \text{Im}\{\lambda_3\} = 10.1326 \text{ rad/s}$$

By substituting the solutions  $\lambda_i$ ,  $\lambda_{i+3}$  (for  $i = 1, 2, 3$ ) to the equation to solve, it is possible to find the eigenvectors  $\underline{X}_{\omega_{0_i}}^U$ , responses of each independent variable for the  $i$ -th natural frequency  $\omega_{0_i}$ :

$$(\lambda_i^2 [M^*] + [k^*]) \underline{X}_{\omega_{0_i}}^U = \underline{0} \implies \underline{X}_{\omega_{0_i}}^U = \begin{pmatrix} X_{1,\omega_{0_i}}^U \\ \Theta_{2,\omega_{0_i}}^U \\ \Theta_{3,\omega_{0_i}}^U \end{pmatrix}$$

The eigenvectors for each  $\omega_{0_i}$ , normalized with respect to the first component  $x_1 = 1$ , are:

$$\underline{X}_{\omega_{0_1}}^U = \begin{pmatrix} X_{1,\omega_{0_1}}^U \\ \Theta_{2,\omega_{0_1}}^U \\ \Theta_{3,\omega_{0_1}}^U \end{pmatrix} = \begin{pmatrix} 1 \\ -19.0479 \\ 12.4436 \end{pmatrix}, \quad \underline{X}_{\omega_{0_2}}^U = \begin{pmatrix} X_{1,\omega_{0_2}}^U \\ \Theta_{2,\omega_{0_2}}^U \\ \Theta_{3,\omega_{0_2}}^U \end{pmatrix} = \begin{pmatrix} 1 \\ -0.2348 \\ 0.0486 \end{pmatrix}, \quad \underline{X}_{\omega_{0_3}}^U = \begin{pmatrix} X_{1,\omega_{0_3}}^U \\ \Theta_{2,\omega_{0_3}}^U \\ \Theta_{3,\omega_{0_3}}^U \end{pmatrix} = \begin{pmatrix} 1 \\ 2.1885 \\ 3.2200 \end{pmatrix}$$

### 1.2.2 Damped system

By considering the damped case ( $[c^*] \neq [0]$ ) the matrix expression of the Equations of Motion (in free motion) becomes:

$$[M^*] \ddot{\underline{x}} + [c^*] \dot{\underline{x}} + [k^*] \underline{x} = \underline{0}$$

By assuming as a solution  $\underline{x} = \underline{X}e^{\lambda t}$ , the equation becomes:

$$(\lambda^2 [M^*] + \lambda [c^*] + [k^*]) \underline{X} = \underline{0}$$

By adding the trivial equation  $[M^*] \dot{\underline{x}} = [M^*] \dot{\underline{x}}$  to the matrix form of the Equations of Motion, the problem can be expressed as:

$$\begin{bmatrix} [M^*] & [0] \\ [0] & [M^*] \end{bmatrix} \begin{pmatrix} \ddot{\underline{x}} \\ \dot{\underline{x}} \end{pmatrix} + \begin{bmatrix} [c^*] & [M^*] \\ -[M^*] & [0] \end{bmatrix} \begin{pmatrix} \dot{\underline{x}} \\ \underline{x} \end{pmatrix} = \underline{0}_{6 \times 1}$$

By setting the vector of state variables  $\underline{z}$  as:

$$\underline{z}_{6 \times 1} = \begin{pmatrix} \dot{\underline{x}} \\ \underline{x} \end{pmatrix} = \begin{pmatrix} \lambda \underline{x} \\ \underline{x} \end{pmatrix} = \begin{pmatrix} \lambda \underline{X} \\ \underline{X} \end{pmatrix} e^{\lambda t} = \underline{Z}_{6 \times 1} e^{\lambda t}$$

The problem can be expressed as:

$$\begin{bmatrix} [M^*] & [0] \\ [0] & [M^*] \end{bmatrix} \dot{\underline{z}} + \begin{bmatrix} [c^*] & [M^*] \\ -[M^*] & [0] \end{bmatrix} \underline{z} = \underline{0} \implies [B] \dot{\underline{z}} + [D] \underline{z} = \underline{0}$$

In which:

$$[B]_{6 \times 6} = \begin{bmatrix} [M^*] & [0] \\ [0] & [M^*] \end{bmatrix}, \quad [D]_{6 \times 6} = \begin{bmatrix} [c^*] & [k^*] \\ -[M^*] & [0] \end{bmatrix}$$

The problem to solve is in the form:

$$\det([B]) \neq 0 \implies \dot{\underline{z}} = -[B]^{-1} [D] \underline{z}$$

The matrix product  $[A]_{6 \times 6} = -[B]^{-1} [D]$  is called state matrix of the system.

Let's consider that  $\underline{z} = \underline{Z}e^{\lambda t}$  and  $\dot{\underline{z}} = \lambda \underline{z} = \lambda \underline{Z}e^{\lambda t}$ :

$$\begin{aligned} [B] \lambda \underline{Z}e^{\lambda t} + [D] \underline{Z}e^{\lambda t} &= \underline{0} \implies \lambda \underline{Z} = -[B]^{-1} [D] \underline{Z} = [A] \underline{Z} \\ \implies (\lambda [I]_6 - [A]) \underline{Z} &= \underline{0} \end{aligned}$$

From the above equation, it is possible to analyze the last three rows of  $\underline{z}$ , equal to  $\underline{x}$ , which contain the mode shapes for the damped case.

The matrix for the eigenvalues and eigenvectors problem computation is the state matrix:

$$[A] = -[B]^{-1} [D] = \begin{bmatrix} -[M^*]^{-1} [c^*] & -[M^*]^{-1} [k^*] \\ [I]_3 & [0] \end{bmatrix}$$

The solutions  $\lambda_{i,i+3}^d = -\alpha_i \pm j\omega_{d_i}$  (for  $i = 1, 2, 3$ ) are complex conjugate, as in the undamped case, but have non-zero real part:

$$\lambda_{1,4}^d = -0.0557 \pm j0.8010, \quad \lambda_{2,5}^d = -0.3114 \pm j4.6816, \quad \lambda_{3,6}^d = -0.3257 \pm j10.1234$$

The real part  $\alpha_r$  describes a decay behaviour in the time responses and is the contribution of the dampers. The imaginary part  $\omega_{d_i}$  refers to the resonance frequencies in the damped system. More precisely, three natural "damped" frequencies are identified as:

$$\omega_{d_1} = \text{Im} \{ \lambda_1^d \} = 0.8010 \text{ rad/s}, \quad \omega_{d_2} = \text{Im} \{ \lambda_2^d \} = 4.6816 \text{ rad/s}, \quad \omega_{d_3} = \text{Im} \{ \lambda_3^d \} = 10.1234 \text{ rad/s}$$

By analyzing the "damped" resonance frequencies, it is possible to see how close they are to the ones of the undamped case. This observation allows to define the system as lightly damped.

The confirmation of that comes from the adimensional damping ratios computation:

$$\underline{h}_{3 \times 1} = \begin{pmatrix} h_1 = \frac{\alpha_1}{\omega_{0_1}} \\ h_2 = \frac{\alpha_2}{\omega_{0_2}} \\ h_3 = \frac{\alpha_3}{\omega_{0_3}} \end{pmatrix} = \begin{pmatrix} 0.0695 \\ 0.0665 \\ 0.0322 \end{pmatrix}$$

In which  $h_i$  is the adimensional damping ratio for the  $i$ -th eigenfrequency (sorted with increasing frequency).

Similarly to the undamped scenario, it is now possible to define the eigenvectors  $\underline{X}_{\omega_{d_i}}^D$  for each natural frequency, normalized with respect to the first component  $x_1 = 1$ :

$$\begin{aligned} \underline{X}_{\omega_{d_1}}^D &= \begin{pmatrix} X_{1,\omega_{d_1}}^D \\ \Theta_{2,\omega_{d_1}}^D \\ \Theta_{3,\omega_{d_1}}^D \end{pmatrix} = \begin{pmatrix} 1 \\ -18.8050 + j2.6391 \\ 12.2816 - j1.7581 \end{pmatrix} \\ \underline{X}_{\omega_{d_2}}^D &= \begin{pmatrix} X_{1,\omega_{d_2}}^D \\ \Theta_{2,\omega_{d_2}}^D \\ \Theta_{3,\omega_{d_2}}^D \end{pmatrix} = \begin{pmatrix} 1 \\ -0.2323 + j0.0809 \\ 0.0448 - j0.0283 \end{pmatrix} \\ \underline{X}_{\omega_{d_3}}^D &= \begin{pmatrix} X_{1,\omega_{d_3}}^D \\ \Theta_{2,\omega_{d_3}}^D \\ \Theta_{3,\omega_{d_3}}^D \end{pmatrix} = \begin{pmatrix} 1 \\ 2.1712 + j0.1567 \\ 3.1917 + j0.2604 \end{pmatrix} \end{aligned}$$



### 1.3 Rayleigh damping

The Rayleigh damping assumption states that the damping matrix can be expressed as:

$$[c^*] = \alpha [M^*] + \beta [k^*]$$

Explicitly, this equation is equivalent to:

$$\begin{bmatrix} c_{11}^* & c_{12}^* & c_{13}^* \\ c_{12}^* & c_{22}^* & c_{23}^* \\ c_{13}^* & c_{23}^* & c_{33}^* \end{bmatrix} = \alpha \cdot \begin{bmatrix} M_{11}^* & M_{12}^* & M_{13}^* \\ M_{12}^* & M_{22}^* & M_{23}^* \\ M_{13}^* & M_{23}^* & M_{33}^* \end{bmatrix} + \beta \cdot \begin{bmatrix} k_{11}^* & k_{12}^* & k_{13}^* \\ k_{12}^* & k_{22}^* & k_{23}^* \\ k_{13}^* & k_{23}^* & k_{33}^* \end{bmatrix}$$

The goal is to obtain values of  $\alpha$  and  $\beta$  that best approximate the above equation, and this may be done through the least square method.

By evaluating each entry of  $[c^*]$  and writing them all in a column vector, it is possible to obtain:

$$\begin{pmatrix} c_{11}^* \\ c_{12}^* \\ c_{13}^* \\ c_{21}^* \\ c_{22}^* \\ c_{23}^* \\ c_{31}^* \\ c_{32}^* \\ c_{33}^* \end{pmatrix} = \begin{pmatrix} \alpha M_{11}^* + \beta k_{11}^* \\ \alpha M_{12}^* + \beta k_{12}^* \\ \alpha M_{13}^* + \beta k_{13}^* \\ \alpha M_{21}^* + \beta k_{21}^* \\ \alpha M_{22}^* + \beta k_{22}^* \\ \alpha M_{23}^* + \beta k_{23}^* \\ \alpha M_{31}^* + \beta k_{31}^* \\ \alpha M_{32}^* + \beta k_{32}^* \\ \alpha M_{33}^* + \beta k_{33}^* \end{pmatrix} = \begin{bmatrix} M_{11}^* & k_{11}^* \\ M_{12}^* & k_{12}^* \\ M_{13}^* & k_{13}^* \\ M_{21}^* & k_{21}^* \\ M_{22}^* & k_{22}^* \\ M_{23}^* & k_{23}^* \\ M_{31}^* & k_{31}^* \\ M_{32}^* & k_{32}^* \\ M_{33}^* & k_{33}^* \end{bmatrix} \cdot \begin{pmatrix} \alpha \\ \beta \end{pmatrix} = [G] \cdot \begin{pmatrix} \alpha \\ \beta \end{pmatrix}$$

Where the matrix  $[G]_{9 \times 2}$  is given by writing  $[M^*]$  and  $[k^*]$  as column vectors one next to the other. Finally, by isolating  $\alpha$  and  $\beta$ :

$$\begin{pmatrix} \alpha \\ \beta \end{pmatrix} = [G]^{-1} \begin{pmatrix} c_{11}^* \\ c_{12}^* \\ c_{13}^* \\ c_{21}^* \\ c_{22}^* \\ c_{23}^* \\ c_{31}^* \\ c_{32}^* \\ c_{33}^* \end{pmatrix} = \begin{pmatrix} 0.6088 \\ 0.0026 \end{pmatrix}$$

## 2 Free motion

The analysis of the free motion system will be done by assuming Rayleigh damping, so the damping matrix  $[c^*]$  is given by:

$$[c^*] = \alpha [M^*] + \beta [k^*] = 0.6088 [M^*] + 0.0026 [k^*] = \begin{bmatrix} 10.6613 & 0 & -2.6358 \\ 0 & 4.8508 & 0.8839 \\ -2.6358 & 0.8839 & 6.5601 \end{bmatrix}$$

And all the calculations of the "Damped system" paragraph should be updated with the new version of  $[c^*]$ .

### 2.1 Time responses

In the previous section, the time response solution was defined as  $\underline{x} = \underline{X}e^{\lambda t}$ , in which  $\underline{X}$  collects amplitude and phase response from each system natural frequency to the independent variables. The eigenvector  $\underline{X}_{\omega_{d_1}}^D$  ( $\underline{X}_{\omega_{d_2}}^D$  and  $\underline{X}_{\omega_{d_3}}^D$  respectively) describes the amplitude and phase components of  $\omega_{d_1}$  ( $\omega_{d_2}$  and  $\omega_{d_3}$  respectively) in the independent variables  $x_1$ ,  $\theta_2$  and  $\theta_3$ . In particular:

$$\begin{aligned} x_1(t) &= \sum_{i=1}^3 e^{-\alpha_i t} \left| X_{1,\omega_{d_i}}^D \right| C_i \cos(\omega_{d_i} t + \Phi_i) = \sum_{i=1}^3 e^{-\alpha_i t} C_i \cos(\omega_{d_i} t + \Phi_i) \\ \theta_2(t) &= \sum_{i=1}^3 e^{-\alpha_i t} \left| \Theta_{2,\omega_{d_i}}^D \right| C_i \cos(\omega_{d_i} t + \Phi_i + \angle \Theta_{2,\omega_{d_i}}^D) \\ \theta_3(t) &= \sum_{i=1}^3 e^{-\alpha_i t} \left| \Theta_{3,\omega_{d_i}}^D \right| C_i \cos(\omega_{d_i} t + \Phi_i + \angle \Theta_{3,\omega_{d_i}}^D) \end{aligned}$$

Each time response has three decaying sinusoids (with decay factor  $\alpha_i$  and angular frequency  $\omega_{d_i}$ ), which manifest in different ways, depending on the values of  $\left| X_{1,\omega_{d_i}}^D \right|$ ,  $\left| \Theta_{2,\omega_{d_i}}^D \right|$  and  $\left| \Theta_{3,\omega_{d_i}}^D \right|$ . All unknowns  $C_i$  and  $\Phi_i$  are obtained by imposing the initial conditions:

$$\begin{aligned} x_{1_0} &= 0.1 \text{ m}, \quad \theta_{2_0} = \frac{\pi}{12} \text{ rad}, \quad \theta_{3_0} = -\frac{\pi}{12} \text{ rad} \\ \dot{x}_{1_0} &= 1 \text{ m/s}^2, \quad \dot{\theta}_{2_0} = 0.5 \text{ rad/s}, \quad \dot{\theta}_{3_0} = 2 \text{ rad/s} \end{aligned}$$

The resulting six unknowns are:

$$C_1 = 0.2477, \quad C_2 = 0.0869, \quad C_3 = 0.9422$$


$$\Phi_1 = -1.0002 \text{ rad}, \quad \Phi_2 = -4.5121 \text{ rad}, \quad \Phi_3 = 17.2612 \text{ rad}$$

It is now possible to fully define and plot the free motion response of each independent variable. By taking into account the products between the constants  $C_i$  and the amplitude factors  $\left| X_{\omega_{d_i}}^D \right|$  or  $\left| \Theta_{\omega_{d_i}}^D \right|$ , it is possible to give a quick explanation of how much a certain frequency manifests in the time response of  $x_1(t)$ ,  $\theta_2(t)$  and  $\theta_3(t)$  using the following matrix representation:


$$\begin{bmatrix} 0.2477 & 0.0869 & 0.9422 \\ 0.0582 & 1.6552 & 2.0620 \\ 0.0120 & 1.0813 & 3.0359 \end{bmatrix}$$

The element in position  $(i, j)$  represents the amplitude of the sinusoids of angular frequency  $\omega_{d_j}$  in the time response of the independent variable  $x_i$  or  $\theta_i$ .


The time response plot of  $x_1(t)$  is mainly given by  $\omega_{d_3}$ :

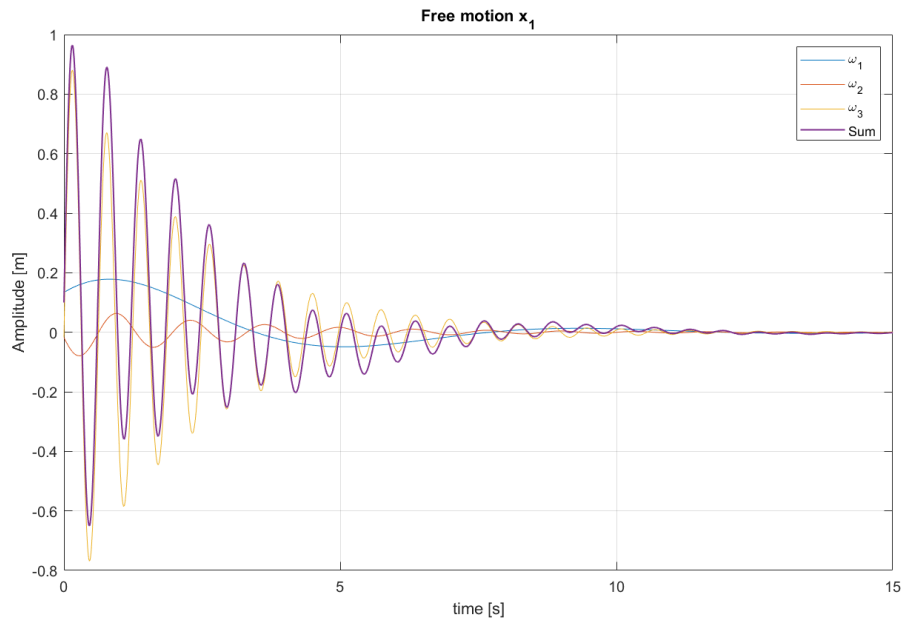


The time response plot of  $\theta_2(t)$  is mainly given by  $\omega_{d_2}$  and  $\omega_{d_3}$ :

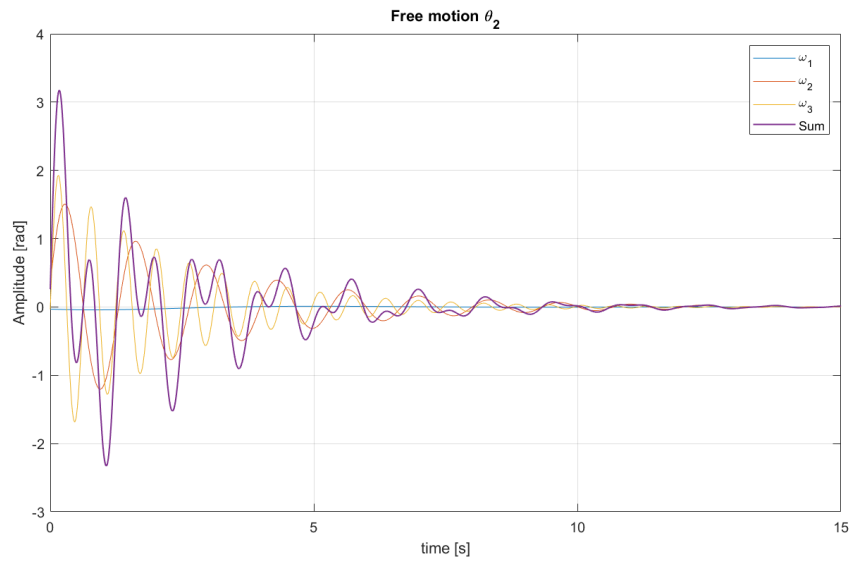

The time response plot of  $\theta_3(t)$  is mainly given by  $\omega_{d_2}$  and  $\omega_{d_3}$ :

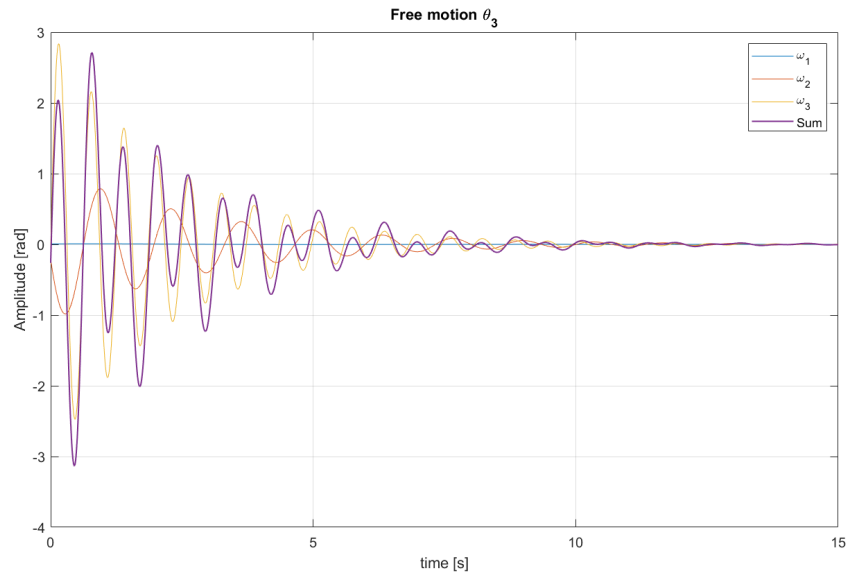

A comparison between all three time responses is given:

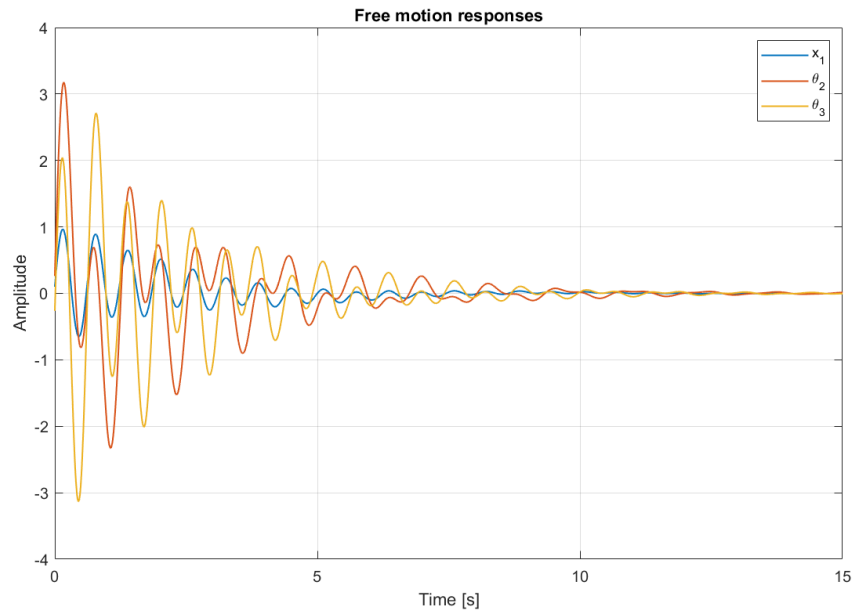

## 2.2 Initial conditions imposition

Some magic trick to be explained yet.

### 3 Forced motion

As already explained at the beginning of the previous section, Rayleigh damping is assumed to occur:

$$[c^*] = \alpha [M^*] + \beta [k^*] = 0.6088 [M^*] + 0.0026 [k^*]$$

#### 3.1 Frequency response matrix

By introducing the external force contribution, the equation to study becomes:

$$[M^*] \cdot \ddot{\underline{x}} + [c^*] \cdot \dot{\underline{x}} + [k^*] \cdot \underline{x} = \underline{Q}$$

Where:

$$\underline{Q} = \begin{pmatrix} F \\ 0 \\ -rF \end{pmatrix} \Rightarrow \underline{Q}_0 = \begin{pmatrix} 1 \\ 0 \\ -r \end{pmatrix}$$

A complex function  $\tilde{x}_p(t)$  can be defined, so that its real part  $\underline{x}_p(t)$  is a particular solution of the equation above:

$$\underline{\tilde{x}}_p(t) = \underline{\tilde{X}}_0 e^{j\Omega t} = \begin{pmatrix} \tilde{X}_{1_0} \\ \tilde{\Theta}_{2_0} \\ \tilde{\Theta}_{3_0} \end{pmatrix} e^{j\Omega t} \Rightarrow \underline{x}_p(t) = \text{Re}\{\underline{\tilde{x}}_p(t)\}$$

By substituting it in the system matrix equation:

$$\underline{\tilde{X}}_0 = [-\Omega^2 [M^*] + j\Omega [c^*] + [k^*]]^{-1} \underline{Q}_0 = [D(\Omega)]_{3 \times 3}^{-1} \underline{Q}_0 = [H(\Omega)]_{3 \times 3} \underline{Q}_0$$

Where  $[H(\Omega)]$  is the frequency response matrix and its entries are the frequency response functions  $H_{i,j}(\Omega)$ , given by:

$$H_{i,j} = [D(\Omega)]_{i,j}^{-1} = \frac{1}{\det(D(\Omega))} [C_D]_{i,j}^T = \frac{1}{\det(D(\Omega))} [C_D]_{j,i} = \frac{1}{\det(D(\Omega))} (-1)^{j+i} \det([M_{D_{j,i}}])$$

## OLD

As a very first thing we defined our convention on signs, assuming as positive the elongation for springs and dampers, the positive directions of  $x$  and  $y$  axes for displacements, and the counter-clockwise direction for rotations.

Then we need to determine the degrees of freedom (DOF) of the system. In order to do this, we will subtract the degrees of constraint (DOC) in the system to the total amount of possible DOF. Since the system is composed by four rigid bodies, the maximum number of DOF is 12.

In order to get the equation of motion (EOM) of the system, we take into account the Lagrange equation in matrix form:

$$\left\{ \frac{\partial}{\partial t} \left( \frac{\partial E_k}{\partial \dot{\underline{x}}} \right) \right\}^T - \left\{ \frac{\partial E_k}{\partial \underline{x}} \right\}^T + \left\{ \frac{\partial D}{\partial \dot{\underline{x}}} \right\}^T + \left\{ \frac{\partial V}{\partial \underline{x}} \right\}^T = \underline{Q} \quad (1)$$

Now we have to compute each component of this equation.

## Equation of Motion and system matrices

### Equation of Motion

#### Freedom and constraints

4 rigid bodies  $\{B_1, D_2, D_3, B_4\}$  :

- A first disk  $D_2$  constrained through a hinge to a mass-less vertical beam which is in turn rigidly connected to a mass  $B_1$ 
  - Slider and hinge : 1 constraint (no movement on  $y$  from the hinge)
  - Rigid connection  $\rightarrow$  1 constraint :  $\dot{x}_2 = \dot{x}_1$
- $B_1$  slides in the horizontal plane
  - 1 slider  $\rightarrow$  2 constraints  $\theta_1 = 0$  and  $y_1 = 0$
- An in-extensible rope connects the periphery of the disk  $D_2$  to another disk  $D_3$  that can translate horizontally and can be rolled back and forth by the rope, which then connects it to the translating mass  $B_4$ .
  - 1 in-extensible rope  $\rightarrow$  1 constraint  $\dot{x}_1 = \dot{x}_E$
  - Slider and hinge  $\rightarrow$  1 constraint :  $y_3 = 0$
- The centre of  $D_3$  is rigidly connected to a mass  $B_4$  whose horizontal motion and rotation are constrained.
  - 1 slider  $\rightarrow$  2 constraints :  $\theta_4 = 0$  and  $x_4 = 0$
  - Rigid connection  $\rightarrow$  1 constraint :  $x_3 = -y_4$

Overall, we obtain 9 degrees of constraints, for a total number of 12 degrees of freedom (as we have 4 bodies each having 3 DOF). Thus, we have a **system with 3 degrees of freedom**.

### Kinematic Relationships

From the considered system, we extract the following kinematic relationships: "

$$\begin{cases} x_1 = x_2 = x_E \\ \dot{x}_C = \dot{x}_2 + R\dot{\theta}_2 \\ \dot{x}_D = \dot{x}_1 - 2r\dot{\theta}_3 \\ y_4 = -x_3 = -x_E + r\theta_3 = -x_1 + r\theta_3 \end{cases} \quad (2)$$

When it comes to the springs and dampers related kinematic relationships, we are interesting in expressing the elongation of each spring, and the elongation speed of each damper. As we assume being in the Static Equilibrium Position, we neglect the pre-load. We obtain the following relations :

$$\begin{cases} \dot{\Delta}l_1 = \dot{x}_1 \\ \dot{\Delta}l_2 = \dot{x}_D - \dot{x}_C = -R\dot{\theta}_2 - 2r\dot{\theta}_3 \\ \dot{\Delta}l_3 = \dot{y}_4 = -\dot{x}_1 + r\dot{\theta}_3 \end{cases} \Leftrightarrow \begin{cases} \Delta l_1 = x_1 \\ \Delta l_2 = -R\theta_2 - 2r\theta_3 \\ \Delta l_3 = -x_1 + r\theta_3 \end{cases} \quad (3)$$

### Kinetic Energy

Given that the system is composed by 3 rigid bodies, the kinetic energy expression could contain up to 6 contributions. In this particular case we only have 5 contributions, because  $M_3$  can only translate and not rotate. Thus, we have:

$$E_k = \frac{1}{2}M_1v_1^2 + \frac{1}{2}M_2v_2^2 + \frac{1}{2}J_2\omega_2^2 + \frac{1}{2}M_3v_3^2 + \frac{1}{2}J_3\omega_3^2 + \frac{1}{2}M_4v_4^2 \quad (4)$$

In order to be able to write this expression in function of the independent variables we chose, we need to introduce the column vector of physical coordinates  $\underline{y}$  and its derivative  $\dot{\underline{y}}$ .

$$\underline{z} = (x_1, x_2, \theta_2, x_3, \theta_3, \theta_4)^T, \dot{\underline{z}} = (\dot{x}_1, \dot{x}_2, \dot{\theta}_2, \dot{x}_3, \dot{\theta}_3, \dot{\theta}_4)^T \quad (5)$$

The kinetic energy can be expressed also as follows:

$$E_k = \frac{1}{2}\dot{\underline{z}}^T[M]\dot{\underline{z}} \quad (6)$$

where  $[M]$  is the matrix:

$$[M] = \begin{bmatrix} M_1 & 0 & 0 & 0 & 0 & 0 \\ 0 & M_2 & 0 & 0 & 0 & 0 \\ 0 & 0 & J_2 & 0 & 0 & 0 \\ 0 & 0 & 0 & M_3 & 0 & 0 \\ 0 & 0 & 0 & 0 & J_3 & 0 \\ 0 & 0 & 0 & 0 & 0 & M_4 \end{bmatrix} \quad (7)$$

Furthermore, we can express the  $\dot{\underline{z}}$  vector as follows:

$$\dot{\underline{z}} = \left( \frac{\partial \underline{z}}{\partial \underline{x}} \right) \dot{\underline{x}} = [\Lambda_m]\dot{\underline{x}} \quad (8)$$

where  $[\Lambda_m]$  is the jacobian matrix, which contains the partial derivatives of the vector  $\underline{y}$  with respect to the vector of independent variables  $\underline{x}$  of the independent variables.

In our case, we have  $\dot{\underline{x}} = (\dot{x}_1, \dot{\theta}_2, \dot{\theta}_3)^T \Leftrightarrow \underline{x} = (x_1, \theta_2, \theta_3)^T$ . To know the value of these derivatives we fill the following table:

	$\dot{x}_1$	$\dot{\theta}_2$	$\dot{\theta}_3$
$v_1$	1	0	0
$v_2$	1	0	0
$\omega_2$	0	1	0
$v_3$	1	0	-r
$\omega_3$	0	0	1
$v_4$	-1	0	r

We obtain that the jacobian matrix is:

$$[\Lambda_m] = \begin{bmatrix} 1 & 0 & R_2 \\ 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{bmatrix} \quad (9)$$

Ernest's proposition :

$$[\Lambda_m]_{6 \times 3} = \begin{bmatrix} 1 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1 & 0 & -r \\ 0 & 0 & 1 \\ -1 & 0 & r \end{bmatrix} \quad (10)$$

From (6) and (8) we can express the kinetic energy as a function of the independent variables:

$$E_k = \frac{1}{2} \dot{\underline{x}}^T [\Lambda_m]^T [M] [\Lambda_m] \dot{\underline{x}}$$

We can now define the generalized mass matrix as:

$$[M^*] = [\Lambda_m]^T [M] [\Lambda_m] \quad (11)$$

$$[M^*]_{3 \times 3} = \begin{pmatrix} M_1 + M_2 + M_3 + M_4 & 0 & -r(M_3 + M_4) \\ 0 & J_2 & 0 \\ -r(M_3 + M_4) & 0 & J_3 + r^2(M_3 + M_4) \end{pmatrix} \quad (12)$$

We observe that this matrix is symmetric. We obtain the final expression for the kinetic energy:

$$E_k = \frac{1}{2} \dot{\underline{x}}^T [M^*] \dot{\underline{x}} \quad (13)$$

## Potential Energy

The potential energy of the system is given by the sum of the potential energy contributions for each rigid body in the system. In this case we only have 1 gravitational contribution, due to the fact that the body  $B_4$  is able to move in the vertical direction. Therefore we have 4 contributions, related to the 3 springs in the system, and the body  $B_4$ :

$$V = V_{el} + V_g = \frac{1}{2} K_1 \Delta l_1^2 + \frac{1}{2} K_2 \Delta l_2^2 + \frac{1}{2} K_3 \Delta l_3^2 + \frac{1}{2} M_4 g y_4 \quad (14)$$

In order to express the elastic potential energy as a function on the independent variables, we perform the same passages we just showed for the kinetic energy. As a first thing we define the matrix  $[K]$  and the vector  $\underline{\Delta l}$ :

$$[K]_{3 \times 3} = \begin{bmatrix} K_1 & 0 & 0 \\ 0 & K_1 & 0 \\ 0 & 0 & K_3 \end{bmatrix} \quad (15)$$

$$\underline{\Delta l}_{3 \times 1} = \{\Delta l_1, \Delta l_2, \Delta l_3\}^T \quad (16)$$

Elastic potential energy can be expressed as:

$$V_{el} = \frac{1}{2} \underline{\Delta l}^T [K] \underline{\Delta l} \quad (17)$$

As we know that :

$$\underline{\Delta l} = [\Lambda_k] \cdot \underline{x} \text{ such as } [\Lambda_k] = \frac{\partial \underline{\Delta l}}{\partial \underline{x}} \quad (18)$$

Where  $[\Lambda_k]$  is the jacobian matrix of the elongation. Thanks to the established kinematic relations, we fill the following table to find the elements of  $[\Lambda_k]$

	$x_1$	$\theta_2$	$\theta_3$
$\Delta l_1$	1	0	0
$\Delta l_2$	0	-R	-2r
$\Delta l_3$	-1	0	r

We obtain that the jacobian matrix is:

$$[\Lambda_k]_{3 \times 3} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -R & -2r \\ -1 & 0 & r \end{bmatrix} \quad (19)$$



By inserting this jacobian matrix in the elastic potential energy expression we obtain:

$$V_k = \frac{1}{2} \underline{x}^T [\Lambda_k]^T [K] [\Lambda_k] \underline{x} \quad (20)$$

We define the generalized matrix  $[K^*]$  as

$$[K^*] = [\Lambda_k]^T [K] [\Lambda_k] \quad (21)$$

$$[K^*]_{3 \times 3} = \begin{bmatrix} k_1 + k_3 & 0 & -rk_3 \\ 0 & R^2 k_2 & 2Rk_2 r \\ -k_3 r & 2Rk_2 r & 4k_2 r^2 + k_3 r^2 \end{bmatrix} \quad (22)$$

We observe that this matrix is symmetric. We obtain the final expression for the potential energy:

$$V_{el} = \frac{1}{2} \underline{x}^T [K^*] \underline{x} \quad (23)$$

Gravitational potential energy can be expressed as:

$$V_g = \frac{1}{2} \underline{P}^T \cdot \underline{y} \quad (24)$$

Where we have the weight vector  $\underline{P} = g \cdot \underline{M} = g \cdot (M_1, M_2, M_3, M_4)^T$  and the vertical displacement vector  $\underline{y} = (y_1, y_2, y_3, y_4)^T = (0, 0, 0, -x_1 + r\theta_3)^T$

We observe that  $\underline{y} = [\Lambda_P] \cdot \underline{x}$  where

$$[\Lambda_P]_{4 \times 3} = \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ -1 & 0 & r \end{pmatrix} \quad (25)$$

And we can rephrase the gravitational potential energy

$$V_g = \frac{1}{2} M_4 g y_4 = \frac{1}{2} \underline{P} \cdot [\Lambda_P] \cdot \underline{x} = \frac{1}{2} \underline{P}^* \cdot \underline{x} \quad (26)$$

Where  $\underline{P}^* = \underline{P} \cdot [\Lambda_P] = (-gM_4, 0, grM_4)^T$  is the weight vector (**to rephrase**).

Thus, the total potential energy can be written

$$V = V_{el} + V_g = \frac{1}{2} \underline{x}^T [K^*] \underline{x} + \frac{1}{2} \underline{P}^* \cdot \underline{x} \quad (27)$$

## Dissipative Energy

The total dissipation of the system is given by:

$$D = \frac{1}{2} c_1 \dot{\Delta} l_1^2 + \frac{1}{2} c_2 \dot{\Delta} l_2^2 + \frac{1}{2} c_3 \dot{\Delta} l_3^2 \quad (28)$$

In the same way we did for kinetic and potential energy, we want to express the dissipation as a function of the independent variables. To reach our goal we introduce the matrix  $[C]$  and the vector  $\underline{\dot{\Delta} l}$ :

$$[C]_{3 \times 3} = \begin{bmatrix} c_1 & 0 & 0 \\ 0 & c_2 & 0 \\ 0 & 0 & c_3 \end{bmatrix} \quad (29)$$

$$\underline{\dot{\Delta} l}_{3 \times 1} = \left\{ \dot{\Delta} l_1, \dot{\Delta} l_2, \dot{\Delta} l_3 \right\}^T \quad (30)$$

As far as the jacobian matrix is concerned, being all the dampers of the system in parallel with the springs, we can state that:

$$[\Lambda_c] = [\Lambda_k] \quad (31)$$

Therefore, following the same procedure that we saw for the potential energy, we express the dissipation as follows:

$$D = \frac{1}{2} \underline{\dot{L}}^T [C] \underline{\dot{L}} = \frac{1}{2} \underline{\dot{x}}^T [\Lambda_c]^T [C] [\Lambda_c] \underline{\dot{x}} = \frac{1}{2} \underline{\dot{x}}^T [C^*] \underline{\dot{x}} \quad (32)$$

Where our Damping matrix is diagonal, and:

$$[C^*] = [\Lambda_c]^T [C] [\Lambda_c] \quad (33)$$

$$[C^*]_{3 \times 3} = \begin{bmatrix} c_1 + c_3 & 0 & -rc_3 \\ 0 & R^2 c_2 & 2Rc_2 r \\ -rc_3 & 2Rc_2 r & 4c_2 r^2 + c_3 r^2 \end{bmatrix} \quad (34)$$

### Principle of Virtual Works

From the principle of Virtual Works, considering that we have a single external force  $F(t)$  applied at the point  $A$  along the horizontal direction, we have :

$$\delta W = F \cdot \delta x_3$$

And, as we have

$$\delta x_3 = \delta (x_1 - r \cdot \theta_3) = \delta x_1 - r \cdot \delta \theta_3$$

Thus, we obtain :

$$\delta W = F \cdot \delta x_1 + 0 \cdot \delta \theta_2 - rF \cdot \delta \theta_3 = (F, 0, -rF) \cdot \begin{pmatrix} \delta x_1 \\ \delta \theta_2 \\ \delta \theta_3 \end{pmatrix} = \underline{F} \cdot \underline{\delta x}$$

Where we identify :

$$\underline{Q}_{3 \times 1} = (F, 0, -rF)^T \quad (35)$$

### Matrix formulation of the Equation of Motion

From (1), we develop each terms based on their new exopression, leading us to :

$$\left\{ \frac{d}{dt} \left( \frac{\partial E_k}{\partial \underline{\dot{x}}} \right) \right\}^T = [M^*] \cdot \underline{\ddot{x}}, \quad \left\{ \frac{\partial E_k}{\partial \underline{x}} \right\}^T = \underline{0}$$

$$\left\{ \frac{\partial D}{\partial \underline{\dot{x}}} \right\}^T = [C^*] \cdot \underline{\dot{x}}, \quad \left\{ \frac{\partial V}{\partial \underline{x}} \right\}^T = [K^*] \cdot \underline{x} + \frac{1}{2} \cdot \underline{P}^*$$

Thus, we can write the Matrix Formulation of our Equation of Motion as follows :

$$[M^*] \cdot \underline{\ddot{x}} + [C^*] \cdot \underline{\dot{x}} + [K^*] \cdot \underline{x} = \underline{Q} = \begin{Bmatrix} F \\ 0 \\ -rF \end{Bmatrix} \quad (36)$$

For readability purposes, we refer to the content of each matrix or vector as defined earlier in this report.

### Eigenfrequencies and eigenvectors of the system

#### Undamped system

In the case of an undamped system, we have to set the damping matrix  $[C^*] = [0]$ , and by setting  $\underline{x} = \underline{X}e^{\lambda t}$  we obtain the equation

$$(\lambda^2 [M^*] + [K^*]) \underline{X} = \underline{0}$$

Which is the same of solving:

$$\lambda^2 = -[M^*]^{-1} [K^*]$$

Computing it in Matlab with the provided numerical values, we obtain the following eigen frequencies in rad/s :

$$\lambda_{1,4} = \pm 0.8017, \quad \lambda_{2,5} = \pm 4.6974, \quad \lambda_{3,6} = \pm 10.1326$$

As we're actually looking for the roots of these values, we identify the 3 natural frequencies of the system :

$$\omega_1 = 0.8017 \text{ rad/s}, \quad \omega_2 = 4.6974 \text{ rad/s} \quad \omega_3 = 10.1326 \text{ rad/s}$$

And the corresponding mode shapes, normalized with respect to the component  $x_1 = 1$  :

$$\underline{X}_{\omega_1}^D = \begin{pmatrix} X_{1,\omega_1}^D \\ \Theta_{2,\omega_1}^D \\ \Theta_{3,\omega_1}^D \end{pmatrix} = \begin{pmatrix} 1 \\ 18.9893 \\ 12.4068 \end{pmatrix}, \quad \underline{X}_{\omega_2}^D = \begin{pmatrix} X_{1,\omega_2}^D \\ \Theta_{2,\omega_2}^D \\ \Theta_{3,\omega_2}^D \end{pmatrix} = \begin{pmatrix} 1 \\ 0.2460 \\ 0.0530 \end{pmatrix}, \quad \underline{X}_{\omega_3}^D = \begin{pmatrix} X_{1,\omega_3}^D \\ \Theta_{2,\omega_3}^D \\ \Theta_{3,\omega_3}^D \end{pmatrix} = \begin{pmatrix} 1 \\ 2.1769 \\ 3.2023 \end{pmatrix}$$

### Damped system

In the case of a damped system, we consider the whole equation of motion

$$[M^*] \ddot{\underline{x}} + [C^*] \dot{\underline{x}} + [K^*] \underline{x} = \underline{0}$$

And by setting  $\underline{x} = \underline{X}e^{\lambda t}$  we obtain the equation

$$(\lambda^2 [M^*] + \lambda [C^*] + [K^*]) \underline{X} = \underline{0} \quad (37)$$

Adding the trivial equation  $[M^*] \ddot{\underline{x}} = [M^*] \ddot{\underline{x}}$  to this system, we can rephrase both matrix problems as :

$$\begin{bmatrix} [M] & [0] \\ [0] & [M] \end{bmatrix} \begin{pmatrix} \ddot{\underline{x}} \\ \dot{\underline{x}} \end{pmatrix} + \begin{bmatrix} [C] & [M] \\ -[M] & [0] \end{bmatrix} \begin{pmatrix} \dot{\underline{x}} \\ \underline{x} \end{pmatrix} = \underline{0}_{6 \times 1} \quad (38)$$

By setting

$$\underline{z} = \begin{pmatrix} \dot{\underline{x}} \\ \underline{x} \end{pmatrix} = \begin{pmatrix} \lambda \underline{x} \\ \underline{x} \end{pmatrix} = \begin{pmatrix} \lambda \underline{X} \\ \underline{X} \end{pmatrix} e^{\lambda t}$$

Thus, we identify that the 3 last lines of  $\underline{Z}$  will be of matter, containing the modes shapes. And we obtain the following matrix problem :

$$[B] \dot{\underline{z}} + [D] \underline{z} = \underline{0} \quad \text{such as} \quad \begin{cases} [B] = \begin{bmatrix} [M] & [0] \\ [0] & [M] \end{bmatrix} \\ [D] = \begin{bmatrix} [C] & [K] \\ -[M] & [0] \end{bmatrix} \end{cases}$$

Therefore, we now want to resolve the problem :  $\dot{\underline{z}} = [B]^{-1} [D] \underline{z}$

As we can rewrite  $\underline{z} = \underline{Z} e^{\lambda t}$ ,  $\dot{\underline{z}} = \lambda \underline{z}$ , the previous equation is reduced to :

$$\lambda \underline{Z} = [B]^{-1} [D] \underline{Z} \Leftrightarrow (\lambda [1] - [B]^{-1} [D]) \underline{Z} = \underline{0} \quad (39)$$

Where the matrix whose eigenvalues and eigenvectors we are looking for is :

$$[B]^{-1} [D] = \begin{bmatrix} -[M]^{-1} [C] & -[M]^{-1} [K] \\ [1] & [0] \end{bmatrix}_{6 \times 6}$$

Solving this eigenvalue problem, will give us the appropriate eigenvalues  $\lambda_{2r-1,2r}^d$ ,  $\forall r \in [1; 3]$  and eigenvectors  $\underline{X}_{2r-1,2r}^d$ ,  $\forall r \in [1; 3]$

Computing it in Matlab with the provided numerical values, we obtain :

$$\lambda_{1,4} = -0.0557 \pm i0.8010, \quad \lambda_{2,5} = -0.3114 \pm i4.6816 \quad \lambda_{3,6} = -0.3257 \pm i10.1234$$

The real part of each eigenvalue is due to the manifestation of dampers, while the imaginary part refers to the new resonance frequency. More precisely, we identify the 3 natural frequencies of the system :

$$\omega_1 = 0.8010 \text{ rad/s}, \quad \omega_2 = 4.6816 \text{ rad/s} \quad \omega_3 = 10.1234 \text{ rad/s}$$

We observe that those damped resonance frequencies are really close to the undamped scenario, leading us to think that this system is a lightly damped one. Indeed, when computing the adimensional damping ratio, and by ordering it accordingly to the increasing order of the eigenvalues, we obtain :

$$\underline{h} = \begin{pmatrix} h_1 \\ h_2 \\ h_3 \end{pmatrix} = \begin{pmatrix} 0.0693 \\ 0.0664 \\ 0.0322 \end{pmatrix}$$

The corresponding mode shapes, normalized with respect to the component  $x_1 = 1$  :

$$\underline{X}_{\omega_1}^D = \begin{pmatrix} X_{1,\omega_1}^D = 1 \text{ m} \\ \Theta_{2,\omega_1}^D = 18.9893 \text{ rad} \\ \Theta_{3,\omega_1}^D = 12.4068 \text{ rad} \end{pmatrix}, \quad \underline{X}_{\omega_2}^D = \begin{pmatrix} X_{1,\omega_2}^D = 1 \text{ m} \\ \Theta_{2,\omega_2}^D = 0.2460 \text{ rad} \\ \Theta_{3,\omega_2}^D = 0.0530 \text{ rad} \end{pmatrix}, \quad \underline{X}_{\omega_3}^D = \begin{pmatrix} X_{1,\omega_3}^D = 1 \text{ m} \\ \Theta_{2,\omega_3}^D = 2.1769 \text{ rad} \\ \Theta_{3,\omega_3}^D = 3.2023 \text{ rad} \end{pmatrix}$$

## Rayleigh Damping Estimation

Starting point :

$$\begin{bmatrix} c_{11}^* & c_{12}^* & c_{13}^* \\ c_{12}^* & c_{22}^* & c_{23}^* \\ c_{13}^* & c_{23}^* & c_{33}^* \end{bmatrix} = \alpha \cdot \begin{bmatrix} M_{11}^* & M_{12}^* & M_{13}^* \\ M_{12}^* & M_{22}^* & M_{23}^* \\ M_{13}^* & M_{23}^* & M_{33}^* \end{bmatrix} + \beta \cdot \begin{bmatrix} k_{11}^* & k_{12}^* & k_{13}^* \\ k_{12}^* & k_{22}^* & k_{23}^* \\ k_{13}^* & k_{23}^* & k_{33}^* \end{bmatrix}$$

Mid point :

$$\begin{pmatrix} c_{11}^* \\ c_{12}^* \\ c_{13}^* \\ c_{21}^* \\ c_{22}^* \\ c_{23}^* \\ c_{31}^* \\ c_{32}^* \\ c_{33}^* \end{pmatrix} = \begin{pmatrix} \alpha M_{11}^* + \beta k_{11}^* \\ \alpha M_{12}^* + \beta k_{12}^* \\ \alpha M_{13}^* + \beta k_{13}^* \\ \alpha M_{21}^* + \beta k_{21}^* \\ \alpha M_{22}^* + \beta k_{22}^* \\ \alpha M_{23}^* + \beta k_{23}^* \\ \alpha M_{31}^* + \beta k_{31}^* \\ \alpha M_{32}^* + \beta k_{32}^* \\ \alpha M_{33}^* + \beta k_{33}^* \end{pmatrix}$$

End point:

$$\begin{pmatrix} c_{11}^* \\ c_{12}^* \\ c_{13}^* \\ c_{21}^* \\ c_{22}^* \\ c_{23}^* \\ c_{31}^* \\ c_{32}^* \\ c_{33}^* \end{pmatrix} = \begin{bmatrix} M_{11}^* & k_{11}^* \\ M_{12}^* & k_{12}^* \\ M_{13}^* & k_{13}^* \\ M_{21}^* & k_{21}^* \\ M_{22}^* & k_{22}^* \\ M_{23}^* & k_{23}^* \\ M_{31}^* & k_{31}^* \\ M_{32}^* & k_{32}^* \\ M_{33}^* & k_{33}^* \end{bmatrix} \cdot \begin{pmatrix} \alpha \\ \beta \end{pmatrix} = [G] \cdot \begin{pmatrix} \alpha \\ \beta \end{pmatrix}$$

## Free Motion Analysis

## Forced Motion Analysis

## Modal approach