

EXTRALUM

Europa Classic Sliding Windows and Doors

General Description

Extralum offers the Europa Sliding Windows and Doors for applications such as homes, offices, commercial establishments, restaurants, buildings, hospitals, banks, stores, supermarkets, and more.

These designs allow for the option of internal and external screens using the EX 2078 profile, except for OXO configurations (right and left), which can only use an internal screen. Additionally, there is the option of a lightweight internal screen with profiles EX 2729, EX 2730, and EX 2759 (see typical design No. 4).

The frame and subframe feature 45° cuts, providing elegance and exceptional strength to the windows and doors, as their joints are reinforced and aligned with metallic brackets inside the profile.

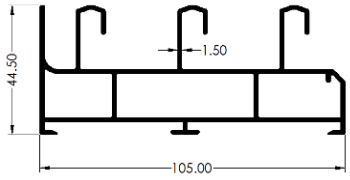

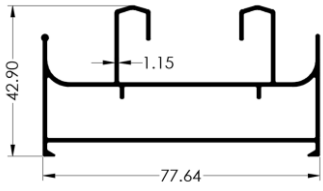





The profiles have thicknesses ranging from 1.10 to 1.70 mm, ensuring excellent functionality and durability for the windows and doors.







Additionally, the Europa windows and doors provide superior sealing and airtightness compared to other window and door options available in the market. These windows and doors are designed with chambers and drainage that direct water back outside, along with the proper use of specialized weatherstrips on the lateral, upper, and lower sections of the panels, smooth and silent operation is guaranteed. The EPDM gaskets further enhance resistance to leaks or air conditioning escape.

The Europa windows and doors ensure security with the optional installation of a multipoint locking kit and anti-lever latch.



Components**PROFILE LIST**

CODE	DESCRIPTION	WEIGHT gr/m	SHAPE
EX 1399	3-WAY SLIDING FRAME EUROPA CLASSIC	1769.22	
EX 1401	2-WAY SLIDING FRAME EUROPA CLASSIC	1112.43	
EX2890	LIGHTWEIGHT INTERNAL AND EXTERNAL SCREEN 2-WAY FRAME EUROPA	966.69	
EX 1379	SASH SLIDING FRAME EUROPA CLASSIC	892.89	
EX 1402	REINFORCED LATERAL SASH FRAME EUROPA CLASSIC SLIDING	1391.42	
EX 2078	SCREEN SASH FRAME EUROPA CLASSIC SLIDING	1113.51	
EX 1382	GLAZING PROFILE EUROPA CLASSIC SLIDING	210.54	
EX 2450	GLAZING PROFILE 10.00 mm EUROPA CLASSIC SLIDING	191.16	

EX 1289	HOOK ADAPTER EUROPA CLASSIC SLIDING	322.54	
EX 1397	ADAPTER 19.50 mm EUROPA CLASSIC SLIDING	350.59	
EX 2130	SCREEN ADAPTER EUROPA CLASSIC SLIDING	289.27	
EX2729	LIGHTWEIGHT SCREEN FRAME EUROPA	505.14	
EX2730	LIGHTWEIGHT SCREEN ADAPTER FRAME EUROPA	698.61	
EX 1580	ADAPTER 1.10 mm SERIE 8025 V1	214.58	
LH0246	VENTILATION LOUVER SLAT BALANCE STRAIGHT SERIES 50	257.31	

Note: The EX 1379 profile can be used for doors and windows up to a maximum height of 2200 mm. For heights exceeding this, the EX 1402 (reinforced) profile must be used.

ACCESSORY LIST

CÓDIGO	DESCRIPCIÓN	FORMA
0200130011	DOUBLE EMBEDDED LOCK WITHOUT KEY EUROPA SLIDING (Minimum height 775 mm per panel)	
0200130012	DOUBLE EMBEDDED LOCK WITH KEY EUROPA SLIDING (Minimum height 775 mm per panel)	
0216180011	SIMPLE MULTI-POINT KIT WITHOUT KEY FOR EUROPA MULTI-PURPOSE (Minimum height 770 mm; see ESC-416)	
0216130006	MULTI-POINT KIT WITH HANDLE AND KEY EUROPA SLIDING (Minimum height 770 mm; includes key)	
0216130005	MULTI-POINT SLIDING KIT WITH CYLINDER EUROPA SLIDING (Minimum height 1870 mm; see ESC-418)	
0200130013	SIMPLE IMPACT LOCK EUROPA SLIDING (Minimum height 470 mm)	
0208120002	DOUBLE IMPACT HANDLE FOR MULTI-PURPOSE PRE-FAB SYSTEM (Minimum height 470 mm)	
0208120005	RECESSED HANDLE FOR SIMPLE IMPACT (Minimum height 470 mm)	
0208130006	RECESSED HANDLE FOR LIGHTEWEIGHT SCREEN	
0200120017	DOUBLE SINGLE POINT SURFACE MOUNTED LOCK WITH KEY (Sold separately, configuration must be consulted for installation.)	

0200120016	SINGLE POINT SURFACE MOUNTED LOCK WITH KEY (Sold separately, configuration must be consulted for installation.)	
0200120012	SINGLE POINT SURFACE MOUNTED LOCK WITHOUT KEY (Sold separately, configuration must be consulted for installation.)	
0200120006	LATCH WINDOWS LOCK (For heights less than 300mm, sold separately)	
0207130005	TANDEM ROLLER 200 kg EUROPA SLIDING (Min width 350 mm, 200 kg max.)	
0207130002	TANDEM ROLLER R EUROPA SLIDING (Min width 460 mm, 120 kg max.)	
0207130011	TANDEM ROLLER 250.00 kg (Min width 800 mm, 250 kg max.)	
0207130008	NYLON ROLLER 40 kg	
0216110001	ROLLER KIT FOR LIGHWEIGHT SCREEN	
0229130004	WIND SEAL 2 TRACKS EUROPA SLIDING	
0229130005	WIND SEAL 3 TRACKS EUROPA SLIDING	
0210180002	ALIGNEMENT CORNER JOINT SL 86 EUROPA	
0210130001	CORNER JOINT 0421 EUROPA SLIDING	
0210130004	CORNER JOINT 36-2214C PERIMETRAL EUROPA SLIDING	
0210130003	CORNER JOINT 0410 EUROPA SLIDING	

0214180003	MULLION GASKET EUROPA MULTIPURPOSE	
0214130001	PVC WEDGE FIXED 100 mm EUROPA SLIDING	
0230120002	DRAIN COVER WITH VALVE PREFABRICATED MULTIPURPOSE	
0230120003	ROLLER ADJUSTMENT HOLE COVER PURPOSE PRE-FAB SYSTEM	
0230130002	REINFORCED PLASTIC COVER	
0230130001	SASH END CAP COVER	
0229130002	IMPACT STOP EUROPA SLIDING <i>(Sold separately)</i>	
0229120004	SCREENING STOP 40.00 mm PREFABRICATED MULTIPURPOSE EUROPA SLIDING <i>(The configuration must be consulted for its installation)</i>	
0210120011	FIXING BRACKET 30.00 mm MULTIPURPOSE EUROPA SLIDING	
0230130004	COVER FIXING SCREW 10.00 mm EUROPA SLIDING	
0213040001	ECCO APOLO BUTTON GUIDE	
0214120001	SHIM 2.0 mm PREFABRICATED MULTIPURPOSE	

Finishes

ALUMINUM FINISHES

Code	Finish
10	Natural Anodized
12	Stainless Steel brushed
35	Bronze Anodized
51	White paint
74	Textured walnut (wood-like)
81	Black textured Paint
90	Black anodized

Note: Additional finishes are available upon request and subject to delivery times.

GLASS TYPES

Available glass types include:

Monolithic glass: 6, 8, 10, and 12 mm.

FUERTEX® safety glass: 6, 8, 10, and 12 mm.

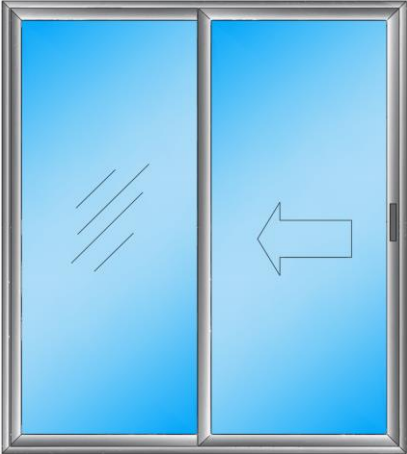

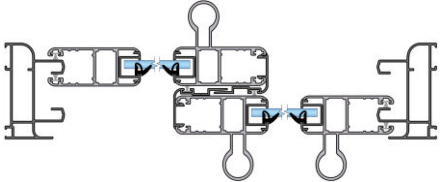
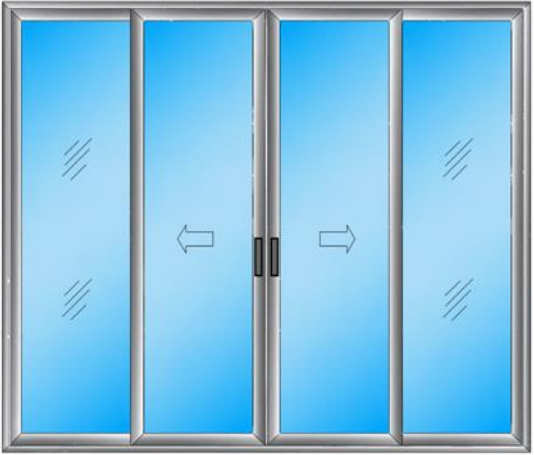


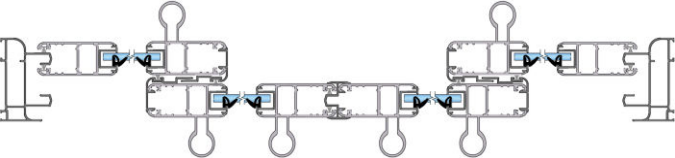
Insulated glass (IGU): thicknesses 16 to 18.5 mm.

VILAX® laminated glass: 6 to 12 mm.


Note: For optimal thickness selection, data on maximum wind speeds and loads, as well as installation height above ground level, should be provided.

Typical Designs


The Europa Classic Sliding Windows and Doors offers typical designs, including:

Europa Classic Sliding Windows and Doors designs	
<u>Two Panels "OX"</u> 	<u>Vertical Cut</u>  <u>Horizontal Cut Sash Frame EX 1379</u>  <u>Horizontal Cut Sash Frame EX 1402</u> 
<u>Four Panels "OXXO"</u> 	<u>Vertical Cut</u>  <u>Horizontal Cut Sash Frame EX 1379</u>  <u>Horizontal Cut Sash Frame EX 1402</u> 

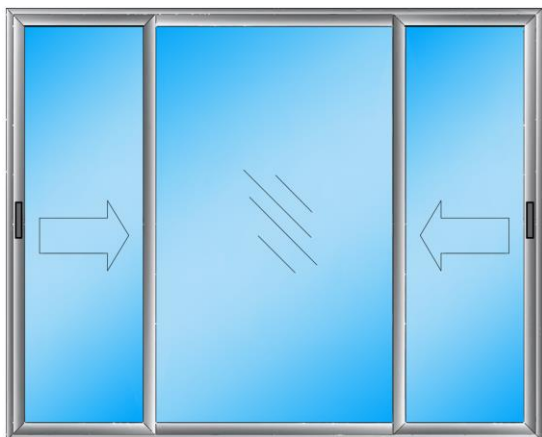
Three Panels "XOX" with screen EX 2078




Vertical Cut

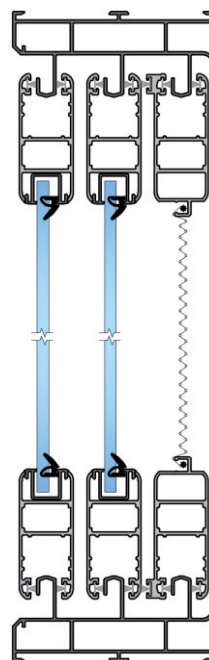


Horizontal Cut

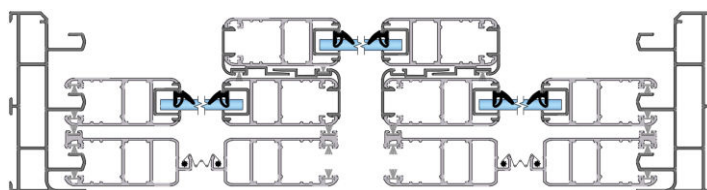

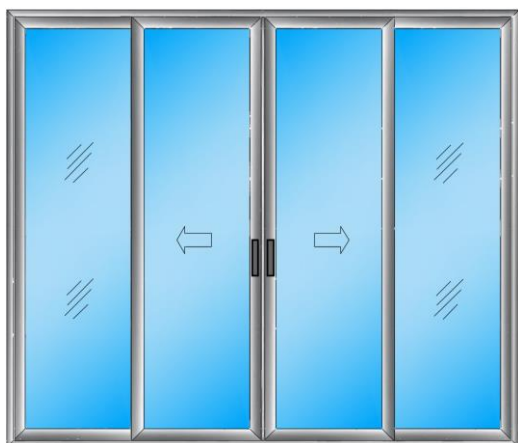
Four Panels "OXXO" with lightweight screen




Vertical Cut



Horizontal Cut



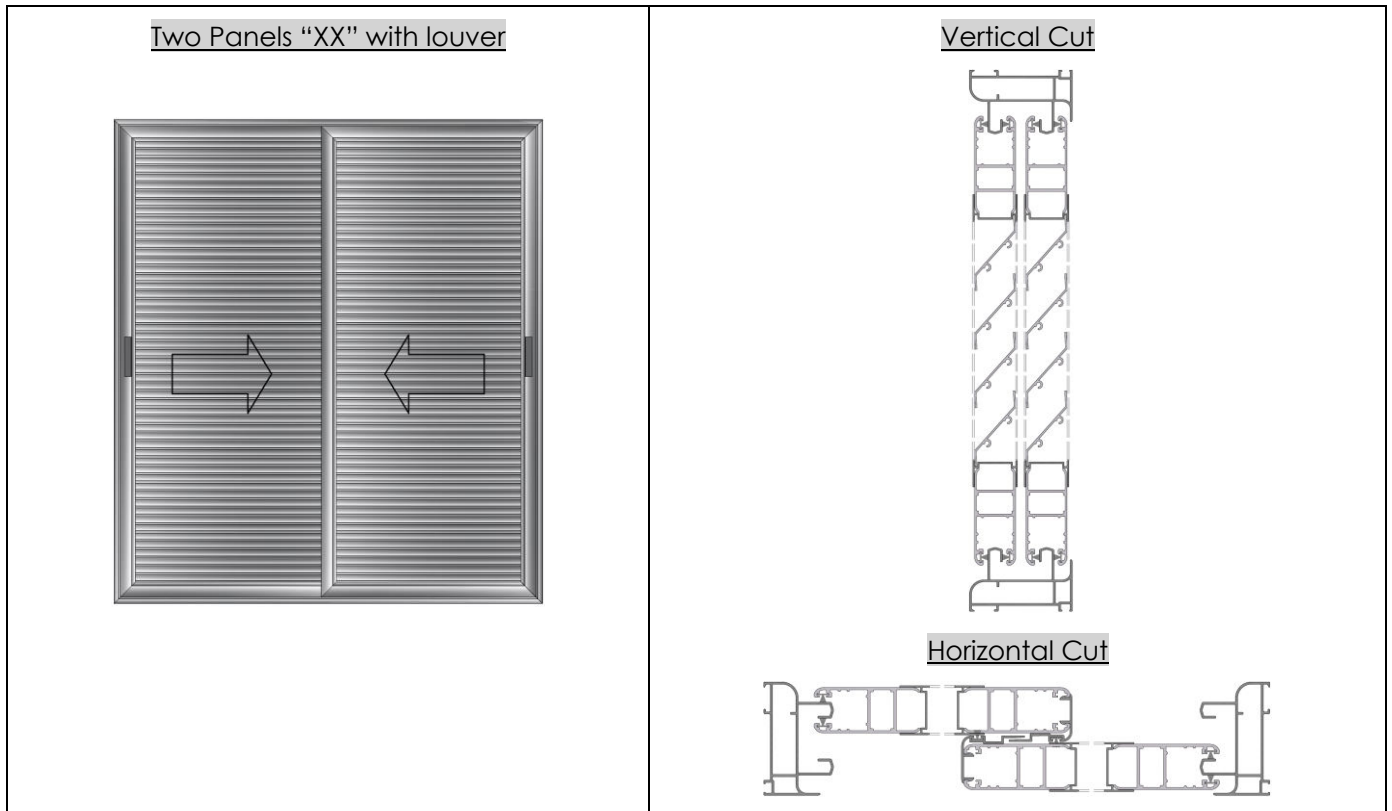

Dimensions

The following table contains the minimum and maximum dimensions per panel that must be respected for the proper functioning of the windows and doors.

Width X (movable)		Height X (movable)	
Min	Max	Min	Max
402 mm	1800 mm	470 mm	3650 mm

Width O (fixed)		Height O (fixed)	
Min	Max	Min	Max
402 mm	1800 mm	470 mm	3650 mm

Note: Safety glass is recommended for panels width over 1600 mm

Glass thickness 6 mm is allowed up to 2800 mm width maximum.

Internal Lightweight Screen: Width max 1500 mm, Height max 1800 mm.

Louvered door/window: The dimensions are the same of the 50 Series Louvered, as well as the adjustment between slats (refer to FT-005).

For dimensions greater than 3000 mm high, the following must be used:

- 10 mm or 12 mm Fuertex safety glass.
- EX1402 reinforced profile on all verticals.

- Locks: Simple EH multipoint kit without a multi-use European key, EH multipoint kit with a handle with a multi-use European key or a surface-mounted lock according to the configurations where it is adaptable.
- No screen available.
- No center lock available, for example OXXO is not available.

The application of full section # 7 of the INTE C312: 2019 standard is recommended, where it specifies the use of safety glass in glazed areas considered risky, such as:

- Section 7.2: Doors
- Section 7.3: Side door panels
- Section 7.4: Low-rise glazed areas

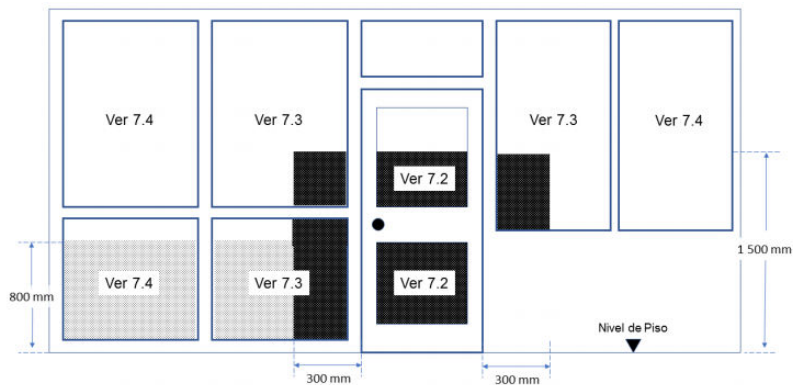


Figura 1. Áreas vidriadas consideradas de riesgo

Recommendations

- Use original hardware.
- Before installing the window, you should verify the integrity of the product and should verify that the structure or framework has the necessary conditions of strength and stability.
- It is recommended to take in count; for choosing the right door/window, additional arguments such as historical data of wind and rain, the geographical location of the project (urban, rural, mountainous, coastal) the environment, guidance on the cardinal points, the presence or absence of eaves and / or plant screens, etc.
- It is recommended to consult Extralum firstly in any application where the requirements for weathertightness is a priority, to obtain the best recommendation for the case.

Acoustic Reduction in Windows

- Acoustic reduction within a room is only achieved when all materials have been designed for this purpose, and the required level of reduction is established.
- In a window, the specification of the type of glass is very important, but the type of window is equally important.

- The noise is not controlled installing acoustic materials, but also AVOIDING NOISE INCOME THROUGH AN OPEN SPACE, that is why the most efficient type of window is the FIXED GLASS type.
- If, due to particular characteristics of the project, it is necessary to open the window at certain times, the most appropriate options are those that, when closed, prevent any opening, such as the folding, projecting and tilt-and-turn windows.
- The sliding window or similar, for all the openings required for opening, is NOT a recommended option to use when acoustic control is required.

*The information and calculations provided are offered as technical assistance, but **DO NOT CONSTITUTE A GUARANTEE OF FUNCTIONALITY OR PERFORMANCE FOR ANY PARTICULAR PURPOSE.** Actual performance may vary in particular applications.*

For any questions, contact Extralum' Sales Department.

www.extralum.com